

# 1.5 Watt Plastic Surface Mount Silicon Zener Diodes

This complete new line of 1.5 Watt Zener Diodes offers the following advantages.

### Specification Features:

- Voltage Range – 3.3 to 68 V
- ESD Rating of Class 3 (>16 kV) per Human Body Model
- Flat Handling Surface for Accurate Placement
- Package Design for Top Side or Bottom Circuit Board Mounting
- Low Profile Package
- Available in Tape and Reel
- Ideal Replacement for MELF Packages

### Mechanical Characteristics:

- Case: Void-free, transfer-molded plastic
- Maximum Case Temperature for Soldering Purposes: 260°C for 10 seconds
- Finish: All external surfaces are corrosion resistant with readily solderable leads
- Polarity: Cathode indicated by molded polarity notch
- Mounted Position: Any

**1SMA5913BT3  
through  
1SMA5945BT3**

**PLASTIC SURFACE  
MOUNT ZENER  
DIODES  
1.5 WATTS  
3.3–68 VOLTS**



**SMA  
CASE 403B-01  
PLASTIC**

### MAXIMUM RATINGS AND CHARACTERISTICS

Rating	Symbol	Value	Unit
DC Power Dissipation @ $T_L = 75^\circ\text{C}$ (Note 1) Derate above $75^\circ\text{C}$	$P_D$	1.5 20	Watts $\text{mW}/^\circ\text{C}$
DC Power Dissipation @ $T_A = 25^\circ\text{C}$ (Note 1) Derate above $25^\circ\text{C}$	$P_D$	900 7.2	$\text{mW}$ $\text{mW}/^\circ\text{C}$
Thermal Resistance from Junction to Lead	$R_{\theta JL}$	29	$^\circ\text{C}/\text{W}$
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	111	$^\circ\text{C}/\text{W}$
Peak Forward Surge @ $T_A = 25^\circ\text{C}$ , (JEDEC Method, Note 3)	$I_{FSM}$	20	Amps
Typical $P_{pk}$ Dissipation @ $T_L < 25^\circ\text{C}$ , (Note 2, PW–10/1000 $\mu\text{s}$ per Figure 8)	$P_{pk}$	200	Watts
Typical $P_{pk}$ Dissipation @ $T_L < 25^\circ\text{C}$ , (Note 2, PW–8/20 $\mu\text{s}$ per Figure 9)	$P_{pk}$	1000	Watts
Operating and Storage Junction Temperature Range	$T_J, T_{stg}$	150	$^\circ\text{C}$


1. FR4 Board, using Motorola minimum recommended footprint, as shown in case 403B outline dimensions spec.
2. Non-repetitive current pulse.
3. Measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulse per minute maximum.

**ELECTRICAL CHARACTERISTICS** ( $V_F = 1.5$  Volts @  $I_F = 200$  mA for all types)


Device	Nominal Zener Voltage $V_Z$ @ $I_{ZT}$ Volts	Test Current $I_{ZT}$ mA	Max Zener Impedance			Max Reverse Leakage Current			Device Marking
			$Z_{ZT}$ @ $I_{ZT}$ Ohms	$Z_{ZK}$ Ohms	$I_{ZK}$ mA	$I_R$ $\mu$ A	$V_R$ Volts	Max DC Zener Current $I_{ZM}$ mAdc	
1SMA5913BT3	3.3	113.6	10	500	1.0	50	1.0	455	813B
1SMA5914BT3	3.6	104.2	9.0	500	1.0	35.5	1.0	417	814B
1SMA5915BT3	3.9	96.1	7.5	500	1.0	12.5	1.0	385	815B
1SMA5916BT3	4.3	87.2	6.0	500	1.0	2.5	1.0	349	816B
1SMA5917BT3	4.7	79.8	5.0	500	1.0	2.5	1.5	319	817B
1SMA5918BT3	5.1	73.5	4.0	350	1.0	2.5	2.0	294	818B
1SMA5919BT3	5.6	66.9	2.0	250	1.0	2.5	3.0	268	819B
1SMA5920BT3	6.2	60.5	2.0	200	1.0	2.5	4.0	242	820B
1SMA5921BT3	6.8	55.1	2.5	200	1.0	2.5	5.2	221	821B
1SMA5922BT3	7.5	50	3.0	400	0.5	2.5	6.5	200	822B
1SMA5923BT3	8.2	45.7	3.5	400	0.5	2.5	6.8	183	823B
1SMA5924BT3	9.1	41.2	4.0	500	0.5	2.5	7.0	165	824B
1SMA5925BT3	10	37.5	4.5	500	0.25	0.5	8.0	150	825B
1SMA5926BT3	11	34.1	5.5	550	0.25	0.5	8.4	136	826B
1SMA5927BT3	12	31.2	6.5	550	0.25	0.5	9.1	125	827B
1SMA5928BT3	13	28.8	7.0	550	0.25	0.5	9.9	115	828B
1SMA5929BT3	15	25	9.0	600	0.25	0.5	11.4	100	829B
1SMA5930BT3	16	23.4	10	600	0.25	0.5	12.2	94	830B
1SMA5931BT3	18	20.8	12	650	0.25	0.5	13.7	83	831B
1SMA5932BT3	20	18.7	14	650	0.25	0.5	15.2	75	832B
1SMA5933BT3	22	17	17.5	650	0.25	0.5	16.7	68	833B
1SMA5934BT3	24	15.6	19	700	0.25	0.5	18.2	63	834B
1SMA5935BT3	27	13.9	23	700	0.25	0.5	20.6	56	835B
1SMA5936BT3	30	12.5	26	750	0.25	0.5	22.8	50	836B
1SMA5937BT3	33	11.4	33	800	0.25	0.5	25.1	45	837B
1SMA5938BT3	36	10.4	38	850	0.25	0.5	27.4	42	838B
1SMA5939BT3	39	9.6	45	900	0.25	0.5	29.7	38	839B
1SMA5940BT3	43	8.7	53	950	0.25	0.5	32.7	35	840B
1SMA5941BT3	47	8.0	67	1000	0.25	0.5	35.8	32	841B
1SMA5942BT3	51	7.3	70	1100	0.25	0.5	38.8	29	842B
1SMA5943BT3	56	6.7	86	1300	0.25	0.5	42.6	27	843B
1SMA5944BT3	62	6.0	100	1500	0.25	0.5	47.1	24	844B
1SMA5945BT3	68	5.5	120	1700	0.25	0.5	51.7	22	845B

 NOTE: Tolerance and Voltage Designation Tolerance designation – The type number listed indicates a tolerance of  $\pm 5\%$ .


## Rating and Typical Characteristic Curves ( $T_A = 25^\circ\text{C}$ )

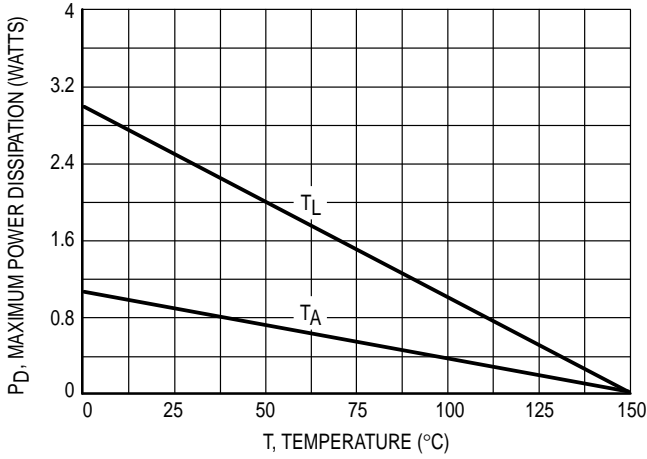


**Figure 1. Steady State Power Derating**

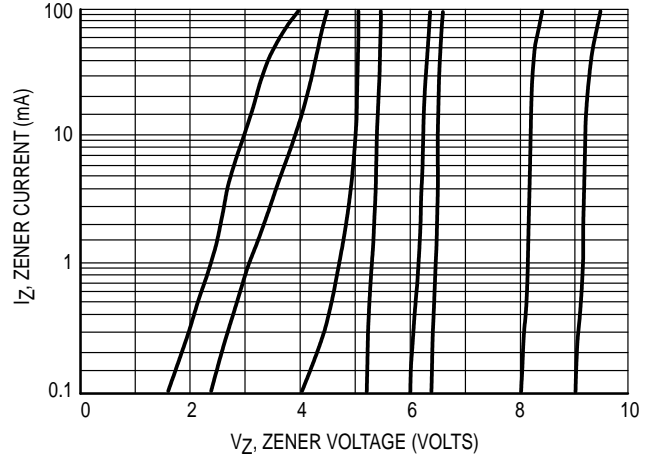


**Figure 2.  $V_Z$  - 3.3 thru 10 Volts**

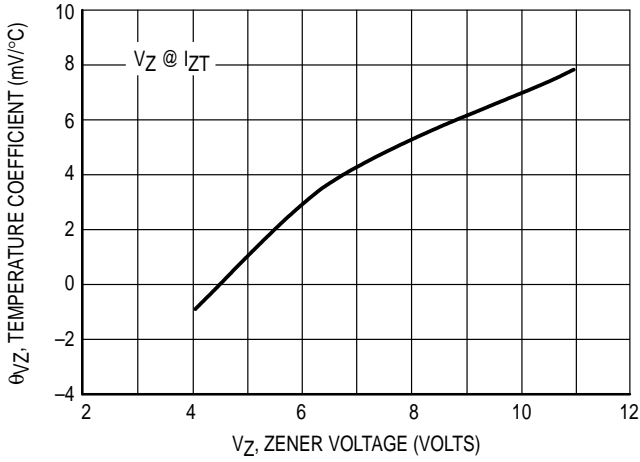

**Figure 3. Zener Voltage - 3.3 to 12 Volts**

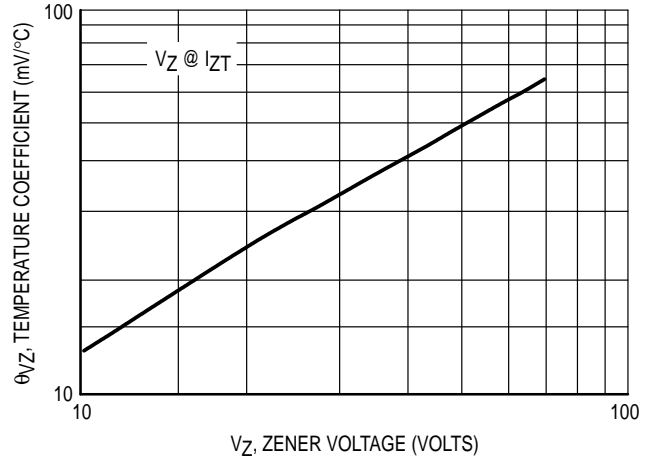


**Figure 4. Zener Voltage - 14 to 68 Volts**

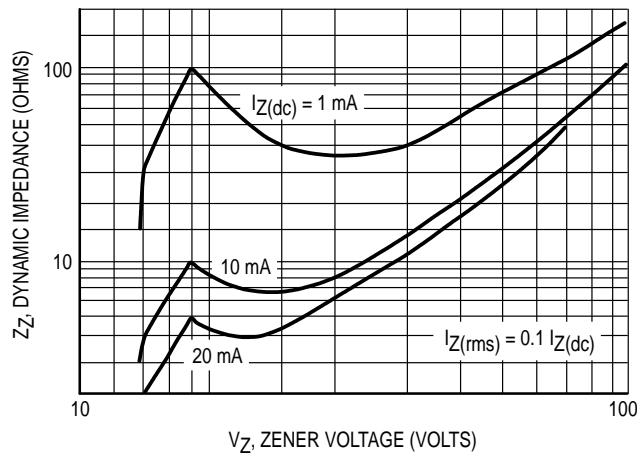


**Figure 5. Effect of Zener Voltage**


## Rating and Typical Characteristic Curves ( $T_A = 25^\circ\text{C}$ )

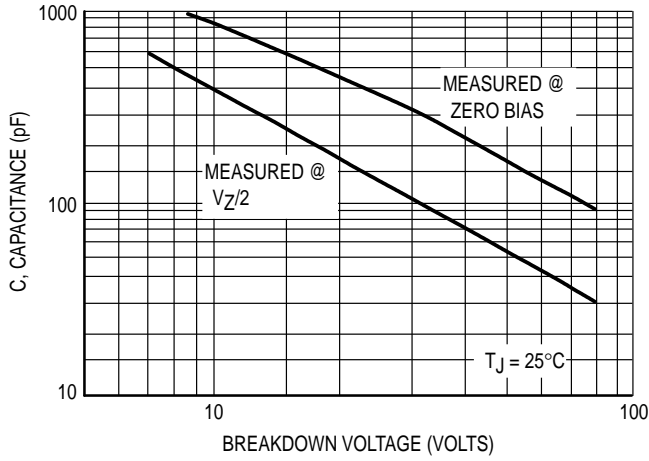


**Figure 6. Capacitance Curve**

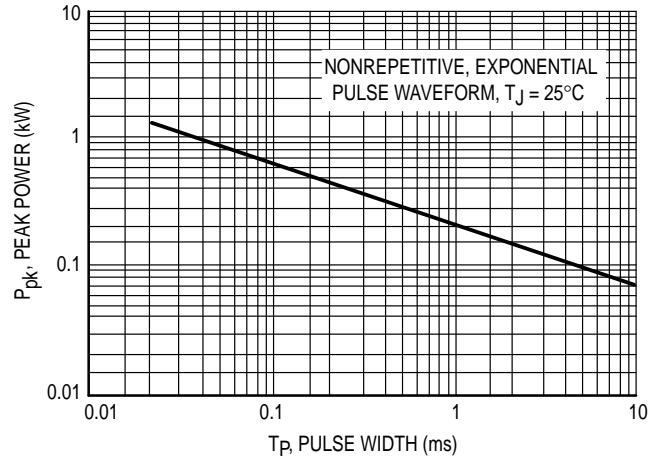

**Figure 7. Typical Pulse Rating Curve**

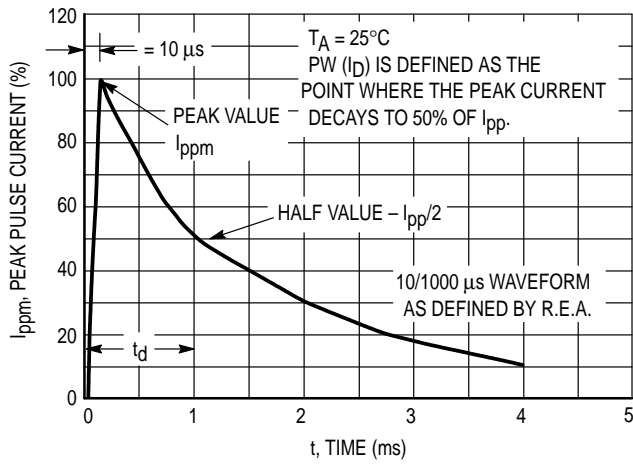


**Figure 8. Pulse Waveform**

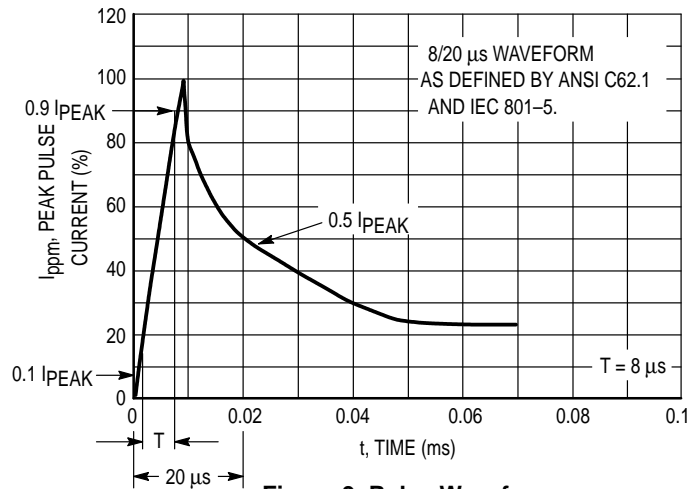


**Figure 9. Pulse Waveform**

# OUTLINE DIMENSIONS

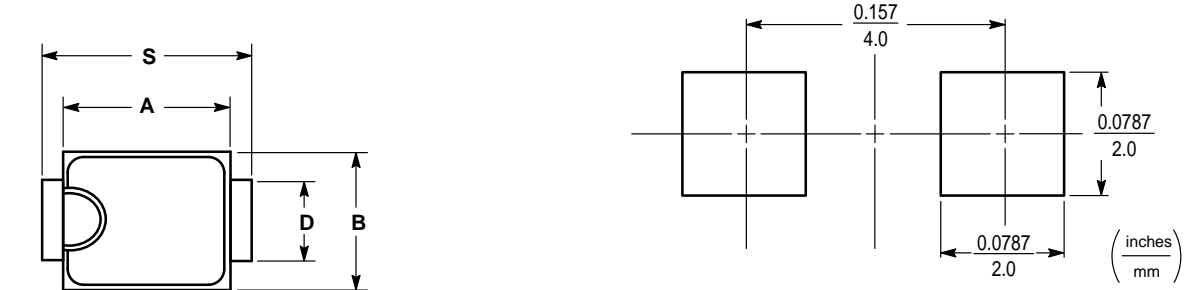


## SMA

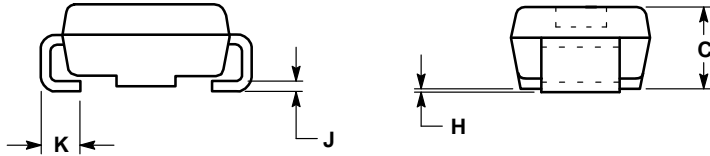

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.160	0.180	4.06	4.57
B	0.090	0.115	2.29	2.92
C	0.075	0.105	1.91	2.67
D	0.050	0.064	1.27	1.63
H	0.004	0.008	0.10	0.20
J	0.006	0.016	0.15	0.41
K	0.030	0.060	0.76	1.52
S	0.190	0.220	4.83	5.59

**CASE 403B-01  
ISSUE O**

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

**How to reach us:**

**USA/EUROPE/Locations Not Listed:** Motorola Literature Distribution;  
P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447 or 602-303-5454

**MFAX:** RMFAX0@email.sps.mot.com – TOUCHTONE 602-244-6609

**INTERNET:** <http://Design-NET.com>

**JAPAN:** Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, 6F Seibu-Butsuryu-Center,  
3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-81-3521-8315

**ASIA/PACIFIC:** Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,  
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298



**MOTOROLA**



1SMA5913BT3/D

