

***Nikon***

**Autofocus Speedlight**

**SB-20**

INSTRUCTION MANUAL

# CONTENTS

<b>FOREWORD</b> .....	3	<b>SYNCHRO-SUNLIGHT FILL-IN</b>	
<b>NOMENCLATURE</b> .....	4-6	<b>FLASH PHOTOGRAPHY</b> .....	36-38
<b>BASIC OPERATION</b> .....	7-13	In TTL Mode .....	37
Installing Batteries .....	7	In A Mode .....	37
Attaching Flash Unit to Camera Accessory Shoe .....	8	In M Mode .....	38
Adjusting Flash Head .....	9	<b>DIFFUSING THE LIGHT</b> .....	39-41
Programmed TTL Auto Flash Shooting (with Nikon F-501/N2020, F-401/N4004 or F-301/N2000) .....	10-11	Bounce Flash Photography Procedure .....	40-41
Flash Shooting .....	12-13	Using A Diffuser .....	41
<b>AUTOFOCUS FLASH PHOTOGRAPHY</b> (with Nikon F-501/N2020 or F-401/N4004) .....	14-16	<b>SYNCHRONIZATION WITH MOTOR-DRIVEN</b> <b>CAMERA</b> .....	42
<b>SETTING CAMERA SHUTTER SPEED</b> .....	17	<b>MULTIPLE FLASH EXPOSURES</b> .....	42
<b>DETERMINING APERTURE</b> .....	18-32	<b>MULTIPLE FLASH PHOTOGRAPHY</b> .....	43-46
TTL Mode (for TTL Automatic Flash Exposure Control) ....	18-22	TTL Multiple Flash Photography .....	43-45
A Mode (for Non-TTL Automatic Flash Exposure Control) .....	23-27	Manual Multiple Flash Photography .....	46
M Mode (for Manual Flash Exposure Control) ...	28-31	<b>AVOIDING "RED EYE"</b> .....	46
Guide Number .....	32	<b>CLOSE-UP FLASH PHOTOGRAPHY IN TTL MODE</b> ....	47
<b>SETTING POWER SWITCH</b> .....	33	<b>TIPS ON SPEEDLIGHT CARE</b> .....	48-49
STBY (STANDBY) Position .....	33	<b>ABOUT BATTERIES</b> .....	50
ON Position .....	33	<b>ACCESSORIES</b> .....	51-52
OFF Position .....	33	Sync Cords SC-11 and SC-15 .....	51
<b>READY-LIGHT INDICATIONS</b> .....	34-35	TTL Remote Cord SC-17 .....	51
Ready-Light Warning Functions .....	35	TTL Multi-Flash Adapter AS-10 .....	51
		TTL Multi-Flash Sync Cords SC-18 and SC-19 .....	52
		Flash Unit Couplers AS-4 and AS-7 .....	52
		DC Unit SD-7 .....	52
		<b>SPECIFICATIONS</b> .....	53-55

## Für Besitzer einer Nikon F4/F4s und F-801

Das SB-20 ermöglicht matrix-gesteuerten Aufhellblitz und Aufhellblitz mit mittlenbetonter Messung zusätzlich zur normalen TTL-Blitzautomatik und Blitzautomatik ohne TTL. Matrix-gesteuerter Aufhellblitz erzeugt eine ausgewogene Kombination von Umgebungslicht und Blitzbeleuchtung, die natürlich wirkt. Details werden besser herausgestellt—ohne daß dadurch die korrekte Belichtung für den Hintergrund verlorengeht.

Für nähere Einzelheiten lesen Sie bitte auch die Bedienungsanleitung zu Ihrer Kamera.

Die möglichen Blitzbetriebsarten für die einzelnen Kombinationen von Kamera und SB-20 entnehmen Sie bitte der Tabelle weiter unten.

### F4/F4s+SB-20

Objektive Objectifs	Sucher Viseur	Multi-Meß-Sucher DP-20 Viseur multi-mesure DP-20				AE-Sportsucher DA-20 Viseur action AE DA-20				6-fach-Vergrößerungssucher DW-21/Lichtschaftsucher DW-20 Amplificateur 6X DW-21/ Viseur de poitrine DW-20			
		P <sub>PH</sub>	S	A	M	P <sub>PH</sub>	S	A	M	P <sub>PH</sub>	S	A	M
AF Nikkore/AI-P-Nikkore AF Nikkor/Nikkor AI-P	Matrix Matriciel	⊙	⊙	⊙	△	-	-	-	-	-	-	-	-
	Mittlenbetont Centrée	○	○	○	△	○	○	○	△	-	-	-	-
	Spot Spot	△	△	△	△	△	△	△	△	△	△	△	△
AF-Telekonverter/ AF-Nikkore für Nikon F3AF/ AI-Nikkore (inkl. AI-S) AF Convertisseur/ AF Nikkor pour F3AF/ Nikkor AI (et AI-S)	Matrix Matriciel	⊙*	⊙*	⊙	△	-	-	-	-	-	-	-	-
	Mittlenbetont Centrée	○*	○*	○	△	○*	○*	○	△	-	-	-	-
	Spot Spot	△	△	△	△	△	△	△	△	△	△	△	△
Sonstige Objektive Autres objectifs	Matrix Matriciel	△	△	△	△	-	-	-	-	-	-	-	-
	Mittlenbetont Centrée	△	△	△	△	△	△	△	△	-	-	-	-
	Spot Spot	△	△	△	△	△	△	△	△	△	△	△	△

⊙ Matrix-gesteuerter Aufhellblitz

○ Aufhellblitz mit mittlenbetonter Messung

△ Konventionelle TTL-Blitzfotografie

\* Das Blitzen erfolgt automatisch in Betriebsart A. Die Blende manuell wählen.

• Bei Verwendung der Sucher DW-20 und DW-21 ist das TTL-Verbindungskabel SC-24 erforderlich.

## Pour les utilisateurs des appareils Nikon F4/F4s, F-801/N8008\*

Le flash SB-20 à mise au point automatique Nikon permet d'effectuer les prises en mesure matricielle et centrée en plus des contrôles de l'exposition avec flash automatique TTL et non TTL. Le flash en mesure matricielle permet de créer un effet naturel et esthétique en remplissant les ombres marquées et en mettant en valeur les détails du sujet—sans perdre l'exposition correcte de l'arrière-plan. Pour les détails, lisez attentivement le mode d'emploi du SB-20 et celui de l'appareil.

Référez-vous aux tableaux ci-après pour les modes de flash utilisables pour chaque combinaison appareil/SB-20.

\*La Nikon N8008 est vendue exclusivement aux Etats-Unis.

⊙ Dosage auto flash/lumière ambiante par mesure matricielle

○ Atténuation des ombres par flash en mesure centrée

△ Flash standard TTL

\* Le mode d'exposition passe automatiquement sur "A". Sélectionnez manuellement l'ouverture.

• La carte de télécommande TTL SC-24 est nécessaire lorsque l'on utilise le DW-20 ou DW-21.

### F-801/N8008+SB-20

Objektive Objectifs	Sucher Viseur	Belichtungsart Mode d'exposition			
		P <sub>D</sub> P P <sub>PH</sub>	S	A	M
AF-Nikkore/ AI-P-Nikkore AF Nikkor/ Nikkor AI-P	Matrix Matriciel	⊙	⊙	⊙	△
	Mittlenbetont Centrée	○	○	○	△
Sonstige Objektive• Autres objectifs•	Matrix Matriciel	○*	○*	○*	△
	Mittlenbetont Centrée	○*	○*	○	△

#### Zur Beachtung:

- Bei Verwendung der AF-Illuminator-LED des SB-20 mit einem AF-Nikkor-Objektiv läßt sich mit Brennweiten von 25 bis 105mm arbeiten. Dieser Bereich verschiebt sich bei Verwendung des AF-Telekonverters TC-16A nach 15 bis 58mm. Der Fokussierbereich liegt bei etwa 1 bis 8 Metern (mit AF-Nikkor 50mm f/1,8, bei Normaltemperaturen, für ein normales Aufnahmeobjekt mit 35% Reflexionsgrad).
- Für indirektes Blitzen die Kamera auf Belichtungsbetriebsart A oder M einstellen und eine der größeren Blenden wählen.
- Bei manueller Blitzkontrolle die Kamera auf Belichtungsbetriebsart A oder M einstellen und die Blende von Hand wählen.

⊙ Matrix-gesteuerter Aufhellblitz

○ Aufhellblitz mit mittlenbetonter Messung

△ Konventionelle TTL-Blitzfotografie

\* Das Blitzen erfolgt automatisch in Betriebsart A. Die Blende manuell wählen.

• Dazu gehören AF-Telekonverter, AI-Nikkore (einschließlich AI-S), das Balgengerät PB-6, Automatik-Zwischenringe usw.

⊙ Dosage auto flash/lumière ambiante par mesure matricielle

○ Atténuation des ombres par flash en mesure centrée

△ Flash standard TTL

\* Le mode d'exposition passe automatiquement sur "A". Sélectionnez manuellement l'ouverture.

• Comprend les convertisseurs AF, les objectifs Nikkor de type AI (y compris AI-S), le soufflet PB-6, les bagues-rallonge automatique, etc.

#### Notes:

- Lorsque l'on utilise l'illuminateur d'assistance AF du SB-20 avec des objectifs AF Nikkor, la distance focale va de 24 à 105mm. Cette plage passe à 15-58mm si l'on utilise un Téléconvertisseur AF TC-16A. La plage de mise au point est d'environ à 8 mètres (avec le Nikkor AF de 50mm f/1,8 à températures normales, pour un sujet standard et 35% de réflectance).
- Pour les prises de vue en flash par réflexion, réglez le mode d'exposition de l'appareil sur A ou M, et sélectionner une des ouvertures les plus larges.
- Lorsque le SB-20 est utilisé avec le contrôle de l'exposition en flash manuel, réglez le mode d'exposition de l'appareil sur A ou M et sélectionner manuellement l'ouverture de l'objectif.

# Nikon

## For Nikon F4/F4s, F-801/N8008\* camera users

The Nikon Autofocus Speedlight SB-20 makes it possible to perform Matrix Balanced Fill-Flash and Center-Weighted Fill-Flash in addition to standard TTL Automatic Flash Exposure Control and Non-TTL Automatic Flash Exposure Control. Matrix Balanced Fill-Flash creates a pleasing, natural effect by filling in harsh shadows and bringing out subject detail—without losing the correct background exposure. For details, be sure to read the SB-20 instruction manual and your camera instruction manual.

Refer to the tables below for usable flash modes in each camera/SB-20 combination.

\*The Nikon N8008 is sold exclusively in the U.S.A.

## Para los usuarios de las cámaras F4/F4s, F-801/N8008\*

El Speedlight de autoenfoco SB-20 de Nikon le permite efectuar flash de relleno equilibrado por matriz y flash de relleno equilibrado al centro además del control de exposición de flash automático TTL estándar y el control de exposición de flash automático no TTL. El flash de relleno equilibrado por matriz crea un efecto placentero y natural llenando las sombras bruscas y resaltando los detalles del sujeto—y sin perder la correcta exposición del fondo.

Para los detalles, asegúrese de leer el manual de instrucciones del SB-20 y el manual de instrucciones de su cámara.

Refiérase a las tablas que se indican a continuación para los modos de flash utilizables en cada combinación de cámara/SB-20.

\*La Nikon N8008 se vende exclusivamente en Estados Unidos de América.

### F4/F4s+SB-20

Lenses Objetivos	Metering system Sistema de medición	Viewfinder Visor	Multi-Meter Finder DP-20 Telémetro del fechador múltiple DP-20				AE Action Finder DA-20 Visor de acción AE DA-20				Waist-Level Finder DW-20/6X High-Magnification Finder DW-21 Visor de pantalla en la parte superior DW-20/Visor de alta ampliación 6X DW-21			
			P <sub>PH</sub>	S	A	M	P <sub>PH</sub>	S	A	M	P <sub>PH</sub>	S	A	M
AF Nikkor lenses/ AI-P-type Nikkor lenses Objetivos Nikkor AF/ Objetivos Nikkor tipo AI-P	Matrix Por matriz		⊙	⊙	⊙	Δ	-	-	-	-	-	-	-	-
	Center-Weighted Calculado para el centro		○	○	○	Δ	○	○	○	Δ	-	-	-	-
	Spot Puntual		Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ
AF Teleconverter/AF Nikkor lenses for Nikon F3AF/AI-type Nikkor lenses (including AI-S) Teleconvertidor AF/Objetivos Nikkor AF para Nikon F3AF/Objetivos Nikkor tipo AI (incluido al AI-S)	Matrix Por matriz		⊙*	⊙*	⊙	Δ	-	-	-	-	-	-	-	-
	Center-Weighted Calculado para el centro		○*	○*	○	Δ	○*	○*	○	Δ	-	-	-	-
	Spot Puntual		Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ
Other lenses Otros objetivos	Matrix Por matriz		Δ	Δ	Δ	Δ	-	-	-	-	-	-	-	-
	Center-Weighted Calculado para el centro		Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	-	-	-	-
	Spot Puntual		Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ	Δ

⊙ Matrix Balanced Fill-Flash

○ Center-Weighted Fill-Flash

Δ Standard TTL flash

\* Exposure mode automatically shifts to A. Select aperture manually.

• TTL Remote Cord SC-24 is required when using DW-20 or DW-21.

⊙ Flash de iluminación equilibrada por matriz

○ Flash de iluminación equilibrada al centro

Δ Flash estándar TTL

\* El modo de exposición cambia automáticamente a A. Seleccione la apertura manualmente.

• Al usar el DW-20 ó DW-21 se requiere del cordón remote TTL SC-24.

### F-801/N8008+SB-20

Lenses Objetivos	Metering system Sistema de medición	Exposure mode Modo de exposición	P <sub>D</sub> P <sub>PH</sub>	S	A	M
AF Nikkor lenses/AI-P-type Nikkor lenses Objetivos Nikkor AF/ Objetivos Nikkor tipo AI-P	Matrix Por matriz		⊙	⊙	⊙	Δ
	Center-Weighted Calculado para el centro		○	○	○	Δ
Other lenses• Otros objetivos•	Matrix Por matriz		○*	○*	○*	Δ
	Center-Weighted Calculado para el centro		○*	○*	○	Δ

⊙ Matrix Balanced Fill-Flash

○ Center-Weighted Fill-Flash

Δ Standard TTL flash

\* Exposure mode automatically shifts to A. Select aperture manually.

• Includes AF Teleconverters, AI-type Nikkor lenses (including AI-S), Bellows Focusing Attachment PB-6, Auto Extension Rings, etc.

⊙ Flash de iluminación equilibrada por matriz

○ Flash de iluminación equilibrada al centro

Δ Flash estándar TTL

\* El modo de exposición cambia automáticamente a A. Seleccione la apertura manualmente.

• Incluye teleconvertidores AF, lentes Nikkor de tipo AI (incluyendo AI-S), fuelle de enfoque PB-6, anillos de extensión automática, etc.

#### Notes:

- When using the SB-20's AF illuminator with AF Nikkor lenses, the focal length is from 24 to 105mm. This range shifts to 15 to 58mm when using AF Teleconverter TC-16A. The focusing range is approx. 1 to 8 meters (with AF Nikkor 50mm f/1.8 at normal temperatures, for a standard subject with 35% reflectance).
- For bounce flash photography, set the camera's exposure mode to A or M and select one of the larger apertures.
- When the SB-20 is used in Manual Flash Exposure Control, set the camera's exposure mode to A or M and manually select lens aperture.

#### Notas:

- Al usar el iluminador AF de la SB-20 con los lentes Nikkor AF, la distancia focal es de 24 a 105mm. Este rango cambia de 15 a 58mm cuando se usa el Convertidor AF TC-16A. El rango de enfoque es de aproximadamente 1 a 8 metros (Con AF de Nikkor de 50mm f/1,8 a temperaturas normales, para un sujeto estándar con un 35% de reflectancia).
- Para fotografía de flash de salto, ajuste el modo de exposición de la cámara en A o M y seleccione una de las aperturas mayores.
- Cuando el SB-20 se utiliza para control de exposición de flash manual, ajuste el modo de exposición de la cámara a A o M y seleccione manualmente la apertura del diafragma.

## FOREWORD

Thank you for purchasing the Nikon Auto-focus Speedlight SB-20. We hope the SB-20 will make photography a much bigger part of your life. Get to know your SB-20, but before using it, be sure to read both your camera instruction manual and this manual. Nikon cannot be held responsible for malfunctions resulting from use of the SB-20 other than as specified in this manual, or from use of the SB-20 with a camera made by a manufacturer other than Nikon.

### For Nikon F-401/N4004 camera users

Read the following instructions carefully when using the SB-20 with F-401/N4004 camera.


1. Nikon F-401/N4004 camera is designed for use with AF Nikkor lenses, except AF-Nikkor 80mm f/2.8, 200mm f/3.5 IF-ED and Autofocus Converter TC-16/TC-16A.

For most photos in this manual, aperture is set by rotating the lens aperture ring. With the F-401/N4004, however, aperture is set using camera's aperture dial. Do not forget to set and lock the lens at its smallest aperture.

For limited use of non-AF Nikkor lenses, see the F-401/N4004 instruction manual.

2. Most of the explanations in this manual dealing with Programmed TTL Auto Flash, TTL Auto Flash, etc., apply to shooting dark subjects. However, by setting the F-401/N4004 to program, aperture-priority or shutter-priority auto exposure mode, with the SB-20 set to TTL, automatic balanced fill-flash is possible in situations where fill-flash is effective, even with a bright subject. For details, see the F-401/N4004 instruction manual. (In **manual exposure mode**, ordinary TTL fill-flash is possible.)

# NOMENCLATURE



Bounce angle scale

**Bounce angle set knob**  
Rotates from  $-7^{\circ}$  to  $90^{\circ}$ .  
For bounce flash shooting,  
see page 40.

Battery cover index

**Autofocus assist illuminator LED**  
See pages 14 to 16.

Battery chamber cover

Mounting foot



Flash head

Zoom indicator window

Zoom set ring

**W** (wide) for lenses  
28mm or longer

**N** (normal) for  
lenses 35mm or  
longer

**T** (telephoto) for  
lenses 85mm or  
longer

Light sensor for non-TTL auto  
flash operation

Mounting foot lock nut

Hot-shoe contacts

### Reflector slot

For bounce flash (see page 41).

### Sync/multiple flash terminal

For (1) off-camera operation with a sync cord and (2) multiple flash photography in manual flash operation (page 46)

### External power source terminal

Accepts power cord from Nikon DC Unit SD-7.



### Aperture selection/shooting distance range panel

See pages 18 to 31.

Before using the SB-20, peel off the protective paper covering the panel.

## Light output index windows

Used in M mode

## Aperture index window

Used in A mode

## Aperture scale window

## Film speed scale window

## Film speed index

## Film speed knob

## Flash shooting distance range indicators

The patterned bar (fourth bar from the top) shows programmed TTL auto flash information.

## Distance scale window


## Distance scale selector

## Power switch

See page 33.

## Open-flash button

For (1) test firing in A mode, (2) multiple flash exposures (page 42) and (3) to turn on SB-20 after it is automatically turned off (page 33).

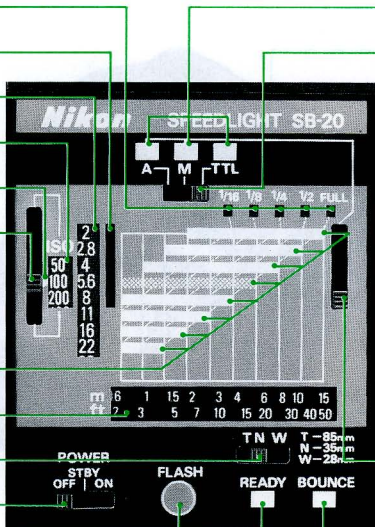

## Flash mode indicators

### Flash mode selector



TTL mode—for programmed TTL auto flash/TTL auto flash operation



A mode—for non-TTL auto flash operation



M mode—for manual flash operation.

### Aperture index knob/light output selector knob

Used in A and M modes

### Bounce set indicator

Lights up when flash head is rotated.


### Ready-light

See page 34.




# BASIC OPERATION

## Installing Batteries

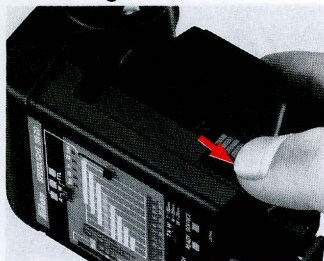


- 1. Remove battery chamber cover.**




- 2. Load four 1.5V AA-type penlight alkaline-manganese batteries or 1.2V NiCd batteries into the battery chamber.**

For battery information, see page 50.




- 3. To reattach battery chamber cover, align front edge of the cover with battery cover index on the flash unit, then push cover down and slide as far as it goes.**


## Attaching Flash Unit to Camera Accessory Shoe



4. Turn the mounting foot lock nut clockwise as far as it goes.




5. Slide mounting foot forward into the camera's accessory shoe as far as it goes.



6. Tighten lock nut firmly.

**With Nikon F3-series cameras with DE-2 or DE-3 finder:** Attach Flash Unit Coupler AS-4 or AS-7 to camera's accessory shoe before mounting the SB-20. The SB-20 cannot be mounted on F3-series camera with the other finders.

## Adjusting Flash Head



- 7.** Make sure bounce angle set knob is set at 0°.



- 8.** Rotate zoom set ring until desired zoom setting appears in the window.

Make sure zoom set ring is properly set at its click-stop position.



**W (Wide)**  
For 28mm or longer lenses



**N (Normal)**  
For 35mm or longer lenses




**T (Telephoto)**  
For 85mm or longer lenses

## Programmed TTL Auto Flash Shooting (with Nikon F-501/N2020, F-401/N4004 or F-301/N2000)

Steps 9 through 11 provide instructions for programmed TTL auto flash shooting with the Nikon F-501/N2020\*, F-401/N4004\*\* or F-301/N2000\* camera. For other flash exposure operations (TTL auto, non-TTL auto and manual flash exposure operations) see "SETTING CAMERA SHUTTER SPEED" on page 17 and "DETERMINING APERTURE," pages 18 to 32.

\*The Nikon N2020 and N2000 are sold exclusively in the U.S.A. and Canadian markets.

\*\*The Nikon N4004 is sold exclusively in the U.S.A. market.

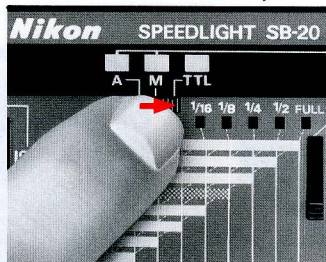


### 9. Set the SB-20's flash mode selector to TTL.

For the flash shooting range in programmed TTL automatic operation, see table on page 21. The shooting distance range panel at the back of the SB-20 also helps you to see the flash shooting range. To read a proper distance range, set the film speed knob and distance scale selector (see page 19.) A patterned bar among the flash shooting distance range indicators shows the shooting distance range in programmed TTL auto operation.


For programmed TTL automatic flash operation, note the following:

- Use AI-S type lenses only. With Nikon F-401/N4004, use only AF-Nikkor lenses, except AF-Nikkor 80mm f/2.8, 200mm f/3.5 IF-ED and Autofocus Converter TC-16/TC-16A.
- For autofocus operation, set the Nikon F-501/N2020's focus mode selector to S for Single Servo Autofocus mode, or set the Nikon F-401/N4004 to A for autofocus mode. For details, see pages 14 to 16.

With F-501/N2020



With F-301/N2000



- 10.** Set camera to a programmed exposure mode (P DUAL, P or P HI for F-501/N2020; P or P HI for F-301/N2000).

With the Nikon F-401/N4004, set the camera to either **program auto** (aperture dial to S, shutter speed dial to A) or **shutter-priority auto** (aperture dial to S, shutter speed dial to desired speed) exposure mode.





- 11.** Set lens to minimum aperture (largest f-number).

With AF Nikkor lenses, lock lens aperture at minimum setting. (See the lens instruction manual).

With the Nikon F-401/N4004, this procedure is unnecessary because the lens is always locked at the smallest aperture.


## Flash Shooting

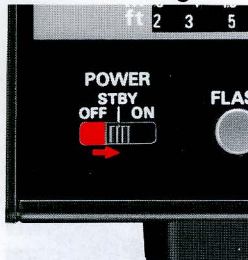

- 12.** Set power switch to STBY (standby position) to turn on SB-20.

LED indicating selected flash mode immediately lights up.


- 13.** Lightly press shutter release button and viewfinder ready-light comes on to indicate flash is ready to fire.

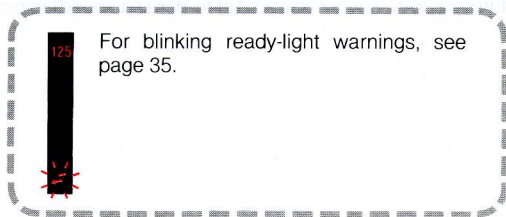



**14. Fully depress shutter release button to take picture.**

Unless viewfinder ready-light blinks after the shot, your flash exposure will be perfect; if it does blink, picture **may** be underexposed—move closer to subject.

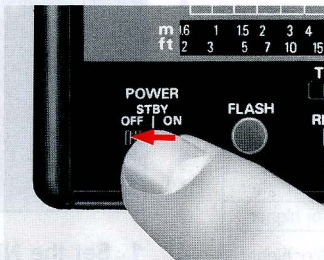

**15. Turn off the SB-20.**


Do not fire flash toward or near the eyes; it may damage the retina.

# AUTOFOCUS FLASH PHOTOGRAPHY (with Nikon F-501/N2020 or F-401/

N4004)

In programmed TTL autofocus flash photography, use film with a film speed specified in the table below for greater depth of field:


	Lens maximum aperture	Film speed
Lens only	f/2.8 or faster	ISO 50 or faster
	Slower than f/2.8	ISO 100 or higher
F-501/ N2020 with TC-16A	f/1.4 or f/1.2	ISO 50 or higher
	f/1.8, f/2, f/2.5 or f/2.8	ISO 100 or higher

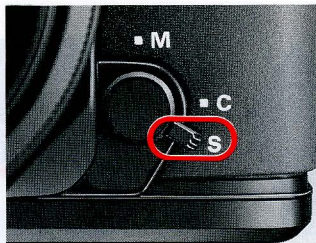

**1. Set the Nikon F-501/N2020's focus mode selector to S for Single Servo Autofocus mode, or set the F-401/N4004 to A for autofocus mode.**

Continuous Servo Autofocus cannot be used for autofocus flash photography.



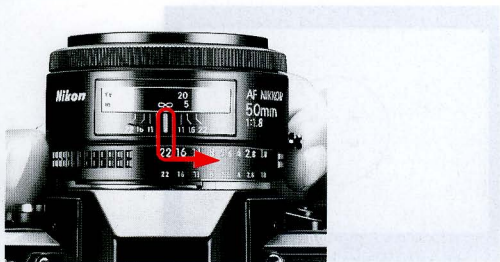

## 2. Set aperture.

With Nikon F-401/N4004, use camera's aperture dial. Don't forget to lock lens at minimum position.

**For programmed TTL operation**, set to smallest lens aperture (largest f-number) and lock the lens aperture. (For details, see the lens instruction manual).



**For other flash operations, set as follows:**


	Lens maximum aperture	Aperture setting
<b>Lens only</b>	f/2.8 or faster	f/2.8 or larger f-number (f/2.8, f/4, f/5.6, etc.)
	Slower than f/2.8	f/5.6 or larger f-number (f/5.6, f/8, f/11, etc.)
<b>F-501/ N2020 with TC-16A</b>	f/1.4 or f/1.2	f/2 or larger f-number (f/2, f/2.8, f/4, etc.)
	f/1.8, f/2, f/2.5 or f/2.8	f/4 or larger f-number (f/4, f/5.6, f/8, etc.)



### 3. Lightly press camera shutter release button.

When ready-light comes on but ambient light is insufficient for autofocus operation, AF illuminator fires to start autofocus operation.

If ambient light is sufficient, the AF illuminator does not fire.



### 4. Confirm whether the green in-focus indicator LED lights up, then fully depress the shutter release button.

If focus-not-possible indicator LED (x) remains lit when using the Nikon F-501/N2020, or if focus indicator LED (●) blinks with Nikon F-401/N4004, autofocus flash photography is impossible. Focus manually on the clear matte field.

# SETTING CAMERA SHUTTER SPEED

Set camera's shutter speed, referring to the table below.

As shown in the table, automatic sync speed setting is available with most Nikon cameras.

Nikon camera	Synchronization speed (sec.)	Camera setting	Running shutter speed (sec.)	Viewfinder shutter speed indication	
F-501/N2020* F-301/N2000*	1/125 or slower	P DUAL (F-501/N2020 only), P, P HI	1/125	125 lights up	
		A, 1/2000 ~ 1/250 sec.	1/125	125 lights up and LED for proper non-flash shutter speed blinks	
		1/125 ~ 1 sec. and B	as set	LED for manually set shutter speed lights up and LED for proper non-flash shutter speed blinks: no indication at B	
F-401/N4004	1/100 or slower	Shutter dial			
		A	S	—	
		A	1.4 ~ 32	1/100	—
		1/2000 ~ 1/125 sec.	S		—
		1/60 ~ 1 sec.	S	as set	—
		1/2000 ~ 1/125 sec.	1.4 ~ 32	1/100	—
		1/60 ~ 1 sec. and B	1.4 ~ 32	as set	—
FA	1/250 or slower	All shutter speed settings except M250 and B in P, S and A modes	1/250	LCD shows 250	
		1/4000 ~ 1/500 sec. in M mode	1/250	LCD shows M250	
		1/250 ~ 1 sec. in M mode	as set	LCD shows manually set shutter speed	
		M250 and B in P, S, A and M modes**	as set	No indication	
FE2	1/250 or slower	A, 1/4000 ~ 1/500 sec.	1/250	—	
		1/250 ~ 8 sec.	as set	—	
		M250 and B**	as set	—	
FG	1/90 or slower	P, A, 1/1000 ~ 1/125 sec.	1/90	Two LEDs representing 1/90 sec. light up	
		1/60 ~ 1 sec.	as set	LED for manually set shutter speed lights up	
		M90 and B**	as set	No indication	
F3-series (via AS-4 or AS-7 coupler)	1/80 or slower	A	1/80	LCD shows 80	
		1/2000 ~ 1/125 sec.	1/80	LCD shows M80	
		1/60 ~ 8 sec. X, B and T	as set	LCD shows manually set shutter speed, no indication at B or T	
FM2	1/250 or slower	1/250 ~ 1 sec. and B	as set	—	
FG-20	1/90 or slower	A, (1/1000 ~ 1/125 sec.	1/90	—	
		1/60 ~ 1 sec., M90 and B	as set	—	

\*In TTL mode, programmed TTL auto flash operation will be performed with the AI-S type lens and F-501/N2020 or F-301/N2000 set at programmed auto exposure mode.

\*\*Improper for programmed TTL auto flash operation and TTL auto flash operation.

# DETERMINING APERTURE

## TTL Mode (for TTL Automatic Flash Exposure Control)


TTL mode is for exclusive use with Nikon F-501/N2020, F-401/N4004, F-301/N2000, FA, FE2, and FG cameras *only*.

For TTL auto flash operation with the Nikon F-501/N2020, F-401/N4004, or F-301/N2000, be sure to set the camera to *aperture priority auto* or *manual exposure mode*.


For correct exposure in TTL mode, use film with a film speed specified in the table below:

Camera	Film speed
F-501/N2020 and F-301/N2000	ISO 25 to 1000
F-401/N4004, FA, FE2 and FG	ISO 25 to 400

To determine aperture with the SB-20's aperture selection/shooting distance range panel for TTL auto flash operation, read the following:  
(For programmed TTL auto flash operation, see pages 10 to 11.)

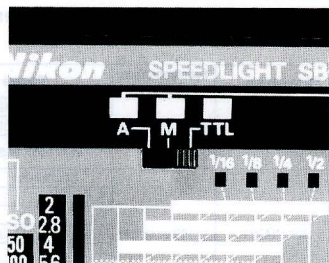


1. Set SB-20's mode selector to TTL.

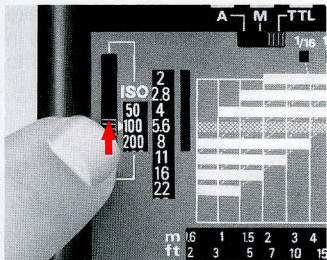


**2. Align film speed in use with the film speed index.**

For intermediate film speeds, use figure nearest the film speed in use. With ISO 32 film, for example, set to ISO 25. With film speeds not listed on the scale, be sure subjects are sufficiently within the shooting distance range indicated on the back of the SB-20.

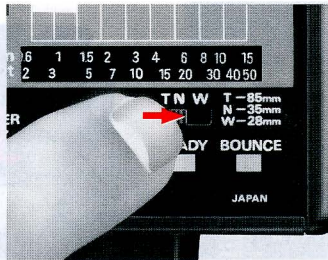

**3. To read proper shooting distance range, set distance scale selector to letter shown in zoom indicator window.**

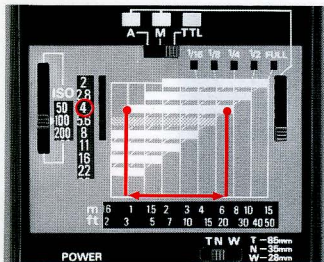

Next, turn on flash unit and take shot in the same manner shown in "BASIC OPERATION," steps 12 to 15.

#### 4. Select and set aperture.

The aperture scale window shows usable apertures. (Depending on film speed in use, all usable apertures may not be shown in the aperture scale window; for usable apertures, see table on next page.) For example, with the film speed index at ISO 100, you can select any aperture from f/2 to f/22. With the zoom set ring at N, selecting f/4 lets you take pictures of subjects 1m to 7.5m (approx. 3.3ft. to 25ft.) away. With Nikon F-401/N4004, use camera's aperture dial.



# Usable apertures/shooting distance range in TTL mode

Unit: m (ft)

	ISO film speed						Shooting distance range			
	1000*	800*	400	200	100	50	25	With zoom set at W	With zoom set at N	With zoom set at T
f/stop	2.8 + 1/3	2.8	2	—	—	—	—	2.8 ~ 20 (9.2 ~ 66)	3.8 ~ 20 (12 ~ 66)	4.5 ~ 20 (15 ~ 66)
	4 + 1/3	4	2.8	2	—	—	—	2.0 ~ 15 (6.6 ~ 49)	2.7 ~ 20 (8.9 ~ 66)	3.2 ~ 20 (10 ~ 66)
	5.6 + 1/3	5.6	4	2.8	2	—	—	1.4 ~ 11 (4.6 ~ 36)	1.9 ~ 15 (6.2 ~ 49)	2.3 ~ 18 (7.5 ~ 59)
	8 + 1/3	8	5.6	4	2.8	2	—	1.0 ~ 7.8 (3.3 ~ 25)	1.3 ~ 10 (4.3 ~ 33)	1.6 ~ 12 (5.2 ~ 39)
	11 + 1/3	11	8	5.6	4	2.8	2	0.7 ~ 5.5 (2.3 ~ 18)	1.0 ~ 7.5 (3.3 ~ 25)	1.2 ~ 9.0 (3.9 ~ 30)
	16 + 1/3	16	11	8	5.6	4	2.8	0.6 ~ 3.9 (2.0 ~ 13)	0.7 ~ 5.3 (2.3 ~ 17)	0.8 ~ 6.3 (2.6 ~ 21)
	22 + 1/3	22	16	11	8	5.6	4	0.6 ~ 2.7 (2.0 ~ 8.9)	0.6 ~ 3.7 (2.0 ~ 12)	0.6 ~ 4.5 (2.0 ~ 15)
	—	—	22	16	11	8	5.6	0.6 ~ 1.9 (2.0 ~ 6.2)	0.6 ~ 2.6 (2.0 ~ 8.5)	0.6 ~ 3.2 (2.0 ~ 10)
	—	—	—	22	16	11	8	0.6 ~ 1.4 (2.0 ~ 4.6)	0.6 ~ 1.9 (2.0 ~ 6.2)	0.6 ~ 2.2 (2.0 ~ 7.2)
	—	—	—	—	22	16	11	0.6 ~ 1.0 (2.0 ~ 3.3)	0.6 ~ 1.3 (2.0 ~ 4.3)	0.6 ~ 1.5 (2.0 ~ 5.0)

\* For Nikon F-501/N2020 and F-301/N2000 only.

■ = Programmed TTL auto flash information.

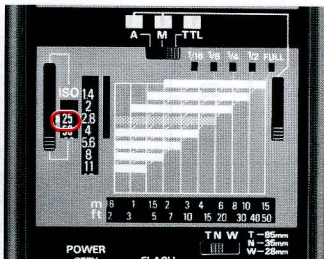

## Exposure compensation in TTL mode

With a dark subject (with low reflectivity) or one that is light in tone (having high reflectivity), over- or under-exposure may occur. To prevent this, compensate exposure by rotating camera's exposure compensation dial. With the FG, push the exposure compensation button. (For details, see camera instruction manual.)

The shooting distance range for TTL automatic flash operation varies with the amount of exposure compensation. For compensated distance range, see table at right, then reset film speed setting on the back of SB-20.

For example, with ISO 100 film and camera's exposure compensation dial set at +2, read 25 on the table and reset the SB-20's film speed index to 25.

With the zoom set ring at N and an aperture of f/4, the flash shooting distance range—which is 1m to 7.5m at

ISO 100—shifts to 0.6m to 3.7m at ISO 25.

The Nikon F-401/N4004 has no exposure compensation dial, and compensates exposure with automatic balanced fill-flash.

Exposure compensation value	Film speed in use				
	+2	+1	0	-1	-2
25	25	50	100	200	400
50	50	100	200	400	800*
100	100	200	400	800*	Not possible
200	200	400	800*	Not possible	Not possible
400	400	800*	Not possible	Not possible	Not possible
800*/1000*	800*	Not possible	Not possible	Not possible	Not possible

\*For Nikon F-501/N2020 and F-301/N2000 only.

⚡: Not possible; make the necessary compensation in the non-TTL automatic mode (see the following) or shoot on manual.




## A Mode (for Non-TTL Automatic Flash Exposure Control)


Use the SB-20 on A mode for automatic operation with Nikon cameras other than Nikon F-501/N2020, F-401/N4004\*, F-301/N2000, FA, FE2, and FG.

The following procedure lets you select aperture with the SB-20's aperture selection/shooting distance range panel for non-TTL auto flash operation.

\*Non-TTL automatic operation is not possible when Nikon F-401/N4004 is set to either program or shutter-priority auto exposure mode.

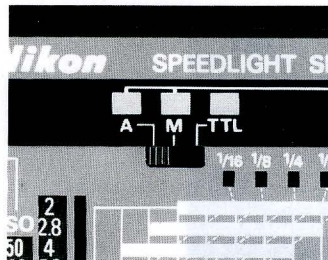


1. Set SB-20's mode selector to A.


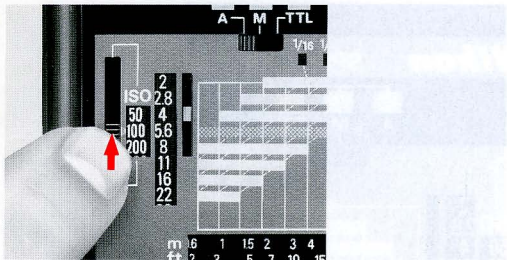


**2. Align film speed in use with film speed index.**

For intermediate film speeds, use the figure nearest the film speed in use. With ISO 32 film, for example, set to ISO 25. With film speeds not listed on the scale, be sure subjects are sufficiently within the shooting distance range indicated on the back of the SB-20.

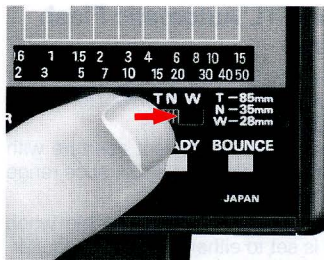

**3. To read proper shooting distance range, set distance scale selector to letter shown in zoom indicator window.**

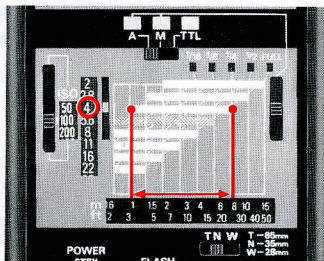

#### 4. Select appropriate aperture and set aperture index knob.

The aperture index window shows usable apertures. With the film speed index at ISO 100, for example, you can select any aperture from  $f/2$  to  $f/8$ .

With the zoom set ring at N, if you select  $f/4$ , you can take pictures of subjects 1m to 7.5m (approx. 3.3 ft. to 25 ft.) away.






## 5. Set your chosen aperture.

With Nikon F-401/N4004, use camera's aperture dial.


Next, turn on flash unit and take shot in the same manner shown in "BASIC OPERATION," steps 12 to 15.

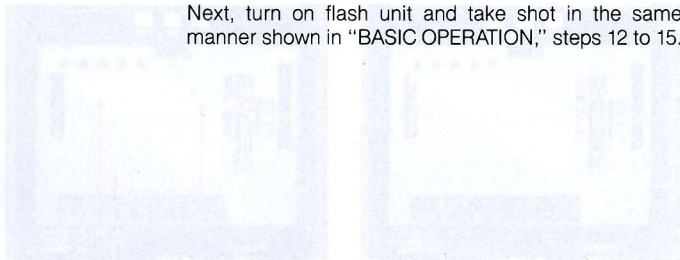

## Usable apertures/shooting distance range in A mode

Unit: m (ft)

		ISO film speed						Shooting distance range			
		1600	800	400	200	100	50	25	Zoom set at W	Zoom set at N	Zoom set at T
f/stop	8	5.6	4	2.8	2	1.4	—	1.4~11 (4.6~36)	1.9~15 (6.2~49)	2.3~18 (7.5~59)	
	11	8	5.6	4	2.8	2	1.4	1.0~7.8 (3.3~26)	1.3~10 (4.3~33)	1.6~12 (5.2~39)	
	16	11	8	5.6	4	2.8	2	0.7~5.5 (2.3~18)	1~7.5 (3.3~25)	1.2~9 (3.9~30)	
	22	16	11	8	5.6	4	2.8	0.6~3.9 (2.0~13)	0.7~5.3 (2.3~17)	0.8~6.3 (2.6~21)	
	32	22	16	11	8	5.6	4	0.6~2.7 (2.0~8.9)	0.6~3.7 (2.0~12)	0.6~4.5 (2.0~15)	




### Exposure compensation in A mode

With a dark background (one with low reflectivity) or one that is light in tone (having high reflectivity), over- or underexposure may occur. To prevent this, compensate exposure by stopping down or opening aperture. With a dark background, stop down the aperture 1/2 to one full f/stop; when the background is light in tone, open the aperture 1/2 to one full f/stop. With the Nikon F-401/N4004, set aperture using the camera's aperture dial.


## M Mode (for Manual Flash Exposure Control)

In M mode, you can choose the amount of light output: full, 1/2, 1/4, 1/8 or 1/16.

To determine aperture and/or light output with the SB-20's aperture selection/shooting distance range panel for manual flash operation, read the following.




1. Set the SB-20's flash mode selector to M.

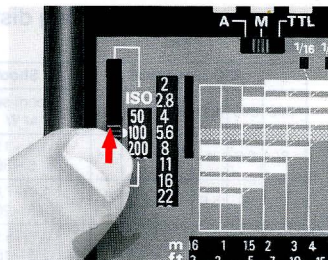


2. Align film speed in use with the film speed index.

For intermediate film speeds, use the figure on the scale nearest the film speed in use. With ISO 32 film, for example, set to ISO 25.



**3. To read proper shooting distance, set distance scale selector to letter shown in zoom indicator window.**




**4. Choose and set aperture.**

The aperture index window shows usable apertures. For example, with film speed index set at ISO 100 and the zoom set ring at N, and if you want to shoot a subject 3m away, you can select any aperture from f/2 to f/8. You can also determine aperture using the SB-20's guide number (GN). For details, see page 32.

With Nikon F-401/N4004, use camera's aperture dial.



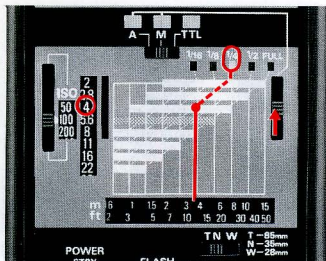

Next, turn on the flash unit and take shot in the same manner shown in “BASIC OPERATION,” steps 12 to 15.


## 5. Set light output selector to appropriate setting.

Follow the appropriate vertical line upward from the distance scale window until it intersects with the horizontal distance scale indicator line for the selected aperture. Then follow the diagonal dotted line upward to determine the correct light output for the aperture selected. For example, with the film speed set at ISO 100 and the zoom set ring at N, to shoot a subject 3.7m away at f/4, fire the flash at 1/4 light output. Set the light output selector so the yellow output index shows “1/4” in the window below.




## To determine light output before selecting aperture

Use the following procedure instead of steps 4 and 5 to determine light output before selecting aperture:

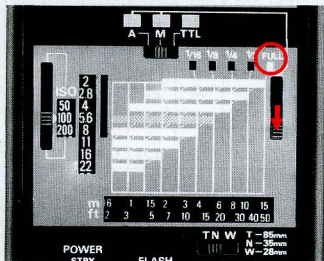

1. Set the light output selector so the yellow light output index indicates the desired light output.

In the example photo, full light output is selected.



2. Determine and set proper lens aperture.

To determine correct aperture, follow both the vertical line from the distance scale window and the dotted line from the light output window to the point of intersection. If the lines do not intersect, move closer to subject or reset light output selector for more light output.

For example, with the film speed index at ISO 100 and zoom set ring at N, to shoot a subject 10m away at full light output, follow both the vertical line from figure 10 in the distance scale window and the dotted line from the light output window to FULL. The two lines intersect at distance range indicators for  $f/2.8$ —you must set your lens to  $f/2.8$ .

To take intentionally over- or underexposed pictures, open or stop-down the lens aperture.

## Guide Number

Unit: m (ft.)

See the table at right for guide numbers of the film speeds and zoom settings.


In M mode, use the following equation to determine aperture:

$$f/\text{stop} = \frac{\text{guide number}}{\text{flash-to-subject distance}}$$

With ISO 400 film and the zoom set knob at N, the SB-20's guide number is 60(m) for full output. If the subject is 15m away, divide 60 by 15 to get f/4.

Light output	Zoom setting	ISO film speed						
		1600	800	400	200	100	50	25
Full	W	88 (289)	62 (203)	44 (144)	31 (102)	22 (72)	15 (49)	11 (36)
	N	120 (394)	85 (279)	60 (197)	42 (138)	30 (98)	21 (69)	15 (49)
	T	144 (472)	102 (335)	72 (236)	51 (167)	36 (118)	25 (82)	18 (59)
1/2	W	62 (203)	44 (144)	31 (102)	22 (72)	15 (49)	11 (36)	7.8 (25)
	N	85 (279)	60 (197)	42 (138)	30 (98)	21 (69)	15 (49)	11 (36)
	T	102 (335)	72 (236)	51 (167)	36 (118)	25 (82)	18 (59)	13 (43)
1/4	W	44 (144)	31 (102)	22 (72)	15 (49)	11 (36)	7.8 (25)	5.5 (18)
	N	60 (197)	42 (138)	30 (98)	21 (69)	15 (49)	11 (36)	7.5 (25)
	T	72 (236)	51 (167)	36 (118)	25 (82)	18 (59)	13 (43)	9 (30)
1/8	W	31 (102)	22 (72)	15 (49)	11 (36)	7.8 (25)	5.5 (18)	3.9 (13)
	N	42 (138)	30 (98)	21 (69)	15 (49)	11 (36)	7.5 (25)	5.3 (17)
	T	51 (167)	36 (118)	25 (82)	18 (59)	13 (43)	9 (30)	6.3 (21)
1/16	W	22 (72)	15 (49)	11 (36)	7.8 (25)	5.5 (18)	3.9 (13)	2.7 (8.8)
	N	30 (98)	21 (69)	15 (49)	11 (36)	7.5 (25)	5.3 (17)	3.7 (12)
	T	36 (118)	25 (82)	18 (59)	13 (43)	9 (30)	6.3 (21)	4.5 (15)

# SETTING POWER SWITCH



## STBY (STANDBY) Position

Use to conserve energy and shorten recycling time.

### With Nikon F-501/N2020, F-401/N4004, F-301/N2000, FA, FE2, and FG:

Use the SB-20's STBY position to turn on the SB-20. In STBY position, when the camera's meter turns off, in one or two minutes the SB-20 turns off automatically. To turn the SB-20 on again, lightly press the camera's shutter release button.

**Note:** When the Nikon FA or FE2 is connected to Nikon Motor Drive MD-12 via a remote cord, the camera's meter stays on and the SB-20 remains on at STBY position.

## With other cameras:

Though the ON position is normally recommended for turning on the flash unit, STBY can also be used.

With other Nikon cameras, even if the camera's exposure meter stays on, the SB-20 automatically turns off when not used for one or two minutes. To turn on again, set power switch to ON or OFF position, then reset to STBY. For convenience, you may also push the open-flash button to turn on the SB-20.

## ON Position

### With cameras other than the Nikon F-501/N2020, F-401/N4004, F-301/N2000, FA, FE2, and FG:

This position is normally used to turn on the SB-20.




### With the Nikon FA, FE2, and FG:

To turn on the SB-20 when using mechanical shutter settings (M250, M90 or B), set power switch to ON.

## OFF Position

When not using the flash unit, always set the power switch to OFF position.

# READY-LIGHT INDICATIONS

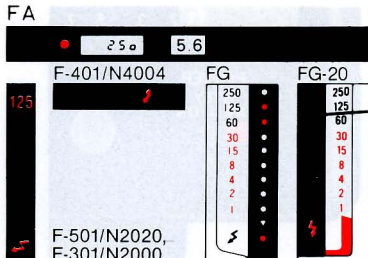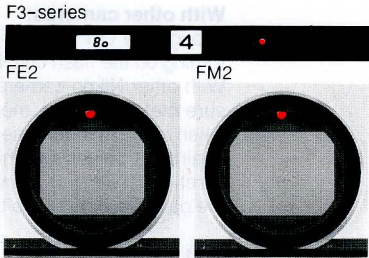

When the flash unit is turned on, the SB-20's ready-light lights up to indicate the flash is ready to fire.

To activate the viewfinder ready-light function when using the Nikon FA, FE2, F-501/N2020, F-401/N4004, F-301/N2000, FG, or FG-20, first turn on the camera's meter by lightly pressing the shutter release button.

With alkaline-manganese batteries, if the ready-light takes more than 30sec. to light up, replace the batteries with a fresh set.

## Ready-Light Warning Functions

To prevent errors, the ready-light inside the camera's viewfinder blinks in the cases listed below. When blinking occurs, check the SB-20's flash mode selector setting, the camera's shutter speed/mode selector setting or film speed setting and adjust as necessary.

- 1) When SB-20 is set at TTL with cameras other than Nikon F-501/N2020, F-401/N4004, F-301/N2000, FA, FE2, or FG. Reset SB-20's flash mode selector to A or M.
- 2) When using the FA, FE2, or FG to perform TTL automatic flash photography with the camera's shutter speed dial set at a mechanical setting (M250, M90 or B). Reset shutter speed dial to another shutter speed setting. For M250, M90 or B setting, reset SB-20's flash mode selector to A or M.
- 3) When performing programmed TTL auto or TTL auto flash operation with a camera film speed setting beyond the usable range. Use film within the appropriate range for TTL auto flash photography (ISO 25 to 400 with the F-401/N4004, FA, FE2 or FG; ISO 25 to 1000 with the F-501/N2020 or F-301/N2000). With the FA, ready-light also blinks when the film speed setting on the camera is near ISO 12.


- 4) When shutter speed set on the FE or FM2 is faster than the flash sync speed. Set the shutter speed to the flash sync speed or slower one.
- 5) With the Nikon F-401/N4004, when the built-in flash and SB-20 are OFF, and when the camera detects flash is effective, the ready-light in the camera's viewfinder blinks when the shutter release button is lightly pressed.

With the SB-20 in TTL or A mode, if both viewfinder ready-light and SB-20 ready-light blink after taking pictures (to warn that lighting might have been insufficient for correct exposure), confirm subject is within the flash shooting distance range and, if necessary, use a wider aperture or move closer to the subject.

With the Nikon F-401/N4004, for scenes where the background is extremely bright, the ready-light may not blink after the shot, even if flash is insufficient for correct exposure.

With weak batteries, ready-lights blink to indicate insufficient flash power, even if the subject is within the shooting distance range; replace batteries with a fresh set.

# SYNCHRO-SUNLIGHT FILL-IN FLASH PHOTOGRAPHY

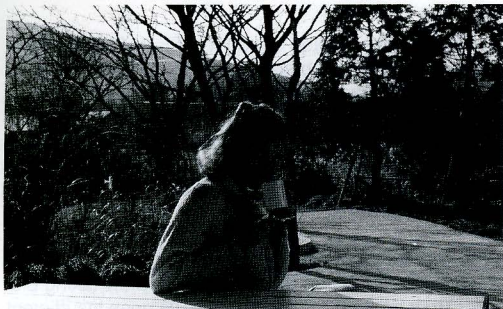


For backlit subjects, to fill in shadows and balance lighting, use the SB-20 even in daytime.

In the following, use a slower shutter speed to avoid a dark background.

## **Without flash:**

The backlit subject comes out too dark.

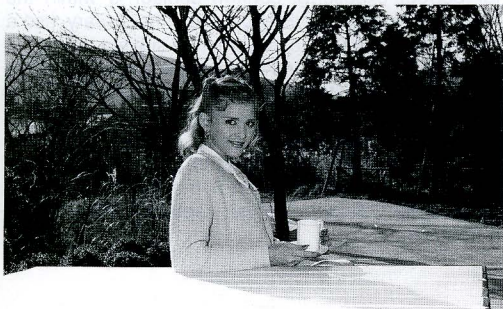

## **With flash:**

Both the subject and the background come out properly exposed.

By setting the F-401/N4004 to program, aperture-priority or shutter-priority auto exposure mode, with the SB-20 set to TTL, automatic balanced fill-flash is possible in situations where fill-flash is effective, even with a bright subject. For details, see the F-401/N4004 instruction manual.

(In **manual exposure mode**, ordinary TTL fill-flash is possible.)

## In TTL Mode

1. Set the camera shutter speed manually to a flash synchronization speed or slower speed.
2. Frame the background in the camera viewfinder, turn on the camera's exposure meter to determine aperture for a correct background exposure, then set the aperture on the lens.
3. Set the flash mode selector to TTL, turn on the SB-20 and take the shot.

With a strongly backlit subject (e.g., scene which includes the sun), it may be difficult to obtain desired exposure balance. In this case, use the SB-20 in M mode.

**Note:** Do not use programmed TTL flash operation for fill-in flash photography.

## In A Mode

1. Determine correct aperture for the backlit subject (according to method on page 25) by referring to the SB-20's aperture selection/distance range panel, then set both the aperture index and the aperture on the lens.
2. Frame the background in the camera viewfinder and turn on camera meter to determine proper shutter speed for the aperture set on the lens. The shutter speed must be equal to or slower than the flash sync speed—without a proper shutter speed you cannot perform fill-in flash photography in A mode.
3. Set the shutter speed from step 2 on camera's shutter speed dial.
4. Set the flash mode selector to A, turn on the flash unit and take the shot.

With a strongly backlit subject, perform fill-in flash photography in M mode.

## In M Mode

1. Manually set the camera shutter speed to a flash synchronization speed or slower speed.
2. Frame the background in the camera's viewfinder, then turn on the camera's exposure meter to read proper aperture for correct background exposure, and set the aperture on the lens.
3. Calculate the flash-to-subject distance using the equation below and set the SB-20 at the calculated distance.

$$\text{flash-to-subject} = \frac{\text{guide number}^*}{\text{f/stop}}$$

\* For guide number, see page 32.

4. Set the SB-20's flash mode selector to M, turn on the flash unit and take the shot.

To eliminate harsh shadows caused by ambient daylight, decrease flash illumination by one or two f/stops using one of the methods below.

1. Use an aperture one or two f/stops smaller than that determined in step 2 in combination with a shutter speed slower by one or two steps.
2. Reduce the amount of light output by one or two steps by resetting the light output selector knob.
3. Use a flash-to-subject distance from 1.4 to two times longer than that determined using the equation in step 3.




# DIFFUSING THE LIGHT



Diffused light eliminates harsh shadows and creates attractive portraits. There are two ways to diffuse light:


1. Bounce light off a broad reflective surface such as the ceiling;
2. Use a diffuser between the flash and the subject.



**Direct flash:** Harsh, unflattering lighting.




**Bounce flash:** Soft, natural-looking lighting.




## Bounce Flash Photography Procedure

1. Select a ceiling to bounce the flash from. In color photography, select a white or silver ceiling—otherwise, color photographs come out with an unnatural color cast similar to that of the reflecting surface.
2. Rotate the flash head upwards, towards the ceiling. To avoid uneven illumination, rotate flash head back  $60^\circ$  or more.
3. Set flash mode selector to TTL for TTL auto flash operation or A for non-TTL auto flash operation, then turn on the flash unit. The bounce indicator lights up.
4. Choose an aperture and perform a test firing. If the ready-light blinks after test firing, indicating under-exposure may occur at the aperture set on the lens, use a wider aperture or reduce the bounce distance and test fire the flash again.
5. Bracket your exposures. You are recommended to take additional shots with the camera's exposure compensation dial set in the + or - direction (not possible with Nikon F-401/N4004) for TTL auto flash operation or with the lens opened up or stopped down one or two f/stops for non-TTL auto flash operation.



**To create a catchlight for the subject's eyes:** Insert white paper into the SB-20's reflector slot so a small amount of direct illumination fills in unflattering shadows around the eyes.



## Using A Diffuser

Place a translucent material, such as one or more sheets of tracing paper, between the flash and subject to diffuse light. It is recommended that you experiment with different flash-to-diffuser distances and/or more than one diffuser.

Use the SB-20 on TTL or M mode when using a diffuser.

## SYNCHRONIZATION WITH MOTOR-DRIVEN CAMERA

In M mode, you can perform sequential flash shootings with a motor driven camera at up to 4.2 fps (frames per second).

The maximum number of flashes for continuous shooting are listed below.


Batteries	Light output	Maximum number of flashes*
AA-type alkaline-manganese batteries inside SB-20	1/4	2
	1/8	4
	1/16	8
AA-type alkaline-manganese batteries inside SB-20 plus C-type alkaline-manganese batteries inside optional DC Unit SD-7**	1/4	4
	1/8	10
	1/16	40***

\* When the SB-20 is charged for 30sec. after the ready-light lights up; at 4.2 fps with fresh batteries; at 20°C (68°F)

\*\* For details about the SD-7, see page 52.

\*\*\* More flashes possible, but never fire the flash more than 40 times. Before firing the flash again, stop using for more than 10 minutes.


## MULTIPLE FLASH EXPOSURES

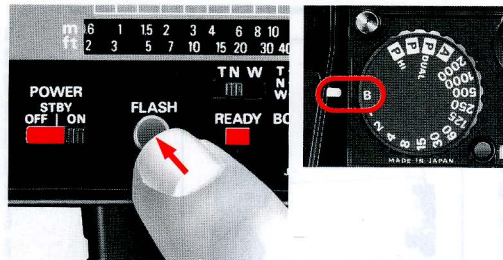

To create multiple-exposure “stroboscopic” effects or paint the scene with light, use the following procedure:

1. Disconnect the flash unit from the camera body.
2. Set the camera at B (bulb).
3. Push the open-flash button repeatedly—as many times as desired.

# MULTIPLE FLASH PHOTOGRAPHY

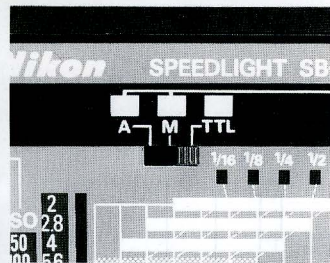

## TTL Multiple Flash Photography


Use the Nikon Speedlight SB-22, SB-20, SB-18, SB-16B or SB-15 connected to an F-501/N2020, F-401/N4004, F-301/N2000, FA, FE2, or FG camera as a master flash unit; and use either the SB-22, SB-21B, SB-20, SB-18, SB-17, SB-16A, SB-16B and/or SB-15 as slave flash unit(s). Up to five flash units can be used.


For TTL multiple flash photography, use the optional TTL Multi-Flash Sync Cord SC-18 (1.5m) and/or SC-19 (3m) to connect the flash units via the TTL multiple

flash terminal. Because the SB-22, SB-21B, SB-20, SB-18 and SB-15 are not provided with a TTL multiple flash terminal, it is necessary to use TTL Remote Cord SC-17 when using these flash units as a master flash unit. To use the SB-22, SB-20, SB-18 and/or SB-15 as slave flash units, use the AS-10. When using the SB-140, SB-14 and/or SB-11 for TTL multiple flash photography, you should also use TTL Remote Cord SC-23. With the Nikon F-401/N4004, programmed TTL auto flash and TTL auto flash are not possible with the SB-11/14/140 (even with the SC-23) or SB-21. They cannot be used for TTL multi-flash either, even as a slave flash unit.

See the system chart on the next page.



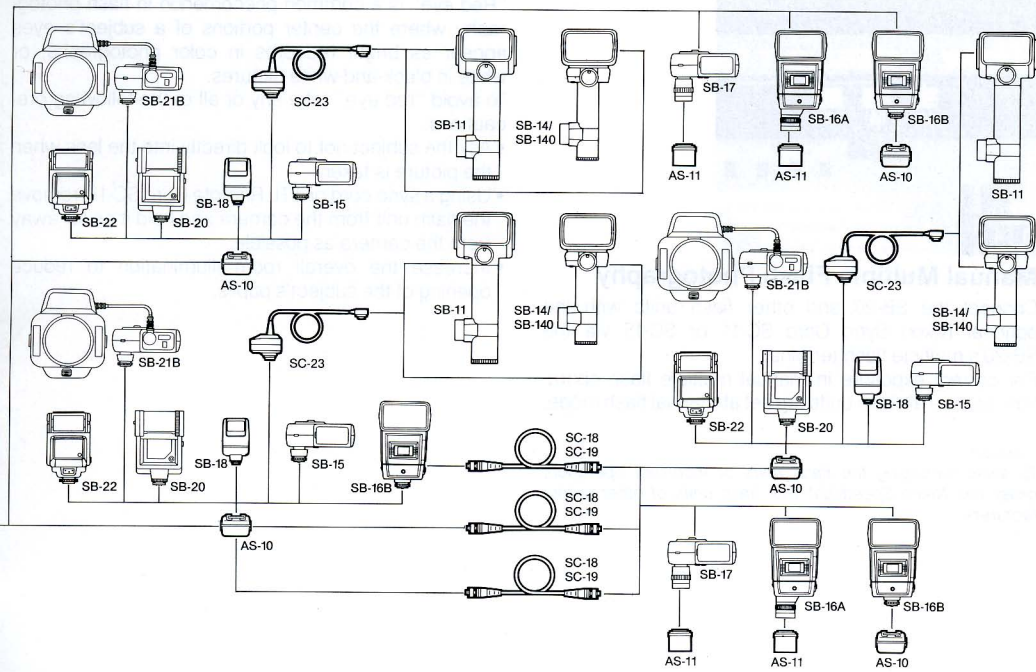

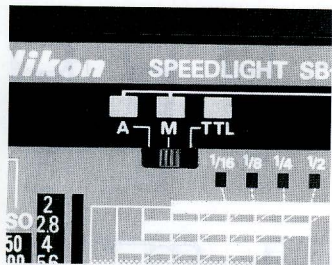

## Manual Multiple Flash Photography

Connect the SB-20 and other flash units with the optional Nikon Sync Cord SC-11 or SC-15 via the SB-20's multiple flash terminal.

For correct exposure in manual multiple flash operation, be sure all flash units are set at manual flash mode.

### **Caution**

*To avoid damaging the flash units or incorrect operation, never mix Nikon Speedlight with flash units of other manufacturers.*

## AVOIDING "RED EYE"

"Red eye" is a common phenomenon in flash photography where the center portions of a subject's eyes appear as bright red orbs in color photographs, or white in black-and-white pictures.

To avoid "red eye," take any or all of the following precautions:

- Ask the subject not to look directly into the lens when the picture is taken.
- Using a sync cord or TTL Remote Cord SC-17, remove the flash unit from the camera and hold it as far away from the camera as possible.
- Increase the overall room illumination to reduce opening of the subject's pupils.



# CLOSE-UP FLASH PHOTOGRAPHY IN TTL MODE

When used with the Nikon F-501/N2020, F-401/N4004, F-301/N2000, FA, FE2 or FG camera, the optional TTL Remote Cord SC-17 lets you perform flash shooting with a subject closer than 0.6m.

1. Use the SC-17 to connect the SB-20 and camera. (See SC-17 instruction manual.)
2. Position the SB-20 and rotate the flash head so light from the flash head covers the subject.
3. Regardless of the lens in use, set the zoom set ring so "W" appears in the zoom indicator window.
4. To determine aperture, use the following equation:

$$f/\text{stop} \cong \frac{A}{\text{flash-to-subject distance}}$$

where A corresponds to the film in use according to the table below:

ISO film speed	25	32	40	50	64	80	100	125	160	200	250	320	400	500*	640*	800*	1000*
A	2	2.2	2.5	2.8	3.2	3.5	4	4.4	5	5.6	6.3	7.1	8	8.9	10.1	11	13




\*For F-501/N2020 and F-301/N2000 only.

If you are using ISO 100 film for example, and the flash-to-subject distance is 0.5m, divide 4 by 0.5 to get f/8. That means you can use an aperture of f/8 or smaller. Use as small an aperture as possible.

5. Set the flash mode selector to TTL, turn on the SB-20 and take the shot.

**With very light- or dark-toned subjects,** make exposure compensation with the camera's exposure compensation dial.


## TIPS ON SPEEDLIGHT CARE




- To remove smudges, wipe with a dry soft or silicon-treated cloth. Never use thinner, benzine or alcohol—they might damage plastic parts.

- Never disassemble or repair the flash unit; if the SB-20 malfunctions, take it immediately to an authorized Nikon dealer or service center.


- Keep the SB-20 away from places where temperature is higher than 50°C, and do not store in damp places. Use within the range of -10°C ~ +50°C.



- Keep the SB-20 away from salt water and out of the rain.



- When not using the SB-20, remove batteries to avoid damage due to battery leakage. If leakage occurs, take the SB-20 to your nearest Nikon authorized service facility.



- When the SB-20 is not used, perform the following once a month:
  1. Install batteries, turn on the SB-20 and fire flash a few times.
  2. Wait until the ready-light comes on.
  3. Turn off the SB-20, and remove the batteries.

# ABOUT BATTERIES

---

## **New batteries**

Purchase the new (freshest) batteries possible.

## **Temperature**

Battery life ratings are based on operation at 20°C (68°F). At other temperatures, battery life is shortened. For low temperature operation, keep spare batteries and if possible, use NiCd batteries.

## **Continuous use**

Batteries are drained much more quickly by continuous use than by intermittent use.

## **Storage**

Store batteries in a cool, dry place below 20°C (68°F).

## **Battery brand**

Do not mix battery brands or model numbers, or new and old batteries.

## **Disposal**

Do not dispose of batteries by burning, and never disassemble batteries.

## **NiCd batteries**

In comparison with regular batteries, NiCd batteries provide faster recycling time and better efficiency at low temperatures.

Before charging NiCd batteries, thoroughly read instructions for batteries and battery charger.

*\*Batteries with a "+" terminal that exceeds 6mm in diameter cannot be used.*

# ACCESSORIES

## Sync Cords SC-11 and SC-15


For off-camera or manual multiple lighting setups or to connect the SB-20 to a camera without a hot shoe use sync cord SC-11 (25cm long) or coiled sync cord SC-15 (one meter long).



SC-15

## TTL Remote Cord SC-17

For programmed TTL auto flash operation or TTL auto flash operation when using the SB-20 off the Nikon F-501/N2020, F-401/N4004, F-301/N2000, FA, FE2 or FG camera, use coiled cord SC-17. The SC-17 ensures automatic sync speed setting and ready-light viewfinder indication just as if the flash unit were directly mounted on the camera. Comes with two TTL multiple flash terminals and one tripod socket.

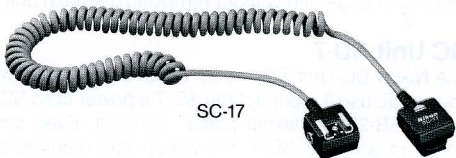

SC-17

## TTL Multi-Flash Adapter AS-10

When using the SB-20, SB-18 or SB-15 as a slave flash unit or when using more than three flash units, use the AS-10. Comes with three multiple flash terminals and one tripod socket.



AS-10

## TTL Multi-Flash Sync Cords SC-18 and SC-19



Use the SC-18 or SC-19 to connect flash units in TTL multiple flash operation. The SC-18 is approx. 1.5m long; the SC-19 is approx. 3m.

## Flash Unit Couplers AS-4 and AS-7

To mount the SB-20 on a Nikon F3-series camera with the DE-2 or DE-3 finder, use the AS-4 or AS-7. The AS-7 lets you change film without removing the flash unit.

## DC Unit SD-7

The Nikon DC Unit SD-7 is an optional external power source. To use it, connect the SD-7's power cord SC-16 to the SB-20's external power terminal. Even when powered with the SD-7, the SB-20 still requires batteries inside the flash unit—*do not remove the batteries.*

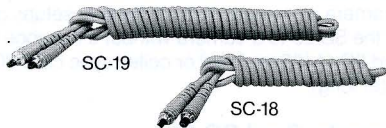

# SPECIFICATIONS

All performance data are for normal-temperature operation [20°C (68°F)]

**Electronic construction** Automatic silicon-controlled rectifier and series circuitry

**Guide number (at manual full light output)** 30 (ISO 100 and meters) or 49 (ISO 25 and feet) with the zoom set ring at N

**Zoom capability** Three settings: W for wideangle, N for normal and T for telephoto

## Angle of coverage

Zoom set ring position	Horizontal	Vertical	Usable lens
W (wideangle)	53°	70°	28mm or longer
N (normal)	45°	60°	35mm or longer
T (telephoto)	23°	31°	85mm or longer

**Bounce capability** Flash head can be rotated down to -7° or up to 90°

## Flash duration

Light output (approx.)	Flash duration (approx.)
Full	1/1200sec.
1/2	1/1500sec.
1/4	1/3700sec.
1/8	1/7400sec.
1/16	1/15000sec.

**Power source** Four 1.5V AA-type alkaline-manganese or NiCd batteries; optional Battery Pack SD-7 holding six C-type batteries is available as an external power source

**Power switch** Three positions are provided—OFF, STBY (for standby) and ON; at STBY position with the Nikon F-501/N2020, F-401/N4004, F-301/N2000, FA, FE2 or FG, SB-20 turns off automatically when flash unit is not used for one or two minutes and turns on when camera exposure meter is on

## Number of flashes and recycling time at manual full light output

Battery type	Number of flashes (approx.)*	Recycling time (approx.)
AA-type alkaline-manganese	160 times	6 sec.
AA-type NiCd	60 times	4 sec.
C-type alkaline-manganese inside the optional SD-7**	Up to 40 times	3 sec.
	Up to 200 times	5 sec.
	Up to 400 times	10 sec.
	Up to 450 times	30 sec.

\*For autofocus operation assisted by the AF illuminator, less number of flashes available.

\*\*With four AA-type alkaline-manganese batteries installed in the SB-20

## Flash exposure control TTL mode

Three flash modes are provided: TTL, A and M  
Used only with Nikon F-501/N2020, F-401/N4004, F-301/N2000, FA, FE2 or FG; for programmed TTL auto flash operation (with F-501/N2020, F-401/N4004 or F-301/N2000 only) or TTL auto flash operation; light is measured through the lens

## Usable film speed range in TTL mode

ISO 25 to 1000 with Nikon F-501/N2020 and F-301/N2000 or ISO 25 to 400 with Nikon F-401/N4004, FA, FE2, and FG

## Usable aperture range in TTL mode

f/2 to f/22 (at ISO 100)

## A mode

For non-TTL auto flash operation; light is measured via light sensor in front of the flash unit

## Usable apertures in A mode

f/2, f/2.8, f/4, f/5.6 and f/8 (at ISO 100)

## Shooting distance range in A mode

Unit: m (ft.)

Aperture	Shooting distance range at ISO 100 and zoom set ring set at N
f/2	1.9 ~ 15 (6.2 ~ 49)
f/2.8	1.3 ~ 10 (4.3 ~ 33)
f/4	1.0 ~ 7.5 (3.3 ~ 25)
f/5.6	0.7 ~ 5.3 (2.3 ~ 17)
f/8	0.6 ~ 3.7 (2.0 ~ 12)

## M mode

For manual flash operation; amount of light output can be varied in five steps



**AF assist LED**

Automatically fires LED beam toward the subject when performing autofocus with the Nikon F-501/N2020 (Single Servo) or F-401/N4004 camera in insufficient light

**Dimensions**

Approx. 71(W)×110(H)×70(D)mm (2.7×4.3×2.7 in)

**Weight**

Approx. 260g (9.1oz) (without batteries)

**Accessories provided** Soft Case SS-20

*Specifications and designs are subject to change without notice.*

Nikon

NIKON CORPORATION

PHONE: 81-3-321-1411 (4 LINES) TELEX: NIKON J2801 FAX: 81-3-3201-8855  
PLU BLDG. 2-1 MARUNOUCHI 3-CHOME, CHIYODA-KU, TOKYO JCG, JAPAN

No reproduction in any form of this manual, in whole or in part (except for brief quotation in critical articles or reviews), may be made without written authorization from NIKON CORPORATION.

**Nikon**

## NIKON CORPORATION

FUJI BLDG., 2-3, MARUNOUCHI 3-CHOME, CHIYODA-KU, TOKYO 100, JAPAN

**PHONE:** 81-3-3214-5311 **TELEX:** NIKON J22601 **FAX:** 81-3-3201-5856

Printed in Japan 9&221-C03(S136)