CONDOR® GD-TK-3000 GARAGE DOLLY TRAILER ADAPTOR KIT USER INSTRUCTION MANUAL


STOP! WARNING: READ THIS FIRST!

First read and understand the instruction manual and product labels for important safety, set-up and troubleshooting information. If you have problems setting up or using the *CONDOR*® GD-TK-3000 Trailer Adaptor Kit, contact customer service at (815) 754-7418 or contact us via email @ www.condor-lift.com. The *CONDOR*® GD-TK-3000 Trailer Adaptor Kit is not intended for use by children.

Assembly Instructions: Remove all parts from shipping box. Check the parts below to make sure you have all the parts needed to assemble your *CONDOR*® GD-TK-3000 Trailer Adaptor Kit before beginning. In the unlikely event that you find a part damaged or missing, please call customer service @ #1-815-754-7418.

Component Photo	Item	Component Description	QTY
	A	CONDOR® Trailer Bracket (LS-PB32-C)	2
0,	В	3/8" x 1" Socket Shoulder Screw (TR-RMP-SBOLT2)	4
	С	5/16" x 1.5" Fender Washer (P-1133215)	4
	D	5/16" - 18 x 2.5" SS Flat Head Socket Cap Screw (P-73914)	4
	E	5/16"-18 Lock Nut (P-37021)	4
	F	5/16" - 18 x 1.5" Spade Head w/ shoulder Thumb Screw (TR-RMP-THMSCRW)	1
0	G	1/4" USS Flat Washer (PCS-1133004)	2

Installation Instructions:

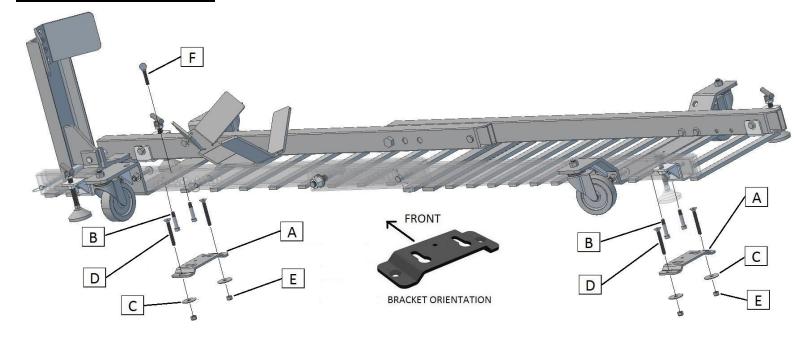

Caution: Always make sure that all fasteners are tight and all pins and parts are in place prior to use.

- 1. Attach Shoulder Screws (B) to the Condor® GD-3500 wheel brackets as shown. (Torque parts B to 18 ft-lbs)
- 2. Attach Trailer Bracket (A) to mounting platform first. Allow a minimum of 14.0" of space on the mounting surface from the center of the Trailer Bracket to the front of the Condor® GD-3500. The Condor® unit should always be fully planted on the mounting platform when engaged into the trailer bracket (A). Place part A parallel to platform end using the recommended dimension and orientation, and drill holes for Screws (D) using a 5/16" drill bit.
- 3. Once the holes for part (A) are drilled, secure it using parts C, D and E. Insert Part D through part A and through mounting platform. Once part D has passed through the mounting platform, secure it with parts C and E. Make sure that parts C and E are secured as shown. Torque E to 24 ft-lbs.
- 4. As shown, place Condor® unit into Trailer bracket by inserting parts B into part A key way. Once parts B have entered the keyway of part A, slide the Condor® unit forward and in the direction of the keyway path. Unit must slide in smoothly. If unit does not slide easily, use included washers (G) under parts B to increase clearance to compensate for floor flatness. Once unit is locked into part A, proceed to use Thumbscrew (F) to secure and lock unit in place.
- 5. Before attempting to load your motorcycle, activate all (4) stops (H) to prevent the unit from moving by turning the T handle clockwise (right) until the rubber pads hold the unit securely in place. Refer to GD-3500 Manual for further instructions for safe operation.

<u>Warning:</u> Only use Condor® unit when trailer adapter kit is properly installed.

CAUTION:

Always make sure that all fasteners are tight and all pins are in place prior to use. Understand the limitations of this product and do not exceed these limitations. Always make sure that the unit's cradle settings are optimum for the tire size of the motorcycle before use. Be sure to read and understand user instructions for the GD-3500 Garage Dolly. If instructions are not clear, additional information is available at www.condor-lift.com or call (800) 461-1344. Technical Components Development & Design is not responsible for any damage incurred by exceeding this product's limitations in structure and/or functionality.

One Year Limited Warranty:

This GD-3500 Garage Dolly product warranty extends to the original consumer purchaser of the product. All illustrations and specifications contained in this manual are based on the latest product information available at the time of printing. Technical Components Development & Design, Inc. reserves the right to make changes at any time, without notice, in color, material, equipment, options, specifications and models. Models may be shown with optimal equipment. Further information may be obtained by contacting Technical Components Development & Design, Inc. at (815) 754-7418.

Return Policy:

15 Day return policy applies. Merchandise may be returned within 15 days of purchase. Merchandise must be unused and in its original packaging. Costumer must call Technical Components Development & Design, Inc. for a Return Authorization number. Return freight is at the responsibility and expense of the customers. Credit is given upon inspection of returned goods. A 15% re-stocking fee applies to all returned merchandise.

Warranty Duration:

This product is warranted to the original consumer purchase for a period of one (1) year from the original purchase date.

What is not covered:

Our warranty will not cover abnormal wear of parts, damage resulting from negligent use of misuse of the product, use contrary to operating instructions, or disassembly, repair or alteration by any person other than an authorized service station. We shall not be liable for any incidental of consequential damages for breach of by express or implied warranty on products.

How your state's law may apply:

Some states do not allow limitations on how long any implied warranty lasts or the exclusion or limitation or incidental or consequential damages. So the above limitations may not apply to you. This warranty gives you specific rights, and you may also have other rights, which may vary from state to state.

Thank you for purchasing the GD-3500 Garage Dolly.

 $CONDOR_{ ext{@}}$ is a trademark of Technical Components Development & Design, Inc.

The GD-3500 Garage Dolly is US Patented & International Patent Pending.

210 Stephenie Dr. Cortland, IL 60112 Phone: (815) 754-7418 Fax: (815) 754-7419

Website: <u>www.condor-lift.com</u>