

# SERIES ND - DOT/SAE

## FITTING SELECTOR GUIDE



Automation

# ND6510 04-06

### Thread Type:




**ND = D.O.T. with thread sealant**

### Advantages:

- Wide temperature range (-50\* - 200\* F)
- MultiGrip one-piece collet
- Pre-applied thread sealant
- Integrated tube support
- Corrosion resistant nickel-plated brass construction

The US Department of Transportation designates that DOT/SAE rated fittings are permitted for use on all pneumatic circuits except for air brake assemblies between frame and axle or between a towed and towing vehicle. Camozzi Series ND DOT/SAE rated fittings are intended for use in strict compliance with DOT FMVSS 571.106 and SAE J2494-3 standards.

### Body Style:

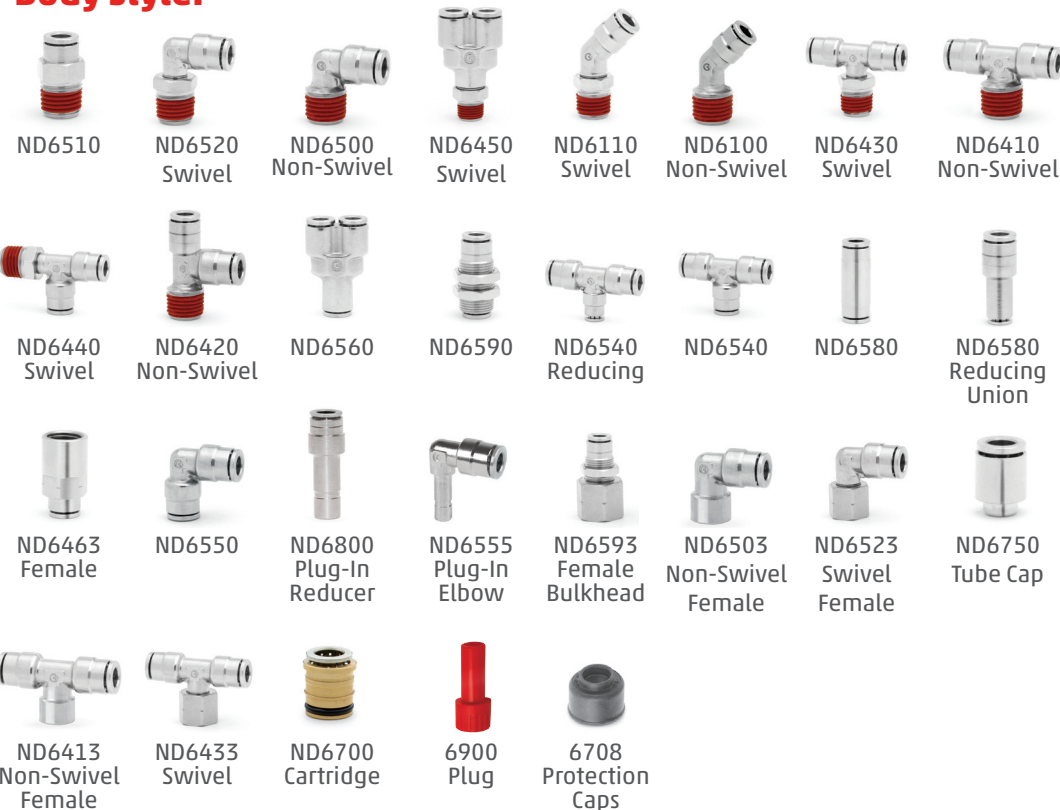

### Tube Size (OD):

**Inch**  
 53 = 5/32"  
**04 = 1/4"**  
 06 = 3/8"  
 08 = 1/2"  
 10 = 5/8"  
 12 = 3/4"

### Thread Size:

**NPTF**  
 32 = 10-32 UNF  
 02 = 1/8"  
 04 = 1/4"  
**06 = 3/8"**  
 08 = 1/2"  
 12 = 3/4"

Scan the QR code, for our entire product catalog.

