



ITX 系列

用户手册

你现选用的产品型号为:

- ITX-M4S1L7
- ITX-M4S1LA(-2/3/4)
- ITX-M4S4DF
- ITX-M4S2GAP
- ITX-NG81-DG
- ITX-NG82
- ITX-M4S2GA

Rev: 1.3

Date: 2009.04





安全指导

01. 务必请仔细阅读本安全指导。
02. 务必请妥善保管本手册,以备将来参考。
03. 请保持本设备的干燥。
04. 机箱的开口缝隙是用于通风避免机箱内的部件过热,请勿将此类开口掩盖或堵塞。
05. 在将本设备与电源连接前,请确认电源电压值,将电压调整为 110V/220V。
06. 请将电源置于不会被践踏到的地方,并且不要在电源线上堆置任何实物。
07. 插拔任何扩展卡或设备模块前,请将电源线拔下。
08. 请留意手册上提到的所有注意和警告事项。
09. 通电之前请确认主机箱中不要遗留螺丝等金属物件,以免电气短路烧毁其他部件。
10. 不得将任何液体倒入机箱开口的缝隙中,否则会产生严重损坏或电路瘫痪。
11. 如果发生以下情况, 请找专业人员处理:
 - ✓ 电源线或插头损坏
 - ✓ 液体渗入机器内
 - ✓ 机器暴露在潮湿的环境中
 - ✓ 机器工作不正常或用户不能通过本手册的指导使其正常工作
 - ✓ 机器跌落或受创
 - ✓ 机器有明显的破损迹象

商标声明

所有的品牌,产品,徽标,商标和公司名称都是属于商标或注册商标各自的拥有者。

AMI[®] 是 AMI 公司的注册商标。

Intel[®], Celeron[®], Pentium[®] 是 Intel 公司的注册商标。

Netware[®] 是 Novell Inc. 的注册商标。

PS/2 和 OS/2 是 International Business Machines 公司的注册商标。

Windows[®] 98/2000/NT/XP 和 Microsoft[®] 是 Microsoft 公司的注册商标。



目录

安全指导.....	2
商标声明.....	2
第一章 主板简介及规格说明.....	4
1.1 包装盒内物品清单.....	4
1.2 主板LAYOUT图及规格表.....	5
第二章 硬件设备的安装说明.....	27
2.1 中央处理器的安装.....	27
2.2 CPU风扇的安装.....	28
2.3 内存的安装.....	30
2.4 主板跳线的设定说明.....	31
2.5 主机板接头说明.....	32
第三章 BIOS 简介.....	42
3.1 BIOS升级更新.....	42
3.2 BIOS设定.....	43
3.3 BIOS语言切换.....	43
第四章 驱动程序的安装.....	44
4.1 芯片组驱动程序的安装.....	44
4.2 板载显卡驱动的安装.....	44
4.3 板载网卡驱动的安装.....	44
4.4 板载声卡驱动的安装.....	44
4.5 USB2.0驱动程序的安装.....	44

第一章 主板简介及规格说明

感谢您采用了我司的 ITX 系列主板，为了保证产品品质并适合市场需求，主板都通过了抗老化、低电压、各种温度、湿度环境下的反复测试，均能满足行业的需求。是兼顾性价比、稳定、寿命长的高规格主流平台解决方案，同时为了兼顾大部份海内外市场，我们专门提供了中英文两种语言的 BIOS。本手册主要介绍了产品的规格参数及安装主板的步骤。需要更加详细的主板 BIOS 设置信息可参看驱动光盘中的 BIOS 设置用户手册。




由于主板规格和 BIOS 软件将不断更新,本手册之相关内容变更恕不另行通知,一切仅供参考,请以实际为准或留意网上公布的升级版本。

1.1 包装盒内物品清单

- ✓ ITX-M4S1L7/ITX-M4S1LA(-2/3/4)/ITX-M4S4DF/ITX-M4S2GAP/ITX-NG81-DG/ITX-M4S2GA/ITX-NG82 主板
- ✓ 80-Conductor Ultra ATA 66/100 IDE 数据线 -- 选配
- ✓ SATA 数据线
- ✓ 用户手册 -- 选配
- ✓ 驱动光盘
- ✓ 质保卡
- ✓ 合格证
- ✓ 挡板

1.2 主板 LAYOUT 图及规格表

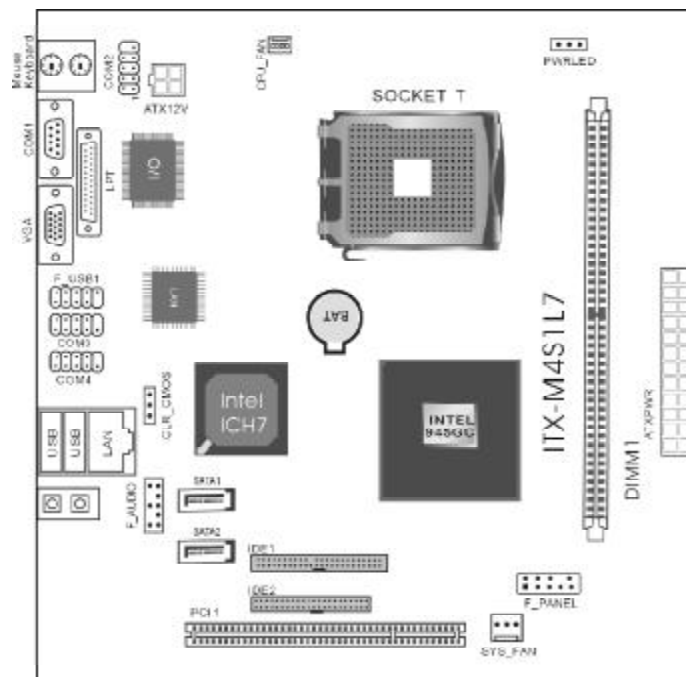

ITX-M4S1L7


图片仅供参考请以实物为准

ITX-M4S1L7 主板规格如下表:


处理器	--支持533/800/1066MHz前端总线 --支持 LGA 775 Intel® Core™2 Quad 6000 系列/Core™ 2 Duo E6000 系列 /Core™ 2 DUO E4000 系列/Pentium® Dual-core E2000 系列 /Celeron® Dual-core E1000 系列/Celeron® 400 系列/Pentium® D 系列/Pentium® 4 系列 /Celeron® D 系列
芯片组	--北桥: Intel®945GC --南桥: Intel®ICH7
内存	--支持 DDRII533/667 内存. --最大容量支持 2GB --内存插槽 1*DDR2 DIMM
板载显卡	--集成 GMA950 显示核心,支持 DX9.0C
板载声卡	--集成 ALC 655 声卡芯片 --支持 2/4 声道输出
板载网卡	--集成 Realtek 8101E 10/100M 自适应网卡芯片, 支持无盘
存储标准	--2 个 SATA 3GB/s 接口, --1 个 IDE 接口,可扩接 2 个设备, --1 个 MINI IDE 接口
扩展槽	--1 个 PCI 插槽
USB 接口	--4*USB 2.0 接口 (2 个后面板板载, 2 个扩展)

内部输入/出接口	--1 个 24 PIN 主电源接口 --1 个 4PIN 12V 电源接口 --2 个 SATA 3GB/s 接口 --1 个 CPU 风扇接口、1 个系统风扇接口 --1 组前面板插针 --1 个前置声卡插针 --1 组 USB 2.0 接口 --3 个 COM 插针 --1 个清除 CMOS 插针 --1 个 IDE 接口 --1 个 MINI IDE 接口
后面板接口	--1 个 PS/2 键盘接口 --1 个 PS/2 鼠标接口 --1 个 COM 接口 --1 个 VGA 接口 --2 个 USB 接口 --1 个 RJ45 接口 --一个打印接口 --2*JACK 接口
输入/输出控制器	--ITE8712F-S
硬件监测功能	--CPU 温度监控 --系统温度监控 --风扇转速监控 --各电压监控----可选
BIOS	--1*4Mbit flash --提供中英文双语言 BIOS 界面
主板结构及尺寸	--ITX 170mm x 170mm

ITX-M4S1LA(-2)

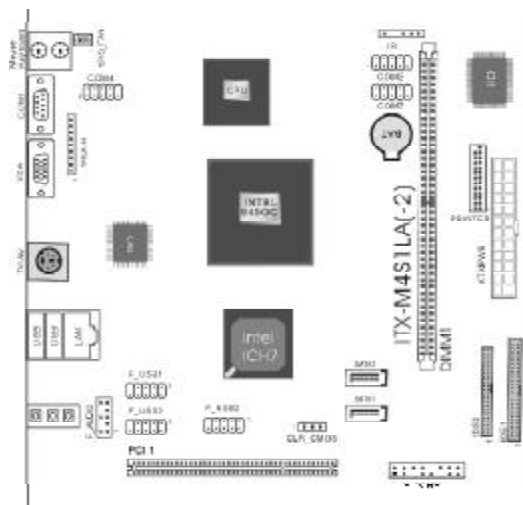

ITX-M4S1LA-3(4)

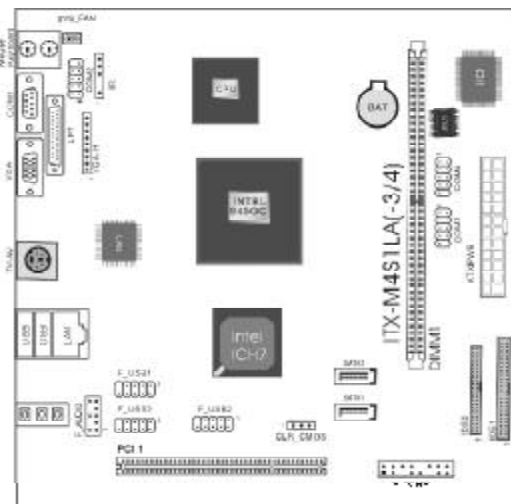

图片仅供参考请以实物为准

四款主机板，板型一致，其区别有：

ITX-M4S1LA 主机板提供 S 端子；

ITX-M4S1LA-2 主机板无 S 端子；


ITX-M4S1LA-3 主机板提供 S 端子及打印接口；

ITX-M4S1LA-4 主机板提供打印接口。

ITX-M4S1LA(-2/3/4) 主板规格如下表：

处理器	板上自带 Intel® Atom™230/330 系列处理器
芯片组	--北桥: Intel®945GC --南桥: Intel®ICH7
内存	--支持 DDRII533/667 内存. --最大容量支持 2GB --内存插槽 1*DDR2 DIMM
板载显卡	--集成 GMA950 显示核心, 支持 DX9.0C
板载声卡	--集成 ALC 655 声卡芯片 --支持 2/4 声道输出
板载网卡	--集成 Realtek 8101E 10/100M 自适应网卡芯片, 支持无盘
存储标准	--2 个 SATA 3GB/s 接口, --1 个 IDE 接口, 可扩接 2 个设备, --1 个 MINI IDE 接口
扩展槽	--1 个 PCI 插槽
USB 接口	--8*USB 2.0 接口 (2 个后面板板载, 6 个扩展)

内部输入/出接口	--1 个 24 PIN 主电源接口 --1 个 4PIN 12V 电源接口 --2 个 SATA 3GB/s 接口 --1 个 CPU 风扇接口 --1 组前面板插针 --1 个前置声卡插针 --3 组 USB 2.0 接口 --3 个 COM 插针; --1 个打印头插针 (针对 M4S1LA/-2) --1 个清除 CMOS 插针 --1 个 IDE 接口; 1 个 MINI IDE 接口 --1 组 IR 插针; 1 组 VGA-H 插针
后面板接口	--1 个 PS/2 键盘接口 --1 个 PS/2 鼠标接口 --1 个 COM 接口 --1 个 VGA 接口 --1 组 TV/AV 接口 (针对 M4S1LA/-3) --2 个 USB 接口, --1 个打印接口 (针对 M4S1LA-3/4) --1 个 RJ45 接口 --3*JACK 接口
输入/输出控制器	--ITE8712F-S
硬件监测功能	--CPU 温度监控 --系统温度监控 --风扇转速监控 --各电压监控 ---可选
BIOS	--1*4Mbit flash --提供中英文双语言 BIOS 界面
主板结构及尺寸	--ITX 170mm x 170mm

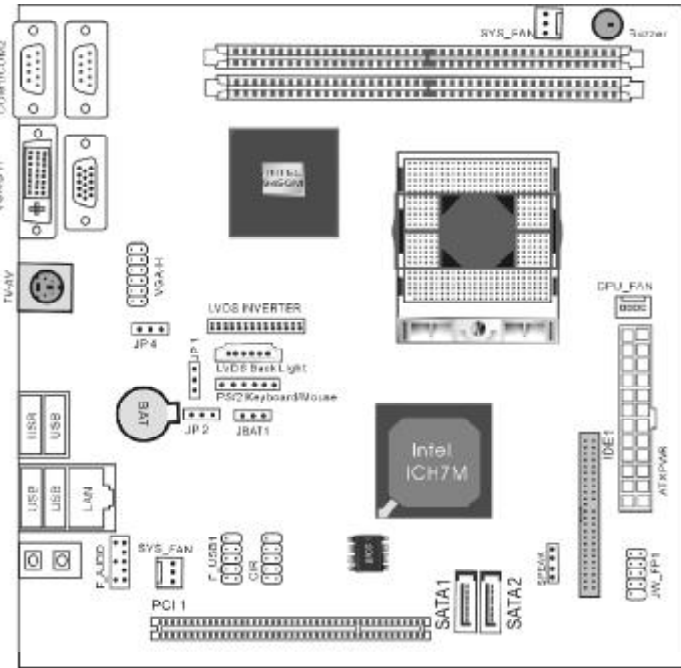



ITX-M4S4DF 正面图

图片仅供参考请以实物为准

ITX-M4S4DF 主板规格如下表:



处理器	1. Socket479 Core Duo、Celeron M 系列处理器 2. 支持 533/667 MHz 前端总线
芯片组	1. 北桥: Intel® 945GM 2. 南桥: ICH7M
内存	1. 支持 DDRII533/667 2. 最大容量支持 2GB
显卡	1. 板载 GMA 950 显示核心, 支持 DirectX 9.0C
声卡	1. 板载 Realtek ALC662 音效解码芯片 2. 支持 2/4 声道输出
网卡	1. 板载 Realtek 8111C 千兆网卡 2. 支持 10/100/1000M 网络传输
存储标准	1. 2*SATA 3 Gb/s 磁盘接口 , 2. 1 个 IDE 磁盘接口
扩展槽	1. 1 个 PCI 插槽, 1 个 Mini-PCIE 插槽
USB	1. 支持 6 个 USB 2.0 端口 (2 个需要扩展)
后面板接口	1. 2 个 COM 接口, 1 个 VGA 接口 2. 1 个 DVI 端口, 1 个 S 端子 3. 4 个 USB 2.0 端口, 1 个 RJ-45 网卡端口 4. 2 JACK 音频接口 (4 声道音频接口)
I/O	1. F71858DG-F

内部输入输出接口	1. 1 个 24-pin ATX 主电源接口 2. 1 个 IDE 接口 3. 2 个 SATA 磁盘接口 4. 1 个 CPU 风扇接口 5. 2 个系统风扇接口 6. 1 组前置音频跳线插针 7. 1 个 USB 扩展插针接口 8. 1 组 CMOS 清除跳线插针 9. 1 组 VGA_H 插针 10. 1 组 CIR 红外插针 11. 1 组 LVDS 插针 12. 1 组 LVDS_Inverter 插针 13. 1 组 PS/2 键鼠插针 14. 1 组前置面板插针
硬件监测功能	1. CPU 温度监控 2. 系统温度监控 3. 风扇转速监控 4. 各电压监控---- 可选
BIOS	1. 1*8Mbit flash
主板结构及尺寸	1. ITX <u>170.00mm</u> x <u>170.00mm</u>

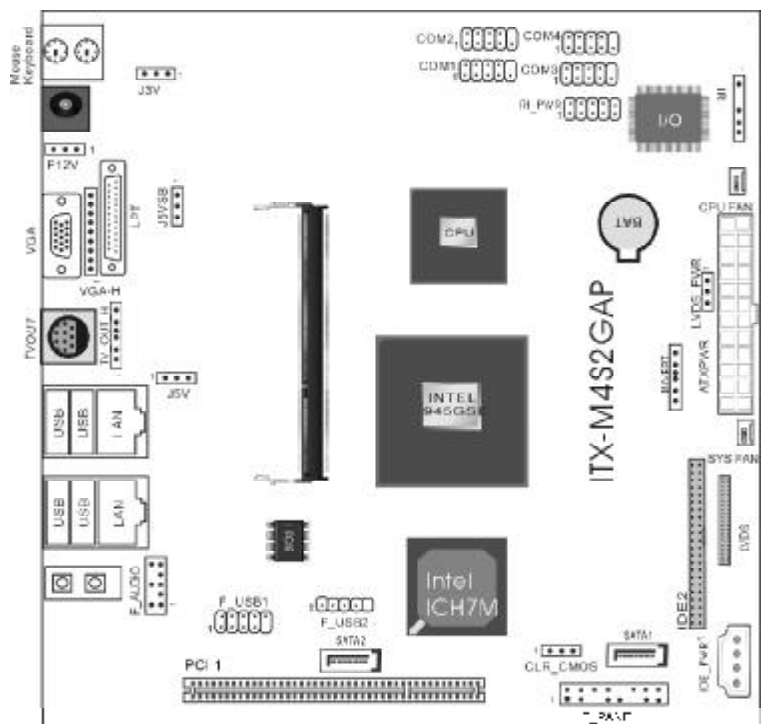

ITX-M4S2GAP 正面图

图片仅供参考请以实物为准

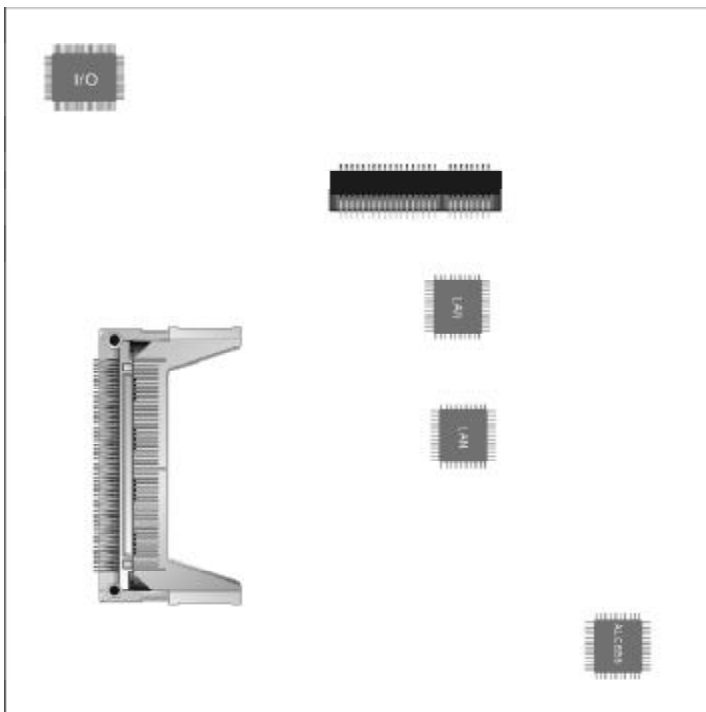

ITX-M4S2GAP 背板图


图片仅供参考请以实物为准



ITX-M4S2GAP 主板规格如下表:

处理器	1. 板上自带 Intel®Atom™N270 系列处理器
芯片组	1. 北桥: Intel® 945GSE 2. 南桥: ICH7M
内存	1. 支持 DDRII533 笔记本内存 2. 最大容量支持 2GB 3. 内存插槽 1*DDR2 SODIMM
显卡	1. 板载 GMA 950 显示核心, 支持 DirectX 9.0C
声卡	1. 板载 Realtek ALC655 音效解码芯片 2. 支持 2/4 声道输出
网卡	1. 板载 Realtek 8111C 双千兆网卡, 支持 10/100/1000M 网络传
存储标准	1. 2*SATA 3 Gb/s 磁盘接口 2. 1个 44pin IDE 磁盘接口
扩展槽	1. 1个 PCI 插槽
USB	1. 支持 7 个 USB 2.0 端口 (3 个需要扩展)
后面板接口	1. 1 个 PS/2 鼠标端口, 1 个 PS/2 键盘端口 2. 1 个 VGA 端口 3. 1 个 S 端子, 1 个打印端口 4. 4 个 USB 2.0 端口 5. 2 个 RJ-45 网卡端口 6. 2 JACK 音频接口 (4 声道音频接口)
I/O	1. ITE8712F-S 双 IO

内部输入/输出接口	1. 1 个 24-pin ATX 主电源接口 2. 1 个 DC 电源接口 3. 1 个 IDE_PWR 辅助电源接口 4. 1 个 MINI IDE 接口 5. 2 个 SATA 磁盘接口 6. 1 个 CPU 风扇接口 7. 1 个系统风扇接口 8. 1 组前置音频跳线插针 9. 3 个 USB 扩展插针接口 10. 1 组红外接口插针 11. 1 组 CMOS 清除跳线插针 12. 1 组 J3V 插针 13. 1 组 P12V 插针 14. 1 组 J5VSB 插针 15. 1 组 J5V 插针 16. 1 组 VGA_H 插针 17. 1 组 TV_OUT_H 插针 18. 4 个 COM 扩展插针 19. 1 组 RI_PWR 插针 20. 1 组 LVDS 插针 21. 1 组 LVDS_PWR 插针 22. 1 组 INVERT 插针 23. 1 组前置面板插针
硬件监测功能	1. CPU 温度监控 2. 系统温度监控 3. 风扇转速监控 4. 各电压监控---- 可选
BIOS	1. 1*8Mbit flash
主板结构及尺寸	1. ITX 170.00mm x 170.00mm

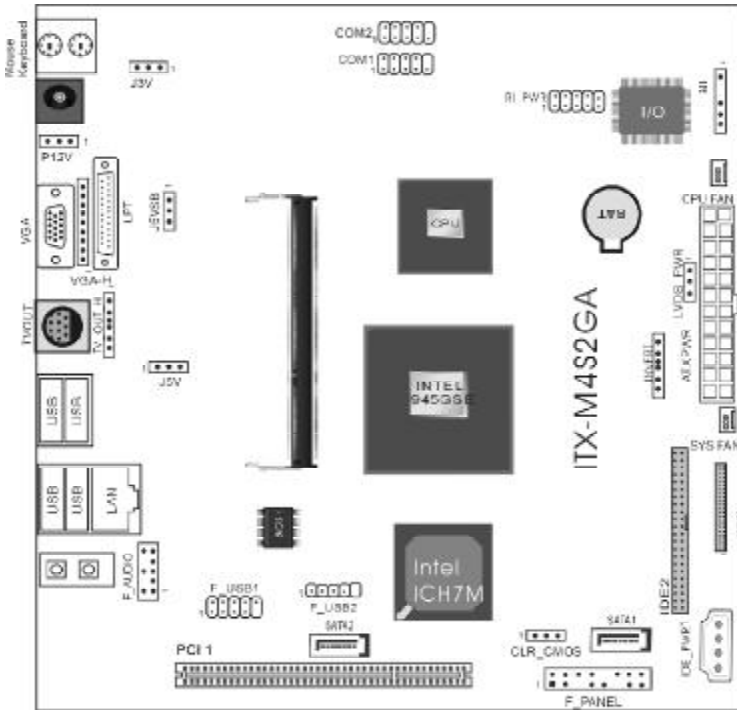


ITX-M4S2GA

备注：ITX-M4S2GA 主机板背面图可参考 ITX-M4S2GAP 主机板背面图，具体见 P15。图片仅供参考请以实物为准

处理器	1. 板上自带 Intel® Atom™N270 系列处理器
芯片组	1. 北桥: Intel® 945GSE 2. 南桥: ICH7M
内存	1. 支持 DDRII533 笔记本内存 2. 最大容量支持 2GB 3. 内存插槽 1*DDR2 SODIMM
显卡	1. 板载 GMA 950 显示核心，支持 DirectX 9.0C
声卡	1. 板载 Real tek ALC655 音效解码芯片 2. 支持 2/4 声道输出
网卡	1. 板载 Real tek 8111C 千兆网卡，支持 10/100/1000M 网络传输
存储标准	1. 2*SATA 3 Gb/s 磁盘接口 2. 1 个 44pin IDE 磁盘接口
扩展槽	1. 1 个 PCI 插槽
USB	1. 支持 7 个 USB 2.0 端口 (3 个需要扩展)
后面板接口	1. 1 个 PS/2 鼠标端口，1 个 PS/2 键盘端口 2. 1 个 VGA 端口 3. 1 个 S 端子，1 个打印端口 4. 4 个 USB 2.0 端口 5. 1 个 RJ-45 网卡端口 6. 2 JACK 音频接口 (4 声道音频接口)
I/O	1. ITE8712F-S

内部输入/出接口	<ol style="list-style-type: none"> 1个 24-pin ATX 主电源接口 1个 DC 电源接口 1个 IDE_PWR 辅助电源接口 1个 MINI IDE 接口 2个 SATA 磁盘接口 1个 CPU 风扇接口 1个系统风扇接口 1组前置音频跳线插针 3个 USB 扩展插针接口 1组红外接口插针 1组 CMOS 清除跳线插针 1组 J3V 插针 1组 P12V 插针 1组 J5VSB 插针 1组 J5V 插针 1组 VGA_H 插针 1组 TV_OUT_H 插针 2个 COM 扩展插针 1组 RI_PWR 插针 1组 LVDS 插针 1组 LVDS_PWR 插针 1组 INVERT 插针 1组前置面板插针
硬件监测功能	<ol style="list-style-type: none"> 1. CPU 温度监控 2. 系统温度监控 3. 风扇转速监控 4. 各电压监控----可选
BIOS	<ol style="list-style-type: none"> 1. 1*8Mbit flash
主板结构及尺寸	<ol style="list-style-type: none"> 1. ITX <u>170.00mm</u> x <u>170.00mm</u>

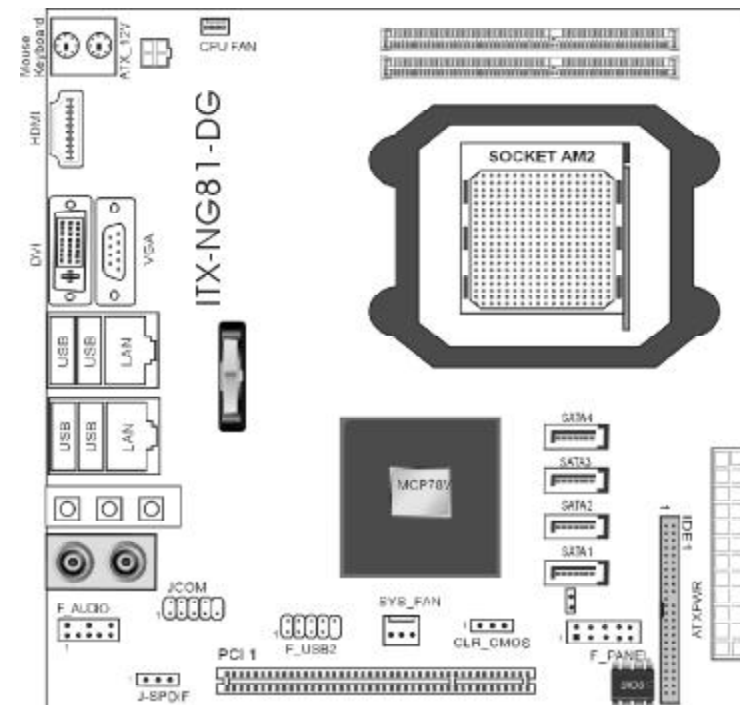


ITX-NG81-DG

图片仅供参考请以实物为准

ITX-NG81-DG 主板规格如下表:

处理器	<ol style="list-style-type: none"> 1. AMD AM2 Athlon64 x2/Athlon64/Sempron 处理器 2. AMD Socket AM2+ Phenom FX / Phenom X4 / Phenom X2 系列处理器 3. HyperTransport 3.0 总线, 支持 AM2+ K10 CPU 4. HyperTransport 1.0 总线, 支持 AM2 K8 CPU
芯片组	<ol style="list-style-type: none"> 1. nVIDIA MCP78V 单芯片
内存	<ol style="list-style-type: none"> 1. 支持 DDRII533/667/800 内存 2. 最大容量支持 2GB 3. 双通道内存 支持 4. 内存插槽 2*DDR2 SODIMM
显卡	<ol style="list-style-type: none"> 1. 板载 GeForce8100 显示核心, 支持 DirectX 10
声卡	<ol style="list-style-type: none"> 1. 板载 Real tek ALC883 音效解码芯片 2. 支持 2/4/5.1/7.1 声道输出
网卡	<ol style="list-style-type: none"> 1. 板载 Real tek 8111C 双千兆网卡, 支持 10/100/1000M 网络传输
存储标准	<ol style="list-style-type: none"> 1. 4*SATA 3 Gb/s 磁盘接口 2. 1 个 40pin IDE 磁盘接口
扩展槽	<ol style="list-style-type: none"> 1. 1 个 PCI 插槽
USB	<ol style="list-style-type: none"> 1. 支持 6 个 USB 2.0 端口 (2 个需要扩展)

内部输入/出口	<ol style="list-style-type: none"> 1. 1 个 24-pin ATX 主电源接口 2. 1 个 4-pin ATX 电源接口 3. 1 个 IDE 接口 4. 4 个 SATA 磁盘接口 5. 1 个 CPU 风扇接口 6. 1 个系统风扇接口 7. 1 组前置音频跳线插针 8. 1 组 USB 扩展插针 9. 1 组 SPDIF 音频插针 10. 1 组 COM 扩展插针 11. 1 组清除 CMOS 插针 12. 1 组前面板插针
后面板接口	<ol style="list-style-type: none"> 1. 1 x PS/2 鼠标端口, 1 x PS/2 键盘端口 2. 1 x DVI 端口, 1 x VGA 端口, 1 x HDMI 端口 3. 4 x USB 2.0 端口 4. 2 x RJ-45 网卡端口, 1 x SPDIF 音频端口 5. 6 JACK (八声道音频接口)
I/O	<ol style="list-style-type: none"> 1. ITE8712F-S
硬件监测功能	<ol style="list-style-type: none"> 1. CPU 温度监控 2. 系统温度监控 3. 风扇转速监控 4. 各电压监控---可选
BIOS	<ol style="list-style-type: none"> 1. 1*8Mbit flash
主板结构及尺寸	<ol style="list-style-type: none"> 1. ITX 170.00mm x 170.00mm

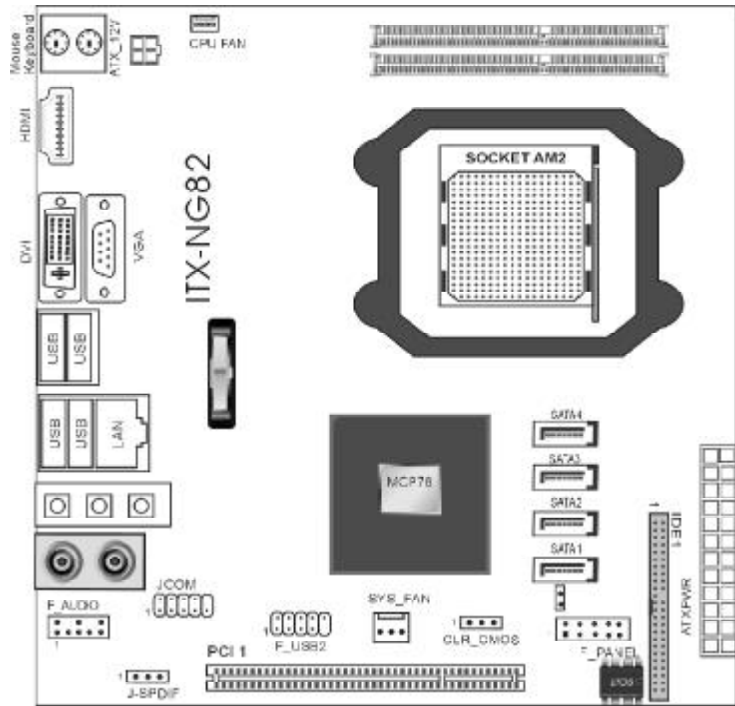

ITX-NG82

图片仅供参考请以实物为准

处理器	<ol style="list-style-type: none"> 1. AMD AM2 Athlon64 x2/Athlon64/Sempron 处理器 2. AMD Socket AM2+ Phenom 系列处理器 3. HyperTransport 3.0 总线, 支持 AM2+ K10 CPU 4. HyperTransport 1.0 总线, 支持 AM2 K8 CPU
芯片组	<ol style="list-style-type: none"> 1. nVIDIA MCP78S 单芯片
内存	<ol style="list-style-type: none"> 1. 支持 DDR2 533/667/800 内存 2. 最大容量支持 2GB 3. 双通道内存 支持 4. 内存插槽 2*DDR2 SODIMM
显卡	<ol style="list-style-type: none"> 1. 板载 GeForce8200 显示核心, 支持 DirectX 10
声卡	<ol style="list-style-type: none"> 1. 板载 Realtek ALC883 音效解码芯片 2. 支持 2/4/5.1/7.1 声道输出
网卡	<ol style="list-style-type: none"> 1. 板载 Realtek 8111C 千兆网卡, 支持 10/100/1000M 网络传输
存储标准	<ol style="list-style-type: none"> 1. 4*SATA 3 Gb/s 磁盘接口 2. 1 个 40pin IDE 磁盘接口
扩展槽	<ol style="list-style-type: none"> 1. 1 个 PCI 插槽
USB	<ol style="list-style-type: none"> 1. 支持 6 个 USB 2.0 端口 (2 个需要扩展)
内部输入/出口	<ol style="list-style-type: none"> 1. 1 个 24-pin ATX 主电源接口 2. 1 个 4-pin ATX 电源接口 3. 1 个 IDE 接口 4. 4 个 SATA 磁盘接口 5. 1 个 CPU 风扇接口 6. 1 个系统风扇接口 7. 1 组前置音频跳线插针 8. 1 组 USB 扩展插针 9. 1 组 SPDIF 音频插针 10. 1 组 COM 扩展插针 11. 1 组清除 CMOS 插针 12. 1 组前面板插针



后面板接口	<ol style="list-style-type: none"> 1 x PS/2 鼠标端口, 1 x PS/2 键盘端口 1 x DVI 端口, 1 x VGA 端口, 1 x HDMI 端口 4 x USB 2.0 端口 1 x RJ-45 网卡端口, 1 x Spdif 音频端口 6 JACK (八声道音频接口)
I/O	<ol style="list-style-type: none"> 1. ITE8712F-S
硬件监测功能	<ol style="list-style-type: none"> 1. CPU 温度监控 2. 系统温度监控 3. 风扇转速监控 4. 各电压监控---可选
BIOS	<ol style="list-style-type: none"> 1. 1*8Mbit flash
主板结构及尺寸	<ol style="list-style-type: none"> 1. ITX <u>170.00mm x 170.00mm</u>




第二章 硬件设备的安装说明

2.1 中央处理器的安装


要安装 Intel775 针 CPU，请按下面的步骤操作

~ 在你将 775 针 CPU 插入插槽之前，请检查 CPU 表面是否不洁或者插槽上是否有歪斜的针脚。如果发现以上情形，切勿强行将 CPU 插入插槽。否则 CPU 或插槽将会严重受损。

步骤一 将主板 CPU 插座侧边的固定拉杆拉起，转动拉杆至大约 135 度的完全打开位置，然后转动承载上盖至大约 100 度的完全打开位置。

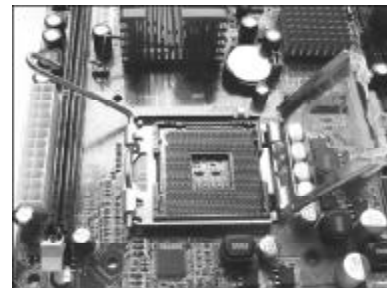


步骤二 去除承载上盖的防护盖，用你的左手食指和拇指扶着承载金属框边缘，用右手拇指揭开防护盖便使它脱离插槽，同时按压防护盖的中央部分助力移除。

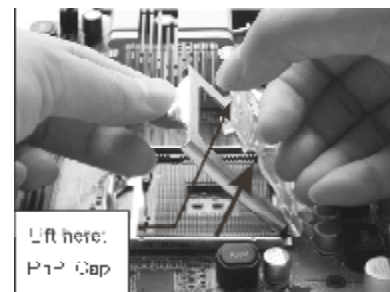



步骤三 卸下CPU保护盖，确认主板上特别设计的Socket底座的2个凸出位置及CPU的2个定位凹口位置方向对准后，将CPU轻轻放置入Socket中，如果两者方向未对准CPU将无法置入Socket中。请注意避免让CPU歪斜而造成针脚损坏。

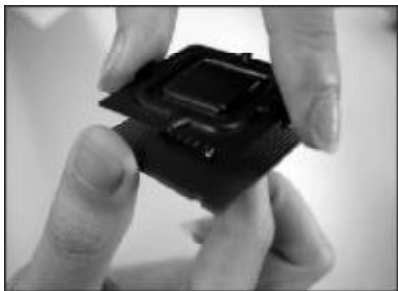

步骤四 CPU放置好后，盖回承载上盖，将拉杆压回，将承载上盖卡入拉杆的固定卡舌之下，固定住拉杆，CPU的安装即完成。




2.2 CPU 风扇的安装

为了CPU能正常工作，必须选用散热性能得到保证的散热器。这里我们以Intel的原装风扇为例，说明CPU风扇的安装过程。


步骤一 在安装风扇前检查一下风扇散热片底部是否涂有散热膏[Intel的原装风扇上一般带有导热材料TIM]，如果您的风扇散热片底部没有导热材料，请在安装前在CPU上表面涂上适量散热膏。



步骤二 请先卸下风扇电源线，将四个扣环的缺口转向内。

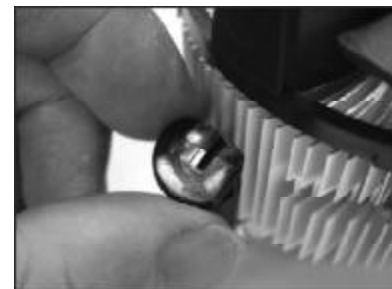

步骤三 确保将风扇电缆放在最靠近主板风扇电源插头的一侧，将散热器放在LGA775插座上，将四个扣件对准主板上的四个通孔，然后将散热器上的四个扣件按下扣紧。

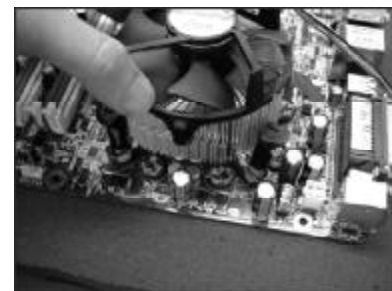

步骤四 将风扇电源线接口插在主机板上标有“CPU FAN”的四线排针处。



2.3 内存的安装

2.3.1 DIMM 内存条的安装

主板支持 DDRII 内存，容量可从最小的 64MB 扩展至最大 2GB。

安装步骤如下：

- 将内存槽两端的白色卡榫向外扳开。
- 将内存条有金手指的那边对准内存槽，注意内存条的凹孔要对应插槽的凸起点。
- 将内存条插入插槽中。若安装正确则插槽两端的白色卡榫会因为内存条置入而自动卡紧，否则不会卡紧。

2.3.2 SODIMM (笔记本) 内存条的安装

主板支持 DDRII SODIMM 内存，容量可从最小的 64MB 扩展至最大 4GB 不等，具体安装步骤如下：

- 将内存条的金手指以 45 度角度放入内存槽中
- 然后稍微用力按下内存条至与内存槽卡扣平行位置，此时卡扣会自动卡紧内存条。



为了使系统稳定，请选用正牌内存。

温馨提示：ITX-NG81-DG/ITX-NG82 主板板载的绿色小 PCB 卡是用来保护 SODIMM 内存插槽的，请用户不要误认为是内存条。

2.4 主板跳线的设定说明

主板上的所有跳线靠近直线或标有粗白线或白色三角符处为第一脚，请务必不要接反，否则有可能对您的主板或其他设备造成损坏。

2.4.1 清除 CMOS 跳线(CLR_CMOS)

如果主板因为 BIOS 设置错误而出现问题，此时可清除 CMOS 解决问题；方法是在断开电源状态下把 CMOS 跳线跳至 2-3 脚，使其短接 5-6 秒。请不要在开机时清除 CMOS，要不然可能会损坏您的主板。跳线设定如下：

CMOS数据状态	CLR_CMOS
保持CMOS数据资料 (预设)	1  3
清除CMOS数据资料	1  3

注：ITX-M4S4DF 清 CMOS 跳线为 JBAT, 针脚设置不变。

2.4.2 LVDS 电源跳线(LVDS_PWR)

针对 ITX-M4S2GAP/ITX-M4S2GA 机种

设置状态	LVDS_PWR
3.3V 可用 (预设)	跳至 2-3 脚
5V 可用	跳至 1-2 脚

2.4.3 DC 与 ATX 电源切换跳线 (J5V/J5VSB/P12V/J3V)

针对 ITX-M4S2GAP/M4S2GA 机种

状态	J5V J5VSB P12V J3V
使用 ATX 电源 (预设)	4 组跳帽全跳 2-3 脚
使用 DC 12V 电源	4 组跳帽全跳 1-2 脚



2.4.4 USB 电源控制插针: JP4

针对 ITX-M4S4DF

设置状态	JP4
5VSB 可用 (预设)	跳至 2-3 脚
5V 可用	跳至 1-2 脚

2.4.5 LVDS 电源跳线设置:JP2

针对 ITX-M4S4DF

设置状态	JP2
3.3V 可用 (预设)	跳至 2-3 脚
5V 可用	跳至 1-2 脚

2.5 主机板接头说明

2.5.1 风扇电源接头(CPU_FAN1/SYS_FAN1)


当将风扇连接到风扇连接头上时,使用者必须将红色的线连接到+12V 的电源针上,黑色的线连接到地线上。如果您想在 BIOS 或硬件监控程序中观察风扇的工作状态,您必须使用支持能侦测转速功能的风扇。对于具有速度感应器的风扇,风扇每一次转动都会产生 2 个脉冲波,系统硬件监控将作统计提供内产生一个风扇转动速度的报告,可在 CMOS 中显示出风扇的转速。



2.5.2 USB 扩展接头

主板提供多个 USB 接口,其中有些可以直接连接 USB 设备, F_USB1/ F_USB2/F_USB3 等接头需要另外连接 USB Cable, 提供给您另外几组 USB 端口,您能从主板经销商或电子市场上购买到此种 USB Cable 连接线。(粗白线或小三角形处为第一脚,请务必不要接错,否则有可能对您的主板或设备造成损害)


~ 插针旁的粗白线或“△”标识处为第一脚,请务必不要接错,否则有可能对您的设备或主板造成损害!

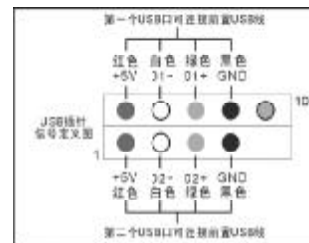

2.5.3 PS/2 键鼠接口 (PS2KBMS)

针对 ITX-M4S4DF


主板提供了 PS/2 键鼠接口插针,可以方便用户连接 PS/2 类型接口的键鼠设备。

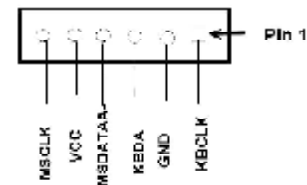

2.5.4 前置音效输出接口 (F_AUDIO)


主板提供了前置音效输出接口 F_AUDIO, 这组声卡插针供您连接到机箱前面板的声卡接头, 这样您就可以很方便地经由主机到面板收听音乐和使用麦克风进行声音输入, 您只要按照其插针功能 (如下图所示) 连接相对应的线即可。



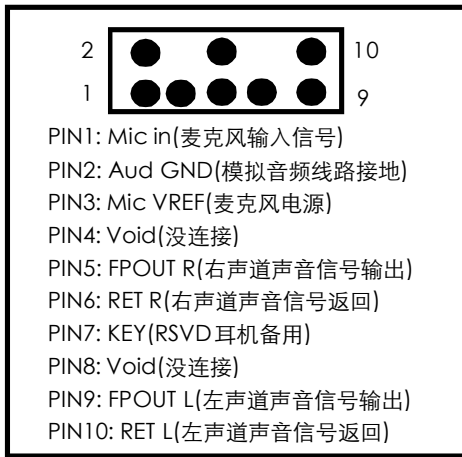

2.5.5 COM 插针 (COM1/COM2/COM3/COM4)

主板提供几个 COM 插针，其接头需要另外连接 COM 连接线，您能从主板经销商或电子市场上购买到此种 COM 连接线。(白三角形标记处为第一脚，请务必不要接错，否则有可能对您的主板或设备造成损害)

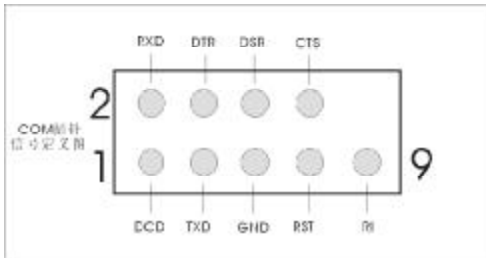

2.5.6 COM 插针的接线方法


若要使用 COM 插针，必需通过转接线来实现，转接线的接线方法如下：




2.5.7 VGA 接口 (VGA_H)

主板提供了 2 种非标准的 VGA 接口，其信号定义图如下所示：

针对 ITX-M4S1LA(-2/3/4)和 ITX-M4S2GAP/ITX-M4S2GA

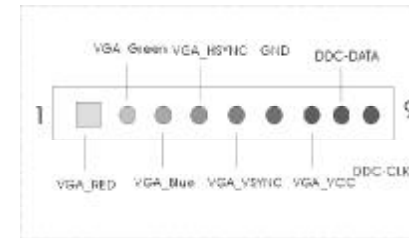


针对 ITX-M4S4DF

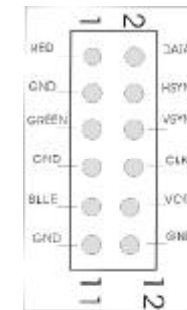




2.5.8 LVDS 接口 (LVDS)

主机板提供了 1 组 LVDS 插针，其信号定义图如下所示：

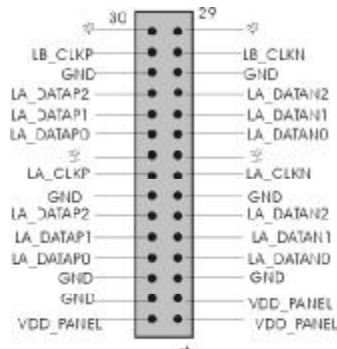



2.5.9 INVERT 接口 (INVERT)

主机板提供了 1 组 INVERT 插针，其信号定义图如下所示：




2.5.10 IDE_PWR 接口 (IDE_PWR)

主机板提供了 1 组 IDE_PWR 电源接口，其信号定义图如下所示：




2.5.11 TV_OUT_H 接口 (TV_OUT_H)

主机板提供了 1 组 TV_OUT_H 插针，其信号定义图如下所示：



2.5.12 RI_PWR 接口 (RI_PWR)



主机板提供了 1 组 RI_PWR 插针，其信号定义图如下所示：

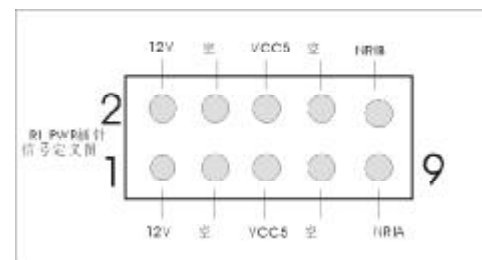

2.5.13 SPDIF 接口 (J_SPDIF)

针对 ITX-NG81-DG /ITX-NG82

主机板提供了 1 组 SPDIF 插针，支持数字音频输入 / 输出功能,其信号定义图如下所示：

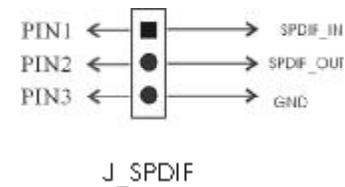




2.5.14 系统信号 / 控制面板接口 (F_PANEL)


ITX-M4S1L7 面板接口






ITX-M4S1LA/M4S2GAP/M4S2GA 面板接口

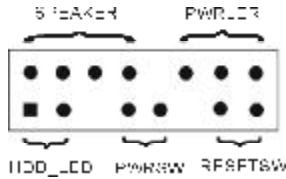

ITX-NG81-DG/NG82 面板接口

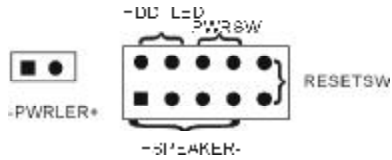

ITX-M4S4DF 面板接口

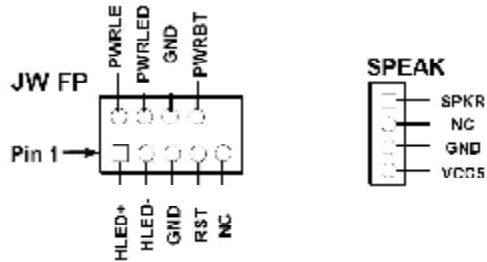

- a.SPEAKER 喇叭连接头
- b.PWRLED 电源指示灯
- c.HD_LED 硬盘指示灯连接头
- d.PWRSW ATX 电源开关
- e.RESETSW 复位按钮

✓ SPEAKER 喇叭连接头

电脑的喇叭连接头(也称蜂鸣器)共有四个脚位, 只要把机箱上的喇叭接头接至此四脚位上即可使用。

✓ PWRLED 电源指示灯

电源指示灯为三个脚位的连接头, 用来指示电脑的工作状态, 当电脑一旦上电时, 指示灯常亮, 反之, 则不亮(注: 有正负之分)。

✓ HDD_LED 硬盘指示灯连接头


这组两脚位排针连接到电脑机箱上的硬盘指示灯接头上, 可由LED以显示硬盘工作的状态, 如果硬盘一旦有读取动作, 指示灯随即亮起(注: 有正负之分)。

✓ PWRSW ATX 电源开关

POWER SW 是一个两针脚的接头, 控制着 ATX 主电源的总开关, 将这组排针连接到电脑机箱上控制电脑电源的开关上, 当两个针脚短接即可开(关)机。


✓ RESET SW 复位按钮

这组两脚位排针接到电脑机箱上的 RESET 开关, 可让您不需要关掉电脑电源即可重新启动系统, 尤其在系统挡机或死机时特别有用。








2.5.15 主板后面板接口说明

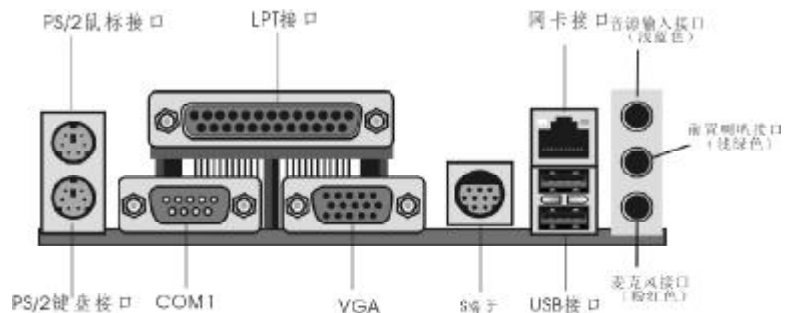


ITX-M4S1LA(-2/3/4)后面板接口 (打印口及S端子为可选)

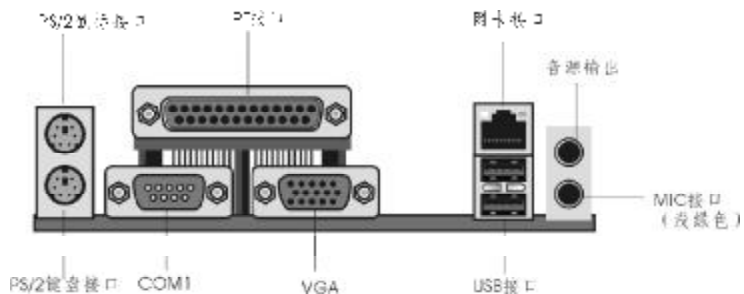

ITX-M4S1L7 后面板接口 (打印口为可选)

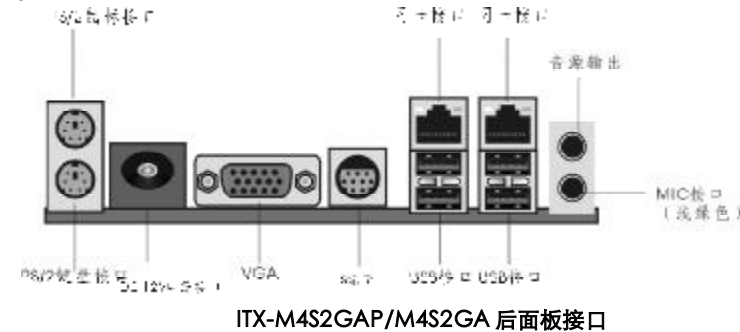
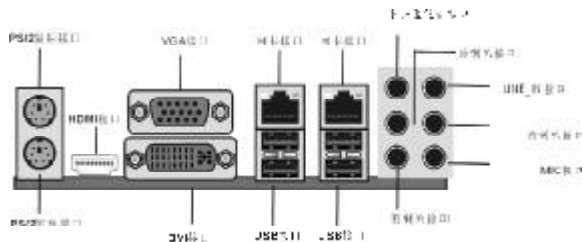


ITX-M4S2GAP/M4S2GA 后面板接口

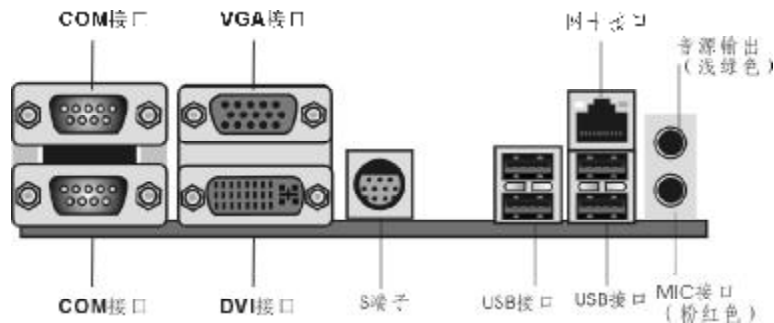

ITX-M4S4DF 后面板接口

备注：图片仅供参考，具体以实物为准



第三章 BIOS 简介

3.1 BIOS 升级更新

为了满足客户的需要，我们特提供 WINDOWS 及 DOS 两个系统的 BIOS 刷新工具，具体操作方法如下

3.1.1 DOS 下刷写方式

- a. 刷新工具：AFUDOS.EXE
- b. 刷新方法：准备一张 DOS 启动盘，只含三个最基本的 DOS 启动文件即可，将 AMI BIOS 刷新工具和 BIOS 文件拷贝到这张软盘 /U 盘根目录下，使用此软盘 /U 盘开机引导系统，进到 DOS 后输入 AFUDOS 空格 BIOS 文件名空格 /P 空格 /B 空格 /N 空格 /C 空格 /X 回车，此时进行 BIOS 刷写过程，当刷写完毕后会有相关提示时，此时才可重启电脑，按 F1 键进入 CMOS 设置，选择 Load Optimal Defaults

3.1.2 WINDOWS 下刷写方式

- a. 刷新工具：AFUWIN.EXE
- b. 刷新方法：在 WINDOWS 下运行 AFUWIN.EXE--- 点击 OPEN--- 选择要对应的 BIOS 文件 --- 勾选 Program ALL Blocks 后点击 FLASH，此时进行刷写 BIOS 过程，刷写过程中键盘鼠标为锁定状态，当刷写完成后键盘鼠标恢复使用，此时重启电脑按 F1 键进入 CMOS 设置，选择 Load Optimal Defaults



BIOS 刷写存在风险，请在专人指导下进行刷写，并留意以下两点：

1. BIOS 文件要与实际产品型号相符
2. BIOS 在刷写过程中请勿非法关机 / 重启电脑

3.2 BIOS 设定

请注意由于 BIOS 的不断更新，可能我们说明的部分或许与现有板上 BIOS 有些不同，一切仅供参考，以实际为主。BIOS 中一些未做过多说明的项目，属于非常用项目请保持缺省值，建议不要随意更改。

欲进入 BIOS 设定程序画面，请依下列步骤：

- a. 打开电源或重新启动系统，在自检画面可看到“PRESS DEL TO RUN SETUP”
- b. 按下 DEL 键后，即可进入 BIOS 设定程序。

BIOS功能键说明	
按 键	功能说明
←→ 键	选择设置项目(左右移动)
↑↓ 键	选择设置项目(上下移动)
+ - 键	改变设定状态,或者变更键位之数值
Tab 键	改变设定状态
ESC 键	退出设置程序并不存储设置
F1功能键	显示目前设定项目的相关辅助说明
F7功能键	放弃程序的修改
F8功能键	载入安全模式的默认值
F9功能键	载入出厂预设优化值
F10功能键	退出设置程序并存储设置

3.3 BIOS 语言切换

为了让更多的用户能够熟悉并对 BIOS 操作，我们特别推出中文和英文两种语言 BIOS，用户只需要进入 CMOS 后按“F5”就可以轻松进行中文和英文 BIOS 之间的切换，让 BIOS 操作不再神秘。

第四章 驱动程序的安装

该板支持 WINDOWS2K 及以上系统, 各系统软件不一, 我们附带光盘里提供 2K/XP/VISTA 系统的驱动, 现安装说明仅以 M4S1L7 2K/XP 系统为例

4.1 芯片组驱动程序的安装

- 进入驱动光盘 MB\INF 目录,鼠标左键双击 "945INF.exe".
- 鼠标点击安装界面上 "下一步" 按钮.
- 点击 "是",再点击 "下一步".
- 安装完成后,在重新启动选项中选择 "是" 然后按 "完成" 重新启动计算机,之后驱动程序自动加载.

4.2 板载显卡驱动的安装

- 进入驱动光盘 MB\VGA\945 目录,鼠标左键双击 "WIN2k_xp1417.exe".
- 鼠标点击安装界面上 "下一步" 按钮.
- 点击 "是",再点击 "下一步".
- 安装完成后,在重新启动选项中选择 "是" 然后按 "完成" 重新启动计算机,之后驱动程序自动加载.

4.3 板载网卡驱动的安装

安装 XP 系统时只需在 "系统属性" 下,选择 "硬件",打开设备管理器,更新网卡的驱动程序即可.

4.4 板载声卡驱动的安装

- 进入驱动光盘 MB\SOUND 目录,鼠标左键双击 "WDM_A379.EXE"
- 按照提示,点击 "下一步",接着再点击 "仍然继续".
- 安装完成后,在重新启动选项中选择 "是" 然后按 "完成" 重新启动计算机,之后驱动程序自动加载.

4.5 USB2.0 驱动程序的安装

主机板需要安装 WindowsXP 以上的版本,在您安装好 WindowsXP/2003 等版本的操作系统后请更新 Microsoft 最新的补丁程序,一般此时系统就可以识别您的 USB2.0 设备了,万一不行您还可以到网站上去下载 USB2.0 驱动程序 (是一个 EXE 可执行文件),双击这个程序后就可以按提示安装了.

ITX SERIES User's Manual

Products Model:

<input type="checkbox"/>	ITX-M4S1L7
<input type="checkbox"/>	ITX-M4S1LA(-2/3/4)
<input type="checkbox"/>	ITX-M4S4DF
<input type="checkbox"/>	ITX-M4S2GAP
<input type="checkbox"/>	ITX-NG81-DG
<input type="checkbox"/>	ITX-NG82
<input type="checkbox"/>	ITX-M4S2GA

Rev:1.3

Date:April 2009



Safety Instructions

1. Always read the Safety Instructions carefully.
2. Keep this manual for future reference.
3. Please keep the equipment away from humidity.
4. The openings on the chassis are for air convection hence protect the equipment from overheating. Do not cover the openings.
5. Make sure the voltage of the power supply is appropriate and adjust it to 110/220V before connect the equipment to the power source.
6. Place the power cord such a way that people can not step on. Do not place anything on the power cord.
7. Always unplug the power cord before inserting any add-on card or module.
8. All cautions and warnings in the manual should be noted.
9. Before connect to the power supply, make sure there are not screws and other metal objects left to avoid electrical short circuit that can destroy other parts.
10. Never pour any liquid into the opening, or else it would make serious damage or circuit paralysis.
11. If in the following situations, please find professionals:
 - ✓ The power cord or plug damaged
 - ✓ Liquid poured into the machine
 - ✓ The equipment exposed to moisture
 - ✓ The equipment does not work properly and the user can not find guidance in this manual to solve the problem
 - ✓ The equipment has been dropped or damaged
 - ✓ Obvious signs of breakage damage have been found

Copyright Statement

All brands, products, logos, trademarks and company names are registered trademarks belong to their respective owners.

AMI[®] is the registered trademark of AMI.

Intel[®], Celeron[®], Pentium[®] are registered trademarks of Intel.

Netware[®] is the registered trademark of Novell Inc.

PS / 2 and OS / 2 are registered trademarks of International Business Machines Co., Ltd.

Windows[®] 98 / 2000/NT/XP and Microsoft[®] are registered trademarks of Microsoft.



Contents

Safety Instructions.....	46
Copyright Statement.....	46
Chapter 1 Motherboard Specifications.....	48
1.1 Box Contents.....	48
1.2 Motherboard Layout and Specification.....	49
Chapter II Hardware Installation	71
2.1 Install CPU	71
2.2 Install CPU fan.....	72
2.3 Install Memory.....	74
2.4 Motherboard Jumper.....	75
2.5 Motherboards Interfaces.....	76
Chapter III BIOS Introduction.....	86
3.1 BIOS Update.....	86
3.2 BIOS Setup.....	87
3.3 BIOS Language Switch	87
Chapter IV Drivers Installation.....	88
4.1 Install Chipset Driver.....	88
4.2 Install Onboard VGA Driver.....	88
4.3 Installing Onboard LAN Driver.....	88
4.4 Install Onboard Audio Codec Driver.....	88
4.5 Install USB 2.0 Driver.....	88



Chapter 1 Motherboard Specifications

Thank you for using the ITX series motherboards, in order to guarantee product quality and suit to market demand, motherboards undergo anti-aging, low voltage, various of temperature, humid environment repeated testing, they can meet the needs of industry with the advantages of cost-effective, stability, longevity, high-quality. Meanwhile, in order to take into account most market both at home and abroad, we provide Chinese-English bilingual BIOS. The guide introduces the specifications and installation steps of the motherboard. Please refer to the BIOS setup user manual in the motherboard driver CD for more detailed information.




As motherboard and BIOS software would be updated constantly, relevant content of the manual may change without further notice, all the information are for reference purposes only, please pay attention to the actual objects and the upgraded version in the Internet publication.

1.1 Box Contents

- ✓ ITX-M4S1L7/ITX-M4S1LA(-2/3/4) /ITX-M4S4DF/ITX-M4S2GAP/ITX-NG81-DG/ITX-M4S2GA/ITX-NG82 Motherboard
- ✓ 80 - Conductor Ultra ATA 66/100 IDE Cable (optional)
- ✓ SATA Cable
- ✓ User' s Manual (optional)
- ✓ Motherboard Driver CD
- ✓ Warranty Card
- ✓ Certificate Card
- ✓ Baffle

1.2 Motherboard Layout and Specification

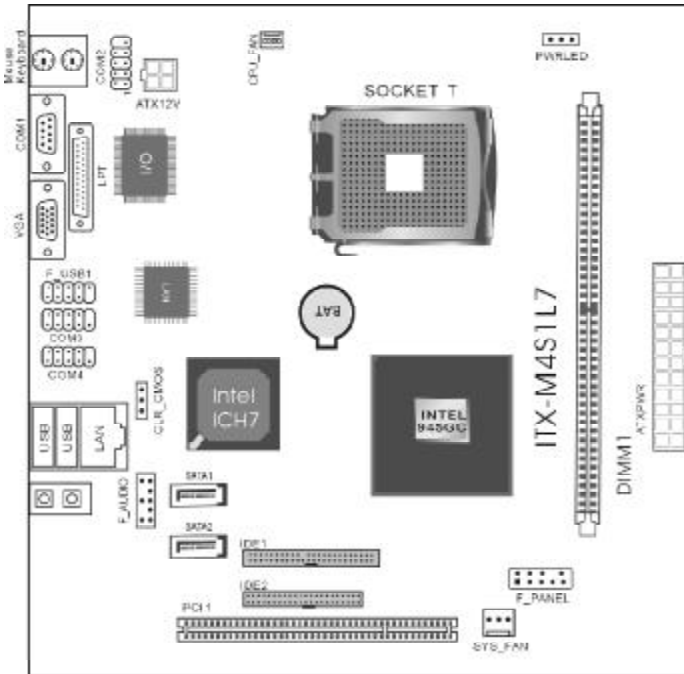

ITX-M4S1L7



ITX-M4S1L7 Specifications:


ITX-M4S1L7	
CPU	<ul style="list-style-type: none"> * Supports 533/800/1066MHz Front Side Bus * Supports LGA 775 Intel® Core™ 2 Quad 6000/Core™ 2 Duo E6000/Core™ 2 DUO E4000/Pentium® Dual-core E2000/Celeron® Dual-core E1000/Celeron® 400/Pentium® D/Pentium® 4/Celeron® D Series
Chipsets	<ul style="list-style-type: none"> * North Bridge: Intel® 945GC * South Bridge: Intel® ICH7
Memory	<ul style="list-style-type: none"> * Supports DDRII 533/667 Memory * Up to 2GB * 1*DDRII DIMM
Graphics	* Integrated GMA950 Graphics Card, Supports DX9.0C
Audio	<ul style="list-style-type: none"> * Integrated ALC 655 Audio Codec * Supports 2/4/5.1 Channel Audio-out
LAN	Integrated Realtek 8101E 10/100M Lan chip, supports Non-harddisk system
Storage Interface	<ul style="list-style-type: none"> * 2*SATA 300MB/s ports * 1*IDE, up to 2 IDE devices * 1*MINI IDE
Expansion Slots	* 1*PCI
USB	4*USB 2.0 ports(2 on the back panel, 2 connected to the internal USB header via the USB Cable)




Internal I/O Connectors	<ul style="list-style-type: none"> * 1*24 PIN main power connector, 1*4PIN 12V power connector * 2*SATA 300MB/s connectors * 1*CPU fan header * 1*system fan header * 1*front panel header * 1*front panel Audio header * 1*USB 2.0 header * 3*COM header * 1*Clearing CMOS jumper * 1*IDE, 1*MINI IDE
Back Panel Connectors	<ul style="list-style-type: none"> * 1*PS/2 keyboard port * 1*PS/2 mouse port * 1*COM port * 1*VGA port * 2*USB ports * 1*RJ45 port * 1*LPT port * 2*JACKs
I/O	ITE8712F-S
H/W Monitoring	<ul style="list-style-type: none"> * CPU/System temperature detection * Fan speed detection * System voltage detection(optional)
BIOS	<ul style="list-style-type: none"> * 1*4Mbit flash * Provide Chinese-English bilingual BIOS interface
Form	ITX 170mm x 170mm



ITX-M4S1LA(-2)

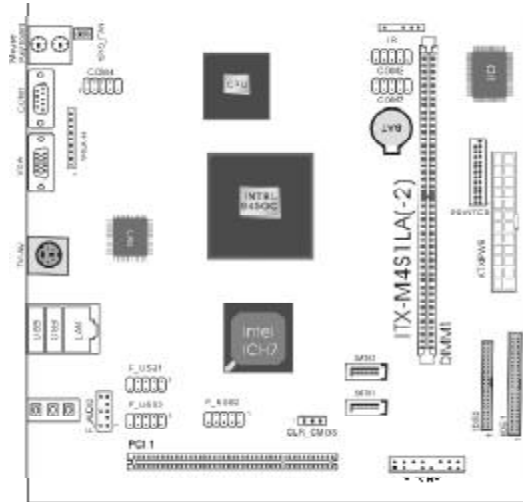

ITX-M4S1LA-3(4)

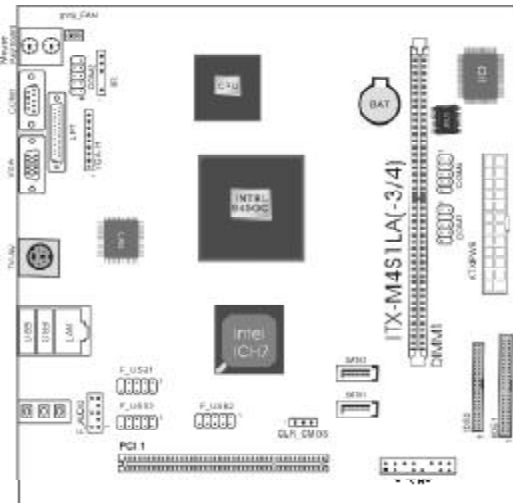


Four main board , the board type are consistent , whose difference has :

- ITX-M4S1LA motherboard to provide S-Video;
- ITX-M4S1LA-2 motherboard no S-Video;
- ITX-M4S1LA-3 motherboard provides S-Video and LPT interface;
- ITX-M4S1LA-4 motherboard to provide LPT interface.

ITX-M4S1LA(-2/3/4) Specifications:

ITX-M4S1LA	
CPU	The motherboard carries Intel® Atom™ 230/330 series processors
Chipsets	* North Bridge: Intel® 945GC * South Bridge: Intel® ICH7
Memory	* Supports DDRII 533/667 Memory * Up to 2GB * 1*DDRII DIMM
Graphics	* Integrated GMA950 Graphics Card, Supports DX9.0C
Audio	* Integrated ALC 655 Audio Codec * Supports 2/4/5.1 Channel Audio-out
LAN	Integrated Realtek 8101E 10/100M Lan chip, supports Non-harddisk system
Storage Interface	* 2*SATA 300MB/s ports * 1*IDE, up to 2 IDE devices * 1*MINI IDE
Expansion Slots	* 1*PCI
USB	8*USB 2.0 ports (2 on the back panel, 6 connected to the internal USB header via the USB Cable)

Internal I/O Connectors	* 1*24 PIN main power connector,1*4PIN 12V power connector
	* 2*SATA 300MB/s connectors
	* 1 *CPU fan header
	* 1 *front panel header
	* 1 *front panel Audio header
	* 3*USB 2.0 header
	* 3*COM header(M4S1LA/-2)
	* 1 *LPT port*(M4S1LA/-2)
	* 1 *Clearing CMOS jumper
	* 1 *IDE,1 *MINI IDE
	* 1 *IR header
* 1 *VGA-H header	
Back Panel Connectors	* 1 *PS/2 keyboard port
	* 1 *PS/2 mouse port
	* 1 *COM port
	* 1 *LPT port(M4S1LA-3/4)
	* 1 *VGA port
	* 1 *TV/AV port(M4S1LA/-3)
	* 2*USB ports
	* 1 *RJ45 port
* 3 *JACKs	
I/O	ITE8712F-S
H/W Monitoring	* CPU/System temperature detection
	* Fan speed detection
	* System voltage detection(optional)
BIOS	* 1 *4Mbit flash
	* Provide Chinese-English bilingual BIOS interface
Form	ITX 170mm x 170mm

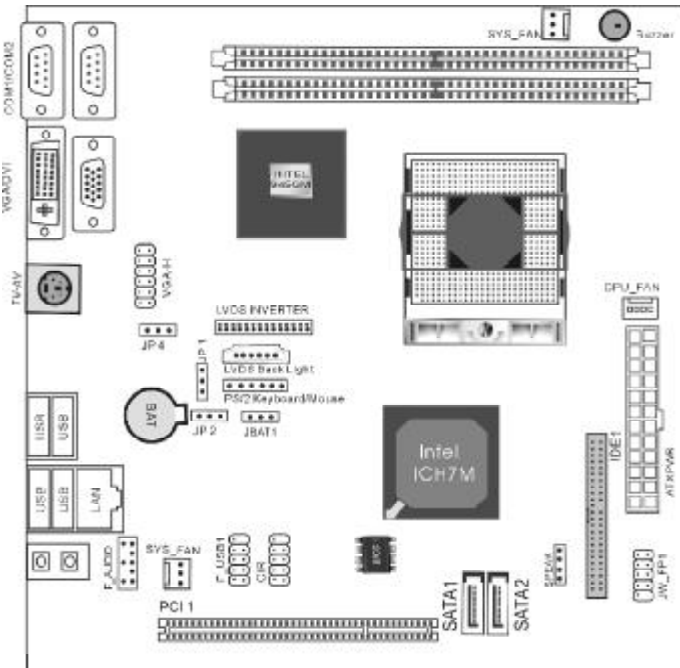

ITX-M4S4DF Positive map




ITX-M4S4DF	
CPU	* Socket479 Core Duo、 Celeron M series processors
Chipsets	* North Bridge: Intel® 945GM
	* South Bridge: Intel® ICH7M
Memory	* Supports DDRII 533/667 Memory
	* Up to 4GB
	* 2*DDRII DIMM
Graphics	* Integrated GMA950 Graphics Card, Supports DX9.0C
Audio	* Integrated ALC ALC662 Audio Codec
	* Supports 2/4 Channel Audio-out
LAN	Integrated Realtek 8111C 1000M Lan chip, supports 10/100/1000M
Storage Interface	* 2*SATA 300MB/s ports
	* 1*IDE
Expansion Slots	* 1*PCI, 1*Mini-PCIE
USB	7*USB 2.0 ports(4 on the back panel, 3 connected to the internal USB header via the USB Cable)
Back Panel Connectors	* 2*COM port
	* 1*DVI port
	* 1*VGA port
	* 1*S-Video port
	* 4*USB ports
	* 1*RJ-45 port
	* 2*JACKs




	* 1*24 PIN main power connector
	* 1* IDE connectors
	* 2*SATA 300MB/s connectors
	* 1*CPU fan header
	* 1*System fan header
	* 1*front panel Audio header
	* 1*USB 2.0 header
	* 1*Clearing CMOS jumper
	* 1*CIR header
	* 1*VGA_H header
	* 1*LVDS header
	* 1*PS/2 mouse keyboard header
	* 1*LVDS_Inverter header
	* 1*front panel header
I/O	* 1*F71858DG-F
H/W Monitoring	* CPU/System temperature detection
	* Fan speed detection
	* System voltage detection(optional)
BIOS	* 1*8Mbit flash
Form Factor	ITX 170mm x 170mm



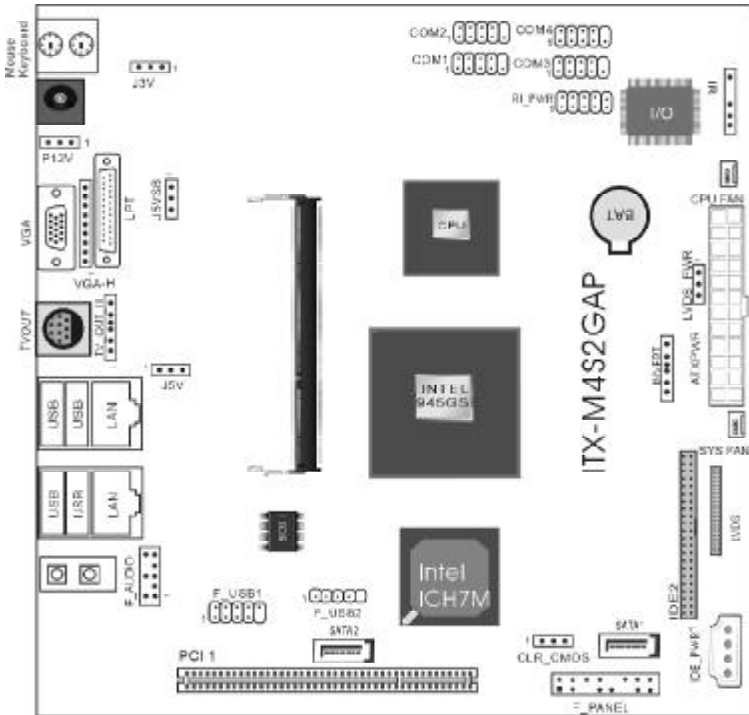

ITX-M4S2GAP Positive map

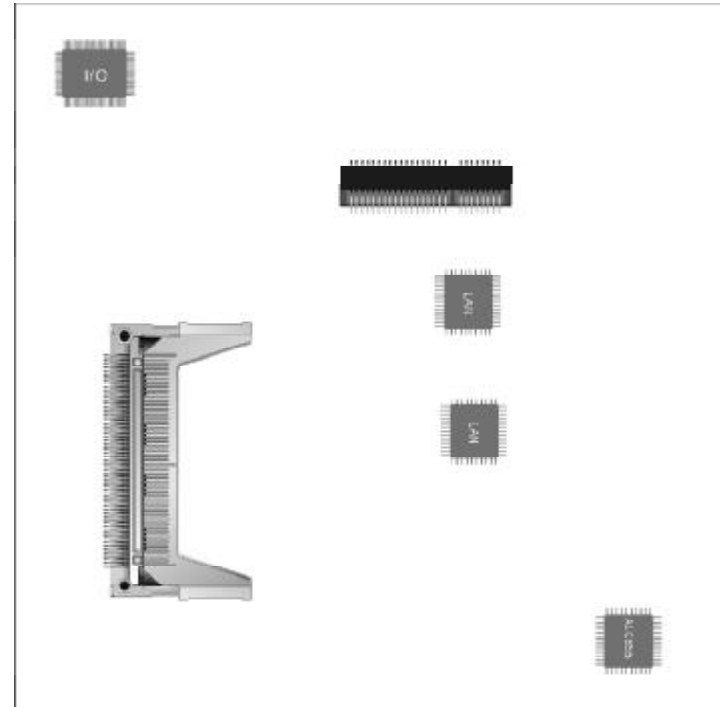


ITX-M4S2GAP The back of the map



ITX-M4S2GAP	
CPU	The motherboard carries Intel® Atom™ N270 series processors
Chipsets	* North Bridge: Intel® 945GSE
	* South Bridge: Intel® ICH7M
Memory	* Supports DDRII 533 Notebook Memory
	* Up to 2GB
	* 1*DDRII SODIMM
Graphics	* Integrated GMA950 Graphics Card, Supports DX9.0C
Audio	* Integrated ALC 655 Audio Codec
	* Supports 2/4 Channel Audio-out
LAN	Integrated Realtek 8111C 1000M Lan chip, supports 10/100/1000M
Storage Interface	* 2*SATA 300MB/s ports
	* 1*IDE
Expansion Slots	* 1*PCI
USB	7*USB 2.0 ports (4 on the back panel, 3 connected to the internal USB header via the USB Cable)
Back Panel Connectors	* 1*PS/2 keyboard port
	* 1*PS/2 mouse port
	* 1*S-Video port, 1*LPT port
	* 4*USB ports
	* 2*RJ-45 port
	* 2*JACKs

Internal I/O Connectors	* 1*24 PIN main power connector, 1*4PIN 12V power connector
	* 1*DC power connector
	* 1*IDE_PWR AUX_power connector
	* 1*MINI IDE connectors
	* 2*SATA 300MB/s connectors
	* 1*CPU fan header
	* 1*System fan header
	* 1*front panel Audio header
	* 3*USB 2.0 header
	* 1*IR header
	* 1*Clearing CMOS jumper
	* 1*J3V header
	* 1*P12V header
	* 1*J5VSB header
	* 1*J5V header
	* 1*VGA_H header
* 1*TV_OUT_H header	
* 4*COM header	
* 1*RI_PWR header	
* 1*LVDS header	
* 1*LVDS_PWR header	
* 1*INVERT header	
* 1*front panel header	
I/O Controller	* 2*ITE8712F-S
HW Monitoring	* CPU/System temperature detection
	* Fan speed detection
	* System voltage detection (optional)
BIOS	* 1*8Mbit flash
Form Factor	ITX 170mm x 170mm

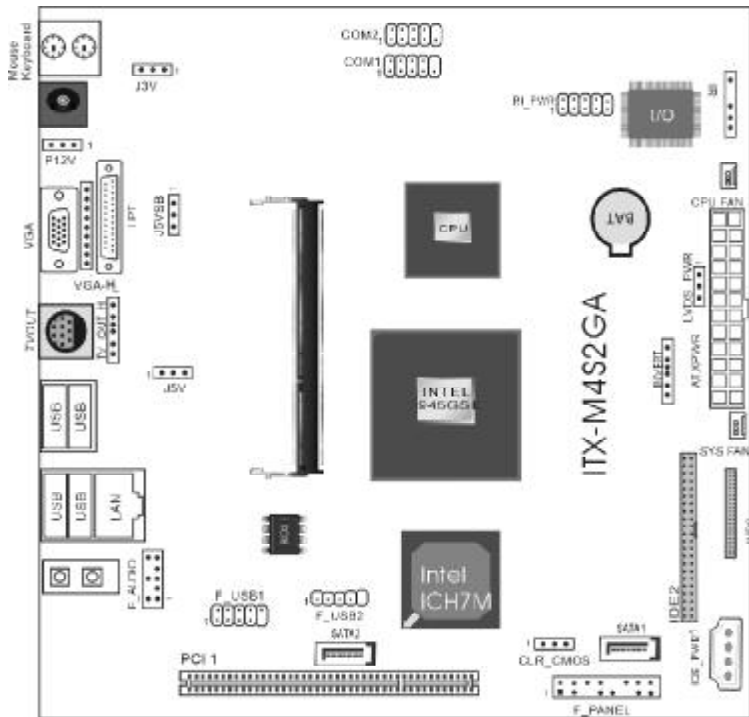


ITX-M4S2GA Positive map

Remarks:

ITX-M4S2GA motherboard diagram can refer to the back of ITX-M4S2GAP motherboard back of maps, see the specific P59.

ITX-M4S2GA	
CPU	The motherboard carries Intel® Atom™ N270 series processors
Chipsets	* North Bridge: Intel® 945GSE * South Bridge: Intel® ICH7M
Memory	* Supports DDRII 533 Notebook Memory * Up to 2GB * 1*DDRII SODIMM
Graphics	* Integrated GMA950 Graphics Card, Supports DX9.0C
Audio	* Integrated ALC 655 Audio Codec * Supports 2/4 Channel Audio-out
LAN	Integrated Realtek 8111C 1000M Lan chip, supports 10/100/1000M
Storage Interface	* 2*SATA 300MB/s ports * 1*IDE
Expansion Slots	* 1*PCI
USB	7*USB 2.0 ports (4 on the back panel, 3 connected to the internal USB header via the USB Cable)
Back Panel Connectors	* 1*PS/2 keyboard port * 1*PS/2 mouse port * 1*S-Video port, 1*LPT port * 4*USB ports * 1*RJ-45 port * 2*JACKs

Internal I/O Connectors	* 1*24 PIN main power connector,1*4PIN 12V power connector
	* 1*DC power connector
	* 1*IDE_PWR AUX_power connector
	* 1*MINI IDE connectors
	* 2*SATA 300MB/s connectors
	* 1*CPU fan header
	* 1*System fan header
	* 1*front panel Audio header
	* 3*USB 2.0 header
	* 1*IR header
	* 1*Clearing CMOS jumper
	* 1*J3V header
	* 1*P12V header
	* 1*J5VSB header
	* 1*J5V header
	* 1*VGA_H header
	* 1*TV_OUT_H header
	* 2*COM header
	* 1*RI_PWR header
	* 1*LVDS header
* 1*LVDS_PWR header	
* 1*INVERT header	
* 1*front panel header	
I/O Controller	* 1*ITE8712F-S
H/W Monitoring	* CPU/System temperature detection
	* Fan speed detection
	* System voltage detection(optional)
BIOS	* 1*8Mbit flash
Form Factor	ITX 170mm x 170mm

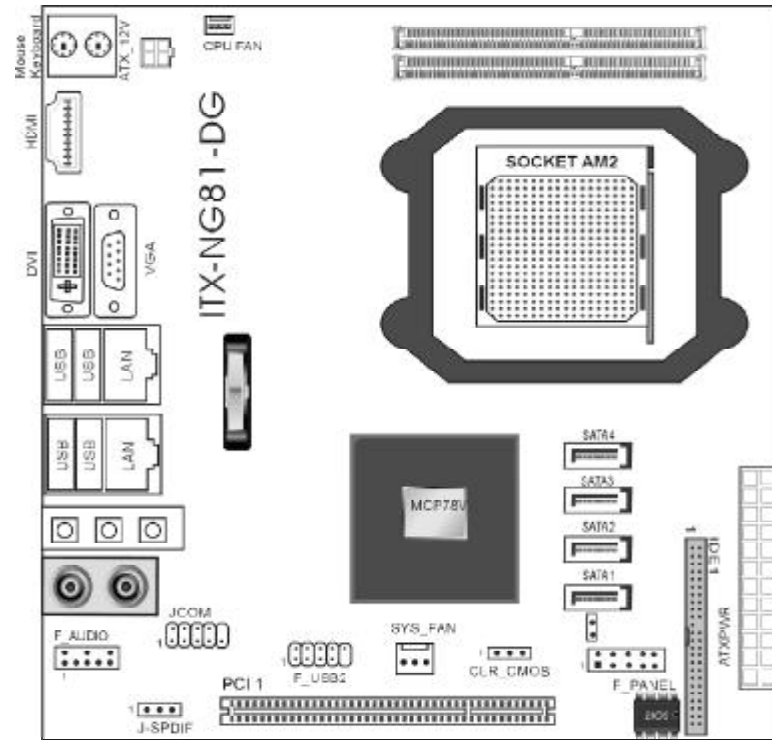

ITX-NG81-DG





ITX-NG81-DG	
CPU	<ul style="list-style-type: none"> * AMD AM2 Athlon64 x2/Athlon64/Sempron * AMD AM2+ Phenom FX / Phenom X4 / Phenom X2 * HyperTransport 3.0, Supports AM2+ K10 CPU * HyperTransport 1.0, Supports AM2 K8 CPU
Chipsets	* Nvidia MCP78V Chipset
Memory	<ul style="list-style-type: none"> * Supports DDRII 533/667 Memory * Up to 2GB * 2*DDRII SODIMM
Graphics	* Integrated GeForce8100, Supports DX 10
Audio	<ul style="list-style-type: none"> * Integrated ALC 883 Audio Codec * Supports 2/4/5.1/7.1 Channel Audio-out
LAN	Integrated Dual Realtek 8111C 10/100/1000M Lan chip, supports Non-harddisk system
Storage Interface	<ul style="list-style-type: none"> * 4*SATA 300MB/s ports * 1*IDE, up to 2 IDE devices
Expansion Slots	* 1*PCI
USB	6*USB 2.0 ports(4 on the back panel, 2 connected to the internal USB header via the USB Cable)





Internal I/O Connectors	<ul style="list-style-type: none"> * 1*24 PIN main power connector, 1*4PIN 12V power connector * 4*SATA 300MB/s connectors * 1*IDE connectors * 1*CPU fan header * 1*System fan header * 1*front panel header * 1*front panel Audio header * 1*USB 2.0 header * 1*COM header * 1*Clearing CMOS jumper * 1*SPDIF header
Back Panel Connectors	<ul style="list-style-type: none"> * 1*PS/2 keyboard port * 1*PS/2 mouse port * 1*DVI port * 1*VGA port * 1*HDMI port * 4*USB ports * 2*RJ45 port * 6*JACKs
I/O	ITE8712F-S
H/W Monitoring	<ul style="list-style-type: none"> * CPU/System temperature detection * Fan speed detection * System voltage detection(optional)
BIOS	* 1*8Mbit flash
Form Factor	ITX 170mm x 170mm




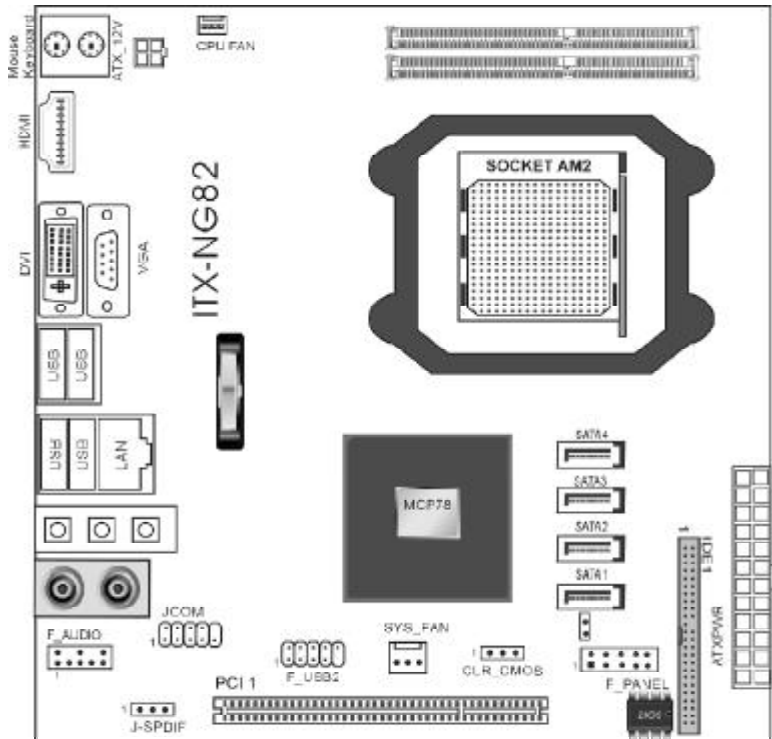

ITX-NG82



ITX-NG82	
CPU	<ul style="list-style-type: none"> * AMD AM2 Athlon64 x2/Athlon64/Sempron * AMD AM2+ Phenom FX / Phenom X4 / Phenom X2 * HyperTransport 3.0, Supports AM2+ K10 CPU * HyperTransport 1.0, Supports AM2 K8 CPU
Chipsets	* Nvidia MCP78S Chipset
Memory	<ul style="list-style-type: none"> * Supports DDRII 533/667 Memory * Up to 2GB * 2*DDRII SODIMM
Graphics	* Integrated GeForce8200, Supports DX 10
Audio	<ul style="list-style-type: none"> * Integrated ALC 883 Audio Codec * Supports 2/4/5.1/7.1 Channel Audio-out
LAN	Integrated Realtek 8111C 10/100/1000M Lan chip, supports Non-harddisk system
Storage Interface	<ul style="list-style-type: none"> * 4*SATA 300MB/s ports * 1*IDE, up to 2 IDE devices
Expansion Slots	* 1*PCI
USB	6*USB 2.0 ports (4 on the back panel, 2 connected to the internal USB header via the USB Cable)





Internal I/O Connectors	* 1*24 PIN main power connector,1*4PIN 12V power connector
	* 4*SATA300MB/s connectors
	* 1*IDEconnectors
	* 1*CPU fan header
	* 1*System fan header
	* 1*front panel header
	* 1*front panel Audio header
	* 1*USB 2.0 header
	* 1*COMheader
	* 1*Clearing CMOS jumper
	* 1*SPDIF header
	Back Panel Connectors
* 1*PS/2 mouse port	
* 1*DM port	
* 1*VGA port	
* 1*HDMI port	
* 4*USB ports	
* 1*RJ45 port	
* 6*JACKs	
I/O Controller	ITE8712F-S
HW Monitoring	* CPU/System temperature detection
	* Fan speed detection
	* System voltage detection(optional)
BIOS	* 1*8Mbit flash
Form Factor	ITX 170mm x170mm




Chapter II Hardware Installation

2.1 Install CPU


Install Intel 775-pin CPU according to the following steps.

- ~ *Before you insert the CPU into the 775-pin socket, please check whether the CPU surface Dirty and whether there are bent pin on the socket. Do not force the CPU into the socket,otherwise CPU or the socket will be seriously damaged.*

Step1 Pulling up the lever by the side of the CPU socket,turn it about 135 degrees around to the complete open position. And then turn the cover about 100 degrees around to the complete open position.

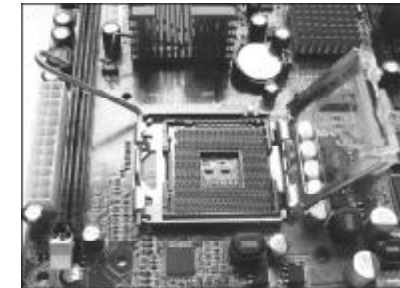


Step2 Remove the protective cap,Hold the metal frame edge by one hand,uncover the protective cap from the metal frame by the other hand and press the center of the cover to remove it.

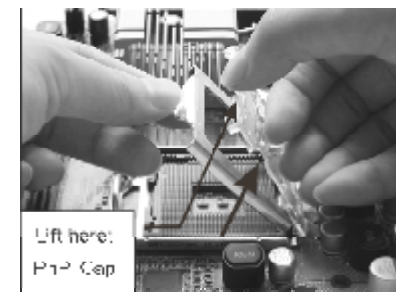



Step3 Unload CPU protective cover, there are two specially designed convex location on the Socket base and two concave location on the CPU, fit them together so that you can insert the CPU into the socket. Please do that correctly to avoid CPU-pin damage.

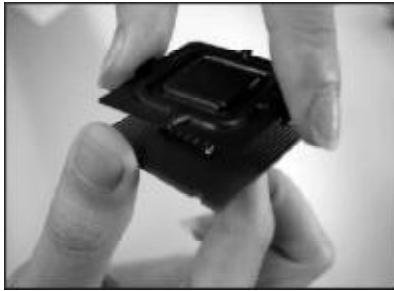

Step4 After insert the CPU, cover the protective cover. Replace the lever to fasten the cover, fix up the lever to complete the CPU installation.




2.2 Install CPU fan

TO keep the CPU work normally, you must chose a good quality CPU cooler. Here we take Intel' s original fan as an example to illustrate the CPU fan installation.


Step1 Before you install the fan, check whether the bottom of the cooler was coated with thermal grease (Intel' s original fans often attached with thermal interface material TIM), if not, coat the CPU surface with some thermal grease.



Step2 Remove the power cord of the fan, point four gaps of the fasteners to the inner part.

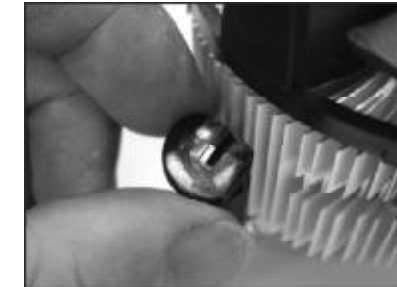


Step3 Make sure put the fan cables on the side of the power plug, place the cooler upon the socket LGA 775, align the fasteners and the four holes on the motherboard, clasp them.

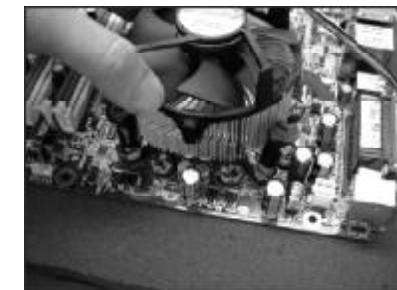



Step4 Plug the fan power cord to the CPU fan header (CPU_FAN) on the motherboard.

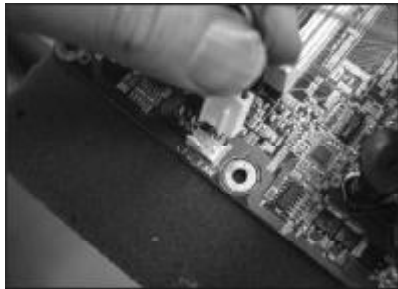

2.3 Install Memory

2.3.1 DIMM Install Memory

Motherboard supports DDRII memory,the capacity can be expanded from minimum 64MB to maximum 2GB.

Installation steps are as follows:

- Unclose the fasteners at the both sides of the memory slot.
- Insert the memory vertically into the slot,pay attention to fitting the notch to the raised point.
- If the installation is correct,the white fasteners at the both sides of the memory slot would close automatically.

2.3.2 DIMM Install Memory

Motherboard supports DDRII SODIMM memory,the capacity can be expanded from minimum 64MB to maximum4GB.

- the memory of the golden angle of 45 degrees into the memory slot
- Then a little hard to press the memory and the memory slot Kakou parallel position, at this time will automatically Kakou tight memory card.



In order to make the system stable, please choose genuine memory.

Warm Tip:That small green PCB that ITX-NG81-DG/ITX-NG82 main board board is loaded with gets stuck is to be used to protect the SODIMM memory slot's , asks a consumer not to think erroneously being memory calorie.



2.4 Motherboard Jumper

The first pin of all jumpers are next to the thick white line or “r”, be sure to connect them correctly, or may damage the motherboard and devices.

2.4.1 Clear CMOS Jumper(CLR_CMOS)

If there are problems with the motherboard because of BIOS setting error,you can clear the CMOS to solve the problem.Turn off the computer and unplug the power cord,move the jumper cap from pins 1-2(defaule) to pins 2-3,keep the cap on pins 2-3 for 5-6 seconds,then move the cap back to pins 1-2.Don't clear the CMOS when the computer is running,or else may damage your motherboard. Jumper settings as follows:

CMOS Definition	CLR_CMOS
Normal	1 3
Clear CMOS	1 3

2.4.2 LVDS POWER Jumper(LVDS_PWR)

ITX-M4S2GAP/M4S2GA

Set up a state	LVDS_PWR
3.3V Available (Default)	1 3
5V Available	1 3

2.4.2 DC and ATX Power switch jumper(J5V/J5VSB/P12V/J3V)

ITX-M4S2GAP/M4S2GA

Set up a state	J5V J5VSB P12V J3V
The use of ATX power supply (Default)	1 3
The use of DC power supply	1 3





2.4.4 USB 电源控制插针: JP4

ITX-M4S4DF

Set up a state	JP4
5VSB(Default)	Jump to 2-3 Pin
5V	Jump to 1-2 pin

2.4.5 LVDS Function setting:JP2

ITX-M4S4DF

Set up a state	JP2
3.3V(Default)	Jump to 2-3 Pin
5V	Jump to 1-2 pin

2.5 Motherboards Interfaces

2.5.1 Fan Power Connectors (CPU_FAN1/SYS_FAN1)


When Plug the fan power cord to the fan header,users must connect the red line to the +12V power-pin and connect the black line to ground. If you want to observe the fan's work state in BIOS or hardware monitor procedures, you need use fans which have speed detection function. The fans with speed sensor produce two pulse each rotation, then the system hardware monitor make a fan speed statistical report which can be displayed in CMOS.



2.5.2 USB Header (F_USB)

Motherboards provide 8 USB ports, 2 of which can be directly connected to USB devices ,The F_USB1/F_USB2/F_USB3 need USB cables and they can provide you another 6 USB ports,you can purchase the USB cable from the motherboard dealer or the electronic market.


~ *The first pin is next to the thick white line or logo "r" on the motherboard, be sure not to mistake,or may damage your devices or motherboard!*

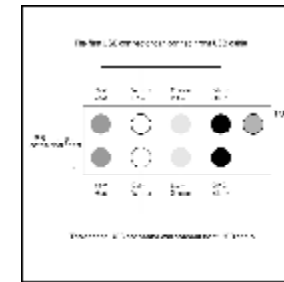

2.5.3 PS/2 Mouse & PS/2 Keyboard Connector(PS2KBMS)

ITX-M4S4DF


The connectors are for PS/2 keyboard and PS/2 Mouse input devices.

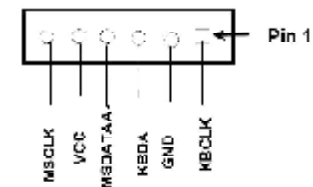

2.5.4 Front Panel Audio Header(F_AUDIO)

You may connect your chassis front panel audio module to this header.It is convenient for you to listen to music and use microphone for voice input. You must connect them correctly(the following chart shows).






- PIN1: Mic in (microphone input)
- PIN2: Aud GND (audio simulation grounding)
- PIN3: Mic VREF (microphone power)
- PIN4: No pin
- PIN5: FPOUT R (right track output)
- PIN6: RET R (right track return)
- PIN7: (KEY) (RSVD Headset Reserve)
- PIN8: No pin
- PIN9: FPOUT L (left track output)
- PIN10: RET L(left track return)



2.5.5 COM Header(COM2/COM3/COM4)

The motherboard provide 3 groups of COM header,COM2/COM3/COM4 need USB cables for connecting, you can purchase this cable from the motherboard dealer or the electronic market. (Note:The first pin is next to the logo “r ” on the motherboard, be sure not to mistake,or may damage your devices or motherboard!)

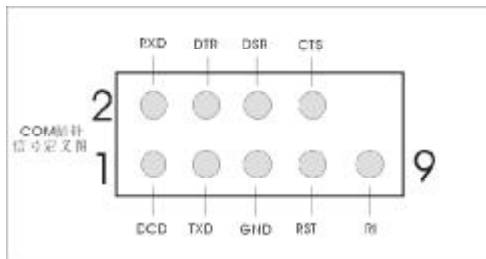

2.5.6 COM Header Connection


You must use the cable to connect COM header, the cable wiring are as follows:

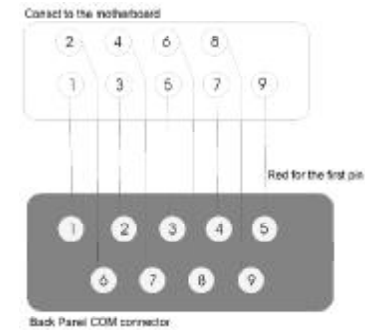


2.5.7 VGA Connector (VGA_H)

One motherboard provides a nonstandard VGA connector, the signal definition chart are as follow:

ITX-M4S1LA(-2/3/4)和ITX-M4S2GAP/M4S2GA

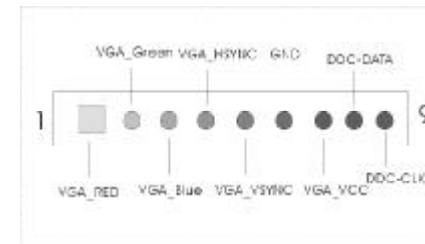


ITX-M4S4df

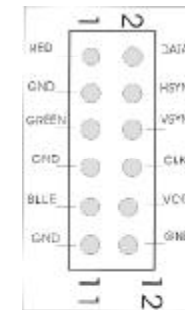




2.5.8 LVDS Header(LVDS)

Motherboard to provide LVDS connector, the map follows the definition signal

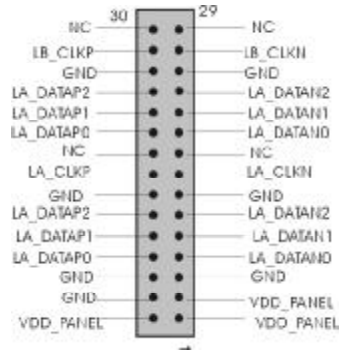


2.5.9 INVERT Header(INVERT)

Motherboard to provide INVERT connector, the map follows the definition signal

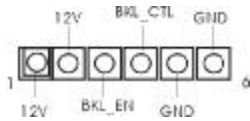


2.5.10 IDE_PWR Header(IDE_PWR)

Motherboard to provide IDE_PWR connector, the map follows the definition signal




2.5.11 ITV_OUT_H Header(ITV_OUT_H)

Motherboard to provide ITV_OUT_H connector, the map follows the definition signal




2.5.12 RI_PWR Header(RI_PWR)

Motherboard to provide RI_PWR connector, the map follows the definition signal

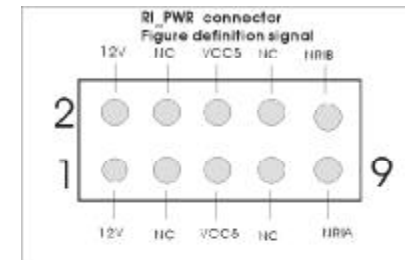

2.5.13 SPDIFHeader(J_SPDIF)

Motherboard to provide RI_PWR connector, the map follows the definition signal

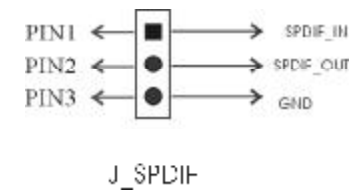


2.5.14 Front Panel Header(F_PANEL)


ITX-M4S1L7 Front Panel




ITX-M4S1LA(-2/3/4)/M4S2GAP/M4S2GA Front Panel

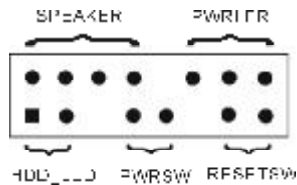

ITX-NG81-DG /NG82Front Panel

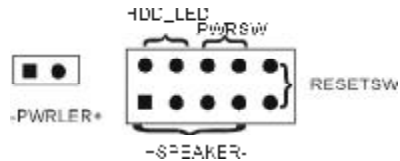

ITX-M4S4DF Front Panel

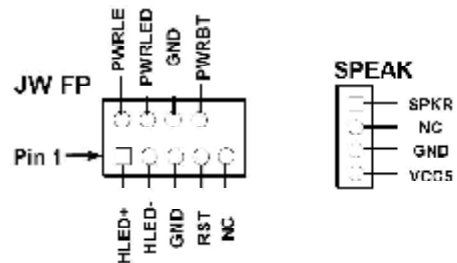

- a. SPEAKER Speaker Connector
- b. PWRLED Power Active LED
- c. HD-LED Hard Disk Active LED
- d. PWRSW ATX Power Switch
- e. RESETSW Reset Switch


- ✓ SPEAKER Speaker Connector
Speaker Connector (also called buzzer) is a four-pins connector, connect the speaker to the four pins.
- ✓ PWRLED Power Active LED
Power Active LED is a three-pin connector, it used to indicate the computer working state, once the computer connect to the power, the PWRLED keep emitting (Note: There are anode and cathode).
- ✓ HD-LED Hard Disk Active LED
This group of two-pin connected to the computer Hard Disk Active LED, the LED can show the hard disk working state, once the hard disk reading, the LED emitting (Note: There are anode and cathode).
- ✓ PWRSW ATX Power Switch
POWER SW is a two-pin connector, it controls the ATX main power, connect this group pins to the power switch of the computer, make the two pins short circuited can open(close) the computer.
- ✓ RESETSW Reset Switch
This group of pins connected to the reset switch on the computer chassis hence you do not need to switch off the computer power to restart the system, it is very useful especially when the system blocks or crashes.




2.5.14 Back Panel Connectors Instructions

ITX-M4S1LA (-2/3/4)


Optional LPT/S-video

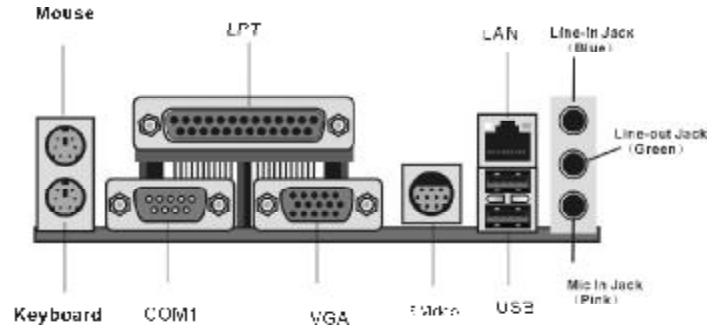


ITX-M4SGAP /M4S2GA((Optional Dual LAN)

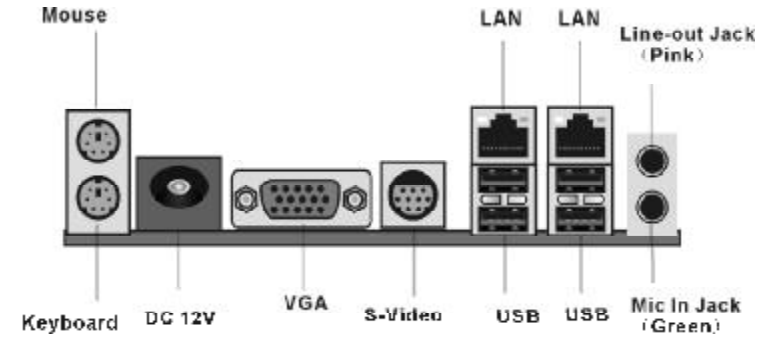


ITX-M4S1L7(Optional LPT)

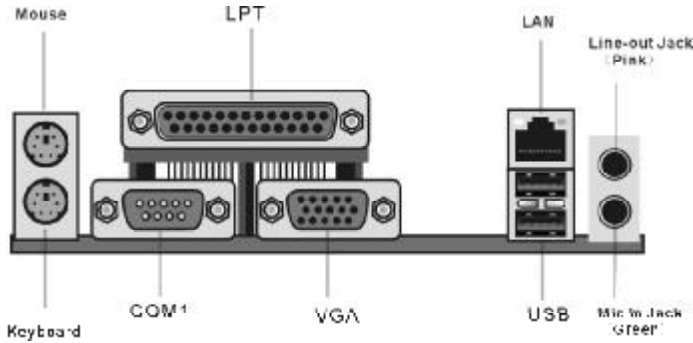

ITX-M4S4DF

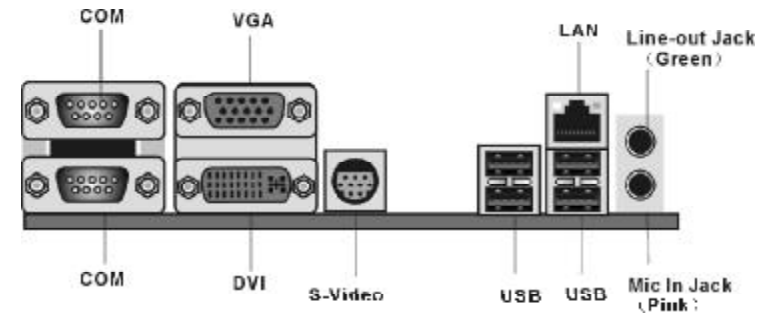

ITX-NG81-DG /NG82(Optional Dual LAN/SPDIF)

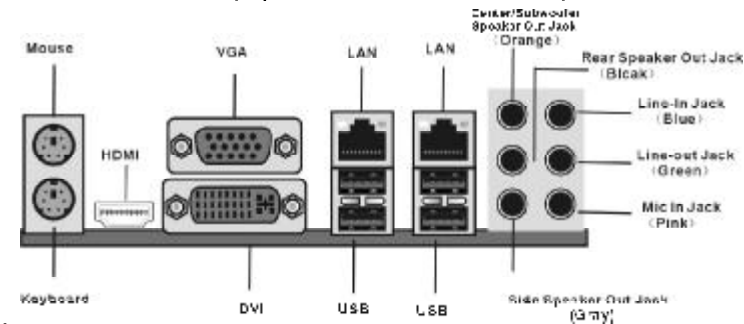

Chapter III BIOS Introduction

3.1 BIOS Update

In order to meet the needs of customers, we offer special WINDOWS and DOS system BIOS flashing tools, operation are as follows.

3.1.1 DOS Flashing

- a. Flash tool: AFUDOS.EXE
- b. Flash operation: Prepare a DOS startup disk, it contains only three basic DOS startup files, copy AMI BIOS Flash tool and BIOS files to the U directory, boot by the guide system, after enter DOS, input: AFUDOS "BIOS file name" /P /B /N /C /X, press Enter to carry BIOS flashing process. After that there will be relevant instructs, at this time, restart the computer, press F1 to set the CMOS, select Load Optimal Defaults.

3.1.2 WINDOWS Flashing

- a. Flash tool: AFUWIN.EXE
- b. Flash operation: In WINDOWS, run AFUWIN.EXE--click OPEN--choose the BIOS file--select Program ALL Blocks--click FLASH. In the writing process, the Keyboard and mouse will be locked until the writing finish, then restart the computer and press F1 to set the CMOS, select Load Optimal Defaults



There will be risks in the BIOS flashing, please do it under the guidance of professional and note the following two points:

- 1. BIOS file should match the product Model*
- 2. In the writing process, Please don't shut down/restart the computer illegally*

3.2 BIOS Setup

Because the BIOS software is constantly being updated, the following BIOS setup screens and descriptions may not exactly match what you see on your screen and they are for reference purpose only. Some of the items are not in common used, we suggest not to change them at will and keep the default value.

Enter steps:

- a. Open or restart the computer, you may see "PRESS DEL TO RUN SETUP" in the self-checking screen.
- b. Press the "DEL" key, then enter the BIOS setup screen.

Functional key explanation	
Navigation Key	BIOS Function explanation
↑ ↓	Moves cursor left or right to select Screens
↕	Moves cursor up or down to select items
+ -	To change option for the selected items
<Tab>	To change option
<ESC>	To jump to the Exit Screen or exit the current screen
<F1>	To display the General Help Screen
<F7>	To Abandon current operation
<F8>	To Load the Fail-Safe default values for all settings
<F9>	To load optimal default values for all the settings
<F10>	To save changes and exit the BIOS SETUP UTILITY

3.3 BIOS Language Switch

To allow more users to become familiar with the BIOS operation, we introduced Chinese-English bilingual BIOS, users only need to click "F5" after enter the CMOS to easily switch them, it makes BIOS operation no longer mysterious.

C Note: For more BIOS program details, please refer to the user's manual PDF file in the motherboard driver CD.



Chapter IV Drivers Installation

The motherboards support WINDOWS2K and later systems, they have different system software, we provide 2K/XP/VISTA system drivers in CD-ROM, take the 2K/XP system installation for example

4.1 Install Chipset Driver

- a. Enter "MB\INF" folder. For 945 series, Double-click "945INF.exe".
- b. Click "NEXT".
- c. Select "YES", then Click "NEXT".
- d. After finish the installation, select "YES", click "FINISH" to restart the computer, then driver will be loaded automatically.

4.2 Install Onboard VGA Driver

- a. Enter "MB\VGA\945" folder, double-click "WIN2k_xp1417.exe".
- b. Click "NEXT".
- c. Select "YES", then Click "NEXT".
- d. After finish the installation, click "FINISH" to restart the computer, then driver will be loaded automatically.

4.3 Installing Onboard LAN Driver

Enter "System Properties", select the "hardware", open the Device Manager to update the driver.

4.4 Install Onboard Audio Codec Driver

- a. Enter "MB\SOUND" folder, double-click "WDM_A379.EXE".
- b. According to tips, click "NEXT", then click "CONTINUE".
- c. After finish the installation, select "YES", click "FINISH" to restart the computer, then driver will be loaded automatically.

4.5 Install USB2.0 Driver

Motherboard need to match Windows XP or later, after you have installed Windows XP/2003 operating system, update the latest Microsoft patch, then this system can generally identify your USB2.0 device. You can also login the relevant website to download USB2.0 Driver (It is an executable file), double-click the program to Install the driver.

