

CONEXANT 878A Video Decoder Manual

<http://www.manuallib.com/conexant/878a-video-decoder-manual.html>

The newest addition to the Fusion family of PCI video decoders is the Fusion 878A. It is a multifunctional PCI device based on the original Bt878/879 products. The Fusion 878A is pin-for-pin compatible with the Bt878/879, and adds enhanced performance capabilities in video and broadcast communication services.

Fusion 878A addresses the current analog TV requirements as well as the evolving digital TV broadcast standards like ATSC (American Television Standards Committee) and DVB (Digital Video Broadcast). The Fusion 878A is PC 98 and PC 99 compliant. Also, Fusion 878A conforms to the Advance Configuration Power Interface (ACPI) and power management requirements outlined in the PCI Bus Power Management Specification 1.0.

ManualLib.com collects and classifies the global product instruction manuals to help users access anytime and anywhere, helping users make better use of products.

<http://www.manuallib.com>




PCI Video Decoder

Fusion™ 878A

Conexant's Fusion™ Family of PCI Video Decoders Integrates Broadcast Video and Data Capture, and Playback in a Single Chip

The newest addition to the Fusion family of PCI video decoders is the Fusion 878A. It is a multifunctional PCI device based on the original Bt878/879 products. The Fusion 878A is pin-for-pin compatible with the Bt878/879, and adds enhanced performance capabilities in video and broadcast communication services. Fusion 878A addresses the current analog TV requirements as well as the evolving digital TV broadcast standards like ATSC (American Television Standards Committee) and DVB (Digital Video Broadcast). The Fusion 878A is PC 98 and PC 99 compliant. Also, Fusion 878A conforms to the Advance Configuration Power Interface (ACPI) and power management requirements outlined in the PCI Bus Power Management Specification 1.0.

Fusion 878A integrates more of the external biasing circuitry, which reduces the overall bill of materials and improves performance characteristics of video and clocking. This enables customers to develop cost-effective, yet flexible solutions addressing analog and digital video.

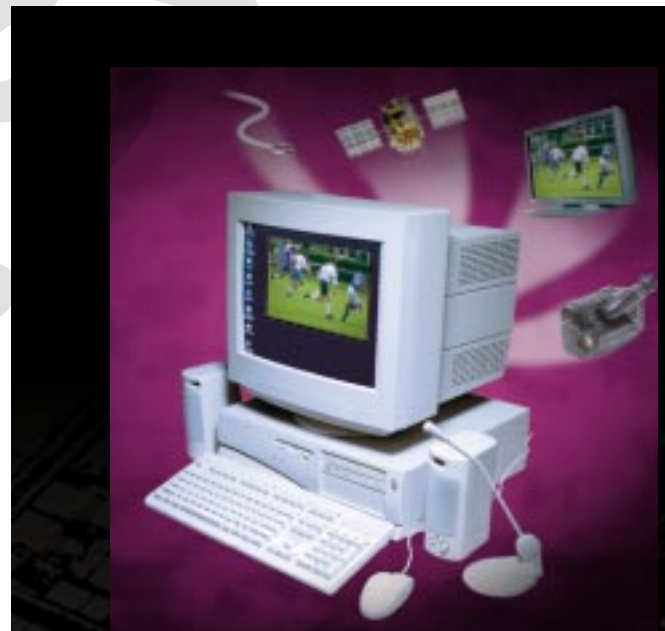

Distinguishing Features

- Supports NTSC/PAL/SECAM video input
- Worldwide graphics controller compatibility
- PC 98/99 compliant
- ACPI and power management
- Transport stream DMA for ATSC and DVB digital broadcast
 - 40 Mbps serial I/O
 - 20 MBps parallel I/O

PCI Video Decoder

Fusion 878A

General Features

Because Fusion 878A is fully compatible with the current Bt878/879, upgrading to requirements like PC 98/99 compliance is a minimal investment. Also, customers can standardize with one PCI video decoder to enable multiple configurations of TV cards that address the broad spectrum of broadcast requirements around the world. Because Fusion 878A is based on the Bt878/879, customers can continue to support their products using one software code base, adding functionality by including additional software modules.

Features	Bt878	Fusion 878A
All Bt848A Features	X	X
Mono Audio	X	X
DVCR	X	X
PC 99 Compliance		X
ATSC Digital TV		X
DVB		X

Transport Stream DMA for Digital Television

The analog and digital audio paths have been modified for increased bandwidth and functionality. The asynchronous parallel port, which uses the analog data path, has an increased raw data rate of 20 MBps. Additionally, the I²S port has been modified to handle data up to 40 Mbps. This added functionality makes Fusion the ideal choice for ATSC, DVB, DBS, and digital cable platforms on the PC.

Driver software is available to move transport packet streams from a wide variety of digital demodulators to host memory using the Fusion 878A DMA engine. Therefore, building next-generation digital broadcast solutions on the proven Bt878 platform is easy and low risk since the software is incremental to existing Fusion software.

PC 99 Compliance

ACPI and Power Management Interface

Fusion 878A supports ACPI and the Power Management Interface 1.0 specifications, making the Fusion 878A the product of choice for green PC and notebook applications.

Vital Product Data


Vital Product Data (VPD) is required by PCI specification version 2.2. Through the Fusion 878A and the use of an external EEPROM, manufacturers can store information that identifies the product down to the serial number. The data is stored in ASCII format and is accessible through the configuration space VPD interface registers. This feature provides board manufacturers and PC OEMs the ability to more accurately track their product as well as offer improved or enhanced customer support.

Worldwide Video Support

The Fusion family supports all the features and flexibility of the Bt848A video solution, including the integration of a NTSC/PAL/SECAM composite and S-video decoder, high-quality scaler, and PCI bus



master on a single device. Like the Bt848A, the Fusion family can place video data directly into host memory for video capture applications and into a target video display frame buffer for video overlay applications.

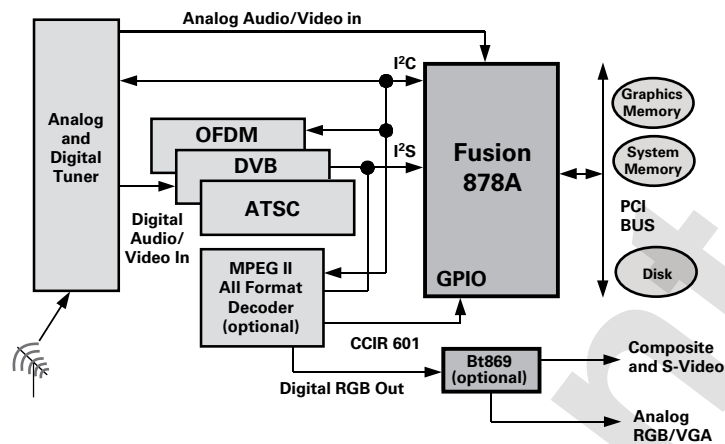

Digital television receiver for the PC

Fusion Software Drivers

Fusion offers a suite of widely fielded software drivers for Windows 95 and Windows 98. With the VxD drivers, board developers can support products using either the Windows 95 or Windows 98 operating systems. VxD and WDM drivers provide video capture, playback and display in accordance with Microsoft's Video for Windows and Direct Show 2.0, respectively. Dialog boxes, tuner, GPIO, and I²C modules can be modified and customized by board developers.

Fusion software drivers are supported by the industry's broadest base of ISV applications commercially available for video editing, teleconferencing, compression, television on the PC and video email. Software is available through retail and OEM channels.

What is a PCI Video Decoder?

A PCI bus analog video decoder is used for three primary PC solutions: video capture and editing, video teleconferencing, and television receiver cards. A video signal is generated by a video source, which can be a camera, VCR or TV tuner. The baseband video that goes into the PCI decoder is a simple analog signal that contains video analog data and video synchronization data, which is used to display the picture properly at the receiving end. The details of the signal depend on the video standard used — NTSC (National Television Standards Committee), PAL (Phase Alternate Line) or SECAM (Systeme Electronique Couleur Avec Memoire). To transmit the picture, the source generates a vertical synchronization signal (VSYNC). This signal resets the receiver (PC monitor) so that it begins picture display at the top of the screen. After the VSYNC signal is sent, the video source scans the first line of the image. Once the scan line is complete, the camera generates a horizontal synchronization signal (HSYNC), which resets the receiver so that it will display the next line starting at the left-hand edge of the display. For each line of the image, a scan line and a horizontal synchronization pulse are sent. The PCI bus attached to the video decoder is the access mechanism, or hub, for this video information traveling to the PC. The need for broadcast data in the PC is a primary reason analog dedicated PC television receiver cards are becoming very popular. The introduction of WebTV for Windows and national broadcaster support of Vertical Blanking Interval (VBI) content contribute to addressing the need for a feature rich, broadcast data function in the PC. PCI video decoder solutions provide the most effective means to achieve this.

Ultralock™ and Scaling Support

Fusion 878A, like the Bt848A, Bt878, and Bt879, utilizes Conexant's patented Ultralock technology that locks to an incoming analog video signal. Ultralock is able to recognize unstable video signals caused by VCR headswitches or any other video source, and adapt the locking mechanism to accommodate the source.

Fusion is able to scale the video image size both vertically and horizontally, using arbitrarily-selected scaling ratios. The X and Y dimensions can be scaled to one-sixteenth of full resolution. Vertical scaling is implemented with Conexant's industry-leading 5-tap vertical filter.

Byte Alignment

Byte alignment is used to improve video performance in packed color modes. Often, video applications are written around the planar, not the packed color mode of operation. The result is video which is not DWORD aligned. To the end user, the color of the video appears misrepresented, showing more R, G, or B (Red, Green, or Blue) than is actually there. Fusion compensates for non-DWORD aligned data by aligning each DWORD with the correct byte lanes in the targeted address.

Product Features

- Supports multistandard NTSC/PAL/SECAM video decoding
- Two DMA channels for simultaneous transmission of digital video and/or HDTV/ audio/MPEG2 transport data across PCI bus
- Supports downstream HDTV transport data via DMA at rates of 40 Mbps in serial mode and 20 MBps in parallel mode
- Can interface to VSB or OFDM demodulators
- Selectable pixel density available - 8, 16, 24, and 32-bits per pixel
- Supports planar YUV, YCrCb, RGB pixel data formats
- Supports complex clipping of video source and VGA video overlay if needed
- Executes Windows 98 'Scatter and Gather'
- 4 composite and 1 S-Video inputs concurrently
- Chroma and luma comb filters/scalers
- Horizontal scaling and vertical cropping
- Filters and scales Y/C video with a 6-tap luma/2-tap chroma polyphase circuit block
- VBI data capture circuitry and software for closed captioning and teletext
- Accepts mono line level and MIC audio signals
- Supports Microsoft's Direct Sound API

- Performs audio capture without additional analog audio cable to sound card
- PCI Rev. 2.2 compliant
- WHQL-certifiable
- Packaged in compact 128-pin plastic QFP
- PC 98/99 compliant

Benefits

- Worldwide support for all television standards
- WHQL certification
- Drop-in replacement for the Bt878 and Bt879
- Preserves customers existing software investment in drivers and applications
- Supports the transport stream DMA for ATSC and DVB digital broadcast as well as hardware digital VCR solutions

Applications

- Television on the PC
- PC radio
- WebTV for Windows
- DTV
- DBS
- Digital cable
- Video email, video editing and video phone
- Motion video and still frame capture
- VBI data services capture (Teletext/NABITS)

Conexant and the Conexant symbol are trademarks of Conexant Systems, Inc.



CONEXANT™

What's next in communications technologies

Further Information

literature@conexant.com
 (800) 854-8099 (North America)
 (949) 483-6996 (International)
 Order # 100532B
 00-0416
 Digital Infotainment
 Printed in USA

World Headquarters

Conexant Systems, Inc.
 4311 Jamboree Road
 Newport Beach, CA
 92660-3007
 Phone: (949) 483-4600
 Fax 1: (949) 483-4078
 Fax 2: (949) 483-4391

Americas

U.S. Northwest/Pacific Northwest – Santa Clara
 Phone: (408) 249-9696
 Fax: (408) 249-7113

U.S. Southwest – Los Angeles
 Phone: (805) 376-0559
 Fax: (805) 376-8180

U.S. Southwest – Orange County
 Phone: (949) 483-9119
 Fax: (949) 483-9090

U.S. Southwest – San Diego
 Phone: (858) 713-3374
 Fax: (858) 713-4001

U.S. North Central – Illinois
 Phone: (630) 773-3454
 Fax: (630) 773-3907

U.S. South Central – Texas
 Phone: (972) 733-0723
 Fax: (972) 407-0639

U.S. Northeast – Massachusetts
 Phone: (978) 367-3200
 Fax: (978) 256-6868

U.S. Southeast – North Carolina
 Phone: (919) 858-9110
 Fax: (919) 858-8669

U.S. Southeast – Florida/South America
 Phone: (727) 799-8406
 Fax: (727) 799-8306

U.S. Mid-Atlantic – Pennsylvania
 Phone: (215) 244-6784
 Fax: (215) 244-9292

Canada – Ontario
 Phone: (613) 271-2358
 Fax: (613) 271-2359

Europe

Europe Central – Germany
 Phone: +49 89 829-1320
 Fax: +49 89 834-2734

Europe North – England
 Phone: +44 1344 486444
 Fax: +44 1344 486555

Europe – Israel/Greece
 Phone: +972 9 9524000
 Fax: +972 9 9573732

Europe South – France
 Phone: +33 1 41 44 36 51
 Fax: +33 1 41 44 36 90

Europe Mediterranean – Italy
 Phone: +39 02 93179911
 Fax: +39 02 93179913

Europe – Sweden
 Phone: +46 (0) 8 5091 4319
 Fax: +46 (0) 8 590 041 10

Europe – Finland
 Phone: +358 (0) 9 85 666 435
 Fax: +358 (0) 9 85 666 220

Asia – Pacific

Taiwan
 Phone: (886-2) 2-720-0282
 Fax: (886-2) 2-757-6760

Australia
 Phone: (61-2) 9869 4088
 Fax: (61-2) 9869 4077

China – Central
 Phone: 86-21-6361-2515
 Fax: 86-21-6361-2516

China – South
 Phone: (852) 2 827-0181
 Fax: (852) 2 827-6488

China – South (Satellite)
 Phone: (86) 755-5182495

China – North
 Phone: (86-10) 8529-9777
 Fax: (86-10) 8529-9778

India
 Phone: (91-11) 692-4789
 Fax: (91-11) 692-4712

Korea
 Phone: (82-2) 565-2880
 Fax: (82-2) 565-1440

Korea (Satellite)
 Phone: (82-53) 745-2880
 Fax: (82-53) 745-1440

Singapore
 Phone: (65) 737 7355
 Fax: (65) 737 9077

Japan
 Phone: (81-3) 5371 1520
 Fax: (81-3) 5371 1501

www.conexant.com