

BB BP4.5-12RT VRLA Battery Datasheet

<http://www.manuallib.com/bb/bp4-5-12rt-vrla-battery-datasheet.html>

FEATURES

Maintenance free(no water topping-up required).

No free acid(Non-spillable battery).

Low self-discharge rate, lower than 3% capacity loss per month.

Can be used in any orientation(excluding used inverted).

Absorbent Glass Mat technology for efficient gas recombination.

ManualLib.com collects and classifies the global product instruction manuals to help users access anytime and anywhere, helping users make better use of products.

<http://www.manuallib.com>



VRLA Rechargeable Battery

BP4.5-12RT (BP4.5-12RTFR)



FEATURES

- Absorbent Glass Mat technology for efficient gas recombination
- Maintenance free(no water topping-up required).
- No free acid(Non-spillable battery).
- Low self-discharge rate, lower than 3% capacity loss per month.
- Can be used in any orientation(excluding used inverted).

APPLICATION

- UPS
- Electronic Doorbells
- Toy-Cars
- Fans



SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	4.5Ah @ 20 hour rate F.V.(1.75V/cell)
Approx. Weight	1780g(3.92lbs.)
Terminals	+250 Faston/-187 Faston
Internal Resistance	≤42m Ω (Fully Charged)
Max. Discharge Current	67.5 A (5 sec.)
Maximum Charge Current	1.35 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage. : -20°C~40°C(-4°F~104°F)
Container Material	ABS(UL94-HB, UL94-V0 is optional)



ISO 9001	
ISO14001	
UL	
CE	
<ul style="list-style-type: none"> ● IEC61056-1 ● JIS C 8702-1 ● GB/T 19639.1 	

DIMENSION(mm/inch)

OUTER DIMENSIONS

TERMINAL TYPE

- **Length**
140±1.5 (5.51±0.06)
- **Width**
48±1.5 (1.89±0.06)
- **Container Height**
102±1.5 (4.02±0.06)
- **Total Height**
104±2.0 (4.09±0.08)

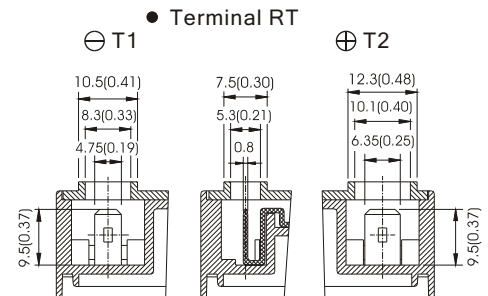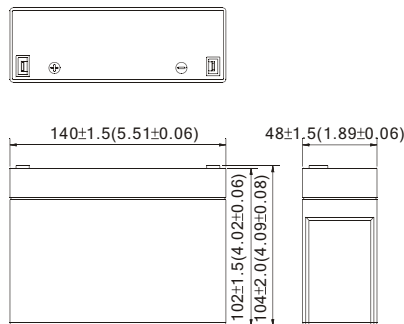

Constant power discharge characteristics at 25 °C/77 °F

Unit: W

Discharge Time F.V. (V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	162.7	119.8	96.0	57.1	32.75	13.12	9.04	5.054	2.660
1.75V	188.3	129.8	100.4	59.3	33.73	13.38	9.18	5.130	2.700
1.70V	200.1	134.4	103.5	60.6	34.34	13.50	9.23	5.156	2.712
1.65V	209.1	137.6	105.9	61.5	34.75	13.59	9.26	5.171	2.724
1.60V	216.0	140.4	108.0	62.1	35.10	13.68	9.29	5.171	2.724

Constant current discharge characteristics at 25 °C/77 °F

Unit: A

Discharge Time F.V. (V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	14.66	10.54	8.35	4.84	2.75	1.09	0.754	0.421	0.222
1.75V	17.28	11.42	8.73	5.02	2.83	1.11	0.765	0.427	0.225
1.70V	18.36	11.83	9.00	5.14	2.89	1.12	0.769	0.430	0.226
1.65V	19.18	12.12	9.21	5.21	2.92	1.13	0.772	0.431	0.227
1.60V	19.82	12.36	9.39	5.26	2.95	1.14	0.774	0.431	0.227

All data shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.