

Print Services Facility for z/OS



User's Guide

Version 4, Release 4.0

Note:

Before using this information and the product it supports, read the information in "Notices" on page 267.

This edition applies to the IBM Print Services Facility Version 4 Release 4 Modification 0 for z/OS, Program Number 5655-M32, and to all subsequent releases and modifications until otherwise indicated in new editions.

This edition replaces S550-0435-02.

© **Copyright IBM Corporation 1983, 2011.**

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

Figures	vii	Merging Data with an Overlay	35
Tables	ix	Using Overlays on Printers with Different Resolutions	36
About This Publication	xi	Testing Overlays.	36
Using This Publication	xi	Medium Overlays and Page Overlays on the Same Page.	36
Understanding Syntax Notation	xii	Page Overlay Rotation in Page Definitions and Form Definitions	37
Related Information	xiii	Page Definitions	37
Using LookAt to View Message Explanations	xiii	Using Page Definitions	37
Using the z/OS Basic Skills Information Center	xiv	Page Segments	38
Using Page Segments	38	Using Multiple System Page Segment Libraries	39
How to Send Your Comments to IBM	xv	Testing Page Segments.	40
If You Have a Technical Problem	xv	Bar Codes	40
Summary of Changes	xvii	Using BCOCA to Produce Bar Code Resources	41
Chapter 1. Introducing Advanced Function Presentation.	1	Producing Bar Codes without BCOCA	42
AFP Architecture	1	Using Bar Code Resources	42
AFP Printing	2	Printing Bar Codes	42
Printing Line Data on AFP Printers	3	Graphics	43
Printing AFP Data in Different Directions and Character Rotations	4	Using Graphics	43
All-Points Addressability	5	Printing Graphic Data	44
Chapter 2. Introducing Print Services Facility	7	Image Resources.	44
How PSF Manages AFP Printing.	7	Using Image Resources	45
Components of PSF Printing	8	Printing Images	46
PSF as an Output Writer (Deferred-Printing mode)	9	Printing Images without IOCA	47
PSF as an Access Method (Direct-Printing Mode)	10	Compatibility among Printers	47
Formatting Data with PSF	10	Text	47
Chapter 3. Using Resources	13	Using Text.	48
Storing PSF Resources	13	Printing Text Data	48
Searching for Resources Specified by a Print Job	14	Combining Character, Image, Graphics, and Bar Code Data.	48
Not Unicode-Enabled	14	Using Resources with the Distributed Print Function (DPF) of PSF	49
Unicode-Enabled	15	Using APSRMARK to Mark Resources	49
Soft and Hard Resources	15	Using Inline Resources	50
PSF System Resource Libraries	15	PSF Resources Supplied by IBM	51
Fonts	18	Chapter 4. Formatting and Printing Data	53
Overview of AFP Fonts	19	Internal Copy Groups	53
Obtaining and Referencing Fonts	23	Form Definitions	54
Using AFP Fonts	24	Printing Controls Specified in Copy Groups	54
Form Definitions	26	Using Form Definitions Supplied with PSF	66
Using Form Definitions	27	Page Definitions	66
Object Containers	27	Defining Page Formats	67
Object Containers as Data Object Resources	28	Using Page Definitions Supplied with PSF	73
Common Object Containers Supported by PSF	28	Chapter 5. Printing Different Types of Data	75
Overlays	32	Line Data	75
Medium Overlays	33	Traditional Line Data	76
Page Overlays	33	Record Format Line Data.	77
Using Overlays	34	Supported Encoding Schemes for Traditional and Record Format Line Data.	78

Shift-Out, Shift-In (SOSI) Codes	78
AFP Structured Fields Included in Line Data	79
XML Data	83
Element Content.	83
External Entities	84
Supported Encoding Schemes and Conversions	84
JCL Parameters	84
MO:DCA-P Data	85
Formatted Data	85
Font Selection	86
JCL Parameters	86
AFP Conversion and Indexing Facility (ACIF)	86

Chapter 6. Using JCL for Advanced Function Presentation 89

Determining Printer Defaults	89
Page Printer Defaults Form	89
Creating JCL for Direct-Printing Mode	91
Creating JCL for Microfilm Devices	91
Assigning OUTPUT Statements to a DD Statement	91
Specifying AFP Parameters in the JCL	92
AFPPARMS	94
AFPSTATS.	94
BURST	95
CHARS.	95
CKPTPAGE	96
CKPTSEC	97
CLASS	97
COLORMAP	98
COMSETUP	98
CONTROL	99
COPIES.	99
COPYCNT	100
DATAACK.	101
DEST	102
DPAGELBL	103
DUPLEX	103
FCB	104
FLASH	104
FORMDEF	105
FORMLEN	106
FORMS	107
INTRAY	107
LINECT	108
NOTIFY	108
OFFSETXB	109
OFFSETXF	110
OFFSETYB	110
OFFSETYF	111
OUTBIN	111
OVERLAYB	112
OVERLAYF	112
PAGEDEF	112
PIMSG	113
PRMODE.	114
PRERROR	115
PRTQUEUE	115
RESFMT	116
SEGMENT	116
SUBSYS	117
SYSAREA	118

SYSOUT	118
TRC	119
UCS	119
USERLIB	120
USERPATH	121
Additional Parameters to Help in Distributing Output	122

Chapter 7. Printing Tasks and Examples 125

Printing on an AFP Printer	126
Specifying a Form Definition	126
Using FORMDEF with COPIES or FLASH Parameters in JCL	128
Specifying Duplex Printing.	131
Specifying Bins (Paper Source)	131
Changing the Paper Source in a Document	132
Using a Forms Flash on a 3800 Printer	132
Printing with Overlays	132
Printing a Medium Overlay	133
Printing a Page Overlay	134
Printing Line Data or XML Data with Page Definition Options.	135
Specifying a Page Definition	135
Specifying Print Direction	138
Specifying Lines per Inch Spacing	139
Specifying Multiple-Up Printing	139
N_UP Printing: Printing Multiple Pages on a Sheet	140
Suppressing Print Data	141
Specifying and Selecting Fonts	141
Changing Formatting within a Document	144
Using Multiple Copy Groups or Page Formats	144
Printing Page Segments	146
Printing MO:DCA-P Data	147
Specifying Carriage Control and Table Reference Characters in Line Data	148
Using Carriage Control Characters in Line Data Records	148
Using Table Reference Characters to Select Fonts	149
Merging Data Lines into a Single Print Line	151
Example of Merging Data Lines	151
Specifying Shift-Out, Shift-In (SOSI) Codes	152
Printing More Than One Copy	153
Bursting and Stacking Continuous-Forms Paper	156
Specifying Whether You Want Error Messages to Be Printed	156
Using TrueType and OpenType Fonts	157
Processing Unicode Complex Text	158
Using Extended Code Pages	159
Printing with Resources from a User Library	160
Printing with Inline Resources.	162
Specifying Notification When the Print Job Has Finished Printing	163
Inhibiting Recovery of a Print Job	164
Specifying Duplex-Page Offset.	164
Transmitting a Data Set to an IBM i System	164
Specifying JCL Parameters for Microfilm Jobs	165
Specifying Color Mapping Tables.	166
Specifying Object Container Libraries in UNIX Files	168

Finishing Your Output	168
Printing on Printers That Support Multiple Resolutions	169
Using QR Code Bar Codes with SOSI Data	171
Specifying Printer Checkpoints	172

Chapter 8. Using Color Mapping Tables 173

Understanding Color Mapping Tables	173
Source Groups	173
Using Target Groups	174
Creating Color Mapping Tables	175
Color Mapping Tool Components	175
Using the Color Mapping Tool	175
Sample Color Mapping Table Source File	176

Chapter 9. Using the AFP Reblocking Program 181

How the Reblocking Program Works	181
Setting Up the AFRREBLK Profile	183
Uploading AFP Files to z/OS	184
Reblocking Data Sets on z/OS.	184
AFRREBLK Command	184
Reblocking More Than One Data Set at a Time	186

Chapter 10. Obtaining AFP Statistics 187

The AFPSTATS Repository	187
Requesting an AFPSTATS Report	187
The Softcopy Report	188
Format	188
Records	189
Example	190
The Hardcopy Report	191
Generating a Hardcopy Report	191
Example	192

Appendix A. Form Definitions Supplied with PSF 193

Form Definition Naming Convention	193
Form Definition for the 3800 Printer.	194
Form Definitions for Printers Other than the 3800, PCL4, and PPDS Printers	194
Form Definitions for HP PCL4 and PPDS Printers	197
Compatibility Form Definitions	198
Form Definitions for Special Purpose Jobs	200
Form Definitions for Finishing Your Output	201
Form Definitions for Printing PSF Reports.	202

Appendix B. Page Definitions Supplied with PSF 203

Page Definitions for the 3800 Printer	203
Page Definitions for the 4224, 4230, 4234, 4247, and 6400 Printers	205
Page Definitions for HP-CL4 and PPDS Printers	206
Page Definitions for All Other Printers Supported by PSF	208
Page Definitions for Printing PSF Reports	211
Page Definition Line-Spacing Values and Fonts	211

Appendix C. AFPSTATS Report. 215

Softcopy Record Details	215
Sample Reports.	228
Sample Softcopy Report	228
Sample Hardcopy Report	230

Appendix D. Page-Printer Defaults Form 237

Appendix E. Microfilm Device Considerations. 239

Images on a Page	239
Graphics on a Page	239
Form Definitions	239
Using FOCA Fonts	240
Page Segments	240
Overlays	240
Specifying Parameters	240
Additional Parameters to Help in Distributing Output	241
Printing Constant Forms	241
Other Considerations.	241

Appendix F. Color and grayscale printing 243

AFP color and grayscale solutions	243
Color printing concepts	244
Color spaces and ICC profiles	244
Gamut and rendering intent	246
Color mixing and calibration	246
Halftones and tone transfer curves	246
File size	247
Grayscale printing concepts	248
Color management	249
ICC profiles	249
Rendering intents	250
Paper characteristics	250
AFP color management	251
Color management resources	251
Data objects	258
Resource library management	260
Tips and best practices	261
InfoPrint AFP Resource Installer	262

Appendix G. Accessibility 265

Using Assistive Technologies	265
Keyboard Navigation of the User Interface	265
z/OS Information	265

Notices 267

Trademarks	268
----------------------	-----

Glossary 271

Bibliography. 287

Print Services Facility (PSF) for z/OS	287
Infoprint Server	287
Advanced Function Presentation (AFP).	288

Data Transforms	288	z/OS Version 1 Release 13	290
Text Processing	288		
Print Management	289	Index	293
Content Manager OnDemand	289		
i-data	290		

Figures

1. Components of AFP Printing	3	28. Pages Printed in Two Directions on	
2. Direction-Rotation Combinations	4	Continuous-Forms Paper	69
3. Copies of a Memo Printed in Four Inline		29. One Logical Page Divided into Four Subpages	72
Directions	5	30. Formatted and Unformatted Text	76
4. Direction-Rotation Combinations on a Sample		31. Traditional Line Data Record	76
Page	5	32. Record Format Line Data Record	77
5. Printing Two Items in the Same Location on the		33. Sample Application Program	82
Page	6	34. Page-Printer Defaults Form Example	90
6. PSF as an Output Writer	9	35. Additional JCL Parameters for Distributing	
7. PSF in Direct-Printing Mode	10	Output	94
8. Resource Storage	14	36. Sample Header Page with Additional	
9. Sample Page Printed on an AFP Printer	18	Distribution Information	122
10. Example of Text That Uses Outline Fonts	19	37. Output from Three Transmissions of a	
11. Overlay on the Sample Page	32	Two-Page Data Set	129
12. Positioning of a Medium Overlay	33	38. Output From Four Transmissions of a	
13. Positioning of a Page Overlay	34	Two-Page Data Set	130
14. Electronic Form (Overlay) on the Sample Page	35	39. Positioning a Page Overlay	135
15. Medium Overlays and Page Overlays on the		40. Printing Four Pages on Two Sheets	140
Same Page	36	41. Output Containing Merged Lines Printed	
16. Page Segments on the Sample Page	38	with a Typographic Font	151
17. Bar Codes on the Sample Page	41	42. IEBGENER Example of Merging Two Print	
18. Graphic on the Sample Page	43	Lines	152
19. Images on the Sample Page	45	43. Sample Output for COPIES=14.	154
20. Text on the Sample Page	48	44. Sample Output for COPIES=(,1,3,2))	155
21. Sample Containing Character Data and Other		45. Sample JCL for Color Mapping Tool	176
Data	49	46. Sample Color Mapping Table Source File	177
22. Relationship between the Medium Origin and		47. Sample AFRREBLK Profile	183
the Page Origin	56	48. Reblocking Numerous Data Sets in ISPF	186
23. Duplex Documents A and B, Specified as		49. Placement of Two Subpages on a Single	
Normal Duplex	57	Physical Sheet	205
24. Duplex Documents C and D Specified as		50. Placement of Multiple-Up Logical Pages on	
Tumble Duplex	58	the Physical Sheets.	210
25. N_UP Printing Partitions for Various Media	60	51. AFPSTATS softcopy report	229
26. Copy Group Printed Using the Constant-Form		52. Page-Printer Defaults Form	237
Function	62		
27. Subgroups Printed from one Page of the Data			
Set	66		

Tables

1.	SYS1.SAMPLIB Members for PSF Documentation Updates	xiii	27.	3800 Model 1 FCBs and Corresponding Page Definitions for 14.88 x 11-Inch Paper	203
2.	AFP Operating Systems and Corresponding PSF Products	7	28.	Page Definitions for 12 x 8.5-Inch Paper	203
3.	PSF System Resource Libraries, Resource Types, and Resource Prefixes.	16	29.	Page Definitions for 9.5 x 11-Inch Paper	204
4.	AFP Parameters in JCL.	92	30.	Page Definitions for 14.88 by 11-Inch Paper	204
5.	Carriage Control Characters.	148	31.	Page Definitions for Multiple-Up Printing	205
6.	Data Set Values for Default AFP Object Types	182	32.	Page Definitions for Continuous-Forms Paper 12 x 8.5 inches	206
7.	The Basic Format of the Softcopy AFPSTATS Report	188	33.	Page Definitions for Continuous-Forms Paper 9.5 x 11 inches	206
8.	Softcopy AFPSTATS Records	189	34.	Page Definitions for Continuous-Forms Paper 14.88 x 11 inches	206
9.	Sections in the Hardcopy AFPSTATS Report	191	35.	Page Definitions for A4 Paper	207
10.	Form definition naming convention from left to right	193	36.	Page Definitions for B4 Paper	207
11.	Form Definition for the 3800	194	37.	Page Definitions for Cut-Sheet Letter Paper	207
12.	Form Definitions for All Printers Other than the 3800, PCL4, and PPDS Printers	194	38.	Page Definitions for Cut-Sheet Legal Paper	208
13.	Form Definitions for Printing Envelopes on the 4028	195	39.	Page Definitions for A4 Paper	208
14.	Form Definitions with a 0,0 Offset	195	40.	Page Definitions for B4 Paper	208
15.	Form Definitions for N_UP 2 Printing	195	41.	Page Definitions for Letter and Continuous-Forms Paper 12 x 8.5 inches or 9.5 x 11 Inches	209
16.	Form Definitions for Three-Hole Punched Paper	196	42.	Page Definitions for Legal and Continuous-Forms Paper 14.88 x 11 inches	209
17.	Form Definitions for Rotating Pages on the Paper	196	43.	Multiple-up Page Definitions	210
18.	Form Definitions used to Select Print Quality on a 64xx or 65xx Printer	197	44.	Page Definitions for Printing on Three-Hole Punched Paper	211
19.	Form Definitions for HP PCL4 and PPDS Printers	197	45.	Page Definitions for Printing PSF Reports	211
20.	Compatibility Form Definitions for AFCCU Continuous-Forms Printers	198	46.	Cross-Reference of Line Spacing and Page Definitions for the 3800 Printer	212
21.	N_UP Compatibility Form Definitions for AFCCU Continuous-Forms Printers	198	47.	Cross-Reference of Line Spacing and Page Definitions for the 4224, 4230, 4234, 4247, and 6400 Printers.	212
22.	3800 Compatibility Form Definitions for Cut-Sheet Printers	199	48.	Cross-Reference of Line Spacing and Page Definitions for Cut-Sheet A4 Paper for the PCL4 and PPDS Printers.	212
23.	Form Definitions Supplied for Special Purposes	200	49.	Cross-Reference of Line Spacing and Page Definitions for Cut-Sheet B4 Paper for the PCL4 and PPDS Printers.	213
24.	Form Definitions for Printers That Support Finishing	201	50.	Cross-Reference of Line Spacing and Page Definitions for Other Printers	213
25.	Additional Form Definitions for Printers That Support Finishing	201	51.	Cross-Reference of Line Spacing and Commonly Used PSF Monospaced Fonts	214
26.	Form Definitions for Printing PSF Reports	202			

About This Publication

This publication provides information about using Print Services Facility™ (PSF) Version 4 Release 4.0 for z/OS® (Program Number 5655-M32), hereafter referred to as PSF.

This publication is written with the assumption that you have experience with application programming and with Advanced Function Presentation™ (AFP™) printers. In this publication, the word *printing* refers to presentation on paper, foils, labels, or microfilm.

Using This Publication

The information in this publication is for the application programmer and z/OS job submitter who use AFP resources, such as form definitions, page definitions, fonts, and color maps, and print on AFP printers.

You can use this publication both as a guide and as a reference to help you learn about the following:

- Chapter 1, “Introducing Advanced Function Presentation,” on page 1 summarizes AFP. It includes information about Mixed Object Document Content Architecture™ for Presentation (MO:DCA-P) architecture and printing AFP data.
- Chapter 2, “Introducing Print Services Facility,” on page 7 summarizes PSF. It includes information about deferred-printing mode, direct-printing mode, PSF data streams, and PSF resources. Key PSF concepts are defined in this section.
- Chapter 3, “Using Resources,” on page 13 describes the resources that PSF uses for printing.
- Chapter 4, “Formatting and Printing Data,” on page 53 describes form definitions and page definitions.
- Chapter 5, “Printing Different Types of Data,” on page 75 summarizes how to print line data and XML records in a PSF format and how to code MO:DCA-P structured fields.
- Chapter 6, “Using JCL for Advanced Function Presentation,” on page 89 summarizes JCL commands and syntax rules to use when printing a job with PSF.
- Chapter 7, “Printing Tasks and Examples,” on page 125 presents detailed examples of PSF tasks that enable you to print data sets.
- Chapter 8, “Using Color Mapping Tables,” on page 173 specifies references to use when using color mapping tables for printers that support them and explains how to create color mapping tables.
- Chapter 9, “Using the AFP Reblocking Program,” on page 181 describes how to use the AFP Reblocking Program.
- Chapter 10, “Obtaining AFP Statistics,” on page 187 describes how to obtain and print a report containing statistics about the print file.
- Appendix A, “Form Definitions Supplied with PSF,” on page 193 describes form definitions supported and supplied with PSF.
- Appendix B, “Page Definitions Supplied with PSF,” on page 203 describes page definitions supported and supplied with PSF.

- Appendix C, “AFPSTATS Report,” on page 215 contains softcopy record details for the AFPSTATS report and sample softcopy and hardcopy reports.
- Appendix D, “Page-Printer Defaults Form,” on page 237 provides a page-printer defaults form for your use.
- Appendix E, “Microfilm Device Considerations,” on page 239 describes how you can use the same data set to print jobs on either paper output or microfilm.
- Appendix F, “Color and grayscale printing,” on page 243 describes the principles of color and grayscale printing, how various products can fit into color and grayscale solutions, and how you can integrate color and grayscale printing with your current operations or implement new color workflows.
- Appendix G, “Accessibility,” on page 265 describes the accessibility features available in z/OS.
- A notices, glossary, bibliography, and index are included. The notices contains important notices and a list of trademarks used in this publication. The Glossary contains terms and definitions related to PSF and the printing environment. The bibliography contains selected titles and order numbers of IBM publications related to PSF and the printing environment.

Understanding Syntax Notation

The following rules apply to coding illustrations throughout this publication:

- Bold highlighting identifies commands, keywords, files, directories, and other items whose names are predefined by the system, or items that must be entered as is, such as **DUPLEX** and **BLOCK**.
- Variable data is printed in italics. Enter specific data to replace the characters in italics; for example, for *PRTnnnn* you could enter **PRT0002**. Italics also identify the names of publications.
- Monospacing identifies examples of specific data values, examples of text similar to what you might see displayed, examples of portions of program code similar to what you might write as a programmer, messages from the system, or information you should actually type.
- Do not enter the following symbols as part of a parameter or option:
 - Vertical Bar |
 - Underscore
 - Brackets []
 - Braces { }
 - Ellipsis ...
- A vertical bar between two values means that you select only one of the values.
- An underscored value means that if an option is not specified, the underscored value, called the default, is used.
- Brackets around a value mean that you do not have to select the value; the value is optional.
- Braces around a value mean that you must select one of the mutually exclusive values. For example, { **THIS** | **THAT** }
- An ellipsis following a command or set of commands indicates the command or set of commands can be repeated.

Related Information

Publications that are referred to in this document or that contain additional information about AFP, the z/OS operating system, PSF, and related products are listed in the “Bibliography” on page 287. For information about all z/OS product publications, see *z/OS Information Roadmap*.

For additional information about z/OS and PSF for z/OS, go to these web pages:

<http://www.ibm.com/systems/z/os/zos/>
<http://www.ibm.com/systems/z/zos/printsoftware/index.html>
http://www.ibm.com/systems/z/zos/printsoftware/psfhome_z_ww.html

To obtain the latest documentation updates for z/OS base elements and optional features that result from DOC APARs and PTFs, go to this DOC APARs and ++HOLD DOC web page:

http://publibz.boulder.ibm.com/cgi-bin/bookmgr_05390/Shelves/ZDOCAPAR

To obtain the latest documentation updates for PSF for z/OS, see the appropriate SYS1.SAMPLIB members in Table 1.

Table 1. SYS1.SAMPLIB Members for PSF Documentation Updates

Member	Publication
APSGADP4	<i>PSF for z/OS: AFP Download Plus, S550-0433</i>
APSGCUS4	<i>PSF for z/OS: Customization, S550-0427</i>
APSGDGN4	<i>PSF for z/OS: Diagnosis, G550-0428</i>
APSGDLG4	<i>PSF for z/OS: Download for z/OS, S550-0429</i>
APSGMAC4	<i>PSF for z/OS: Messages and Codes, G550-0432</i>
APSGSEC4	<i>PSF for z/OS: Security Guide, S550-0434</i>
APSGUSR4	<i>PSF for z/OS: User's Guide, S550-0435</i>

Using LookAt to View Message Explanations

LookAt is an online facility that you can use to view explanations for most IBM messages and some system abends and codes. Using LookAt to find information is faster than a conventional search because in most cases LookAt goes directly to the message explanation.

To find a message explanation in LookAt, you enter the message identifier (for example, APS708I or APS*). Some messages have information in more than one document. For those messages, LookAt displays a list of documents that contain the message.

You can access LookAt from these locations:

Internet

Access the LookAt website at:

<http://www.ibm.com/systems/z/os/zos/bkserv/lookat/>

z/OS TSO/E host system

Install code on your z/OS system to access LookAt from a TSO/E command line, such as TSO/E prompt, ISPF, or z/OS UNIX[®] System Services.

Microsoft® Windows® workstation

Install code on your workstation to access LookAt from a Windows graphical user interface or a command prompt (also known as the DOS command line).

Wireless handheld device

Link to the LookAt Mobile Edition from the LookAt website to access LookAt from a handheld device that has wireless access and an Internet browser, such as Internet Explorer for Pocket PCs; Blazer or Eudora for Palm OS; or Opera for Linux® handheld devices.

To install LookAt on your TSO/E host system or Windows workstation, you can obtain the code from:

- A CD-ROM in the *z/OS Collection*
- The *z/OS and Software Products DVD Collection*
- The LookAt website's **Download** link. More information is available in the LOOKAT.ME files available during the download process.

Using the z/OS Basic Skills Information Center

The z/OS Basic Skills Information Center is a web-based information resource intended to help users learn the basic concepts of z/OS, the operating system that runs most of the IBM mainframe computers in use today. The Information Center is designed to introduce a new generation of Information Technology professionals to basic concepts and help them prepare for a career as a z/OS professional, such as a z/OS system programmer.

Specifically, the z/OS Basic Skills Information Center is intended to achieve these objectives:

- Provide basic education and information about z/OS without charge.
- Shorten the time it takes for people to become productive on the mainframe.
- Make it easier for new people to learn z/OS.

To access the z/OS Basic Skills Information Center, which is available to all users (no login required), go to:

<http://publib.boulder.ibm.com/infocenter/zoslnctr/v1r7/index.jsp>

How to Send Your Comments to IBM

We appreciate comments from you about this publication. Please comment on the clarity, accuracy, and completeness of the information or give us any other feedback that you might have.

Use one of these methods to send us your comments:

- Send an email to: printpub@infoprint.com
- Visit the Contact z/OS web page at:
<http://www.ibm.com/servers/eserver/zseries/zos/webqs.html>
- Mail your comments to this address:
IBM Corporation
6300 Diagonal Hwy 002J
Boulder, CO 80301-9270
U.S.A.

Include this information:

- Your name and address
- Your email address
- Your telephone or fax number
- The publication title and order number:
PSF for z/OS: User's Guide
S550-0435-03
- The topic and page number related to your comment
- The text of your comment

When you send comments to IBM, you grant IBM a nonexclusive right to use or distribute your comments in any way it believes appropriate without incurring any obligation to you.

IBM or any other organizations will only use the personal information that you supply to contact you about the issues that you submit.

If You Have a Technical Problem

Do not use the feedback methods listed above. Instead, do one of these:

- Contact your IBM service representative.
- Call IBM technical support.
- Visit the IBM zSeries support web page at:
<http://www.ibm.com/servers/eserver/support/zseries/>

Summary of Changes

PSF for z/OS: User's Guide, S550-0435-03:

This publication contains additions and changes to information previously presented in *PSF for z/OS: User's Guide, S550-0435-02*. The technical additions and changes are marked with a revision bar (|) in the left margin.

General changes:

- References to these products have been removed because the releases are no longer in service:
 - PSF 4.1.0 for z/OS
 - z/OS V1R9–V1R10
- References to InfoPrint® ProcessDirector for Windows have been added.
- “zSeries® File System” has been changed to “z/OS File System”.
- References to *Printer Information, S544-5750*, have been removed and replaced with a reference to the PSF display printer information function or a general reference to the documentation for the printer.

New information:

- “Using the z/OS Basic Skills Information Center” on page xiv provides information about all z/OS product publications.
- “How to Send Your Comments to IBM” on page xv provides information about submitting comments to IBM.
- The Portable Network Graphics (PNG) data object resource has been added. See “Object Containers as Data Object Resources” on page 28 and “Data objects” and “Types of data objects” in Appendix F, “Color and grayscale printing,” on page 243.
- Information about PDF multiple-page and TIFF multiple-image data object resources has been added to “Multiple-Image and Multiple-Page Resources” on page 30. Also see “AFP Architecture” on page 1, “Object Containers as Data Object Resources” on page 28, “Common Object Containers Supported by PSF” on page 28, and “Types of data objects” in Appendix F, “Color and grayscale printing,” on page 243.
- Information about PTOCA objects with OEG that are stored in the page segment library has been added to “Text” on page 47. Also see “AFP Architecture” on page 1, “Resources” on page 8, Table 3 on page 16, and “Using Inline Resources” on page 50.
- PSF supports text fidelity controls. See “Printing Text Data” on page 48.
- A new parameter, COPYCNT, has been added to print greater than 255 copies. See Table 4 on page 92 and “COPYCNT” on page 100. References to the COPYCNT parameter have also been added to information that discusses the COPY parameter. See “Specifying COPIES without the FORMDEF Parameter” on page 130 and “Printing More Than One Copy” on page 153.
- “Processing Unicode Complex Text” on page 158 has been added.
- Support for the extended code page function has been added to “Using Extended Code Pages” on page 159.

- New CMR types, passthrough, indexed, and device link, have been added to "Color Management Resources" in Appendix F, "Color and grayscale printing," on page 243.

Changed information:

- "Formatting Data with PSF" on page 10 has been updated with references for graphics and images.
- References to extended code pages have been added to "Storing PSF Resources" on page 13, Table 3 on page 16, "FOCA Fonts" on page 19, "Obtaining and Referencing Fonts" on page 23, "USERPATH" on page 121, and "Printing with Resources from a User Library" on page 160.
- "Searching for Resources Specified by a Print Job" on page 14 has been reorganized based on whether PSF is Unicode-enabled instead of whether a resource is a data object. This is because extended code pages can be stored in UNIX files and follow the search order for Unicode-enabled, but they are not data objects.
- A reference to processing complex text has been added to "TrueType and OpenType Fonts" on page 23.
- Type Transformer is no longer an optional feature of InfoPrint Fonts for Multiplatforms. See "Mapping FOCA Fonts" on page 24 for information about downloading it for free.
- "Using Printer-Resident Fonts" on page 25 has been updated.
- A note has been added to "Bar Codes" on page 40 about using the display printer information function in PSF to see if a printer supports bar code encodings, such as Data Matrix, GS1 DataBar, Royal Mail RED TAG, and USPS Intelligent Mail Container.
- "Using APSRMARK to Mark Resources" on page 49 has been updated.
- The default explanation for "COPIES" on page 99 has been updated.
- The description of the P240 value in "RESFMT" on page 116 has been updated.
- Information about font resolution has been updated in "Printing with Resources from a User Library" on page 160.
- "Finishing Your Output" on page 168 has been updated with information about suppressing interrupt message pages when PSF is attached to a printer with finisher capability.
- The HEADING-UU and RESOURCEDO records have been added to the AFPSTATS softcopy report and the description for the RESOURCEDF record has been updated. See Table 8 on page 189.
- "Softcopy Record Details" on page 215 have been updated for the AFPSTATS report.
- The sample AFPSTATS softcopy report in Figure 51 on page 229 has been updated.
- The "Interchange Set" field has been added to the first page of the AFPSTATS report to indicate what MO:DCA-P interchange set the print file uses. See "Sample Hardcopy Report" on page 230.
- JPEG File Interchange Format (JFIF) image data objects are now called AFPC (AFP Consortium) JPEG Subset image data objects. See "Types of data objects" in Appendix F, "Color and grayscale printing," on page 243.
- Appendix G, "Accessibility," on page 265, "Glossary" on page 271, and "Bibliography" on page 287 have been updated.

Deleted information:

- "OUTPUT Statements in the PSF Startup Procedure" has been removed from Chapter 6. See *PSF for z/OS: Customization* for this information.

Chapter 1. Introducing Advanced Function Presentation

To understand what Print Services Facility (PSF) for z/OS can do for you, you must first understand the relationship between Advanced Function Presentation (AFP) and PSF. This chapter gives an overview of AFP and briefly explains how AFP and PSF are related.

AFP is an architected system of hardware and software for creating, formatting, viewing, retrieving, printing, and distributing information about a wide variety of printer and display devices. First introduced in 1984 to support the IBM® 3800 Model 3 high-speed printer, AFP now supports improved printing technology and functions.

The AFP architecture governs the creation and control of data types (such as text, font, image, graphics, bar code, fax, color, audio, and multimedia) so that computer output is more readable and attractive. AFP's specific interchange architecture, called Mixed Object Document Content Architecture (MO:DCA™), makes information interchange possible among different operating systems that use different protocols. These operating systems include:

- AIX®
- IBM i
- Linux
- VM
- VSE
- Windows
- z/OS

AFP Architecture

AFP's MO:DCA architecture is a device-independent data stream that governs the interchange of documents. Without such an architecture, information exchange is difficult and unpredictable. A subset of MO:DCA is Mixed Object Document Content Architecture for Presentation (MO:DCA-P), which defines presentation documents.

A mixed object document is the collection of data objects that comprise the document's content and the resources and formatting specifications that dictate the processing functions performed on the content. The term *mixed* in the MO:DCA-P architecture refers both to the mixture of data objects and the mixture of document constructs that comprise the document's components.

A MO:DCA-P document can contain a mixture of presentation data objects. Each data object type has unique processing requirements. An Object Content Architecture (OCA) has been established for each IBM data object to define its respective syntax and semantics. MO:DCA-P documents can contain data and data objects governed by these OCAs:

- **Bar Code Object Content Architecture™ (BCOCA™)**: Describes and generates bar code symbols.
- **Color Management Object Content Architecture™ (CMOCA™)**: Supports the color management information required to render presentation data.

- **Font Object Content Architecture (FOCA):** Supports the digital presentation of character shapes by defining their attributes, such as shape definitions, shape dimensions, and positioning information.¹
- **Graphics Object Content Architecture (GOCA):** Represents pictures generated by a computer, commonly referred to as computer graphics.
- **Image Object Content Architecture (IOCA):** Represents image information such as scanned pictures.
- **Presentation Text Object Content Architecture (PTOCA):** Defines text information.

MO:DCA-P documents can also contain or reference some non-OCA data objects that are registered in the MO:DCA-P architecture. Such data objects can be carried in a generic MO:DCA-P object envelope called an object container. Some examples of data objects that can be carried in an object container are image objects in Encapsulated PostScript® (EPS) format, Portable Document Format (PDF) single-page and multiple-page objects, TrueType and OpenType fonts, and color mapping tables (CMT).

MO:DCA-P data is composed into pages before it is sent to the printer and includes data placement and presentation information (such as which font to use), along with the data to be printed. The data to be printed is comprised of embedded OCA objects and object containers, and included resources. An embedded object must be physically embedded every time it is used and you need a separate object for each size and rotation you use. A resource is included in the MO:DCA-P data stream through a reference to the object, so it is not physically embedded in the data stream. You can save BCOCA, GOCA, IOCA, and PTOCA objects as resources. For information about BCOCA, GOCA, IOCA, and PTOCA resources, see Chapter 3, “Using Resources.”

To generate MO:DCA-P output from an application program, you can use any of these methods:

- Use a text-formatting program that generates page data, such as Document Composition Facility (DCF).
- Use AFP Toolbox (Program Number 5655-A25) to generate MO:DCA-P data in your application program. You can use this licensed program to generate MO:DCA-P output from an application without having to have detailed knowledge of the MO:DCA-P data stream and syntax.
- Use one of many products from IBM Business Partners to generate MO:DCA-P output and, with the provided design tools that are both flexible and easy to use, create personalized, customer-oriented documents.

For more information, see *AFP Application Programming Interface: Programming Guide and Reference*, *Mixed Object Document Content Architecture Reference*, or *PSF for z/OS: Introduction*.

AFP Printing

One common way to use AFP data is to print it. Figure 1 on page 3 shows the main components of AFP printing: resources, data streams, and the printer driver.

1. Unlike the other OCAs, font objects are not carried inside the MO:DCA-P data stream. However, the MO:DCA-P architecture does provide and carry references to external font objects.

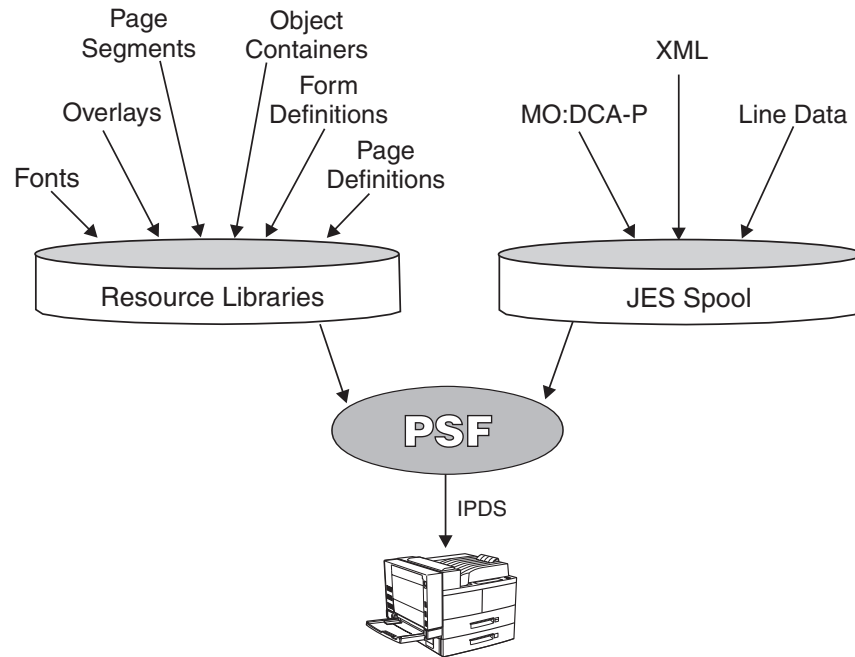


Figure 1. Components of AFP Printing

1. Different types of resources are stored in resource libraries and can be retrieved by PSF for printing. A *resource* is a collection of printing instructions and sometimes data to be printed. It is bounded by delimiters that identify its type, such as graphics, image, or text.
2. Data streams can contain line data, MO:DCA-P data, and XML data. A *data stream* is data and control information transmitted through a data channel. The data streams are stored on the system spool, which is a storage area that lets users queue jobs to a device, such as a printer. The system spool for z/OS is Job Entry Subsystem (JES).
3. The data streams and resources are processed by the *printer driver*, which is a program that passes commands and resources with a data stream from the system spool to tell the printer how to print the data. The printer driver for z/OS is PSF. For more information about PSF see Chapter 2, “Introducing Print Services Facility.”

Printing Line Data on AFP Printers

All AFP printers are *page printers*. Page printers differ from line printers in that a page printer receives an entire page of data before printing any data, whereas a line printer receives one line of data at a time and prints each line as it is received.

PSF can process line data so that AFP page printers can print it; therefore, a job prepared for printing on a line printer can be printed on a page printer with little or no change to the application. You can enhance line data by using electronic forms (overlays), typographic fonts, and other advanced-printing functions. For more information about line data, see “Line Data” on page 75. Also see “Printing on an AFP Printer” on page 126.

Printing AFP Data in Different Directions and Character Rotations

Print direction is the combination of inline and baseline directions. Text can be printed in four print directions. For each of the directions, characters can be printed in four rotations.

The *inline direction* is the direction in which successive characters are added to a line of text. The four inline directions are:

- **ACROSS:** Text characters are placed in a line from left to right across the page.
- **DOWN:** Text characters are placed in a line from top to bottom down the page.
- **BACK:** Text characters are placed in a line from right to left across the page.
- **UP:** Text characters are placed in a line from bottom to top up the page.

The *baseline direction* is the direction in which successive lines of text are added to a page.

The four character rotations for each inline direction are 0°, 90°, 180°, and 270°, and are measured clockwise around each inline direction. For example, the text in this paragraph is printed *across* the page, and its rotation is 0°. Figure 2 shows the 16 possible combinations of these inline directions and character rotations. For information about the combinations supported by the printer you are using, see the documentation provided with the printer.

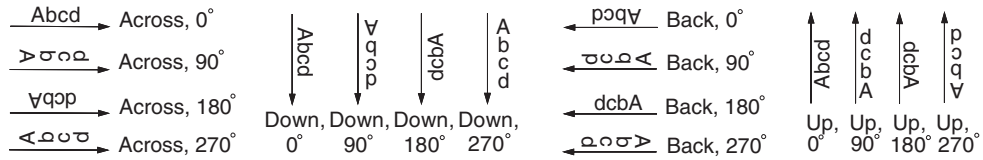


Figure 2. Direction-Rotation Combinations

PSF can process line data so that it can be printed in each inline direction with any character rotation. Figure 3 on page 5 shows four copies of a memo, each printed in a different inline direction with 0° character rotation. The memo was reformatted for each direction.

Pages are said to be printed in *portrait* page presentation when the shorter edges of the paper are the top and bottom of the page, and pages are said to be printed in *landscape* page presentation when the longer edges of the paper are the top and bottom of the page.

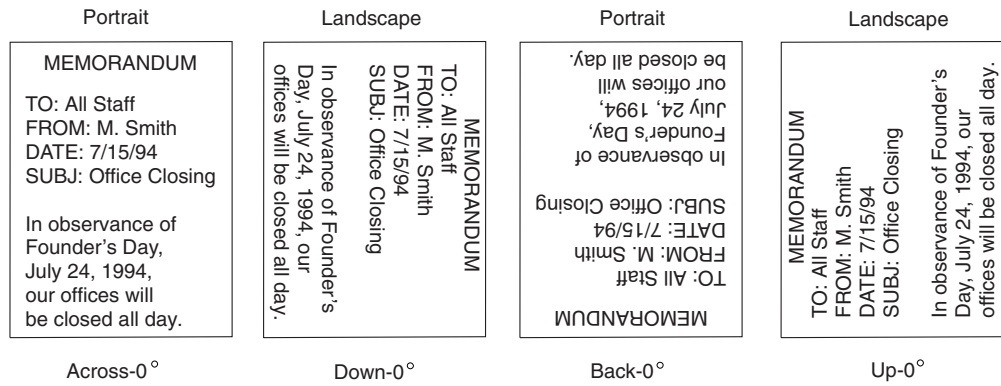


Figure 3. Copies of a Memo Printed in Four Inline Directions

You can use a page definition to specify or select different inline directions and character rotations for different fields of data. Text-formatting programs can also produce different inline directions and character rotations for text. Figure 4 shows the different combinations of inline directions and character rotations used on a sample page.

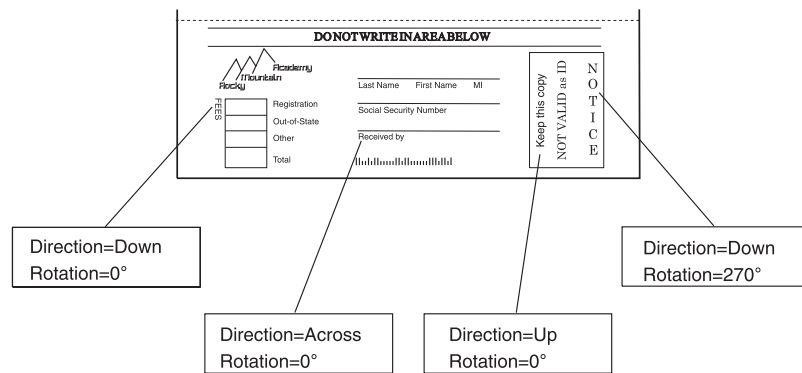


Figure 4. Direction-Rotation Combinations on a Sample Page

All-Points Addressability

AFP page printers can print all addressable points, or *picture elements (pels)*, on a page. You can use *all-points addressable (APA)* printing to mix a variety of type sizes, styles, images, and electronic forms on a single page. All-points addressability lets PSF print different data at the same place on the page. Overlapping data in this manner does not produce **bold** print as it does with an impact printer. (To produce bold print with a page printer, you must use a bold font.) However, you can use the data-merging capabilities of PSF and page printers to do these:

- Create composite characters by printing more than one character at the same location on the page. This is shown with the slash printed on top of the 0 in Example 1 in Figure 5 on page 6.
- Overlap characters so that parts of each character have a common area. This is shown with the asterisks (*) printed on top of the characters 200.00 in Example 2 in Figure 5 on page 6.
- Merge a graphics object with character data. This is shown with the mountain graphic printed over the name of the academy in Example 3 in Figure 5 on page 6.


Example 1	Ø8ØFE	
Composite Characters		
<hr/>		
Example 2	Cost	\$200.00
Overstruck Characters	Reduced to	\$150.00
<hr/>		
Example 3		
Logo and Name Merged		

Figure 5. Printing Two Items in the Same Location on the Page

Pel Density and Placement

The pel density is a major factor in determining the quality of a particular printer's output. The page printers supported by PSF have a variety of pel densities. To learn about the pel density² of your printer, see the documentation provided with the printer. PSF sends the printer the address of a pel, along with the data to be placed there. With all-points addressability, you send data to the page printer in any sequence and position it anywhere on the printable area of the page.

For some print jobs, PSF must select addresses from formatting specifications. For others, addresses are already contained in the print jobs when PSF receives them.

Measurement Unit Conversion

PSF accepts text, images, graphics, and bar code objects with values in the range of 1 through 32,767 for a 10 inch unit base. Some printers support only 2,400 units for every 10 inches and some support 14,400 units for every 10 inches. When the input values are not supported by the printer, PSF converts the input units for unit base values to values supported by the printer. This conversion can affect processing performance. Other printers support the full range of units for unit base values. For those printers, PSF does not convert the input units.

2. Pel density is also called print-head resolution, or resolution.

Chapter 2. Introducing Print Services Facility

Print Services Facility (PSF) is a licensed printer driver program. Table 2 shows the AFP operating systems and the PSF products they support.

Table 2. AFP Operating Systems and Corresponding PSF Products

Operating System	PSF Product
z/OS	PSF for z/OS
VM	PSF/VM
VSE	PSF/VSE
IBM i	PSF/400
AIX	InfoPrint Manager for AIX InfoPrint ProcessDirector for AIX
Windows	InfoPrint Manager for Windows InfoPrint ProcessDirector for Windows
Linux	InfoPrint ProcessDirector for Linux

PSF has similar capabilities in all environments, plus differences unique to the operating system on which it is running. This publication focuses on PSF on the z/OS system. On any operating system, PSF combines print data with resources to manage and control data transmitted to AFP printers. PSF accepts various data streams, transforms these data streams into the data stream required by each printer (using processing and printing options specified by the user and the installation), and then transmits the data to the printer. In addition, PSF:

- Manages resources
- Verifies a part of the syntax of the input data stream (the printer verifies the rest of the syntax)
- Provides diagnostic aids, which provide information that can be used for problem determination
- Reports the status of a printer to the system operator
- Provides accounting information
- Provides error-recovery procedures for AFP printers, meaning that if a job does not print because of a printer problem, PSF retransmits the affected pages to the printer at a later time

With PSF, you receive a starter set of resources. You can create additional resources by using other programs.

How PSF Manages AFP Printing

Figure 1 on page 3 shows the basic components used to print data on AFP printers in a z/OS environment. The PSF printer-driver program processes the MO:DCA-P, line data, and XML data streams from the JES spool, combines the data streams with resources needed to print the data, converts the data into Intelligent Printer Data Stream™ (IPDS™), and sends the result to the printer. Because MO:DCA-P and IPDS are part of the same architecture, this is a very efficient process for applications that produce MO:DCA-P.

Components of PSF Printing

This section describes the two main components of PSF printing; data streams and resources. It then explains how PSF communicates with the printer.

Data Streams

The data streams placed on the JES spool are:

- Line data** Application output prepared for printing that is not composed into pages. To print line data on page printers, a page definition is required to provide the data placement and presentation information. For information about printing line data, see “Line Data” on page 75.
- XML data** Data that has been identified as using Extensible Markup Language (XML) standards from the World Wide Web Consortium. XML does not describe data placement or presentation information. For printing on page printers, a page definition is required to provide the data placement and presentation information. The XML data processed by PSF can be encoded in EBCDIC, ASCII, UTF-8 or UTF-16. For more information about printing XML data, see “XML Data” on page 83.
- MO:DCA-P** Data that is already composed into pages, including data placement and presentation information (such as which font to use). For information about printing MO:DCA-P data, see “MO:DCA-P Data” on page 85.
- IPDS** Data sent to the printer that contains both the data to be printed and the controls defining how the data is to be presented. For more information about IPDS, see “Communication between PSF and the Printer” on page 9.
- Mixed-mode** A combination of line data and MO:DCA-P data. If MO:DCA-P data is already formatted into pages, it cannot be printed on the same logical page as line data. When PSF finds the beginning or the ending of a MO:DCA-P data page, it starts a new page.

Resources

PSF uses a combination of these resources to print AFP data:

- Fonts** Graphic characters of a given style that are used to present text. AFP fonts that PSF supports can be one of these types:
- FOCA** Fonts defined by the Font Object Content Architecture (FOCA). A FOCA font is a paired character set and code page that can be used together to print a string of text characters.
 - TrueType and OpenType** Unicode-enabled fonts *not* defined by FOCA. TrueType and OpenType fonts consist of tables that identify the formatting information used to support Unicode encoding.

Form definitions

Information that defines the presentation of the logical page on the physical medium, such as where the page should be placed on the medium and whether the data should be printed on one or both sides of the paper.

Object containers

Object envelopes that contain certain types of non-OCA data objects.

Overlays

Predefined data objects that can contain text, images, graphics, bar codes, object containers, and page segments and can be merged with application data for presentation. Overlays are often used as electronic forms.

Page definitions

Information used to format line data and XML data into AFP pages.

Page segments

Predefined data objects that can contain text, image, graphics, and bar code data objects that can be presented at any location on a page and are included during printing. Examples of items that can be page segments include logos, signatures, bar charts, and engineering drawings.

Bar codes, graphics, images, and text

BCOCA, GOCA, IOCA, and PTOCA objects stored as resources.

For more information about resources, see Chapter 3, “Using Resources.”

Communication between PSF and the Printer

PSF converts MO:DCA-P, line data, and XML data from the JES spool into IPDS. IPDS contains information about a printer, such as the characteristics of the printer, its resolution, what resources it has, whether it has sufficient memory, and whether it receives and prints a job. PSF communicates back and forth with the printer through IPDS in order to successfully manage and control the data transmitted to the printers.

PSF as an Output Writer (Deferred-Printing mode)

In deferred-printing mode, PSF is the output writer that processes the spooled output from JES and sends a data stream to a page printer. All the printers supported by PSF can print in deferred mode, and PSF can process data for one or more page printers at a time.

In deferred-printing mode, you are not using PSF directly. Rather, JES sets up, starts, and controls each output writer and its system output devices. Output from an application program is spooled to JES, and printing is deferred until JES schedules PSF to print the spooled output data set. The components involved in generating formatted output on a system output printer are shown in Figure 6.

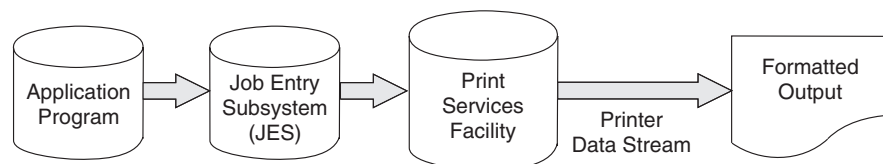


Figure 6. PSF as an Output Writer

Using information from Job Control Language (JCL) parameters and from the formatting specifications, PSF processes the print data set to generate the data stream from which the printer produces formatted output. For information about

using JCL parameters to control the output, see Chapter 6, “Using JCL for Advanced Function Presentation.” For more information about deferred-printing mode, see *PSF for z/OS: Customization*.

PSF as an Access Method (Direct-Printing Mode)

In direct-printing mode, PSF acts as an access method for the printer. PSF devotes the printer exclusively to the job, and the output is printed immediately. The components involved in direct-printing mode are shown in Figure 7.

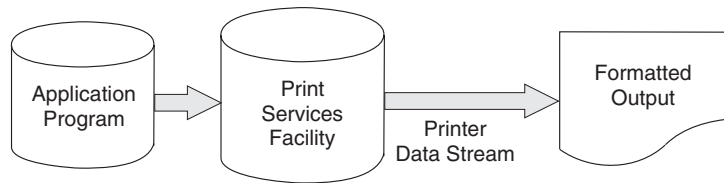


Figure 7. PSF in Direct-Printing Mode

Only channel-attached printers can print in direct-printing mode. (Microfilm devices cannot be attached in direct-printing mode.)

PSF uses JCL parameters for direct-printing mode, but these parameters are different from those used in deferred-printing mode. Direct-printing mode does not support these deferred functions:

- User libraries
- System-assisted restart
- PSF repositioning
- Data-set checkpointing
- Multiple data-set processing
- JES operator commands to control the printer
- Job header and trailer pages
- Data set header pages
- Carrier-strip marking
- Mandatory page labeling
- System Management Facilities (SMF) type 6 processing
- Notification of print completion
- Restartable abends
- Redirection of message data sets
- TrueType and OpenType font support
- Color management support

For more information about direct-printing mode, see *PSF for z/OS: Customization*.

Formatting Data with PSF

PSF lets you format data in many ways. For example, by using page definitions to format the print lines into pages and form definitions to place the formatted pages on the media and to select media options, you can do these:

- Specify outline fonts to be scaled by the printer in any size or aspect ratio (see page 19).
- Include page overlays and page segments anywhere on a page (see “Page Overlays” on page 33 and “Page Segments” on page 38).
- Include graphics and images on a page (see “Graphics” on page 43 and “Image Resources” on page 44).
- Include electronic forms (see “Merging Data with an Overlay” on page 35).

- Specify data fields to be printed as bar codes (see “Bar Codes” on page 40).
- Specify where the printer should position the page origin (see “Page Position” on page 55).
- Specify duplex printing (see “Duplex Printing” on page 56 and “Specifying Duplex Printing” on page 131).
- Select finishing options such as stapling or binding (see “Finishing Output” on page 63 and “Finishing Your Output” on page 168).
- Select paper from multiple input bins, or route pages of the output to different output bins (see “Paper Source” on page 56 and “Specifying Bins (Paper Source)” on page 131).
- Change formatting on a page-by-page basis within a job (see “Page Definitions” on page 66 and “Changing Formatting within a Document” on page 144).
- Print in any position on a page (see “Defining Page Formats” on page 67).
- Print in different orientations (see “Printing AFP Data in Different Directions and Character Rotations” on page 4 and “Print Direction” on page 68).
- Specify lines or fields to be printed in color (see “Page Format Options for Formatting Fields” on page 70).
- Select different fonts for lines or fields of data (see “Fonts” on page 70).
- Position print lines relative to other objects on a page (see “AFP Structured Fields Included in Line Data” on page 79).
- Position multiple logical pages on a single sheet (see “N_UP Printing: Printing Multiple Pages on a Sheet” on page 140).
- Specify data fields to be suppressed on some page copies of a document (see “Suppressing Print Data” on page 141).
- Include color resource objects for color fidelity management (see “Specifying Object Container Libraries in UNIX Files” on page 168).

Chapter 3. Using Resources

A *resource* is a collection of printing instructions and sometimes data to be printed. A resource is stored in a resource library and can be retrieved by PSF for printing.

This chapter describes where resources are stored and how PSF searches for resources, gives information about different types of resources, shows examples of resources being used in a document, describes various ways to use resources, and lists some resources that are supplied by IBM. For information about managing resources, see *PSF for z/OS: Customization*.

Storing PSF Resources

Resources can be stored in PSF libraries or as printer resources:

- **System libraries**, including security libraries. System libraries can be:
 - A concatenation of partitioned data sets (PDS or PDSE) that contain members for one or more resources. Typically, a resource is built by an application or by an AFP licensed program and is stored in a library for other print jobs.
 - A path or set of paths for system UNIX files (DFSMS Hierarchical File System (HFS) or z/OS File System (zFS) files) that contain extended code pages or any resource installed in a resource access table (RAT), such as TrueType and OpenType font objects and data object resources.
- **Private user libraries**. A private print-resource library can be:
 - A PDS or PDSE that is owned by an individual user and is accessed only when an authorized job submitter specifies the data set name with the USERLIB OUTPUT JCL parameter.
 - A path or set of paths for private UNIX files that contain extended code pages or any resource installed in a RAT, such as TrueType and OpenType font objects and data object resources. User path libraries are owned by individual users and are accessed only when an authorized job submitter specifies the path with the USERPATH OUTPUT JCL parameter.
- **Print data sets**. Inline resources are stored in the print data set.
- **Printers**. Some printers can store resources, such as fonts. Resources stored in a printer are considered “resident” or “printer-resident”. Captured resources are temporary printer-resident resources.
- **Distributed Print Function (DPF) libraries** on a personal computer. For more information about the DPF function of PSF, see the InfoPrint Manager for Windows publications in “Bibliography” on page 287.

Printer-resident fonts and resources in DPF libraries are used only after a marked host resource is found. For more information, see “Using Printer-Resident Fonts” on page 25 and “Using Resources with the Distributed Print Function (DPF) of PSF” on page 49.

Resources found in system libraries, user libraries, or inline are considered host resources. Host resources reside in the printer only during the print job. Printer-resident resources and DPF resources are stored in the printer or in an intermediate caching device such as InfoPrint Manager for Windows.

Figure 8 shows where resources can be stored.

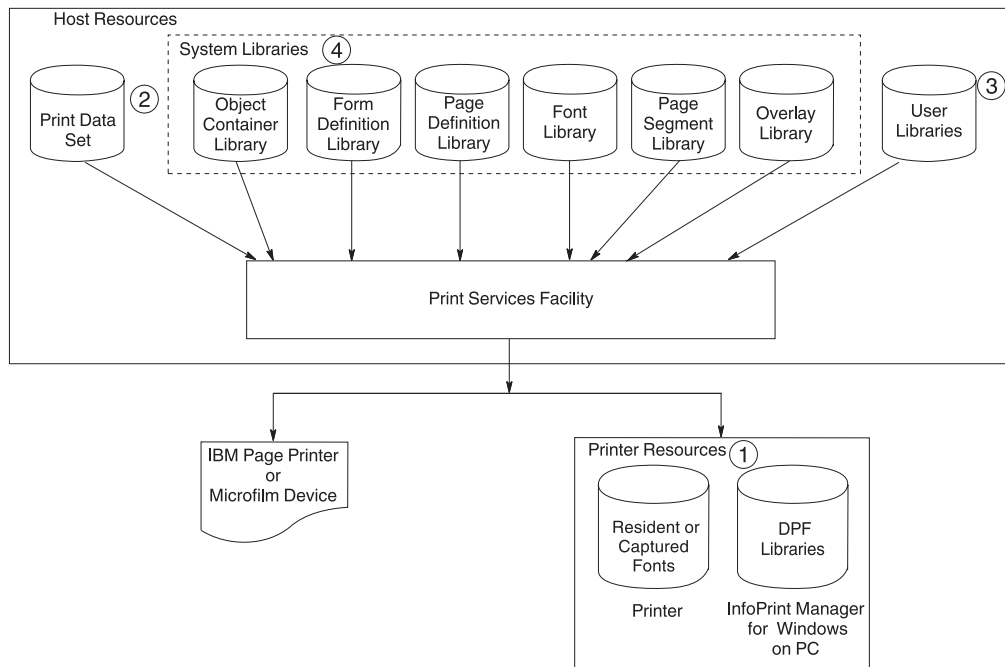


Figure 8. Resource Storage

The resources that can be used depend on how the printer is set up, what licensed programs are installed, what libraries are assigned to each printer, and what data set is being processed.

When you select your printer by specifying JCL parameters, you are also selecting that printer's assigned system libraries. Check with your system-support group for what resources are available, what libraries the resources are in, and what libraries are assigned to each printer on your system.

Searching for Resources Specified by a Print Job

When a resource is referenced by a print data set, PSF searches for the resource. The method PSF uses to search for a resource depends on whether PSF is Unicode-enabled. Data object resources and extended code pages that are stored in UNIX files require PSF to be Unicode-enabled. Data object resources are found in object container libraries and extended code pages are found in font libraries. See Table 3 on page 16 for examples of data object resources.

You can enable PSF for Unicode with either the PARM parameter on the EXEC statement of the PSF startup procedure or the Unicode enabled parameter in the Printer Inventory. See *PSF for z/OS: Customization* for information about enabling PSF for Unicode.

Not Unicode-Enabled

When PSF is not Unicode-enabled, PSF searches for resources in this order:

1. If a resource can be activated by PSF, resources that are resident in the printer.
2. If PSF finds an Invoke Medium Map (IMM), internal copy groups immediately preceding IMM records in the print data set.
3. Inline resources in the print data set.

4. Resources in PDS or PDSE user libraries in the order they are specified.
5. Resources in PDS or PDSE system libraries in the order they are concatenated.

Note: Data object resource names are truncated to eight characters.

For more detailed information, see *PSF for z/OS: Customization*.

Unicode-Enabled

When PSF is Unicode-enabled, PSF searches for resources in this order:

1. If a resource can be activated by PSF, resources that are resident in the printer.
2. If PSF finds an Invoke Medium Map (IMM), internal copy groups immediately preceding IMM records in the print data set.
3. Inline resources in the print data set.
4. Resources in user path libraries.
5. Resources in PDS or PDSE user libraries in the order they are specified (except data object fonts and CMRs).
6. Resources in system path libraries.
7. Resources in PDS or PDSE system libraries in the order they are concatenated (except data object fonts and CMRs).

Note: PSF truncates the resource name to eight characters when searching PDS or PDSE libraries.

Soft and Hard Resources

Resources are considered hard or soft depending on how they are used.

Soft resources

Soft resources are resources that are included on a page but not mapped. Soft resources are integrated into the page data that is then sent to the printer.

Hard resources

Hard resources are sent to the printer in advance of the page as a separate resource object. They are mapped and only sent to the printer the first time they are referenced.

If a resource is used by more than a single page in the document it might be beneficial for you to use the resource as a hard resource. Before it is used, a hard resource is referenced with a Map structured field in the active environment group of the page in which it is used.

PSF System Resource Libraries

Resource libraries contain the resources needed for printing. Because some of the libraries (font, object container, and page segment) can contain multiple resource types, and because PSF does not enforce a prefix for most of the eight-character resource names, you should define a naming convention that identifies each type of resource in a library. IBM recommends using a two-character prefix naming convention for eight-character resource names

Table 3 on page 16 shows the PSF system resource libraries, the types of resources stored in each library, and the required and IBM-recommended prefixes.


Table 3. PSF System Resource Libraries, Resource Types, and Resource Prefixes

Library	Type of Resource	Description	Prefix	See...
Font				"Fonts" on page 18
	FOCA font	Stored in PDS or PDSE font resource libraries:		"FOCA Fonts" on page 19
		240- and 300-pel character set	C0	
		3800 character set	C1–CG	
	Outline character set	CZ		
		Code page; extended code page	T1	
		240- and 300-pel coded font	X0 (required)	
		3800 coded font	X1–XG (required)	
		Outline coded font	XZ (required)	
		Stored in UNIX file path resource libraries:		
		Extended code page	T1	
	TrueType and OpenType font	Stored in UNIX file path resource libraries	No prefix used	"TrueType and OpenType Fonts" on page 21
Form definition	Form definition		F1 (required)	"Form Definitions" on page 26
Object container	Color mapping table		M1	"Object Containers" on page 27
	Encapsulated PostScript	Data object resource	E1	
	Image (IOCA)	IOCA resources that are identified in the data stream as hard resources by using Map Data Resource (MDR) structured field must be placed in the object container system library, a user library, or inline with the print data. Supported as a data object resource.	I1	
	IOCA tile	Data object resource	IT	
	Microfilm setup		H1	
	PDF resource	Data object resource	PR	
	PDF single-page	Data object resource	PP	
	Other data object resources	See <i>Mixed Object Document Content Architecture Reference</i>	No prefix recommended	
Overlay	Overlay		O1	"Overlays" on page 32
Page definition	Page definition		P1 (required)	"Page Definitions" on page 37

Table 3. PSF System Resource Libraries, Resource Types, and Resource Prefixes (continued)

Library	Type of Resource	Description	Prefix	See...
Page segment	Bar code (BCOCA)		B1	"Bar Codes" on page 40
	Graphic (GOCA)		G1	"Graphics" on page 43
	IOCA	IOCA resources that are identified in the data stream as hard resources by using MDR structured field must be placed in the object container system library, a user library, or inline with the print data.	I1	"Image Resources" on page 44
	Text (PTOCA)	PTOCA object with OEG	No prefix recommended	"Text" on page 47
	Page segment		S1	"Page Segments" on page 38

Figure 9 on page 18 shows a page printed on an AFP printer by using PSF. This page shows examples of the kinds of data described in the following sections.




Rocky Mountain Academy
1234 Rocky Road
Boulder, Colorado 80301

February 25, 2003

Ms. Jane A. Doe
25 Park Avenue
White Rock, NY 10601



Dear Ms. Doe

Thank you for your interest in Rocky Mountain Academy. The admission application you requested is enclosed.

Sincerely,

John R. Smith
Director of Admissions

JRS/els
Enclosure

DO NOT WRITE IN AREA BELOW

 FEEs	<input type="checkbox"/> Registration	Doe	Jane	A.
	<input type="checkbox"/> Out-of-State	<small>Last Name</small>	<small>First Name</small>	<small>MI</small>
	<input type="checkbox"/> Other	<input type="text"/>		
	<input type="checkbox"/> Total	<input type="text"/>		
				

**Keep this copy
NOT VALID as ID
NOTICE**

Figure 9. Sample Page Printed on an AFP Printer

Fonts

A *font* is a collection of graphic characters sharing the same type family, style, and weight. You can use a font for an entire data set or file, for an entire page, or for selected lines or fields of data on a page.

Page printers can print fonts with various point sizes,³ styles, weights, and widths on a single line or on various lines on a page. Multiple fonts can be printed on a page. Before each page is printed, the fonts required for the page are sent to the printer (downloaded) if the printer does not already have them in its storage. The printer storage required for a font depends on the point size (for raster fonts),

3. A point size is a standard typographical measurement of the height of a font. One point is about 1/72 inch.

number of characters in the font, and whether it is double-byte or single-byte. Several publications that describe fonts are available in the “Bibliography” on page 287.

Overview of AFP Fonts

IBM AFP printers can use FOCA raster and outline fonts, which are single-byte or double-byte, or TrueType and OpenType outline fonts.

FOCA Fonts

Raster and outline fonts defined by the Font Object Content Architecture (FOCA) are called FOCA fonts. A FOCA font is a paired character set and code page that can be used together to print a string of text characters. FOCA fonts are stored in partitioned data sets (PDS or PDSE) in font resource libraries.

The different types of FOCA fonts that PSF supports are:

Raster fonts

A raster font is a font created by a series of pels arranged to form an image. Raster fonts are created in a specific point size, so if you want to use different sizes of the same raster font, you have to store multiple versions of the same font. Raster fonts can have 240-pel or 300-pel formats:

240-pel fonts

240-pel raster fonts can be bounded-box or unbounded-box. All IBM AFP printers except the 3800-3 use bounded-box fonts.

300-pel fonts

Many IBM AFP printers print documents at 300-pel resolution. 300-pel fonts are provided in the optional Compatibility Fonts feature of PSF, or in the AFP Font Collection, Program Number 5648-B33. Your system programmer can also convert any single-byte 240-pel font in the bounded-box format to a 300-pel font by using the font-conversion program distributed with PSF. This program, APSRCF30, is described in *PSF for z/OS: Customization*.

Outline fonts

PSF supports single- and double-byte outline font technology, in which the character shapes are represented by mathematical expressions. Because the font shape is defined without regard to size, outline fonts are scalable; therefore, you only have to store one version of an outline font. This increases your system storage space and enhances printing performance. Figure 10 illustrates how one outline font can be used with many different widths and scale factors.

This is the same Font with
different widths & scale factors

Figure 10. Example of Text That Uses Outline Fonts

When you use an outline font you must specify a font size and a horizontal scale factor. These can be specified either in the MO:DCA-P data stream or in a coded font.

Single-byte and double-byte fonts

Some page printers can print with both single-byte and double-byte fonts. A single-byte font can access up to 256 graphic characters from a character set. A double-byte font is used for printing languages whose base alphabets contain more than 256 graphic characters. To represent all the characters, more than 256 code points are needed. Therefore, two bytes are used: one byte to identify the section, and one byte to identify the code point in that section. An example of a writing system that requires double-byte fonts is kanji, in which the graphic characters are symbols in Japanese ideographic alphabets.

DBCS simulation fonts

Double-byte character set (DBCS) simulation fonts are outline fonts that are positioned like the old DBCS raster fonts. This allows you to use outline fonts to print applications that use the old DBCS fonts without changing the application or changing its appearance. The DBCS simulation fonts should only be used for an old application. Never mix the old DBCS raster fonts with the DBCS core raster or outline fonts because they are positioned differently.

FOCA fonts are stored in partitioned data sets (PDS or PDSE) in font resource libraries. A font resource library is composed of three library-member types:

- A *coded font member* associates a code page and a font character set as a pair. A single-byte coded font contains one code page and font character-set pair. A double-byte raster coded font, which requires two bytes to identify each graphic character, contains two or more code page and font character-set pairs; each pair is called a font section. A double-byte outline font contains one code page and font character-set pair. IBM requires a prefix of **X0-XG** and **XZ** for coded font resource objects.
- A *code page member* associates a code point and a graphic character identifier for each graphic character supported by the code page and specifies how code points that are not valid are to be processed. IBM recommends a prefix of **T1** for code pages.

Extended code pages are code pages that can contain Unicode values, which a printer that supports extended code pages uses to print TrueType and OpenType fonts. Extended code pages can be stored in a partitioned data set (PDS or PDSE) in a font resource library or in a UNIX file in a font path library. When stored in UNIX files, extended code pages must have a .ECP file extension in uppercase format. For more information, see “Using Extended Code Pages” on page 159.

- A *font character set member* contains a graphic character identifier and a raster pattern or outline for each graphic character in the font or font section, as well as information about how the characters are to be printed. IBM recommends a prefix of **C0-CG** and **CZ** for font character sets.

PSF searches for FOCA fonts in any of these repositories:

Resident in the printer

If a font is resident or captured in a printer, PSF attempts to activate the font in the printer. See “Using Printer-Resident Fonts” on page 25 and “Using Captured Fonts” on page 26 for more information.

Inline in the print data set

PSF looks for the specified font inline after first trying to activate the printer resident version of the font.

User path library

Extended code pages that are installed in a user path library can be accessed by PSF. PSF uses z/OS UNIX System Services to access the code pages in path libraries specified in the USERPATH parameter on the OUTPUT JCL statement. PSF must be Unicode-enabled before it can search for path libraries specified with the USERPATH parameter. For more information, see “USERPATH” on page 121.

User library

A font that is installed in a user library can be accessed by PSF. PSF accesses the fonts in PDS or PDSE libraries specified in the USERLIB parameter on the OUTPUT JCL statement. For more information, see “USERLIB” on page 120.

PSF attempts to locate all fonts referenced in the user library after it has looked for the printer resident version first and then the specified font inline. PSF looks for extended code pages referenced in the user library after it has looked in the user path library.

System font path library

Extended code pages that are installed in a system font path library can be accessed by PSF. PSF uses z/OS UNIX System Services to access the code pages in path libraries specified in the FONTPATH parameter on the PRINTDEV statement of the PSF startup procedure. PSF must be Unicode-enabled before it can search for path libraries specified with the FONTPATH parameter. For more information, see *PSF for z/OS: Customization*.

PSF attempts to locate referenced extended code pages in the system font path library after it has looked in the user path library and then the user library.

System library

A font that is installed in a system font library can be accessed by PSF. PSF accesses the fonts in PDS or PDSE libraries specified in the FONTDD, FONT240, or FONT300 parameters on the PRINTDEV statement of the PSF startup procedure. For more information about specifying the parameters on the PRINTDEV statement, see *PSF for z/OS: Customization*.

PSF attempts to locate all fonts identified in the system font library after it has looked for the printer resident version, the specified font inline, and in the user library. PSF looks for extended code pages referenced in the system library after it has looked in the user path library, the user library, and the system font path library.

TrueType and OpenType Fonts

TrueType and OpenType fonts are outline fonts. They consist of tables that identify the formatting information used to support Unicode encoding. PSF has these limitations when supporting TrueType and OpenType fonts:

- PSF does not manage TrueType and OpenType fonts with installation Exit 7.
- PSF does not support TrueType and OpenType fonts in direct-printing mode.
- PSF only supports TrueType and OpenType fonts on printers that support Unicode.

TrueType and OpenType fonts are stored in UNIX files (HFS or zFS files) in font path libraries. A font path library contains these TrueType and OpenType objects:

Font The basic TrueType and OpenType font element, which is a grouping of characters with the same typeface and style. A font object is stored as a single object or file.

Collection

A group of TrueType and OpenType fonts collected together and stored as a single object or file. Font collections are created by the font vendor.

Linked font

A group of TrueType and OpenType fonts that are associated by linking. One base font object is linked to other TrueType and OpenType font objects, which are known as linked fonts. The Font Installer for AFP Systems or the InfoPrint AFP Resource Installer performs font linking during font installation.

For PSF to use TrueType and OpenType fonts, the fonts must be in one of these repositories:

Resident in the printer

If a TrueType and OpenType font is resident or captured in a printer, PSF attempts to activate the font from the printer. See “Using Printer-Resident Fonts” on page 25 and “Using Captured Fonts” on page 26 for more information.

Inline in the print data set

A TrueType and OpenType font can be contained inline in the print data set if it is wrapped in a MO:DCA-P object container construct. A wrapped TrueType and OpenType font is used to place the font inline in the MO:DCA-P data stream. PSF cannot interpret a TrueType and OpenType font data stream, unless it is contained in MO:DCA-P. PSF looks for the specified font inline after first trying to activate the printer resident version of the font.

User path library

TrueType and OpenType fonts that are installed in a user path library can be accessed by PSF. These fonts do not contain any MO:DCA-P structured fields and, therefore, can be used by other print servers on multiple operating systems. PSF uses z/OS UNIX System Services to access the fonts in path libraries specified in the USERPATH parameter on the OUTPUT JCL statement. For more information, see “USERPATH” on page 121.

PSF attempts to locate referenced TrueType and OpenType fonts in the user path library after it has looked for the printer resident version first and then the specified font inline.

System font path library

A TrueType and OpenType font that is installed in a system font path library can be accessed by PSF. These fonts do not contain any MO:DCA-P structured fields and, therefore, can be used by other print servers on multiple operating systems. PSF uses z/OS UNIX System Services to access the fonts in path libraries specified in the FONTPATH parameter on the PRINTDEV statement of the PSF startup procedure. For more information about specifying the FONTPATH parameter on the PRINTDEV statement, see *PSF for z/OS: Customization*.

PSF attempts to locate referenced TrueType and OpenType fonts in the system font path library after it has looked for the printer resident version, the specified font inline, and in the user path library.

Obtaining and Referencing Fonts

The way you obtain and reference fonts depends on whether they are FOCA fonts or TrueType and OpenType fonts.

FOCA Fonts

FOCA fonts are provided in the optional Compatibility Fonts feature of PSF, the AFP Font Collection, Program Number 5648-B33, and Infoprint® Fonts for z/OS, Program Number 5648-E76, (outline fonts only).

Double-byte 240 dpi raster fonts are available as a feature in the AFP Font Collection. Double-byte outline (scalable) fonts are available in the AFP Font Collection or in Infoprint Fonts for z/OS. These fonts can be used on printers at any resolution, provided that the printer supports font scaling.

For MO:DCA-P data, you reference the fonts in the data stream with a Map Coded Font (MCF) structured field. Fonts used with line data or XML data are referenced in the page definition used to submit the job (see “Fonts” on page 70). Fonts used with traditional line data can also be referenced in the JCL used to submit the job. For information about selecting fonts in JCL, see “CHARS” on page 95.

To reference FOCA fonts in a user library, see “USERLIB” on page 120. To reference extended code pages in a user path library, see “USERPATH” on page 121.

TrueType and OpenType Fonts

A basic set of TrueType and OpenType fonts is provided with WorldType Fonts for AFP Print Servers, which is an optional feature of Infoprint Fonts for Multiplatforms (Program Number 5648-E77). To use TrueType and OpenType fonts with PSF, you need to use a resource installer program, such as the Font Installer for AFP Systems (an optional feature of Infoprint Fonts for Multiplatforms) or the InfoPrint AFP Resource Installer (Program Number 5639-EE2). The resource installer program installs and builds access tables for TrueType and OpenType fonts that contain formal font names, paths, file names, and font attributes. The TrueType and OpenType fonts are mapped from their formal names to a path and file name that PSF can access.

Keep these considerations in mind when you reference TrueType and OpenType fonts:

- For MO:DCA-P data, you reference TrueType and OpenType fonts in the print data set by using a Map Data Resources (MDR) structured field.
- To process complex text, you reference TrueType and OpenType fonts in the print data set. See “Processing Unicode Complex Text” on page 158.
- For line data or XML data, you reference TrueType and OpenType fonts in a page definition that is referenced by the JCL for the application that generates the line data (see “Fonts” on page 70).
- When you reference a TrueType and OpenType font, you can optionally specify a FOCA code page that the printer uses to interpret the print data. Otherwise, you can specify the Unicode encoding of the data.
- When you reference a TrueType and OpenType font, you select the vertical font size, the horizontal scale factor, and the character rotation for the font.

To install TrueType and OpenType fonts in path libraries, see “Using TrueType and OpenType Fonts” on page 157.

Using AFP Fonts

AFP fonts can be mapped, used on printers with different resolutions, used to produce bar codes, used as printer-resident, and captured.

Note: When using fonts for a microfilm device, see Appendix E, “Microfilm Device Considerations.”

Mapping FOCA Fonts

Many outline fonts supplied in the AFP Font Collection and Infoprint Fonts for z/OS have equivalent raster fonts in selected sizes. If you specify outline fonts in your print jobs and are printing on a printer that supports only raster fonts, PSF tries to use equivalent raster fonts. You can use Type Transformer to create raster fonts from Type 1 outline fonts in the sizes you need. You can obtain Type Transformer at no extra charge from the IBM Type Transformer download web page: <http://www-01.ibm.com/support/docview.wss?uid=psd1P4000840>. PSF's user font mapping tables should be updated with information about these fonts.

For more information about using PSF's font mapping tables, see *PSF for z/OS: Customization* or contact your system programmer.

Using FOCA Fonts on Printers with Different Resolutions

Some printers are manually configured to support a single raster resolution at a time, but can be switched between two different raster resolutions. Some printers can accept multiple raster resolutions and metric technology fonts at the same time; this function is sometimes called “automatic” or “auto resolution mode”. Ensure that the host font you want to use is supported by the printer. Some printers support only a single resolution. To determine which resolutions your printer supports, see the documentation provided with the printer.

Your system programmer can define multiple system font libraries (for example, 240-pel , 300-pel , and outline fonts) for switchable and auto mode printers. If the printer accepts only resources at a single resolution, PSF uses the printer's resolution to determine which system library to use. If the printer accepts multiple resolutions, you can use one of these methods to tell PSF which resolution system library to use:

- Your system programmer can specify a format resolution by using the Printer Inventory or the Resource Exit 7.
- Format the MO:DCA-P data by using an application that includes the Font Resolution and Metric Technology triplet on the MCF2 structured field. Two applications that currently support this triplet are Document Composition Facility (DCF) with APAR PQ07945 and Overlay Generation Language (OGL) with APAR PQ07878. See your application user's guide or to *Mixed Object Document Content Architecture Reference* for more information.
- Specify the RESFMT parameter on the OUTPUT statement. RESFMT tells PSF the resolution of the raster fonts that were used to format the data. See “Specifying AFP Parameters in the JCL” on page 92 for more information about the RESFMT parameter.
- Let PSF use the default system font library.

If the format resolution is specified in multiple places, PSF uses the first non-zero value it finds in the methods previously listed.

Using FOCA Fonts to Produce Bar Codes

Just as you can use FOCA fonts to print symbols for alphanumeric characters, you can use them to print symbols for bar codes. There are many different types of bar codes. The type of bar code is defined by its coding arrangement, or *symbology*. Most bar codes are produced with BCOCA; however, IBM supplies an RPQ font product that prints bar codes with the Postnet symbology, 5799-DGX. This product is designed for 240-pel and 300-pel printers that support the downloading of host fonts.

Bar code fonts also can be acquired from IBM in a variety of symbologies and sizes to meet your specific application needs. For information about obtaining bar code fonts, see the AFP licensed font products web page:

http://www-03.ibm.com/systems/z/zos/printsoftware/afpfonts_ww.html

Using Printer-Resident Fonts

You can use printer-resident fonts only if they are supported on a printer. Some AFP printers, such as the network printers, InfoPrint 4000 and the InfoPrint 60, can use either host fonts or printer-resident fonts. Some printers, such as the 64xx, use only resident symbol sets, which are stored in the printer. Some printers, such as the 382x printer, 3835 printer, and 3900-001 printer, only use host fonts that have been downloaded from PSF to the printer. Other printers do not support all the possible print-direction and character-rotation combinations for resident fonts and in some cases the characters in a printer-resident font might not match the characters in the host version of the font. Your system programmer can tell you which printer-resident fonts are available on each applicable printer in your installation. For information about the fonts your printer supports, see the documentation provided with the printer.

If you are using a printer that supports only resident fonts, you are limited to printing with the font set stored on that printer. If you are using a printer that supports both resident and host fonts, you might want to use resident fonts instead of the equivalent host font. PSF can access the resident fonts in the printer instead of downloading them from the host font library, which saves transmission time. Your system programmer can identify or *mark* the host fonts by running the APSRMARK utility.

In order for a printer-resident font to be used, it **must** be the functional equivalent of the *marked* host version of the font. A host font that has been marked as PUBLIC by using the APSRMARK utility is not sent to the printer if a matching printer-resident font is stored in the printer. If a font is marked as PRIVATE, PSF sends that font from the library to the printer even if a matching printer-resident font exists. If a font is not marked PUBLIC or PRIVATE, PSF assumes that the font is PRIVATE.

If you have AFP Font Collection, its fonts are already marked PUBLIC and you need not run APSRMARK to enable the printer-resident fonts. Also, the Font Installer for AFP Systems or the InfoPrint AFP Resource Installer enables TrueType and OpenType fonts for capture so you do not need to run APSRMARK.

If you update a font or create a new version of it by using an AFP utility, such as Type Transformer (see the IBM Type Transformer download web page: <http://www-01.ibm.com/support/docview.wss?uid=psd1P4000840>), the new version will not be marked PUBLIC, and it will be sent to the printer from host or user libraries. If, however, you bypass IBM utilities to directly update the resource object code for a host-resident marked font, without changing the APSRMARK stamp that marks it as PUBLIC, PSF treats it as a PUBLIC font and does not

download it to the printer; instead, PSF uses the earlier, printer-resident version. If you want to use the new version, you can mark the font PRIVATE or else mark it PUBLIC with a new RRDATE and RRTIME. Some printers can capture these modified fonts and make them resident, after they have been correctly marked.

Do not mark a metric-only font character set PRIVATE, and do not mark code pages used with double-byte outline fonts PRIVATE. Because a metric-only font contains no font pattern, it must be marked PUBLIC, and print jobs must use the printer-resident version of the font. For more information about the APSRMARK utility, see *PSF for z/OS: Customization*, or see your system programmer.

Using Captured Fonts

Some printers, such as the InfoPrint 60, InfoPrint 3000, and InfoPrint 4000, can capture downloaded fonts. Captured fonts become temporary printer-resident fonts, which improves performance for future jobs that use the same fonts. Printers can capture both raster fonts and outline fonts. A font that is marked PUBLIC, contains the appropriate date and time stamp, and resides in a system library is eligible for capture. Captured fonts remain resident in the printer provided that there is sufficient storage.

Do not mark sensitive fonts, such as signatures and MICR fonts, eligible to be captured. This is because it is possible that an unauthorized person could access the captured font, even from another system. Improper use of font capturing might cause unpredictable results; therefore, only system administrators should handle the font capture feature. For more information about font capture, see the documentation provided with the printer.

Notes:

1. FOCA fonts are enabled for printer-resident activation or capture by using the APSRMARK utility.
2. TrueType and OpenType fonts are enabled for printer-resident activation or capture by using the Font Installer for AFP Systems or the InfoPrint AFP Resource Installer.

Form Definitions

A *form definition* is the resource that specifies the physical attributes of the printed output. The word *form* refers to a sheet of paper or any other print medium.

You must specify a form definition for each data set you want to print. You can specify a form definition by name, or you can use the default form definition set up by your installation.

A form definition contains printing controls that specify the following options, within the limitations of each printer:

- Page origin, which is the top-left boundary for printing. When the printer is duplexing, page origin can be different for the front and back of the page.
- Sheets on which medium overlays are to be printed.
- Sheets on which a forms flash is to be printed.
- Printing with only overlays or forms flash and no variable data. This is the constant-forms function.
- Number of copies of each page to be printed.
- Paper source (input bin of the printer) for printers with more than one paper source.

- Output bin for printers with more than one output stacker.
- Simplex printing (on one side of a sheet) or duplex printing (on both sides of a sheet).
- Data fields that are to be suppressed (not printed).
- Printed copy groups to be stacked offset from each another.
- Page presentation in either portrait or landscape position.
- Print-quality level for printers that support different levels.
- Horizontal adjustment in pels.
- N_UP printing of multiple logical pages on a sheet. These pages can be MO:DCA-P pages (fully composed pages containing data and the structured fields that control how the data is presented), line data, or XML data.
- Type of font fidelity. You can ensure the font used to format the data and the font used to print the data have the same resolution.
- Type of finishing; for example, corner stapling.

A form definition is required for every print job that you send to an AFP printer. PSF needs the form definition to position the logical page on the physical form. The form definition specifies the origin of the logical page as an offset from the origin of the physical form, or medium. The logical page is an area defined by the page definition for line data and XML data, or by structured fields for MO:DCA-P data.

For more information about medium origin and logical page origin, see “Page Position” on page 55.

Note: When creating form definitions for a microfilm device, see Appendix E, “Microfilm Device Considerations.”

Using Form Definitions

IBM requires a prefix of **F1** for form definitions.

- For more information about the function of a form definition in printing, see “Form Definitions” on page 54.
- For information about using a form definition, see “Specifying a Form Definition” on page 126.

Object Containers

An *object container* is a MO:DCA structure that carries object data, which might or might not be defined by a presentation architecture. The required container structure depends on where the object is stored, how it is included in the data set, or both. If the object is stored in a resource library, the object can be included in its unaltered, original form; otherwise, the object must be wrapped with the appropriate MO:DCA container structured fields.

Object container resources are stored in object container libraries in one of these:

- Partitioned data sets (PDS or PDSE)
 - PSF accesses object container resources in PDS or PDSE libraries specified in the OBJCOND parameter on the PRINTDEV statement of the PSF startup procedure or the USERLIB parameter on the OUTPUT JCL statement. For more information, see “USERLIB” on page 120.
- UNIX files (HFS or zFS files)

PSF uses z/OS UNIX System Services to access data object resources in path libraries specified in the OBJCPATH parameter on the PRINTDEV statement of the PSF startup procedure or the USERPATH parameter on the OUTPUT JCL statement. For more information, see “USERPATH” on page 121.

For more information about specifying the parameters on the PRINTDEV statement, see *PSF for z/OS: Customization*. For information about the order that PSF uses to search for object container resources, see “Searching for Resources Specified by a Print Job” on page 14.

Object Containers as Data Object Resources

Object container and image (IOCA) resources that PSF supports as hard or soft resources are called data object resources. These are some of the object container resources that PSF supports as data object resources:

- Color management
- Encapsulated PostScript (EPS)
- IOCA tile
- PDF resource
- PDF single-page
- PDF multiple-page
- Resident color profile
- Other object containers, such as GIF, PCL, PCX, PNG, and TIFF, including TIFF multiple-image

See *Mixed Object Document Content Architecture Reference* for a complete list of data object resources. See Appendix F, “Color and grayscale printing,” on page 243 for information about data objects used in color printing.

Hard data object resources are identified in the print data set by using the Map Data Resource (MDR) structured field and must be in a PSF system object container library, in a user library specified by the USERLIB or USERPATH parameter, or coded inline as part of the print data set. A soft data object resource is included by a page definition or by an IOB structured field in the input data set.

Notes:

1. If an object container resource is inline as part of the print data set, the resource must be wrapped with MO:DCA structured fields.
2. If an object container resource is placed in a system or user library the resource might or might not be wrapped in MO:DCA structured fields:
 - For an object container resource wrapped in MO:DCA structured fields, the library is defined with carriage controls.
 - For an object container resource not contained in an object container, the library is defined without carriage controls. The library can be concatenated with libraries that do have carriage controls.

See Table 3 on page 16 for the prefixes that IBM recommends for naming some data object resources.

Common Object Containers Supported by PSF

PSF supports all object containers that are supported by the printer. These are some of the common object containers that PSF can send to the printer:

- Color management resources

- Color mapping table resources
- Encapsulated PostScript resources
- IOCA tile resource objects
- Microfilm setup resources
- Multiple-image and multiple-page resources
- PDF single-page object resources
- PDF resource objects
- Resident color profile resource objects

For a complete list of object container types that might be supported by PSF and the printer, see registered object-type OIDs in the MO:DCA registry in *Mixed Object Document Content Architecture Reference*.

Color Management Resource (CMR)

A color management resource is an object that provides color management in presentation environments.

Because CMR objects do not reside in partitioned data sets, a prefix is not needed for the name. For more information, see Appendix F, “Color and grayscale printing,” on page 243 or see *Color Management Object Content Architecture Reference*.

For print jobs that use CMRs, IBM recommends you use outline fonts or TrueType and OpenType fonts. See “Obtaining and Referencing Fonts” on page 23.

Color Mapping Table (CMT) Resource

For some printers, such as the InfoPrint Color 100 and the InfoPrint Color 130 Plus, you can use a color mapping table (CMT) to map non-color fields to color; old color fields to new color fields; and new color fields to different new color fields. Thus, with a CMT, you can specify new color fields in existing applications and documents without changing the documents or applications. You can also use various color mappings with a single document to print the document, specifying color in a variety of ways without changing the original document. CMT resources are stored in the object container library. IBM recommends a prefix of **M1** for color mapping tables.

For more information, see the COLORMAP parameter on page 98 and Chapter 8, “Using Color Mapping Tables.”

Encapsulated PostScript (EPS) Resource

An EPS resource, which can contain any combination of text, graphics, and images, can be included along with MO:DCA-P data and printed on an IPDS printer that supports this object.

An EPS resource can be a soft or hard resource and is stored in the object container library. If the EPS resource is identified in the print data set by using a Map Data Resource (MDR) structured field, it is considered a hard resource. If the EPS resource is not identified by using the MDR structured field, but is just included through an Include Object (IOB) structured field, it is considered a soft resource.

EPS data does not have to be wrapped in MO:DCA-P structured fields when it is stored as a resource. If EPS data is to be embedded in the data stream, it must be wrapped in MO:DCA-P structured fields.

Because an EPS resource is a type of object container resource, and PSF does not enforce a prefix for the 8-character name of an object container resource, your site

should define a naming convention to avoid conflicts with other object container resources. IBM recommends a prefix of **E1** for EPS objects. For more information, see “Object Containers as Data Object Resources” on page 28.

IOCA Tile Resource Object

This is an IOCA FS45 tile resource. An IOCA tile resource object must be identified in the print data set by using an MDR structured field. An IOCA tile resource object does not have to be wrapped in MO:DCA-P structured fields when it is stored as a resource. If this object is to be embedded in the data stream, it must be wrapped in MO:DCA-P structured fields.

Because an IOCA tile resource object is a type of object container resource, and PSF does not enforce a prefix for the 8-character name of object container resources, your site should define a naming convention to avoid conflicts with other object container resources. IBM recommends a prefix of **IT** for IOCA tile resource objects. For more information, see *Image Object Content Architecture Reference*.

Microfilm Setup Resource

To print to a microfilm device, you need to specify a microfilm setup resource for your document. The microfilm setup resource is similar in concept to a form definition. The structure of the object container data field in the microfilm setup resource is defined by the manufacturer of the microfilm device. You can use microfilm setup resources to specify the processing commands for various microfilm device functions, such as titles, format, and extraction masks. Microfilm setup resources are stored in the object container library.

For information about how to use the utility that generates and packages the data in the microfilm setup resource, see *PSF for z/OS: Customization*. The utility, provided with the microfilm device, places the setup resource information in an AFP object container, which is associated with the AFP print job by using JCL keywords. The resulting microfilm resource object container can be placed in a system library, in a user library, or inline in the data stream. PSF sends the object container setup resource with your data set to the microfilm device. If you do not specify a microfilm setup resource for your document, PSF uses the host default microfilm setup resource that your system programmer created, and your output might not appear as you expected.

For more information about the microfilm setup resource, see the publications provided with the microfilm device.

Because a microfilm setup resource is one type of object container resource, and PSF does not enforce a prefix for the 8-character name of the microfilm setup resource, your site should define a naming convention to avoid conflicts with other object container resources. IBM recommends a prefix of **H1** for microfilm setup resources.

For more information about sending print jobs to a microfilm device, see Appendix E, “Microfilm Device Considerations.”

Multiple-Image and Multiple-Page Resources

PDF multiple-page object resources, which can contain any combination of text, graphics, and images with PDF operators, and TIFF multiple-image object resources can be included along with MO:DCA-P data and printed on an IPDS printer that supports the objects. PDF multiple-page and TIFF multiple-image object resources can be transferred to the printer as one AFP object container,

which optimizes file size, reduces processing time, and lets you individually reference and print one or more pages or images.

PDF multiple-page and TIFF multiple-image object resources can be stored inline with the print data, in a user library, or in the system object container library. When a multiple-page or multiple-image object is stored as a resource, it does not have to be wrapped in MO:DCA-P structured fields, but the page or image you want to reference must be included with an Include Object (IOB) structured field and the offset of the page or image must be specified. If the object offset is not specified, the first page or image within the object container is selected. When the object container is embedded in the data stream, it must be wrapped in MO:DCA-P structured fields.

PDF Single-Page Object Resource

A PDF single-page object resource, which can contain any combination of text, graphics, and images with PDF operators, can be included along with MO:DCA-P data and printed on an IPDS printer that supports this object. A PDF single-page object resource can be a soft or hard resource that is stored inline with the print data, in a user library, or in the system object container library.

If the PDF single-page object resource is identified in the print data set by using an MDR structured field, it is considered a hard resource. If the PDF single-page object resource is not identified by using the MDR structured field, but is just included through an Include Object (IOB) structured field, it is considered a soft resource.

A PDF single-page object does not have to be wrapped in MO:DCA-P structured fields when it is stored as a resource. If this object is to be embedded in the data stream, it must be wrapped in MO:DCA-P structured fields.

Because a PDF single-page object resource is a type of object container resource, and PSF does not enforce a prefix for the 8-character name of an object container resource, your site should define a naming convention to avoid conflicts with other object container resources. IBM recommends a prefix of **PP** for PDF single-page object resources. For more information, see “Object Containers as Data Object Resources” on page 28.

PDF Resource Object

This is a resource object that can be referenced by a PDF single-page or multiple-page object. Examples of PDF resource objects are fonts, font descriptors, and raster images. PDF resource objects must be identified in the print data set by using an MDR structured field.

A PDF resource object does not have to be wrapped in MO:DCA-P structured fields when it is stored as a resource. If this object is to be embedded in the data stream, it must be wrapped in MO:DCA-P structured fields.

Because a PDF resource object is a type of object container resource, and PSF does not enforce a prefix for the 8-character name of object container resources, your site should define a naming convention to avoid conflicts with other object container resources. IBM recommends a prefix of **PR** for PDF resource objects.

Resident Color Profile Resource Object

This is a device-resident resource object that defines how device-dependent colors in a data object are related to device-independent colors. For example, many data object resources contain colors specified in the CMYK color space but tuned to one

of a number of offset press standards that are geography-based. Some examples of resident color profiles are CMYK SWOP (US) and CMYK Euroscale (Europe). A resident color profile resource object defines how to render the colors in the data object resource that references it.

See the printer documentation to determine whether the printer has resident color profile resource objects and which ones are available.

Overlays

An *overlay* is a collection of predefined data that can be printed on a page by itself or merged with other data on a page as the page is printed.

Because an overlay can be printed on a page at the same time as the print data set is printed, overlays can be used as electronic forms to replace preprinted forms. The overlay on the sample page, shown in Figure 11, contains the information printed on the bottom of every letter. The print data set contains data that fills out the overlay.

DONOTWRITEINAREBELOW

Academy Mountain Press

Doe Jane A.
Last Name First Name MI

Registration
Out-of-State
Other

Social Security Number

Received by

Total

Keep this copy
NOT VALID as ID
NOTICE

Figure 11. Overlay on the Sample Page

An overlay can contain many different elements. Some of these elements are:

- Bar codes
- Boxes with and without shading
- Fonts, including fonts not used in the print data set
- Graphics and images
- Grids, arcs, and polygons
- Object containers
- Page segments
- Rules with different weights and thicknesses
- Text printed in different inline directions and character rotations
- Vertical, horizontal, and diagonal rules

An overlay cannot include another overlay, although multiple overlays can be printed on the same page.

PSF supports *medium overlays* and *page overlays*. Medium and page overlays have an identical object structure; the same overlay can be used as a page overlay or as a medium overlay. However, there is a difference in how to include the overlay on a page and in how PSF positions the overlay on the page. Therefore, when you create an overlay, its specified size and position might need to be different based on how you are using it.

You can create both medium and page overlays by using an IBM product such as Overlay Generation Language (OGL)/370 or by using any of a variety of programs from IBM Business Partners. Many of these have easy-to-use PC-based layout editors that let you see the overlay as you create it. For more information about coding overlays, see *Overlay Generation Language User's Guide and Reference*.

Note: When using overlays on a microfilm device, see Appendix E, “Microfilm Device Considerations.”

Medium Overlays

PSF positions a medium overlay at the media origin. The medium origin is constant throughout a document, but is printer-dependant.⁴ Thus, a medium overlay is positioned at the same place on each page on which it is printed. You can print medium overlay data in different locations on different pages in these ways:

- Create different versions of a medium overlay.
- Use different medium maps to position the same medium overlay in different positions.

Figure 12 shows the positioning of a medium overlay.

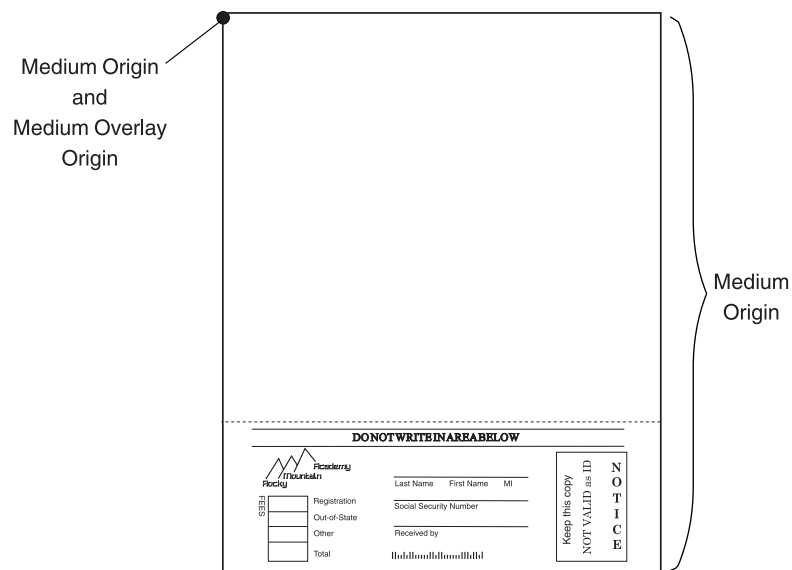


Figure 12. Positioning of a Medium Overlay. The overlay is positioned at the medium origin.

As Figure 12 shows, the size of a medium overlay is generally the same as the page size. In this example, the positioning information in the overlay causes PSF to print the data in the overlay at the bottom of the page. You can control the size of a medium overlay; for example, the OGL OFFSET parameter increases the total size of the compiled overlay resource and offsets the overlay data within the expanded overlay boundaries.

Page Overlays

PSF can position a page overlay, like a page segment, at various locations on different pages. The position of a page overlay can be defined in the print data set relative to the logical page origin of each page on which the page overlay is to be printed. The logical page origin is defined in the form definition, or with the OFFSETXF and OFFSETYF, or the OFFSETXB and OFFSETYB keywords on the OUTPUT JCL statement.

4. For information about the medium origin for your printer, see the documentation provided with the printer.

For added flexibility in positioning a page overlay on a page, you can specify in the print data set that the page overlay is to be printed at the current print position on the page. Figure 13 shows the positioning of a page overlay at specified horizontal (x -direction) and vertical (y -direction) distances from the logical page origin.

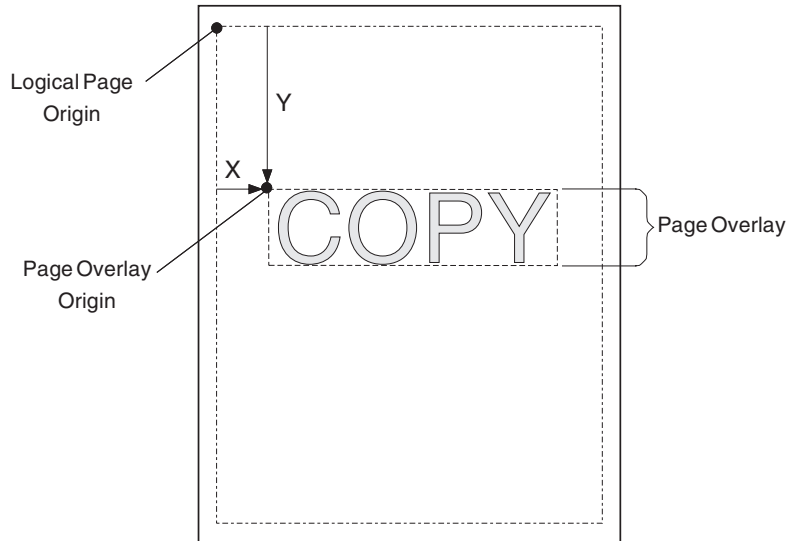


Figure 13. Positioning of a Page Overlay. The overlay is positioned relative to the logical page origin.

The size of a page overlay can be the same as the page size; or, as Figure 13 shows, the size of a page overlay can be limited to the size of the overlay data. If you limit the size of the overlay to the size of the overlay data, you can position the overlay more easily in different locations on different pages.⁵

Note: Not all AFP printers support page overlays. If the printer does not support page overlays, PSF issues an error message and prints the page without the overlay.

Using Overlays

You can use medium overlays, page overlays, or both. The choice depends in part on the application. To print the same overlay in different positions on a page, you must use a page overlay. To print the same overlay in the same position on each page of a print data set, you can use either a medium overlay or a page overlay; for this kind of application, however, specifying a medium overlay might be easier. The two kinds of overlays are specified by different procedures. IBM recommends a prefix of **O1** for all overlays.

- **Medium Overlays:**

To include a medium overlay on all sheets of a data set, you can specify the overlay name on the **OVERLAYF** or **OVERLAYB** keywords of the **OUTPUT JCL** statement. Or you can use the form definition to include a medium overlay on some or all sheets of a print data set. You do not need to modify the print data set in order to print a medium overlay on every sheet.

If you want to print a medium overlay without merging it with data from the print data set, use a utility such as IBM Page Printer Formatting Aid (PPFA) to

5. To do this by using **UGL**, use overlay **OFFSET** value of zero.

specify the constant-forms function in the form definition. For example, in PPFPA, use the CONSTANT subcommand. When the constant-forms function is specified, PSF prints the medium overlay on a page by itself. Thus you can, for example, print an overlay on the back side of each page in a print data set with no variable data on that side.

When you use a medium overlay, you can specify different overlays for different copies of a page. For example, you can print one copy of a page with an overlay, the second copy of the page with a different overlay, and the third copy with no overlay.

The number of medium overlays that you can use on a page depends on the complexity of the overlays, the amount of storage required for fonts and page segments in the overlays, and the amount of storage required for the page. You can specify a maximum of eight medium overlays in a subgroup.

- **Page Overlays:**

You can include a page overlay in line data or XML data by creating a page definition that calls in the overlay to print, relative to a print line (in traditional line data), a layout (in record format line data), or an xlayout (in XML data). For line data, you also can code an Include Page Overlay (IPO) structured field in the application to include the overlay on a particular page and to identify the print position of the overlay on that page. You must list the overlay name in the page definition used for printing the line data before you can call it by using an IPO structured field. You can use a utility such as PPFPA to create a page definition that includes a page overlay or lists the overlay for inclusion by an IPO structured field. See “AFP Structured Fields Included in Line Data” on page 79 for more information about using structured fields.

To include a page overlay in a MO:DCA-P document, use the facilities provided by a document layout program, or specify the IPO structured field in the document. In order to use an IPO structured field, you must also list the overlay in a Map Page Overlay (MPO) structured field on the same page.

The number of page overlays that you can use on a single page depends on the complexity of the overlays, the amount of storage required for fonts and page segments in the overlay, and the amount of storage required for the page.

Merging Data with an Overlay

PSF lets you use an application to merge data with an electronic form, or *overlay*. An overlay contains constant information and can also contain blanks that can be filled in by the application. The print data set created by the application contains the variable data that is printed on the electronic form. PSF can print both the variable data and the form on a single sheet, eliminating the need to print forms before printing the variable data. PSF can also print an overlay on a blank page containing no variable data. Figure 14 shows an electronic form that was used on the sample page. The application program supplied the name *Jane A. Doe*.

DONOTWRITEINAREABELOW

	Registration	Doe	Jane	A.
	Out-of-State	Last Name First Name MI		
	Other	Social Security Number		
	Total	Received By		

Keep this copy
 NOT VALID as ID
 N
O
T
I
C
E

Figure 14. Electronic Form (Overlay) on the Sample Page

Using Overlays on Printers with Different Resolutions

PSF supports multiple system overlay libraries, as follows:

- 240–pel library
- 300–pel library
- Default library

The respective system libraries would contain overlays designed to print at 240–pel resolution, 300–pel resolution, or at any resolution. If you know that your overlay prints best at a certain resolution, then you should store the overlay in the system library designed for it and specify this resolution to PSF.

You can use any of several methods to specify the format resolution:

- Your system programmer can specify a format resolution by using the Printer Inventory or the Resource Exit 7.
- Specify the RESFMT keyword on the OUTPUT statement. RESFMT indicates the resolution in which the overlays were formatted. See “Specifying AFP Parameters in the JCL” on page 92 for more information.
- Let PSF use the default system overlay library.

Testing Overlays

To make the testing of overlays easier, PSF allows you to submit an overlay as print data. To do this, specify the overlay name as the data set name in the job submission JCL. The overlay is treated as a page. Only one overlay at a time can be printed in this manner.

Medium Overlays and Page Overlays on the Same Page

PSF can print medium overlays and page overlays on the same page. Figure 15 shows the sample page with the medium overlay from Figure 12 on page 33 and the page overlay from Figure 13 on page 34 printed along with the variable data from the print data set.

The figure shows a sample page with the following content:

Rocky Mountain Academy
1234 Rocky Road
Boulder, Colorado 80301

February 25, 2003

Ms. Jane A. Doe
25 Park Avenue
White Rock, NY 10601

Dear Ms. Doe

Thank you for your interest in Rocky Mountain Academy. The admission application you requested is enclosed.

Sincerely,
John R. Smith
John R. Smith
Director of Admissions

JRS/els
Enclosure

DONOTWRITEINAREABELOW

HERE	Registration	_____
	Out-of-State	_____
	Other	_____
	Received by	_____
	Total	

Rocky Mountain Academy
Doe Jane A.
Last Name First Name MI
Social Security Number
Keep this copy
NOT VALID as ID
N
O
T
I
C
E

Figure 15. Medium Overlays and Page Overlays on the Same Page

Page Overlay Rotation in Page Definitions and Form Definitions

In PPFA, an orientation parameter has been added to the PRINTLINE and LAYOUT parameters for page definitions and form definitions. You can create page definitions and form definitions that specify overlay orientation by using the OVROTATE keyword added to PPFA with APAR PQ17714.

If you are writing your own MO:DCA-P objects, see the extension to the Resource Object Include (X'6C') triplet of the Page Modification Control (PMC) structured field in *Mixed Object Document Content Architecture Reference*, or the LND structured field in the *Advanced Function Presentation: Programming Guide and Line Data Reference*. You can use the PMC structured field or the LND structured field to specify the Resource Object Include triplet orientation parameter. This parameter allows you to rotate page overlays.

If the printer does not support page overlay rotation, PSF ignores the Resource Object Include triplet parameter. PSF also ignores the Resource Object Include triplet orientation parameter if the triplet does not include an overlay. PSF does not generate messages for either of these conditions.

Page Definitions

A *page definition* is the resource that specifies how PSF formats line data or XML data into pages. PSF does not use a page definition for MO:DCA-P data, because that data is composed into pages before PSF receives it. The page definition replaces the forms control buffer (FCB) used by line printers.

You can specify a page definition by name, or you can use the default defined by your installation.

A page definition contains formatting information specifying these :

- Page size (height and width)
- Print direction for the page of data
- Number of lines per inch
- Fonts to be used for printing the data
- Where data from each input record is to be printed
- Constant data to be printed
- Data fields that can be suppressed
- Data fields to be printed as a bar code
- Print position for carriage control characters or channel codes
- List of page segments used by this job
- List of page overlays used by this job
- List of object containers used by this job
- Conditional processing to change page formats, based on the data
- Color selection (for printers that support printing in multiple colors)
- Include and position page segments or overlays
- Rotation of included page overlays

Using Page Definitions

IBM requires a prefix of **P1** for page definitions.

- For more information about the function of a page definition in printing, see “Page Definitions” on page 66.
- For information about using a page definition, see “Specifying a Page Definition” on page 135.

- When sending constant data to a microfilm device, see Appendix E, “Microfilm Device Considerations.”

Page Segments

A *page segment* is an object that can be merged with the variable data on a page being printed. It typically contains image data such as bar codes, signatures, logos, or graphics converted into image format. You can include a page segment in a print data set or in an overlay resource.

Page segments can contain character data formatted as MO:DCA-P data; however, limitations exist when you use page segments that contain text, and no IBM products create page segments that contain text.

You can create page segments by using any PC program in combination with the AFP WorkBench for Windows, or with the AFP Printer Driver for Windows. The AFP Printer Driver converts the PC application page into an AFP page segment, which can then be uploaded to z/OS.

The page segments on the sample page are shown in Figure 16.

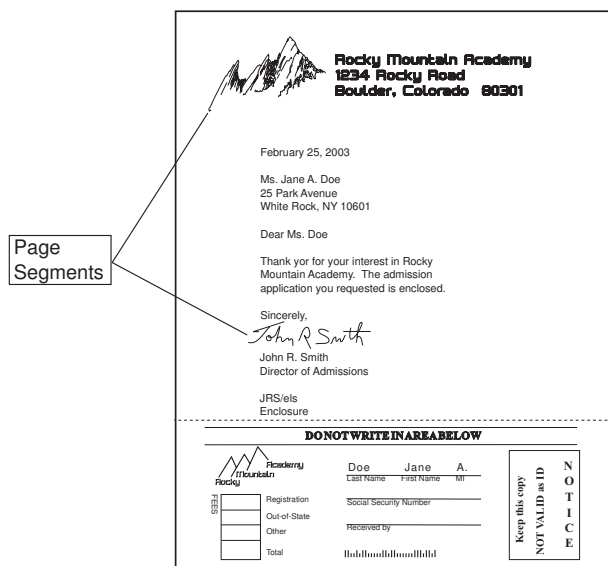


Figure 16. Page Segments on the Sample Page

PSF can position a page segment at any location on a page. The position of a page segment is defined relative to the logical page origin, to the origin of an overlay, or to the page content that precedes it. (The logical page origin is defined in the form definition, or with the OFFSETXF and OFFSETYF keywords, or the OFFSETXB and OFFSETYB keywords on the OUTPUT statement.) For added flexibility in positioning a page segment, you can specify that PSF print the page segment at the current print position on the page.

Note: When using page segments on a microfilm device, see Appendix E, “Microfilm Device Considerations.”

Using Page Segments

You can include a page segment in an overlay by using commands in a utility such as OGL. For line data and XML data, you can create a page definition to include a

page segment positioned relative to a print line (in traditional line data), layout (in record format line data), or xlayout (in XML data). You can also include page segments in line data and in MO:DCA-P data by using MO:DCA-P structured fields. An Include Page Segment (IPS) structured field specifies the name and page position for a page segment. An Include Object (IOB) structured field can also specify size, rotation, and color for a page segment. IBM recommends a prefix of **S1** for page segments.

To include a page segment in a print data set or in an overlay, you can use commands in an AFP resource utility (such as PPFPA) or in a document layout application, to specify the name of the page segment and where to place it on the page.

Page segments included with an IOB structured field must be MO:DCA-P page segments. MO:DCA-P page segments consist of image (IOCA), graphic (GOCA), or bar code (BCOCA) object data. For more information about writing MO:DCA-P structured fields, see “AFP Structured Fields Included in Line Data” on page 79.

When printing a page segment on more than one page of a print data set, you can improve performance by requesting that PSF retain the page segment in the printer while the file is printing. Page segments that are retained in printer storage are called *hard* page segments. To request that PSF retain the page segment in printer storage do this:

- For line data, specify the page segment in the page definition.
- For page data, identify the page segment as a *hard* page segment in a Map Page Segment (MPS) structured field in the print data set.

If a page segment is included in an overlay, PSF retains the page segment in printer storage provided that the overlay is retained.

Page segments included through an IOB structured field are always *soft* page segments, because the information in the object environment group must be changed for the override values specified in the IOB.

You can also include page segments in a print data set by coding structured fields in the print data set. *Advanced Function Presentation: Programming Guide and Line Data Reference* describes how to code the structured fields used to include page segments on a page.⁶ For an example of how to use these structured fields, see “Printing Page Segments” on page 146.

With IBM printer microcode for extended page segments, the maximum number of page segments is extended to a total of 32511 page segments per sheet. Extended page segments are not supported when the printer is connected with DPF or RPM3.

Using Multiple System Page Segment Libraries

PSF can support multiple system page segment libraries. The system libraries can contain page segments designed to print at 240–pel resolution, 300–pel resolution, or at any resolution. If you know that your page segment prints best at a certain resolution, then you should store the page segment in the system library designed for it and specify this resolution to PSF when you submit a print job.

6. The Include Page Segment structured field is used to include a page segment on a particular page of a print data set or in an overlay. The Map Page Segment structured field is used in a page definition or a page print data set to name the page segment for resource management.

You can use any of several methods to specify the image resolution:

- Your system programmer can specify a format resolution by using the Printer Inventory or the Resource Exit 7.
- Specify the RESFMT keyword on the OUTPUT statement. RESFMT indicates the resolution in which the page segments were formatted. See “RESFMT” on page 116 for more information.
- Let PSF use the default system page segment library, which can contain segments at 240 or 300 ppi, or at both resolutions.

Testing Page Segments

To make the testing of page segments easier, PSF allows you to submit a page segment as print data. To do this, specify the page segment name as the data set name in the job submission JCL. The page segment is treated as a page. Only one page segment at a time can be printed in this manner.

Note: Printing page segments that have text (PTOCA) included will have unpredictable results. The page segment does not contain enough information about the font. Therefore, you might get message APS818I posted and your text might be printed with an incorrect font.

For more information about page segments, see *Mixed Object Document Content Architecture Reference*.

Bar Codes

A bar code resource (or BCOCA resource) is a Bar Code Object Content Architecture (BCOCA) object stored as a resource in the page segment library. Bar codes are soft resources.

Bar codes represent characters by sets of parallel bars of differing thickness and separation, multiple rows of parallel bars, or a matrix of data cells that is typically composed of squares or circles. These codes can represent, for example, product numbers, part numbers, and manual numbers. Bar codes can be read optically by transverse scanning. Figure 17 on page 41 shows the bar code printed on the sample page.

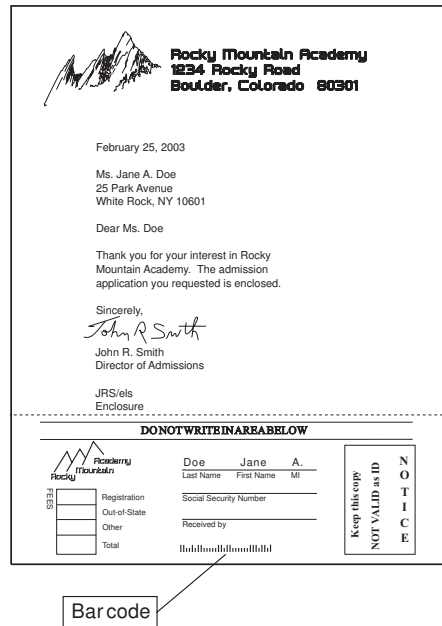


Figure 17. Bar Codes on the Sample Page

Many different kinds of bar code coding arrangements, or *sybologies*, have been developed for specific applications. PSF supports both linear sybologies and two-dimensional sybologies. Some of these codes are:

- 2 of 5 Codes: Industrial, Interleaved, Matrix
- Codabar
- Code 39 (Code 3 of 9)
- Code 93
- Data Matrix and MaxiCode
- EAN 8 and EAN 13
- MSI/Plessey
- PDF417
- Postnet
- QR Code
- UPC A and UPC E

Note: To see if a printer supports bar code encodings, such as Data Matrix, GS1 DataBar, Royal Mail RED TAG, and USPS Intelligent Mail Container, use the display printer information function in PSF. See *PSF for z/OS: Diagnosis* for more information.

A bar code can be created several different ways, but if it is created by using a set of MO:DCA-P structured fields called a BCOCA object, the object can then be stored as a resource for easier use.

Using BCOCA to Produce Bar Code Resources

By using a set of structured fields called a bar code data object or BCOCA object, you can direct some PSF-supported printers to produce bar codes. A bar code data object specifies the type of bar code (the sybology), its size, and positioning information. Many different bar code sybologies can be produced by use of bar code data objects.

A bar code data object can be included in a print data set or in an overlay resource, or it can be created from bar code specifications in a page definition. PSF accesses resources and sends them to the printer with the print data set.

When you create a bar code data object, you have these options:

- One of several bar code types (symbolologies) can be selected.
- The bar code elements can be of any height and width, within the limitations of the symbology.
- The bar code can be printed in one of several colors (on printers that support printing in more than one color). However, you cannot specify color when you are specifying bar codes in a page definition.
- The bar code can be placed at any position on the page.
- The bar code can be rotated.

If the bar code is stored as a resource, you can change some of these properties at print time. For more information about coding bar code data objects and about the options you can specify, see *Mixed Object Document Content Architecture Reference* or *Bar Code Object Content Architecture Reference*. For information about coding bar code specifications in page definitions, see *Page Printer Formatting Aid: User's Guide*.

Producing Bar Codes without BCOCA

If your printer does not support BCOCA, you can print bar codes by using a program that produces non-BCOCA bar codes, such as the IBM Document Composition Facility (DCF) program. DCF uses the MO:DCA-P Presentation Text Data (PTX) structured field. This structured field contains codes that instruct the printer to draw horizontal or vertical rules of different lengths and thicknesses. These bar codes cannot be stored as resources. For more information about using DCF to produce bar codes, see *Document Composition Facility Bar Code User's Guide*.

You can also use fonts to produce non-BCOCA bar codes. These bar codes are stored as text. For more information about using fonts to produce bar codes, see to "Using FOCA Fonts to Produce Bar Codes" on page 25.

Using Bar Code Resources

Bar code resources are stored in the page segment library, included through an Include Object (IOB) structured field and are embedded in the data stream at print time. Because bar code resources are stored in the page segment library, IBM recommends a prefix of **B1** for bar code resources. This lets you find all the bar code resources easily. Each time you use a bar code resource, you can define different properties, such as size and rotation.

Printing Bar Codes

Not all printers support BCOCA. If your printer does not support BCOCA, you can still print bar codes by producing them with a program that does not give BCOCA output, or by using fonts.

Printers that support bar codes support different bar code symbolologies and symbology parameters. Your printer can use default values for unsupported parameters; therefore, you should verify that the bar codes printed by your printer are suitable for your purposes. Bar codes generated on printers with different resolutions can differ in length because of the resolution correction needed to round the bar code widths to a specific pel size. Each printer can use a different algorithm for this calculation; therefore, you need to test on each type of printer to be used to print bar codes.

For information about the bar code support that your printer provides, see the documentation provided with the printer.

Graphics

A graphic resource (or GOCA resource) is a Graphics Object Content Architecture (GOCA) object stored as a resource in the page segment library. Graphic resources are soft resources.

Graphic data contains commands to draw lines, arcs, and circles and can be used to represent something as complex as a three-dimensional engineering drawing. It is created by a program and stored in a set of MO:DCA-P structured fields called a GOCA object. This object can then be stored as a resource for easier use.

Along with drawing commands, a graphics object can contain image and character data. Whenever image data is included in a graphics object, you should code the Image Resolution field in the Graphics Data Descriptor (GDD) to provide image resolution information to the printer, which lets the printer print the image at the correct size. When character data is included in a graphic, all fonts used must be mapped in the print data set or overlay or page segment that includes the graphic data object.

Figure 18 shows the graphic data printed on the sample page.

Graphic

Rocky Mountain Academy
1234 Rocky Road
Boulder, Colorado 80301

February 25, 2003

Ms. Jane A. Doe
25 Park Avenue
White Rock, NY 10601

Dear Ms. Doe

Thank you for your interest in Rocky Mountain Academy. The admission application you requested is enclosed.

Sincerely,
John R. Smith
John R. Smith
Director of Admissions

JRS/als
Enclosure

DONOTWRITEINRABELOW

	Doe	Jane	A.
	Last Name	First Name	MI
	Registration		
	Out-of-State		
	Other		
	Social Security Number		
	Received by		
	Total		

Keep this copy
NOT VALID as ID
NOTICE

Figure 18. Graphic on the Sample Page

Using Graphics

Graphic resources are stored in the page segment library, included through an Include Object (IOB) structured field and are embedded in the data stream at print time. Because they are stored in the page segment library, IBM recommends a prefix of **G1** for graphics. This allows you to easily find all the graphic resources.

A graphic resource can be included in a print data set, in an overlay resource, in a page segment resource, or saved and used as a resource. For information about the data format for AFP graphics, see *Graphics Object Content Architecture for Advanced Function Presentation Reference*.

Note: When using graphics on a microfilm device, see Appendix E, “Microfilm Device Considerations.”

Printing Graphic Data

Each time you reference a graphic resource, it can be manipulated in these ways:

- Placed in any position on the page.
- Scaled to any size; that is, enlarged or reduced, by the printer.
- Rotated by the printer.
- Clipped so that only part of the graphic is printed.

For more information about how to code graphics resources and what options can be specified, see *Mixed Object Document Content Architecture Reference*.

Because graphic data is stored in vector representation, it is always resolution-independent. That is, graphic data can be printed at the same size on any printer that supports graphic data objects, regardless of the resolution of the printer.

Most printers, such as the InfoPrint 70, InfoPrint 2000, and InfoPrint 4100, support graphics. To determine whether your printer does, see the documentation provided with the printer.

Image Resources

An image resource⁷ is an IOCA object, which is also called a data object resource. If the IOCA resource is to be stored in a system library, you can store it in either the page segment library or the object container library, depending on whether the IOCA resource is a hard or soft resource. If the IOCA resource is identified in the print data set by using a Map Data Resource (MDR) structured field, it is considered a hard resource and must be stored in the object container library. If the IOCA resource is not identified by using the MDR structured field, but is just included through an IOB structured field, it is considered a soft resource. As a soft resource it can be stored in either the page segment library or the object container library. IBM recommends that all new IOCA resource objects be stored in the object container library.

Image resources contain a series of picture elements (pels) arranged in rows and columns. Image objects also specify where the image is placed on the page. Figure 19 on page 45 shows the images printed on the sample page.

7. An image resource is also called an IO image object, a raster pattern, or an IOCA resource.

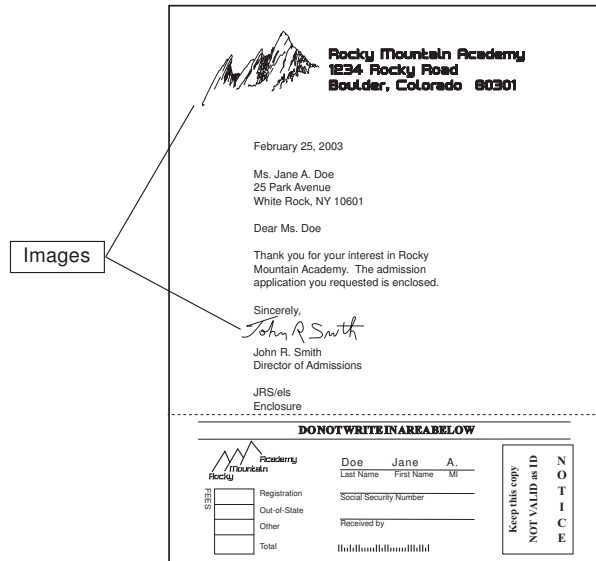


Figure 19. Images on the Sample Page

Image resources are created by a scanning device or a program and stored in a set of MO:DCA-P structured fields called an IOCA object. The object can then be stored as a resource for easier use.

Using Image Resources

Soft image resources can be stored in the page segment library or object container library, can be included through an Include Object (IOB) structured field, and are embedded in the data stream at print time. PSF looks for a soft image resource in this order:

1. Inline in the print data
2. In a user library
3. In the system page segment library
4. In the system object container resource library

If you use the image resource in more than a single page of the document or in multiple documents, it might be better to use the MDR structured field to identify the image resource as a hard resource in the print data set. This allows PSF to download the image resource once and use it repeatedly in the print data set. If the image resource is being used as a hard resource, it must be stored in the object container library. PSF looks for a hard image resource object in this order:

1. Inline in the print data set
2. In a user library
3. In the system object container library

For the complete order that PSF uses to search for image resources, see “Searching for Resources Specified by a Print Job” on page 14.

Because an image resource is one type of resource in a library of multiple resource types, and PSF does not enforce a prefix for the 8-character name of the image resource, your site should define a naming convention to avoid conflicts with other resources. IBM recommends a prefix of **I1** for image resources.

The image resource can be included in a print data set, in an overlay resource, in a page segment resource, or stored and used as a resource. An image resource can be manipulated in these ways:

- It can be placed in any position on the page.
- It can be stored and transmitted to the printer in compressed form, saving storage and transmission time.
- It can be resolution-independent, so that an image created with one resolution (pel density) can be printed at the same size on a printer with a different resolution.
- It can be scaled to any size (enlarged or reduced) by the printer.
- It can be rotated by the printer.
- It can be clipped so that only part of it is printed.

For more information about coding IOCA image data objects and the options you can specify, see *Mixed Object Document Content Architecture Reference* or to *Image Object Content Architecture Reference*.

PSF provides a MO:DCA-P document called IOCAMMR. IOCAMMR contains an IOCA image that has been compressed by the IBM MMR compression algorithm. You can print this image on any IPDS printer that supports IOCA. You can also use this document as a test file or print it in hexadecimal to assist an image application developer in understanding the structure of a MO:DCA-P document that contains an IOCA image object. If an image has been compressed by use of the CCITT Group4 compression algorithm, you would code it similarly.

Note: When using images on a microfilm device, see Appendix E, “Microfilm Device Considerations.”

Printing Images

Most printers, such as the InfoPrint 70, InfoPrint 2000, and InfoPrint 4100, support image resources. To determine whether your printer supports image resources, see the documentation provided with the printer.

Ordinarily, image resources print only on printers that support IOCA images. With PSF, however, you can print some image resources even on a printer that supports only IM image data objects. For more information about IM images, see “Printing Images without IOCA” on page 47. These restrictions apply:

- The resolution of the image resource must be the same as that of the printer.
- The image resource must be stored in uncompressed format.
- The image resource must contain only one segment.
- The image resource must specify one of these mapping options (these mapping options do not require scaling or correction of resolution):
 - Image point to pel
 - Image point to pel with double-dot
 - Scale-to-fit, with the input image space the same as that of the output space

When printed on a printer that supports image resources, an image can be resolution-independent. That is, every such printer prints the image at the same size, even if the resolution of the image is different from the resolution of the printer. Because of differences in the scaling algorithms used by various printers, however, exact fidelity of the image is not guaranteed. To be resolution-independent, you must specify a parameter that tells the printer to correct the

resolution. To learn about the mapping options a printer has that can correct the resolution, see the documentation provided with the printer.

Printing Images without IOCA

To print an image on a printer that does not support IOCA, you can use an IM image data object. An IM image data object specifies the content of a raster image and its placement on a page. You can manipulate an IM image in these ways:

- It can be placed in any position on the page.
- It can be enlarged to twice its size. This is the double-dot function.

Compatibility among Printers

All the printers supported by PSF support IM image data objects. However, an IM image might or might not print at the same size on a printer with a different resolution; it depends on whether the printer supports IOCA, as follows:

- If the printer does not support IOCA, IM images created with one resolution shrink or expand.
- If the printer does support IOCA, PSF transforms the IM image data object into an IOCA image, taking advantage of the resolution independence available with IOCA image data objects. Thus, the IM image prints at the correct size. Because of differences in the scaling algorithms used by various printers, however, exact fidelity of the image is not guaranteed.

Text

A text resource is a Presentation Text Object Content Architecture (PTOCA) object with Object Environment Group (OEG) that is stored as a resource in the page segment library. PTOCA object with OEG resources are soft resources.

A PTOCA object with OEG defines the text in the presentation space and defines the position, rotation, and size of the object area on a MO:DCA page. PTOCA objects with OEG are referenced on an Include Object (IOB) structured field or embedded in an overlay, page, or line data. All fonts used must be mapped in the page or overlay that includes the text object.

Figure 20 on page 48 shows the text printed on the sample page.

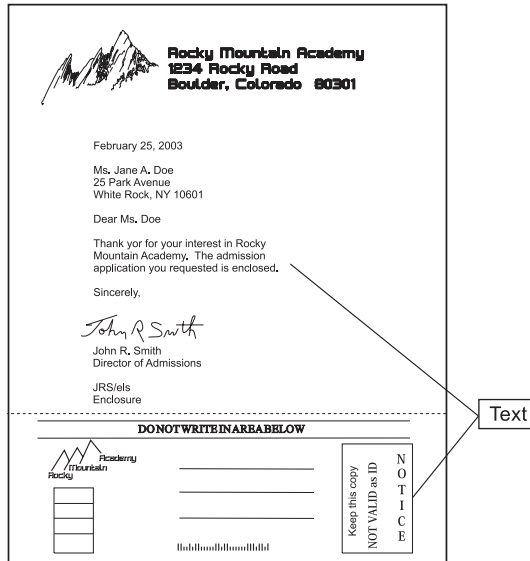


Figure 20. Text on the Sample Page

Using Text

Text resources are stored in the page segment library. A text resource can be:

- Included through an IOB structured field in a page or overlay.
- Embedded in a page, overlay, or line data, but not in a page segment.
- Included in an inline resource group.

For information about the data format for AFP text, see *Presentation Text Object Content Architecture Reference*.

Printing Text Data

Each time you reference a text resource, it can be manipulated in these ways:

- Placed in any position on the page.
- Rotated by the printer.


A text resource can use a CMR in the OEG to specify color management. For more information about how to code text resources and what options can be specified, see *Mixed Object Document Content Architecture Reference*.

PSF supports text fidelity controls that let you indicate whether PSF continues or ends processing of a print file when an unsupported PTOCA control sequence is encountered. You can also indicate whether text fidelity errors are reported.

Combining Character, Image, Graphics, and Bar Code Data

PSF can merge variable data from application programs with print resources and can print the data at any location on a page. PSF can merge text, image, graphics, and bar code data to create a composite output of different data types.

Figure 21 on page 49 is a sample page shown in two parts: character data and print resources (graphic, image, and bar code data) merged with it.

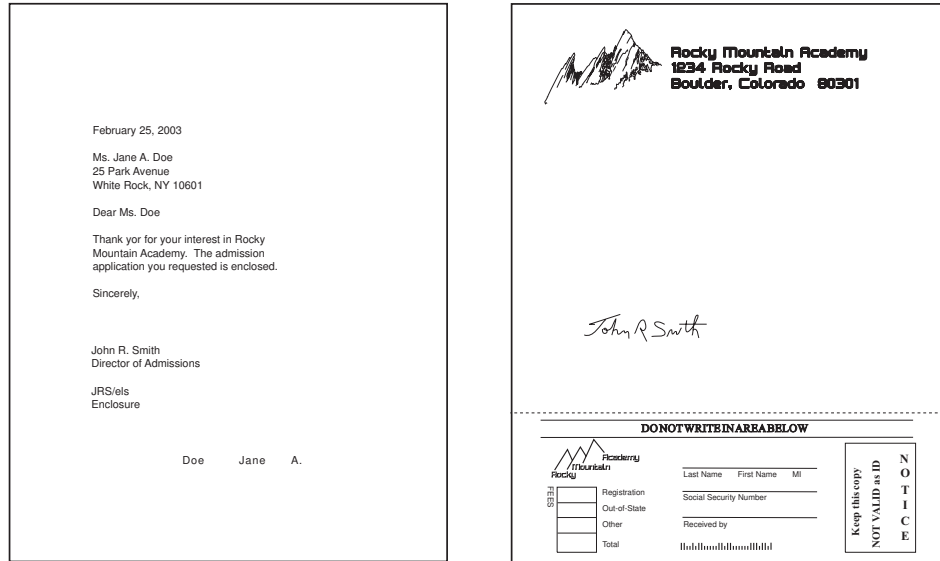

Character Data

Other Data

Figure 21. Sample Containing Character Data and Other Data

Using Resources with the Distributed Print Function (DPF) of PSF

When data and resources are sent from a host system (z/OS or IBM i), the Distributed Print Function (DPF) of PSF stores them on a Windows print server on a Local Area Network (LAN) or a Wide Area Network (WAN). DPF drives printers attached to the Windows server to print data sent from the host.

DPF can store PSF for z/OS and PSF/VSE resources in its libraries. Thus you save the time and expense of having to transmit the resources from the host libraries. PSF for z/OS tells DPF not to store inline resources or resources found in user libraries. Inline resources can be captured on DPF if this function is requested by the system programmer by using Exit 7 or the Printer Inventory. See *PSF for z/OS: Customization* for more information.

For more information about using the DPF function of PSF, see the InfoPrint Manager for Windows publications listed in the “Bibliography” on page 287.

Using APSRMARK to Mark Resources

Resources are marked as PUBLIC or PRIVATE by using a PSF utility called APSRMARK. A mark of PUBLIC instructs PSF to look for a printer-resident version of the resource first, and, if none is found, to download the host resource. A mark of PRIVATE (or no mark at all) instructs PSF to download the host resource.

System programmers generally use APSRMARK to mark new or updated resources. In addition to marking resources such as overlays, page segments, and fonts for DPF, APSRMARK also can be used to mark fonts for resident font activation or capture by the printer.

If you edit a marked resource by using an AFP utility program, such as OGL, but do not alter the original mark, the new version is not downloaded. If you edit a

marked resource and delete the original mark, the new version of the resource is considered PRIVATE and is downloaded. If you use APSRMARK to mark the new version of the resource as PUBLIC, that resource is time- and date-stamped by APSRMARK. The next time a job uses that resource, the new host version has a more recent stamp than the current resident version, and therefore the version is downloaded and saved again.

Because the time- and date-stamp for PUBLIC resources are always compared, you are assured of getting the most recent host version of a resource if you use standard IBM utilities for creating your resources. If you do not use an IBM utility to directly update the resource object code for a marked resource, however, you can circumvent the process. If you update the resource without deleting or changing the APSRMARK time- and date-stamp, PSF cannot differentiate between your updated resource and the resident version and uses the resident version instead of the updated version.

For additional information about using APSRMARK, see *PSF for z/OS: Customization*.

Using Inline Resources

Resources can be placed in a line data or MO:DCA-P print data set by an appropriate application. Resources cannot be used in an XML print data set. A resource that is in a print data set is called an *inline resource*. For information about how to code inline resources, see *Advanced Function Presentation: Programming Guide and Line Data Reference*.

PSF can use all types of resources sent inline:

- Fonts
- Form definitions
- MO:DCA resources (BCOCA, GOCA, IOCA, and PTOCA with OEG)
- Object container resources
- Overlays
- Page definitions
- Page segments

When the name of the inline resource matches the name of a resource used by the print data set, PSF uses an inline resource to print the data set. For example, if the print data set references a page segment named S1LOGO, and an inline page segment is named S1LOGO, PSF uses the inline page segment. If the inline resource is marked PUBLIC, PSF might use a printer-resident version of the resource.

PSF stores inline resources temporarily and uses them only for the data set in which they are sent inline. After the data set finishes processing, PSF deletes the resources to prevent any other data set from using them.

PSF searches the temporary, inline-resource library for a resource before searching for it in the user libraries or system libraries. When you use a resource from a security library, however, PSF searches only the security library. For information about using security resources, see *PSF for z/OS: Security Guide*.

PSF can use inline resources (fonts, page segments, and overlays) that have been marked for use with resident fonts or for use with the DPF resource library. Your system programmer must mark these resources, using the APSRMARK program, before you can use them with resident fonts or with the DPF resource library. For

more information about using APSRMARK, see “Using APSRMARK to Mark Resources” on page 49 and “Using Resources with the Distributed Print Function (DPF) of PSF” on page 49.

Even though resident resources can be activated by inline resources that are marked PUBLIC, PSF tells the printer not to capture inline resources. If you want them made resident in the printer, then you must directly install them into the printer, if your printer has this capability, or you must put them in a system library. PSF allows only PUBLIC resources from system libraries to be captured, with one exception. Exit 7 can be coded to allow capture of inline resources for printers that are attached through DPF. For more information about the system programmer's role in using resources stored in the DPF library or for information about Exit 7, see *PSF for z/OS: Customization*.

See “Printing with Inline Resources” on page 162 for guidelines and examples of specifying inline resources.

PSF Resources Supplied by IBM

IBM supplies these resources with PSF:

- Form definitions, which are listed in Appendix A, “Form Definitions Supplied with PSF.”
- Page definitions, which are listed in Appendix B, “Page Definitions Supplied with PSF.”

You can also use other IBM licensed programs to create and tailor PSF resources. For information about these programs, see *PSF for z/OS: Introduction*.

For information about the fonts that IBM supplies for PSF, see these:

- *IBM AFP Fonts: Font Summary for AFP Font Collection* for fonts contained in the AFP Font Collection, Program Number 5648-B33. Samples of fonts are shown in *IBM AFP Fonts: Font Samples*.
- *IBM Infoprint Fonts: Font Summary* for AFP fonts contained in Infoprint Fonts for z/OS, Program Number 5648-E76, and TrueType and OpenType fonts contained in the WorldType Fonts for AFP Print Servers optional feature of Infoprint Fonts for Multiplatforms, Program Number 5648-E77.

Chapter 4. Formatting and Printing Data

Every data set printed on a page printer requires one or more *copy groups*. A copy group (also called a medium map) controls the printing of a form (a physical sheet of paper). If you are printing on both sides of a sheet, a copy group controls the printing of both sides. If you change copy groups, PSF automatically ejects to a new sheet before using the controls in the next copy group.⁸

Copy groups are contained in a *form definition* or one or more *internal copy groups*. PSF uses a form definition or an internal copy group to control the modifying and printing of forms. PSF uses a *page definition* to compose pages from line data.

This chapter describes internal copy groups, form definitions, and page definitions. You can create form definitions and page definitions by using the IBM Page Printer Formatting Aid (PPFA) licensed program or by using some other products, which might differ from the products described in this chapter.

Internal Copy Groups

An internal copy group is a copy group that you define within a print data set instead of within a form definition. You can use internal copy groups to dynamically change any of the functions controlled by a copy group without modifying the form definition. To use an internal copy group, do these:

1. Define the copy group in the print data set, starting with a Begin Medium Map (BMM) structured field and ending with an End Medium Map (EMM) structured field.
2. Immediately follow the copy group definition with an Invoke Medium Map (IMM) structured field to call it.

You can define and call an internal copy group before the first page of data and between pages of data. Each time you want to call an internal copy group, you must define the copy group and follow it with an IMM structured field, even though you might have called the same internal copy group previously in the data set.

In any one print data set, PSF can use a combination of internal copy groups and copy groups defined within the form definition. PSF uses the internal copy group instead of one in the form definition if all of these conditions are met:

- The copy group is defined within the print data set.
- An IMM structured field immediately follows the copy group.
- The name of the copy group in the IMM structured field matches the name of the internal copy group that precedes it.

If these conditions are not met, PSF uses a copy group in the form definition, either the first copy group in the form definition or the copy group named in the IMM structured field.

Just as job submitters can specify JCL parameters to override values in copy groups in form definitions, job submitters can also override values in internal copy groups. For example, a job submitter can override the duplex option in all copy

8. When you are using N_UP printing, changing copy groups might *not* cause PSF to eject to a new form.

groups, including internal copy groups, by specifying the DUPLEX JCL parameter. Some JCL parameters, such as FLASH and COPIES group values, have special considerations depending on whether the copy group is found within a user-specified or system-default form definition. For these JCL parameters, PSF treats internal copy groups as if they were defined in a user-specified form definition. For more information about these JCL parameters, see “Using FORMDEF with COPIES or FLASH Parameters in JCL” on page 128.

Notes:

1. You can use conditional processing to select copy groups in form definitions, but you cannot use conditional processing to select internal copy groups.
2. You cannot define internal copy groups in XML data.
3. An internal copy group can be selected only by a structured field in a print data set.

Form Definitions

A form definition must contain one or more copy groups. Many of your form definitions contain a single copy group. In this case, all the pages of the print job are printed according to the same form specifications. However, if your job requires different specifications for different pages of output, you can use a form definition that contains multiple copy groups.

To begin printing a data set, PSF selects the first copy group in a form definition, unless the data set begins with a control record that includes instructions to select a different copy group. A copy group within a form definition can be selected by a structured field in a print data set or by conditional processing in a page definition. For more information about selecting copy groups in a form definition, see “Using Multiple Copy Groups or Page Formats” on page 144. For more information about conditional processing, see “Conditional Processing” on page 71.

This section gives you more information about:

- Specifying printing controls in copy groups
- Using form definitions supplied with PSF

Printing Controls Specified in Copy Groups

The printing controls that can be specified in a copy group include:

- “Page Position” on page 55
- “Paper Source” on page 56
- “Duplex Printing” on page 56
- “Duplex-Page Offsets” on page 59
- “N_UP Printing” on page 59
- “Constant Forms” on page 60
- “Page-Presentation Compatibility” on page 62
- “Finishing Output” on page 63
- “Offset Stacking” on page 63
- “Print Quality Level” on page 64
- “Horizontal-Adjustment for the 3800 Printer” on page 64
- “Subgroup Modifications” on page 64, including:
 - Overlays
 - Data suppression

- Paper source
- Output bin selection
- Forms flash for 3800 printers

Note: When sending output to a microfilm device, see Appendix E, “Microfilm Device Considerations.”

Page Position

The copy group assigns horizontal and vertical offsets to position the top left corner of the logical page on the physical form (sheet). The page position is relative to the medium origin.

The medium origin is the top left corner of the physical piece of paper (or other medium) being printed on, as seen by the printer microcode. For cut-sheet printers, the medium origin is always the top left corner of a sheet viewed with the short side as the top. For continuous-forms printers that support page-presentation compatibility, such as the 3835 and 3900 printers, the medium origin is always the top left corner of the narrow edge of the form. For more information about medium origin your printer supports, see the documentation provided with the printer.

The page origin is the starting position of the logical page, which contains the user's print data. The logical page is defined in the page definition for line data, or in structured fields for MO:DCA-P data. All the data in the print data set must fit within the boundaries of this logical page.

The form definition positions this logical page on the physical form. The page origin is specified as a horizontal offset and a vertical offset from the medium origin. The page could be positioned at the medium origin, but it is typically offset to avoid unprintable areas or areas too near the edges of forms. For information about printable areas for your printer, see the documentation provided with the printer.

Figure 22 on page 56 shows the relationship between the medium origin and the page origin. The size of the logical page and its print direction are defined in the page definition for line data or in structured fields for MO:DCA-P data. The offset of the page origin is defined in the form definition. In the figure, the horizontal offset is labeled *X*, and the vertical offset is labeled *Y*.

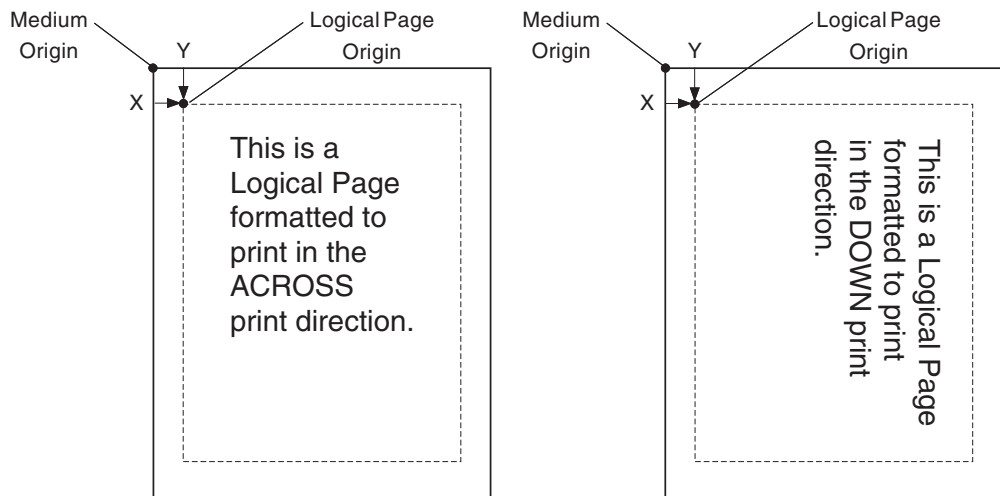


Figure 22. Relationship between the Medium Origin and the Page Origin

Page origin is not affected by the print direction specified in the page. As Figure 22 shows, changing the page print direction from across to down does not change the position of the page origin.

You can specify *different* logical page offsets for the front and the back of a duplex printed page. For additional explanation, see “Duplex-Page Offsets” on page 59.

Paper Source

To specify the paper source, insert a control in the copy group or a subgroup of it⁹ (see “Subgroup Modifications” on page 64.) This control indicates whether paper is to be fed from the primary source or from an alternative source. Printers can have up to 255 alternative paper sources. To see what paper sources your printer supports, see the documentation provided with the printer.

Note: Some printers support disabled mechanisms. For example, if a form definition specifies the primary source, but that source is disabled, the operator can print the job from an alternate source. To see if your printer supports disabled mechanisms, see the documentation provided with the printer.

For continuous-forms printers, PSF ignores copy controls for paper source, because these printers have only one paper source.

Duplex Printing

Some printers can print on one side of the sheet (simplex printing) or on both sides (duplex printing). To see if your printer can print in duplex mode, see the documentation provided with the printer.

You specify duplex or simplex printing in a control in the copy group. These choices are available:

- To print on only one side, specify *no duplex*.
- If the sheets are to be bound on the long edge of the paper, as Document A and Document B are in Figure 23 on page 57, specify *normal duplex*.

9. To specify the paper source in the form definition, use “BIN”. For an example that shows how to specify the paper source, see “Specifying Bins (Paper Source)” on page 131.

- If the sheets are to be bound on the short edge of the paper, as Document C and Document D are in Figure 24 on page 58, specify *tumble duplex*.

Figure 23 shows Document A and Document B printed with normal duplex. Notice that the pages are printed in the *portrait position* for Document A and in the *landscape position* for Document B.

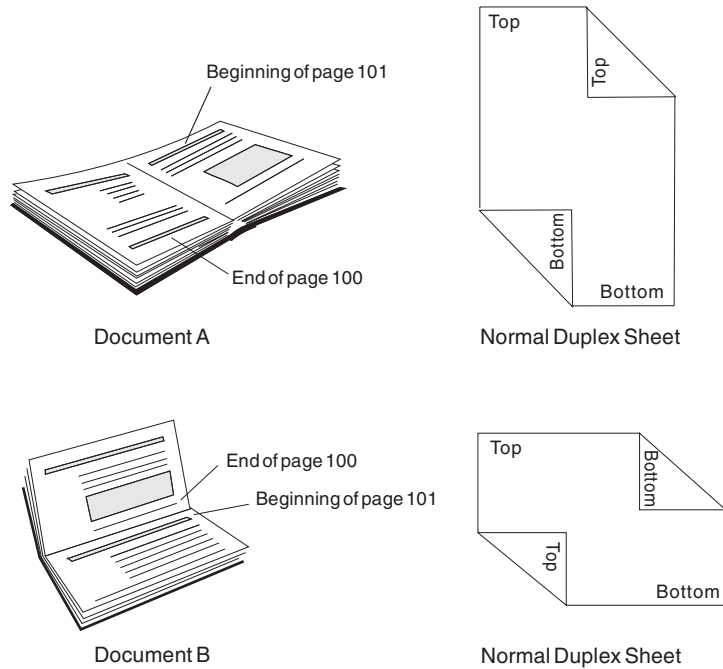


Figure 23. Duplex Documents A and B, Specified as Normal Duplex

Figure 24 on page 58 shows Document C and Document D printed with tumble duplex. Notice that the pages are printed in the *portrait position* for Document C and in the *landscape position* for Document D.

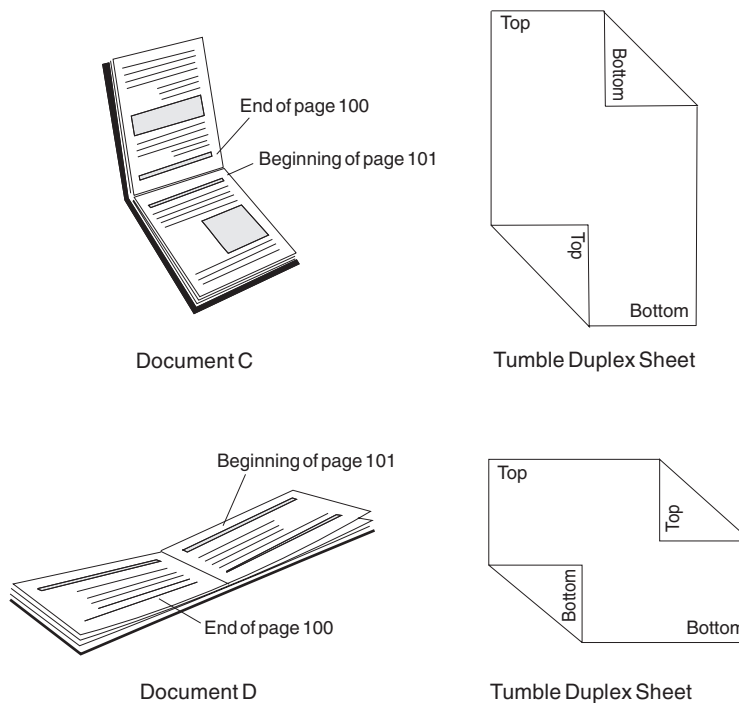


Figure 24. Duplex Documents C and D Specified as Tumble Duplex

Some printers can print despite a disabled duplex paper path; other printers are unable to print in duplex printing mode. PSF has the following disabled mechanism support for some PSF-supported printers (your installation might have defined print classes or destinations that do not have this support for disabled mechanisms):

- If duplex printing is disabled or is not supported for a specific printer, the printer prints in simplex.
- If the primary paper source is disabled, the printer selects paper from one of the alternate paper sources.
- If offset stacking is disabled, no offset stacking occurs.

If a mechanism is disabled, your output might not be as expected, and you might want to reassign output to another printer.

For a printer that does not support printing in duplex or that has a disabled duplex path, PSF processes the duplex control in these ways:

- For no N_UP printing, PSF processes two consecutive pages of data as a pair. The first page is processed as the front of the sheet, and any controls specified in the form definition for the front are applied. The second page is processed as the back of the sheet, and any controls specified in the form definition for the back are applied. If you request multiple copies in the form definition, all the copies of front pages are printed first, and then all the copies of back pages are printed.
- For basic N_UP printing, PSF processes the first n consecutive pages of data as the front of the sheet, applying any controls specified in the form definition for the front. PSF processes the next n consecutive pages of data as the back of the sheet, applying any controls specified in the form definition for the back. If you request multiple copies in the form definition, all the copies of the front n pages are printed first, and then all the copies of the back n pages.

- For *enhanced N_UP printing*, PSF is unable to process the duplex control, because page buffering and page reordering might be required to simulate duplex printing. In this case, the data cannot be printed.

To see if your printer can support disabled mechanisms and print in duplex printing mode, see the documentation provided with the printer.

Duplex-Page Offsets

You can specify *different* logical page offsets for the front and back of a duplex sheet. You might want to specify different page positions when, for example, the printed pages will be bound or when you are printing on three-hole punched paper. In these cases, you might want to specify a smaller left margin for the back of the sheet to leave room on the right side of the sheet for the binding or the holes.

N_UP Printing

PSF supports *N_UP printing*, a printer media-handling support that is specified in the form definition. With N_UP printing, you can place multiple pages in partitions on a sheet, enabling you to print much more data on a sheet, saving printer-use costs, paper, and storage space.

N_UP printing differs from multiple-up printing, in that N_UP printing is specified in the form definition and works with MO:DCA-P data (page data) and with line data. You can use N_UP printing to place multiple MO:DCA-P pages or line data on a sheet, and to format each of the N_UP pages differently. In contrast, multiple-up printing is activated in a page definition and works only with traditional line data. The entire multiple-up impression is formatted with a single page format and only appears to have multiple logical pages.

To use N_UP printing, you need a form definition that specifies N_UP. (IBM has enhanced Page Printer Formatting Aid (PPFA) so you can create form definitions that specify the N_UP subcommand.) These new form definitions specify the number of pages on a sheet in addition to the other form definition options, such as duplex and page offsets.

The form definition does not control the size of the pages on the sheet. The size of the pages on the sheet is controlled in the page definition for line data, or in the structured fields in a MO:DCA-P page.

PSF supports two levels of N_UP: *basic N_UP*, and *enhanced N_UP*. Enhanced N_UP requires PPFA 1370 APAR PN54401. To see if your printer can support N_UP, see the documentation provided with the printer.

With *basic N_UP printing*, using a form definition, you can print up to four pages on one side of a sheet of paper in simplex mode, and up to eight pages in duplex mode, by creating a new form definition that contains the PPFA N_UP subcommand. With basic N_UP, you accept the default placement of the pages in the partitions. The partitions are all the same size and are placed one to four per side, depending on the number specified in your N_UP subcommand. The page must be the correct size to fit within the partition area. For basic N_UP, the valid printable area (VPA) is the intersection of the partition and the current logical page. Figure 25 on page 60 shows the equal partitions created on a side of a sheet by including the basic N_UP subcommand in a form definition. The figure shows continuous forms, and cut-sheet forms with both wide and narrow leading edges, feeding into the printer.

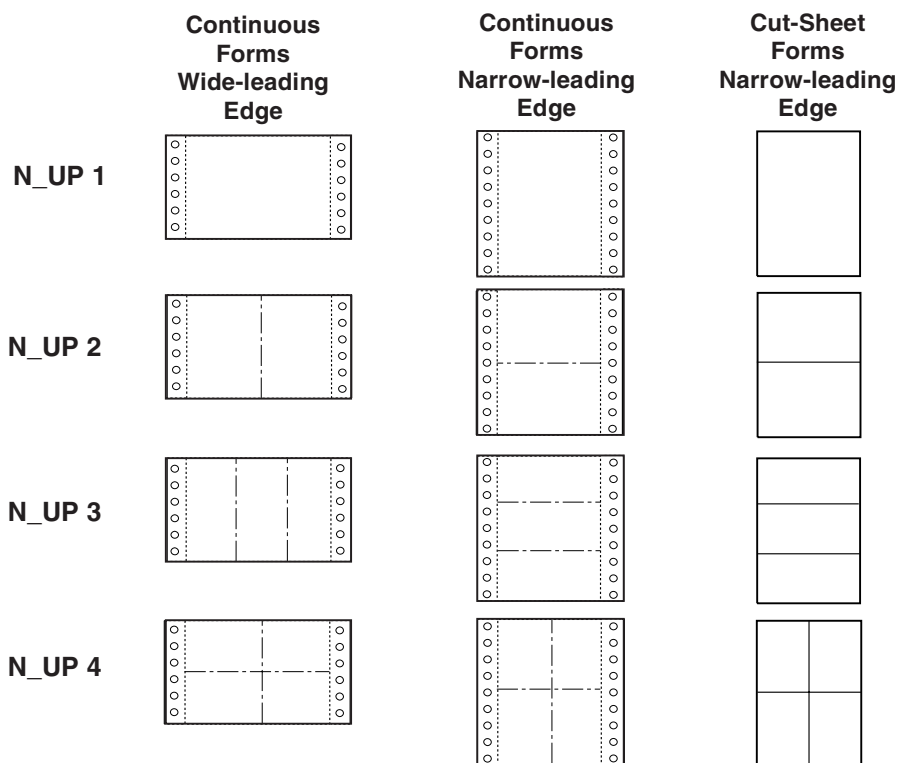


Figure 25. N_UP Printing Partitions for Various Media

With *enhanced N_UP printing*, you can place pages at any location on either side of the sheet. You can also:

- Place a page relative to any partition origin on either side of the sheet, in any orientation, and in any size that fits on the sheet. You can place multiple pages relative to the same origin, when the total number of pages does not exceed the N_UP limit for that sheet.
- Place overlays relative to any partition origin, with or without variable page data from the application program.
- Specify a different rotation for each page.
- Specify one or more different overlays for each page.
- Specify a different offset for each page.

Page Printer Formatting Aid: User's Guide describes how to use N_UP printing.

Note: When sending N_UP data to a microfilm device, see Appendix E, "Microfilm Device Considerations."

Constant Forms

You can use the *constant-forms* function to print medium overlays or a forms flash (3800 printer only) on blank pages without adding blank pages to your print data set; PSF generates the blank pages on which to print the overlays or the forms flash. These pages generated by PSF are called *constant forms* because no variable data from the print data set is printed on the page.

For example, you can print an overlay containing constant text on the back of each page of a print data set without modifying the data set; you simply specify the constant-forms function in the form definition. You specify the constant-forms

function for an entire copy group; you identify the overlays and form flashes in the subgroups of a copy group. See “Subgroup Modifications” on page 64.

Note: When printing constant forms to a microfilm device, see Appendix E, “Microfilm Device Considerations.”

Using the constant-forms function, you can request that PSF generate and print the constant form as the front and/or back side of each sheet in the copy group, as follows:

- For the front side of each sheet:

PSF prints the constant form as the front side of each sheet.

If duplex printing is specified for the copy group, PSF prints the pages from the print data set on the back side of each sheet. The print data set must contain at least one page that is printed by use of this copy group; otherwise, PSF does not generate any constant forms for this copy group.

If simplex printing is specified for the copy group, the print data set must not contain any pages to be printed by use of this copy group; for subsequent pages in the print data set, a different copy group must be used.

- For the back side of each sheet (duplex printing only):

PSF prints the constant form as the back of each sheet, and the pages from the print data set on the front of each sheet.

The print data set must contain at least one page printed by use of this copy group; otherwise, PSF does not generate any constant forms for this copy group.

- For both the front and back side of each sheet (duplex printing):

PSF prints the constant form as both the front and back sides of each sheet.

The print data set must not contain any pages to be printed by use of this copy group; a different copy group must be used for subsequent pages in the print data set.

Figure 26 on page 62 shows two pages printed by use of a copy group that specifies the constant-forms function for the back side of each sheet. A subgroup in that copy group specified overlay O1CODES for the back side of the sheet. Note that the print data set contains only two pages; PSF generates the pages that are printed as the back sides of the sheets.

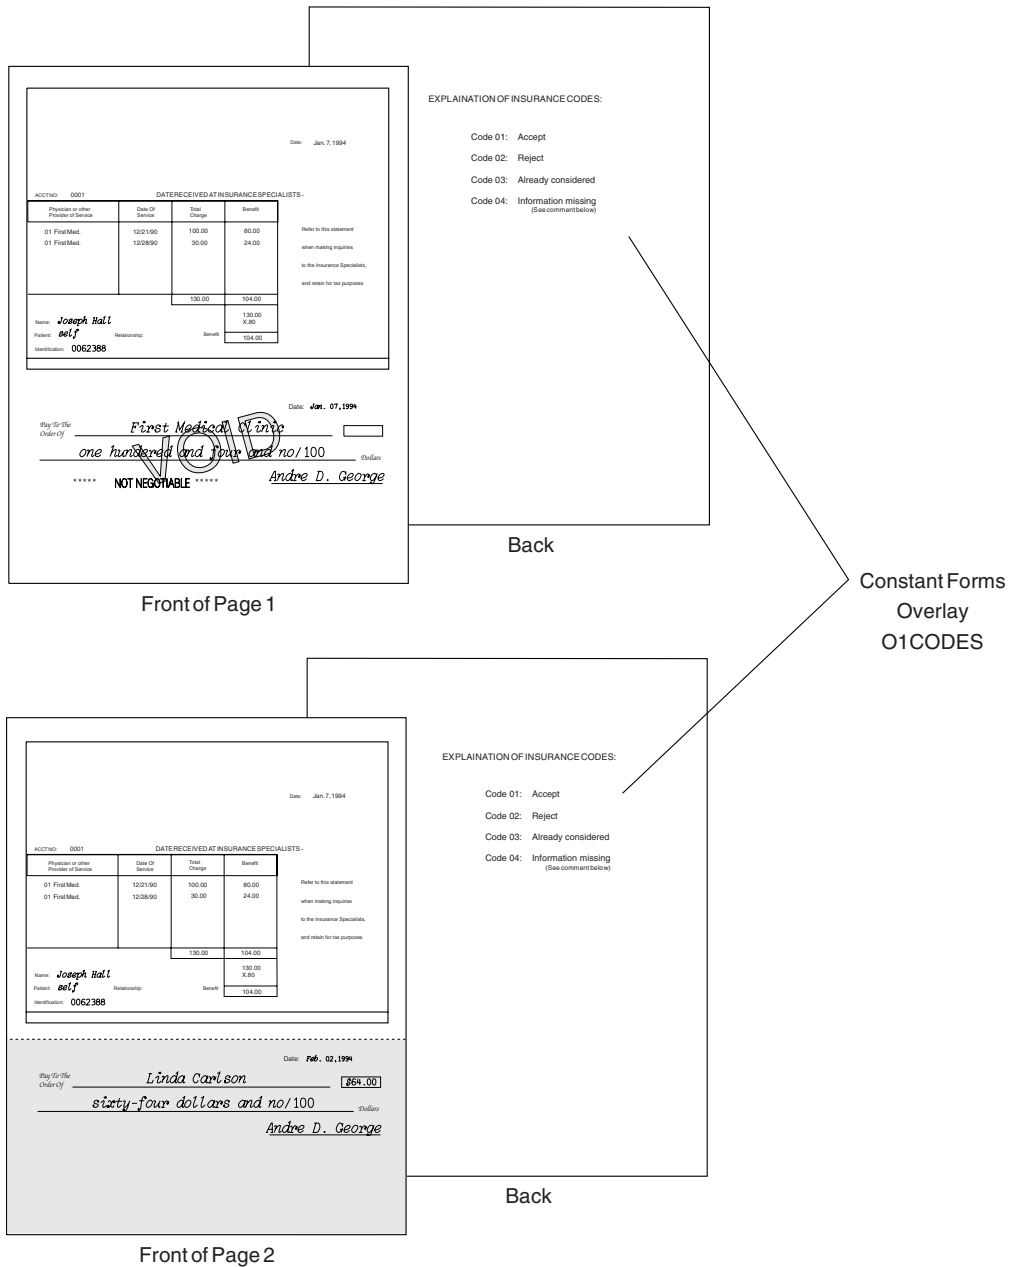


Figure 26. Copy Group Printed Using the Constant-Form Function

If the constant-forms function is specified in a copy group, but no overlays or forms flashes are specified in the subgroups of that copy group, PSF generates a blank page. In the example shown in Figure 26, the back side of each sheet would be blank.

Page-Presentation Compatibility

PSF-supported printers can have different hardware (default media) origins. As a result, for compatibility across PSF-supported printers, you might need to use form definitions that contain page-presentation controls. For a description of the default medium origins for your printer, see the documentation provided with the printer.

You can also build other form definitions for page-presentation compatibility by using a tool such as PPFA. For more information about using PPFA, see *Page Printer Formatting Aid: User's Guide*.

Finishing Output

Finishing refers to an operation you can perform with a finisher, such as the InfoPrint 60 finisher. The capabilities of your finisher determine the available types of finishing. Some examples of finishing types include:

- corner stapling
- edge stitching
- saddle stitching
- z-folding

Specify the finishing request to PSF in a MO:DCA-P Medium Finishing Control (MFC) structured field in the form definition. By specifying the finishing request in an MFC structured field in a copy group, you can control finishing on a collection of pages. For example, you can staple a collection of pages without the requirement that subsequent pages are collected for stapling.

For more information about how to code finishing in a form definition, see *Page Printer Formatting Aid: User's Guide*. For an example of how to request finishing, see "Finishing Your Output" on page 168. For sample form definitions, see Table 24 on page 201.

Offset Stacking

In offset stacking, the sheets printed according to one copy group are stacked offset to the sheets printed according to the preceding copy group. If you want your printed output to be offset-stacked, specify offset stacking in the copy group.

Note: If the form definition specifies offset stacking, but the stacker is disabled, the operator can print the job without offset stacking on some printers. To see if your printer supports disabled mechanisms, see the documentation provided with the printer.

If you want the printed output from a continuous-forms printer to be offset-stacked, the printer must be equipped with a burster-trimmer-stacker (BTS) feature or an equivalent post-processing device (see "Bursting and Stacking Continuous-Forms Paper" on page 156). If your continuous-forms printer does not have a BTS feature but supports edge-marking, the printer changes the edge-markings on the sheets that you specify to be offset-stacked.

The following steps show how to specify offset stacking. Assume that you have a five-sheet data set to be printed with the same set of printing controls, but that you want sheet 3 offset from sheets 1 and 2, and you want sheets 4 and 5 offset from sheet 3.

1. Create a form definition containing two copy groups that are identical except that copy group A does not specify offset, and copy group B does.

Notes:

- a. The printer offsets a copy group relative to the previous copy group. If you specify copy group A (which does not specify offset) for sheets 4 and 5, those sheets will not be offset from sheet 3.
- b. Because the same offset is used for all the sheets in a group, they are in one stack.

2. Copy group A is the default copy group. PSF selects it for sheets 1 and 2, which will not be offset from any sheets preceding them.
3. For page 3, offset stacking is specified by either of these:
 - An Invoke Medium Map (IMM) structured field specifying copy group B, inserted at this point in the data set
 - Conditional processing, specified in the page definition

Whichever method is used, sheet 3 will be offset from sheets 1 and 2.

4. At the start of sheet 4, copy group B (the copy group that specifies offset stacking) is selected again, by either of the methods just described. Sheets 4 and 5 will be offset from sheet 3, and will be stacked together.

Print Quality Level

With some printers, you can select different levels of print quality, such as draft or near-letter quality. For higher print quality, printing speed is slower.

To specify the print-quality level, insert a control in the copy group of the form definition.

If you specify a quality level for a printer that supports only one quality level, and if the quality level you specify is not that level, PSF sends an error message and ignores that specification. For information about the levels of print quality that your printer supports, see the documentation provided with the printer.

Horizontal-Adjustment for the 3800 Printer

Specify the horizontal-adjustment value as a control in the copy group. This value indicates both the starting print position and the amount of space by which the 3800 printer operator can adjust the position of the printed data to the left or right. Specify the adjustment value as a number of picture elements (pels). For information about the adjustment values for the 3800 printer, see the documentation provided with your printer.

Subgroup Modifications

A copy group contains one or more subgroups, each of which can contain specifications for different versions of a page. In a subgroup, you can specify what modifications are to be made to a page and how many copies of each version are to be printed. The sum of the number of copies specified in the subgroups is the total number of copies of each page to be printed.

For simplex printing, you can code a subgroup to specify the modifications for a single page in that subgroup. For duplex printing, you can code a subgroup to specify one set of modifications for both sides of the sheet, or you can code two subgroups to specify a different set of modifications for each of the two sides.

In a subgroup, you can specify these modifications:

- Overlay identification
- Data suppression
- Paper source
- Output bins for paper destination
- Forms flash for the 3800 printer

Overlay Identification: You can identify the names of up to eight medium overlays for each side of a sheet. In Figure 27 on page 66, the INVOICE overlay was printed for the first subgroup, and the PACKLIST overlay was printed for the second subgroup.

Data Suppression: You can identify up to eight suppression names (names identifying fields that are not to be printed), provided they have been defined in the page definition. In Figure 27 on page 66, no suppression names were specified for the first subgroup, and three suppression names were identified for the second subgroup: Salesperson, PRICE, and AMOUNT.

Paper Source: In a form definition created by using the PPFA program, you can include the BIN subcommand in the subgroup to specify the paper source. Use this subgroup subcommand only for printers with more than one media source and that support bin selection in a subgroup. You can also select the paper source by specifying a component ID (such as 50 for letter-size paper), media name (such as LETTER for letter-size paper), or both. This frees you from knowing which bin has the paper you want to use. For more information, see *Page Printer Formatting Aid: User's Guide*.

PSF uses information specified in the form definition to determine which paper source to use, according to this hierarchy:

1. Component ID
2. Media name
3. Bin number
4. Default paper source

For example, if a component ID is specified in the form definition, PSF uses it to select the paper source. If no component ID is specified or it is not found in the printer, PSF uses the media name.

Some printers only support bin numbers, some support bin numbers and media names, some support bin numbers and component IDs, and some support bin numbers, media names and component IDs. By specifying the paper source all ways, you can free yourself from knowing which bin a paper type is loaded in on those printers with media name or component ID support. This also lets you use a bin number to print on those printers that only support bin numbers.

Output Bins for Paper Destination: You can use a form definition to include the OUTBIN subcommand in the subgroup to specify the paper destination. Use the OUTBIN subcommand only for printers that have more than one media destination and support output bin selection in a subgroup.

If you specify the OUTBIN parameter in the OUTPUT JCL statement (see "OUTBIN" on page 111), it takes precedent over any OUTBIN specifications in the form definition for the job. If the bin specified in the JCL OUTBIN keyword is not available, or bin selection is not supported by the printer, the printer default bin is used, even if the bin selection was specified in the form definition.

Forms Flash for the 3800 Printer: You can specify whether the 3800 printer forms-flash unit prints its negative on each sheet in a subgroup. For the other page printers, PSF ignores this control.

You can also specify that PSF is to print overlays or forms flashes without printing any variable data on certain pages of your output. For example, you can specify that a constant overlay is to be printed on the back of each page of a duplex print job. See "Constant Forms" on page 60.

As an example, Figure 27 on page 66 shows a page in a data set printed by using a copy group containing two subgroups. In the first subgroup, three duplicate sheets were printed with a set of modifications; in the second subgroup, two duplicate

sheets were printed with a different set of modifications. The two sets of sheets were generated from the same page of information in the data set but were modified differently.

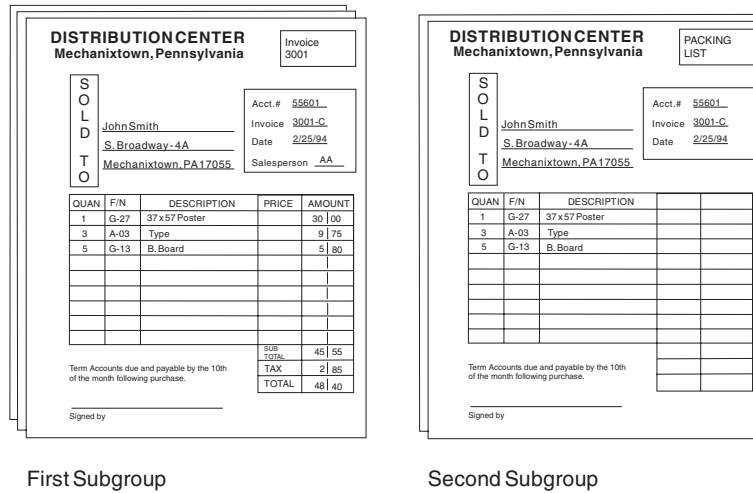


Figure 27. Subgroups Printed from one Page of the Data Set

For more information, see “Using FORMDEF with COPIES or FLASH Parameters in JCL” on page 128.

Using Form Definitions Supplied with PSF

PSF provides general-purpose form definitions, described in Appendix A, “Form Definitions Supplied with PSF.” These form definitions specify a page position at the top of the page; one copy of each page is printed, on one or both sides.

The source modules are stored in the SYS1.SAPSPDFD library. You can use the source code to customize form definitions and page definitions for your organization.

Page Definitions

A *page definition* is the resource that contains formatting specifications for line data or XML data. This resource is required for any data set or any part of a data set that is not already composed into pages when PSF receives it. No page definition is used for data that is already composed into pages. If you specify a page definition for MO:DCA-P data, PSF ignores it.

A page definition contains one or more *page formats* (also known as *data maps*), each of which contains a complete set of page formatting specifications.

A page format controls the printing of an entire page (a physical sheet of paper) if you are printing on only one side, or one *side* of a sheet of paper if you are printing in duplex (on both sides of the sheet). If you change page formats, PSF automatically ejects to a new page before using the controls in the next page format.

Many page definitions have only one page format. All the pages of the print job are printed to the same specifications. If your job requires different specifications for different pages of output, you can use a page definition that contains multiple page formats.

To begin printing a data set, PSF selects the first page format in a page definition. To specify a page format, insert a structured field in a data set or use conditional processing in the page definition. For more information about conditional processing, see “Conditional Processing” on page 71.

To change from one page format to another, you can use the Invoke Data Map (IDM) structured field, as described under “Using Multiple Copy Groups or Page Formats” on page 144.

This section gives you more information about:

- Defining page formats
- Using page definitions supplied with PSF

For information about specifying a page definition, see “Specifying a Page Definition” on page 135.

Defining Page Formats

A page format contains formatting controls for your data set that indicate where and how text, and optionally, page overlays and page segments are to be placed on the page. The page format is defined relative to the origin of the sheet specified in the form definition. A page format can specify one of three types of data:

- Traditional line data, which might contain CCs and TRCs
- Record format line data, which contains record IDs and might contain CCs
- XML data

All page formats in the page definition must specify the same type of data. If you do not specify a type of data, the page format assumes you are using traditional line data. For information about using types of line data, see “Line Data” on page 75 or see *Advanced Function Presentation: Programming Guide and Line Data Reference*. For information about using XML data, see “XML Data” on page 83.

A page format can contain the following information:

- Size of the page area to be formatted, specified as the width and height of the page (required)
- Print direction
- Relative print line positioning
- Options for already formatted print records
- Formatting options for individual fields in print records
- Fonts
- Conditional processing

Page Size

The page size, width, and height are defined in the page format. This area is called the *logical page*. All the text and images contained in your print data set must fit within the boundaries of this logical page.

The logical page should cover the entire area of the physical form on which your data can print. If you are printing *multiple-up* applications (in which two or more pages of application data are formatted on the same side of a physical form), you must make your logical page large enough to contain all the pages of application data. This applies only to multiple-up formatting for which a page definition is used; it does not apply to N_UP printing.

Characters or images that extend outside the boundaries of the logical page cannot be printed. Whether you receive error messages indicating the characters or images were not printed depends on the value in the DATAACK parameter. For more information, see “DATAACK” on page 101.

Be careful when positioning text near the top or bottom of the logical page area. The position you specify for character data in your page definition is the position at which the baseline of the characters are printed.¹⁰ When you position character data in a page definition, be sure to leave room for the characters and their ascenders and descenders. For example, never place a character 0 inches down from the top of the page.

You should also be careful not to extend data off the right side of the page. This can happen if your print lines are too long, or if you have used a font that is too large to fit within your page area.

In most cases you do not have to be concerned with placing characters too near the left margin of the page. Characters are positioned from the front or leading edge of their baseline, so that a character can be placed at the exact left edge of the logical page. Italic fonts, however, can extend off the left edge of the page. This is because italic characters are *kerned* to tuck under the adjacent characters. Some italic characters extend a few pels to the left of their character space origin. Therefore, when you print with an italic font, be sure to position the text line a few pels to the right of the left edge of the logical page.

For more information about character baselines and positioning, see *IBM AFP Fonts: Font Summary for AFP Font Collection*.

Print Direction

The page format assigns a print direction to the lines of text in the logical page. The print direction can be one of four inline directions supported by AFP printers:

- ACROSS—oriented 0° from the page origin
- DOWN—oriented 90° from the page origin
- BACK—oriented 180° from the page origin
- UP—oriented 270° from the page origin

In addition to print direction, AFP text can be printed in four character rotations: 0°, 90°, 180°, and 270°. Each of these character rotations is specified relative to the print direction. Unless you specify otherwise, a 0° rotation is used with any print direction you select for your page definition. For more information about print direction and character rotation, see “Printing AFP Data in Different Directions and Character Rotations” on page 4.

Not all AFP printers can print in every combination of print direction and character rotation. For information about the print orientations your printer supports, see the documentation provided with the printer.

Figure 2 on page 4 shows the different print directions possible on AFP printers. For information about the relationship between print direction and page origin, see “Page Position” on page 55.

10. The baseline is the imaginary line on which characters sit. The character extends above the baseline. Characters such as the lower-case “g” or “y” have pieces called *descenders*, which extend below the baseline.

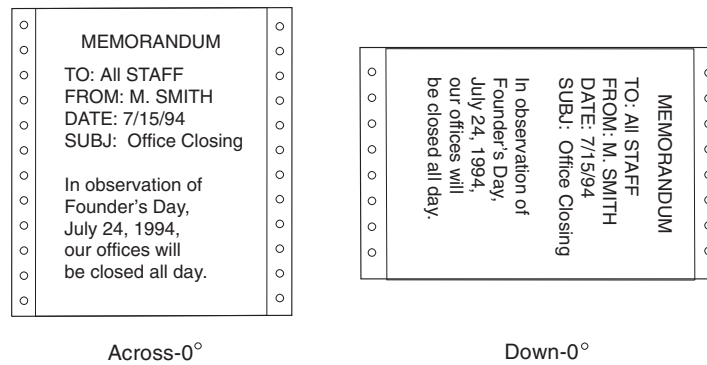


Figure 28. Pages Printed in Two Directions on Continuous-Forms Paper

Relative Print Line Positioning in a Page Definition

Relative print line is a function of the page definition that lets formatting float on the page. In some earlier releases of PSF, all page definition formatting was tied to a specific position on the page. With relative print line, values in the print data carriage control byte can determine different formatting to be applied to the current page position. This lets the application change record formatting, print line spacing, fonts, overlays, and page segments at any page position, without writing MO:DCA-P structured field commands in the print data.

Relative print line provides increased formatting flexibility. It also preserves the benefit of using page definition formatting, which lets you make changes to the printed output without changing the application program that generates that output.

In many cases, using a page definition to format can reduce the time required to develop and test an application. However, relative print line does not eliminate application development requirements: the application must write print records that can take advantage of the formatting capability.

Page Format Options for Formatted Print Records

When the print data set contains records that are already formatted into output print lines, you can specify additional formatting options in the page format. For this type of data stream, you can use the page format to:

- Specify the number of print lines per page
- Specify the number and starting position for a group of lines on a page
- Specify how carriage controls in the data are to be processed
- Specify the position on the page at which channel codes in the data are to start
- Change line spacings for groups of lines within the page
- Select fonts for the entire page or for groups of lines or fields on a page
- Provide a list of fonts for selection by table reference characters (TRCs) in the data
- Change print directions of one or more lines
- Change the character rotation of a font for one or more lines
- Define and place fields of constant text on each page with the variable data
- Define, place, and select fonts for fields of variable data
- Indicate variable data fields to be generated as bar codes
- Define conditional processing tests on the input record to effect formatting changes
- Include page segments or overlays anywhere on a page
- Provide a list of page segments to be mapped in the printer

- Provide a list of page overlays to be included by the print data set
- Select multiple colors, if the printer supports multiple colors

Note: Not all printers support multiple colors. For information about color support for your printer, see the documentation provided with the printer.

- Specify an absolute or relative position for records, fields, or objects

Page Format Options for Formatting Fields

You can use the page definition not only to place records that have been formatted into print lines, but also to format individual fields within print records. The page format specifies the position, the print direction, and the font for each individual field that you want printed. You can also prevent fields in the print record from printing, by simply not specifying them in the page format. You can use field formatting to change the output for formatted print records that you are currently printing, or you can use field formatting to print unformatted print records that are not formatted into print lines but that contain only the data to be printed.

This capability of AFP enables an application program to generate *only* the variable data to be printed. The data fields in the print record can be generated in any sequence by the program. Specifications in the page format let you use each field more than one time, if you so choose, and place a field at any position on the page. This makes maintaining applications easier, because the format of the printed output can be changed without affecting the application program. In addition, provided that all of the necessary data fields are contained in the print records, new report formats can be created from an existing application by simply creating a new page definition or page format.

When you format fields from application print records, the page format can be used to:

- Define conditional processing tests based on individual fields in the data.
- Specify the starting position and length in the print record for each field to be formatted.
- Place each field on the page with absolute or relative positioning.
- Specify different print directions for fields within the page, and, optionally, character rotation.
- Select fonts for each field.
- Identify fields that can be suppressed (that is, not printed) on some copies of output or in some transmissions of the output data set.
- Identify fields to be generated as bar codes.

Note: QR Code bar codes require special considerations. See “Using QR Code Bar Codes with SOSI Data” on page 171 for more information.

- Define and place fields of constant text on each page with the variable data.
- Select a color for each field, if the printer supports multiple colors.

Note: Not all printers support multiple colors. For information about color support for your printer, see the documentation provided with the printer.

Formatted and unformatted print records can be used together in an application program to add formatting flexibility.

Fonts

You can specify fonts in a page format in several ways:

- You can name a single font for printing all the text on the page.
- You can name different fonts for use with groups of lines, a single line, or data fields in a record.

- You can add a character rotation parameter to a specified font to rotate characters in the inline print direction, as described in “Printing AFP Data in Different Directions and Character Rotations” on page 4.
- You can specify fonts in a font list for selection by including table reference characters (TRCs) in the data.

If your JCL specifies a page definition that specifies one or more fonts, those fonts are used instead of fonts named in the JCL CHARS parameter (see page 95) or UCS parameter (see page 119). If you want to select FOCA fonts with the JCL CHARS parameter, do not use a page definition that names fonts.

Note: You cannot specify TrueType and OpenType fonts with the JCL CHARS parameter. See “TrueType and OpenType Fonts” on page 23.

If you are using the default page definition for a printer, you can select fonts with the JCL CHARS or UCS parameter, *even if* the default page definition specifies a font.¹¹ A default page definition modified by the CHARS or UCS parameter is classified as a modified-default page definition.

If you are using TRCs to select fonts, you can specify the fonts either in a font list in the page format, or in the JCL CHARS parameter. For rules that might affect your decision about where to specify fonts, see “Using Table Reference Characters to Select Fonts” on page 149.

You can use the PPFA FONT command to select either raster fonts or outline fonts. You can also specify scaling information and size for outline fonts. The line spacing should be coordinated with the size of the font you are using.

When the page definition specifies record format processing, font specifications external to the page definition are ignored.

Conditional Processing

You can use the *conditional-processing* function to:

- Define tests to be performed on fields in selected input records. These tests are called *conditions*.
- Specify *actions* that you want PSF to perform when certain conditions are met.

The actions PSF can conditionally perform are:

- Activating a different copy group. You can do this to change options such as offset stacking and bin selection.
- Activating a different page format. You can do this to change options such as print direction and line spacing.
- Starting a new page.
- Starting a new sheet.

You can also specify when PSF is to perform the conditional actions:

- Before the current line is formatted
- Before the current subpage is formatted
- After the current line is formatted
- After the current subpage is formatted

11. This statement has one exception: If an FCB is named in the JES initialization statements for the printer, and your system programmer has created a page definition by the same name, which names a font, that page definition is the printer default, and the font named in it cannot be overridden by CHARS or UCS in JCL.

Note: A subpage is a logical page; or, in multiple-up applications, a subpage can be part of a logical page. For a description of subpages in multiple-up applications, see "Conditional Processing for Multiple-Up Applications."

Because you can specify that PSF is to change processing options *before* the current line or subpage, you can test an input record and change the processing options before that record is printed. For example, you can specify that when the contents of a certain field in a record are different from the contents of the corresponding field in the preceding record, PSF should start printing on a new page.

Conditional Processing for Multiple-Up Applications: The printable portion of a sheet can be divided into sections called *subpages*, each having the appearance of a smaller printed page, as in Figure 29. Subdividing the printed page in this way is called *multiple-up* printing. In the figure, the traditional line data is printed with subpages to give the *appearance* of four separate pages. Do not confuse multiple-up printing with N_UP printing, which places up to four *actual* logical pages of data on one side of a sheet.

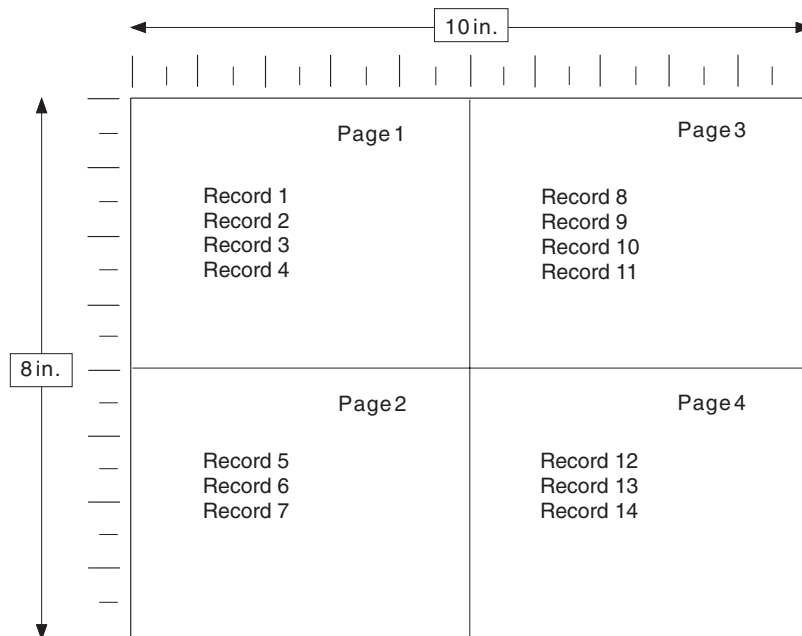


Figure 29. One Logical Page Divided into Four Subpages

You can use multiple-up processing with or without defining sections of the page as subpages. However, you must define subpages to perform conditional processing either before or after one of the subdivisions (subpages) of a multiple-up page. You can only use multiple-up printing with traditional line data.

With the IBM Page Printer Formatting Aid program, you can identify the input records that form a subpage. For more information, see *Page Printer Formatting Aid: User's Guide*.

Multiple Conditions: With conditional processing you can specify more than one condition and corresponding action for the same input record. You can also specify conditions and actions for more than one line in a subpage. If your page definition contains such multiple conditions, more than one of the conditions can be met.

PSF handles multiple conditions as follows:

- If you define multiple conditions for the same input record, PSF performs the specified action for the *first* condition that is met. PSF will not perform any other conditional actions for that input record.
- If you define conditions for more than one input record in the same subpage, and if a condition is met that specifies that PSF is to take an action *after* the current subpage is formatted, PSF will not perform any other conditional actions for subsequent records in that subpage.

Reprocessing: *Reprocessing* occurs when PSF is requested to perform an action either before the current line is formatted or before the current subpage is formatted. In these cases, PSF must reprocess one or more input records, perhaps using a new copy group or page format.

While reprocessing records, PSF does not perform some conditional actions that would require additional reprocessing. Because of these restrictions, you might get unexpected results.

When PSF reprocesses records because a condition specified that PSF was to perform an action before the current line, this restriction applies:

PSF does not perform actions specified to occur either before the line or before the subpage. This restriction is in effect only for the one input record being reprocessed.

When PSF reprocesses records because a condition specified that PSF was to perform an action before the current subpage, these restrictions apply:

- PSF does not perform actions specified to occur before the current subpage. This restriction is in effect for all of the input records in the current subpage.
- PSF does not perform actions specified to occur before the current line. This restriction is in effect only for the first input record in the current subpage.

Notes:

1. The reprocessing restrictions apply even if you specify that PSF is to change to a new page format before reprocessing the input records.
2. Do not use the JCL SEGMENT parameter (see page 116) and conditional processing at the same time. The JCL SEGMENT parameter causes a data set to be broken up into multiple small data sets, and conditional processing is not supported across data set boundaries. If you use the functions at the same time, the results might be unpredictable.

Using Page Definitions Supplied with PSF

General-purpose page definitions for printing traditional line data on some of the more common paper sizes are provided with PSF. These page definitions are described in Appendix B, "Page Definitions Supplied with PSF."

Also supplied are page definitions converted from the FCB modules that were provided with the 3800 Printer Model 1 (FCB3STD1, FCB3STD2, FCB3STD3, FCB36, and FCB38). FCB modules are used with line printers to define the vertical format of printed output: lines per inch, skipping and spacing, and length of form. If you have created customized FCB modules for your line printers, you must convert the FCBs to page definitions for use by a page printer. For information about the page definitions in your system libraries, consult your system-support group.

The source modules are stored in the SYS1.SAPSPDFD library. You can use the source code to customize form definitions and page definitions for your organization.

Chapter 5. Printing Different Types of Data

PSF can print data sets formatted as line data, as XML data, as Mixed Object Document Content Architecture Presentation (MO:DCA-P) data, or as a mixture of line data and MO:DCA-P data. This chapter describes how to use PSF to print the different data types. It includes these sections:

- “Line Data” contains information to help you create line data records and create MO:DCA-P structured fields that can be mixed with line data.
- “XML Data” on page 83 describes how a page definition uses XML start tags to process XML data.
- “MO:DCA-P Data” on page 85 describes how to create and use MO:DCA-P data.
- “AFP Conversion and Indexing Facility (ACIF)” on page 86 describes how you can use ACIF with different types of data.

Line Data

This section is intended to help you create line data records in the format expected by PSF. This section also contains information you can use to create MO:DCA-P structured fields. The structured fields are considered general-use programming interfaces and are documented in *Advanced Function Presentation: Programming Guide and Line Data Reference*; see that publication before creating structured fields in your program.

Line data is application output to be printed that is not in MO:DCA-P format. To compose pages for the page printer from line data, PSF separates the incoming print records into pages according to specifications in a page definition. A page definition is always required for printing line data with PSF. You can create your own page definition or use a page definition provided with PSF. For more information about page definitions, see Chapter 4, “Formatting and Printing Data.” There are two types of line data: traditional and record format. When the term “line data” is used in this publication, the term applies to both types of line data, unless otherwise specified.

The line data input to PSF can consist of records that are fully formatted; it can consist of records that contain only the fields of data to be printed; or it can consist of records of both types. You can use the page definition resource to format fields of line data outside of the application program.

Figure 30 on page 76 shows the difference between formatted and unformatted line text.

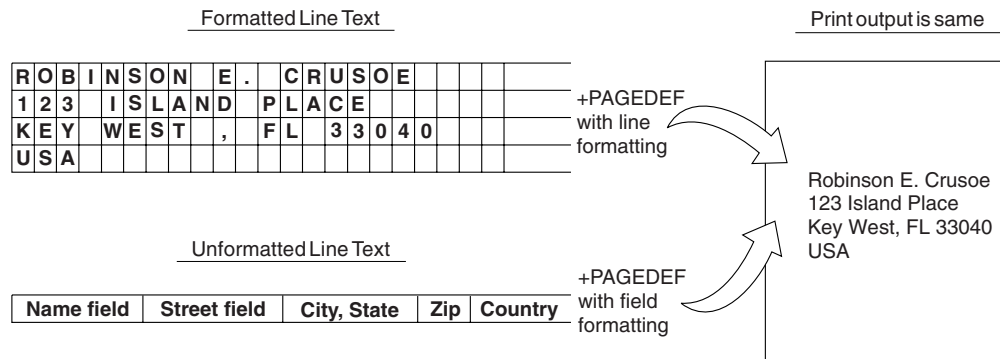


Figure 30. Formatted and Unformatted Text

Traditional Line Data

Traditional line data is data formatted for printing on a line printer. Fully formatted line data can be printed on a line printer without a page definition, but all line data needs a page definition to be printed on a page printer.

A traditional line data record can contain a 1-byte carriage control (CC) character and a 1-byte table reference character (TRC) followed by the data to be printed.¹² Both characters are optional and are defined as follows:

- cc** Carriage control character, which defines the positioning, write, space, or skip operation
- trc** Table reference character, which identifies the font with which the line is to be printed

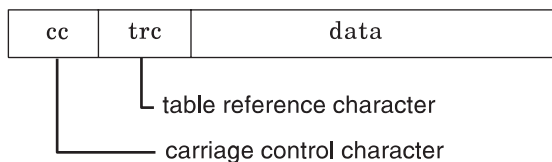


Figure 31. Traditional Line Data Record

Existing applications¹³ that generate data consisting entirely of line data records can be printed on a page printer. However, a page definition is required in place of the forms control buffer (FCB) used for line printers. For information about printing jobs generated for a 3800 line printer and for jobs containing merged lines, see “Merging Data Lines into a Single Print Line” on page 151.

As was noted in “Using Page Definitions Supplied with PSF” on page 73, PSF page definitions are provided for these FCB modules: FCBSTD1, FCBSTD2, FCBSTD3, FCB36, and FCB38. If the name of the page definition is the same as that of the FCB used with a line printer, no JCL changes are required because the FCB parameter is interpreted as the name of a page definition. If the name is different,

12. With a line printer, the maximum number of data bytes in a single input record is 208. With a page printer, the maximum number is 32768 bytes.

13. “Existing applications” are applications originally designed for formatting and printing data on line printers. For considerations that apply when these applications are run on a page printer, see the documentation provided with your printer.

however, you must specify the name of the page definition with either the JCL PAGEDEF parameter (see page 112) or the FCB parameter (see page 104).

TRCs are supported for compatibility with 3800 line printers. For traditional line data applications in which the number of lines between font changes is constant, IBM recommends selecting fonts in the page definition. For font selection when the number of lines between font changes is variable, TRCs can provide more flexibility.

Carriage Control Characters and Table Reference Characters

Traditional line data can contain CC characters, TRCs, both, or neither. CC characters are used to control writing, spacing, and skipping operations as the data is being formatted. TRCs are used to select the font that prints the record text containing the TRC.

For more information about using CC characters and TRCs, see “Specifying Carriage Control and Table Reference Characters in Line Data” on page 148.

Data Lines Merged into a Single Print Line

PSF can merge multiple input data records to print a single print line. When two or more lines of data that contain printable characters are printed in the same line space, the printed line can cause two or more characters to be superimposed. Thus you can print composite characters with line data. You can also use this function to create printed lines in which different fields are printed in different fonts.

Some traditional line data applications merge data lines with lines containing mostly blanks and a few vertical bars. On line printers, this is one way to merge tabular application data with a traditional line data electronic form. This method can more than double the amount of data per page, but at some cost in performance. On AFP printers, you can greatly improve performance by using an overlay to print electronic forms. For more information, see “Overlays” on page 32.

For more information about merging data lines, see “Merging Data Lines into a Single Print Line” on page 151.

Record Format Line Data

A type of line data that is supported by PSF and formatted by a page definition is record format line data. With this format, each data record contains a record identifier, which selects the record descriptor (RCD) in a record format page definition that is used to format the line data, and might contain a carriage control (CC) byte. Record identifiers are 1–250 bytes. However, within a data map, all record identifiers must be the same length. You can use blanks to make the record identifiers the required length. Figure 32 shows the form of record format line data:

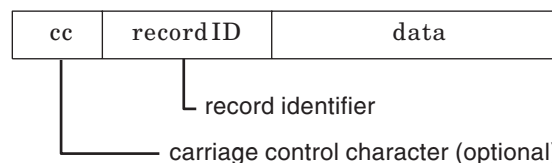


Figure 32. Record Format Line Data Record

The CC byte is required when record format data is mixed with MO:DCA-P data, but is ignored. The CC byte is optional for record format line data at all other times, but if you put it in, you must inform PSF that it is there. For information

about specifying the CC byte, see “Specifying Carriage Control and Table Reference Characters in Line Data” on page 148.

Many functions used in the line descriptor (LND) to format traditional line data are used in the RCD to format record format line data. Others, such as header and trailer processing, are unique to RCDs. For more information about formatting line data, see *Advanced Function Presentation: Programming Guide and Line Data Reference*.

Traditional line data is similar to record format line data in that neither is formatted into pages. However, traditional line data can be printed on line printers while record format line data cannot.

Supported Encoding Schemes for Traditional and Record Format Line Data

The encoding schemes supported by PSF for traditional and record format line data are:

- EBCDIC (single-byte)
- EBCDIC (double-byte)
- ASCII (single-byte only)
- UTF-8
- UTF-16

If your line data is entirely UTF-8 or UTF-16, the UDType parameter must be specified with the PPSA PAGEDEF command so that PSF looks for a Byte Order Mark (BOM). For UTF-8 data, the BOM is the first three bytes of the line data. For UTF-16 data, the BOM is the first two bytes of the line data and tells PSF if the data is in big endian order or little endian order. The BOM is required if the line data encoding is UTF-16 in little endian order. Otherwise, the BOM is optional.

All supported line data encodings can be printed with FOCA fonts and TrueType and OpenType fonts. However, single-byte UTF-8 data can only be printed with FOCA fonts and an ASCII code page that you have specified for the font. For more information about using TrueType and OpenType fonts with the supported encodings, see *Using OpenType Fonts in an AFP System*.

Shift-Out, Shift-In (SOSI) Codes

A data set that contains both single-byte and double-byte character codes can necessitate coding the structured fields in the data set to change from one kind of character code to the other. To avoid doing this, you can instruct PSF to provide special processing by specifying SOSI1, SOSI2, SOSI3, or SOSI4.

The data set can then contain the shift-out code, X'0E', and the shift-in code, X'0F', to indicate to PSF when a font change is required. PSF converts the shift-out and shift-in codes to Set Coded Font Local text controls, described in *Presentation Text Object Content Architecture Reference*.

The conversion for SOSI1 is as follows:

1. Each X'0E' is replaced with a blank (X'40'), followed by a PTOCA structure that contains a Set Coded Font Local text control for the second font.
2. Each X'0F' is replaced with a PTOCA structure that contains a Set Coded Font Local text control for the first font, followed by a blank (X'40').

The conversion for SOSI2 is as follows:

1. Each X'0E' is replaced with a PTOCA structure that contains a Set Coded Font Local text control for the second font.
2. Each X'0F' is replaced with a PTOCA structure that contains a Set Coded Font Local text control for the first font.

The conversion for SOSI3 is as follows:

1. Each X'0E' is replaced with a PTOCA structure that contains a Set Coded Font Local text control for the second font.
2. Each X'0F' is replaced with a PTOCA structure that contains a Set Coded Font Local text control for the first font, followed by two blanks (X'4040').

The conversion for SOSI4 is the same as for SOSI2.

PSF assumes that each line starts with a single-byte font, which means that the data is scanned for the codes one byte at a time. After PSF processes a shift-out code, PSF scans the data two bytes at a time, examining only the first byte of each pair. Because the scan starts one byte at a time on each line, if a line starts with double-byte font data, the first byte in the line must be a shift-out code, so that scanning is done two bytes at a time.

See “Specifying Shift-Out, Shift-In (SOSI) Codes” on page 152 for information about the methods of specifying SOSI codes and examples of specifying SOSI codes.

AFP Structured Fields Included in Line Data

For more flexibility in formatting your line data applications, you can include certain AFP control records and you can embed certain AFP structured fields in the data. This lets you change the formatting of selected pages in a data set, or include images or blocks of page data on a page. By mixing structured fields with line data, you can do these:

- Change a copy group to change electronic overlays, duplexing, paper source, or field suppressions.
- Change a page format to change print direction, data formatting, or conditional processing specifications.
- Include page segments from a library.
- Include page overlays from a library.
- Include image data inline with the application print data.
- Use text control sequences to include MO:DCA-P data, or to draw vertical and horizontal rules on a page.

For a description of the structured fields that can be mixed with line data, see *Advanced Function Presentation: Programming Guide and Line Data Reference*.

When you mix structured fields with line data records, these apply:

- All records in the data set must contain either the X'5A' control character or one of the valid carriage control characters listed in Table 5 on page 148. If no control characters are specified, the data set can contain only line data records.
- The RECFM subparameter of the DCB parameter must specify “A” for American National Standard control characters or “M” for machine-code control characters.
- If the length of the structured field records is greater than or equal to the logical record length defined for the print data set, the record format of the data set must be specified as variable. These record formats can be specified:
 - Variable ANSI (VA)
 - Variable machine (VM)

Variable-blocked ANSI (VBA)

Variable-blocked machine (VBM)

If the length of the structured field records is less than the logical record length defined for the print data set, a fixed-length record format can be specified.

- Structured fields that change copy groups or page formats cause PSF to eject to a new page. The first print record following one of these structured fields is the first record on the new page.
- Structured fields other than those that change copy groups or page formats do not affect the placement of line data records, nor can they affect the font or the orientation used for printing the line data records. These characteristics of line data records are defined in the page definition. Line data records mixed with structured fields print as defined in the page definition, regardless of whether structured fields are present. For example, if line data record two prints on line two of the page when the data set contains no structured fields, the record still prints on line two of the page even if a structured field to write MO:DCA-P data or to include a page overlay is written before it.

A structured field can affect the printing of line data records if it contains text control sequences that change the spacing between characters and between words. Spacing between characters and between words in the line data record is changed, because these characteristics are not controlled in the page definition.

- Line data records can affect the placement, the font, and the orientation of MO:DCA-P data defined with structured fields. If the font ID, the orientation, or the placement is not defined in the structured field, or if the placement is defined as “relative”, the values specified in the page definition for the current line data record is used for the MO:DCA-P data.

If ANSI control characters are defined, the current line data record is the line data record that immediately precedes the structured field record. If machine-code controls are defined for the print data set, the current line data record is the line data record following the structured field record.

- Line data records can also affect the placement of page segments, page overlays, and images. The structured fields used to include page segments or page overlays can specify absolute position relative to the page origin, or placement at the current print line position. Images included directly in a line data set are always placed relative to the current print line. When you include these objects in line data, you can control their position by controlling the placement of the current line data record. This might involve writing a blank line data record at the position desired, or using carriage control characters to place the current line data record at the correct position.

To include a structured field in a print data set, you can either edit the print data set or include instructions in the application program to put the record in the print data set at the correct location, as in the segment from a sample application program shown in Figure 33 on page 82.

Figure 33 on page 82 shows a segment of a sample application program that is writing an Invoke Data Map (IDM) structured field to change the page format to be DATAMAP2, which defines 90° rotated text with an underscored font. The IDM structured field is written between the fifth and sixth line data records to call a new page format. The sixth line data record becomes the first print record on the new page to be formatted with the DATAMAP2 page format. Notice that the carriage control byte for the sixth line data record contains the “+” sign, which is the ANSI code to space zero lines. If the carriage control byte is a blank (ANSI code to skip one line before printing), the sixth record will not print on line 1 of the new page, but on line 2.

The coding in Figure 33 shows the layout and the description of the IDM record. The structured field begins with the X'5A' carriage control byte. A record descriptor word (RDW) field is coded in front of the structured field, because this is an assembly language program that is writing variable-length records. No RDW would be coded if fixed-length records were being written or if the program were written in a high-level language such as COBOL, which does not require user-coded RDW fields.

For information about coding carriage control bytes or variable-length records, see the publications for your programming language. For descriptions of the AFP structured fields, see *Advanced Function Presentation: Programming Guide and Line Data Reference*.

```

.
.
.
OPEN (PRINT,(OUTPUT)) OPEN OUTPUT DATA SET
*****
* PUT FIRST 5 LINES OF DATA *
*****
PUT PRINT,LINE1
.
.
PUT PRINT,LINES
*****
* PUT A Structured Field TO CHANGE THE PAGE FORMAT SO *
* THAT THE TEXT IS ROTATED 90 AND PRINTED USING AN UNDER- *
* SCORED FONT. A NEW PAGE IS STARTED. *
*****
PUT PRINT,IDM
*****
* PUT REMAINING LINES OF DATA *
*****
PUT PRINT,LINE6
.
.
PUT PRINT,LINE10
CLOSE PRINT CLOSE OUT DATA SET
.
.
*****
* DECLARES FOR FIRST 5 LINES OF DATA *
*****
LINE1 DS OCL19 FIRST LINE
RDW1 DC X'00130000' RECORD DESCRIPTOR WORD
DATA1 DC CL15'+THIS IS LINE 1' CARRIAGE CONTROL AND DATA
.
.
LINE5 DS OCL19 FIFTH LINE
RDW5 DC X'00130000' CARRIAGE DESCRIPTOR WORD
DATA5 DC CL15'+THIS IS LINE 5' CARRIAGE CONTROL AND DATA
*****
* DECLARES FOR THE STRUCTURED FIELD *
*****
IDM DS 0XL21 INVOKE DATAMAP STRUCTURED FIELD
RDW DC X'00150000' RECORD DESCRIPTOR WORD
CC DC X'5A' 5A CONTROL CHARACTER
SFLEN DC X'0010' LENGTH OF STRUCTURED FIELD
SFICODE DC X'D3ABCA' HEX CODE FOR INVOKE DATAMAP
SFIFLAGS DC B'00000000' FLAGS
SFISEQ DC X'0001' SEQUENCE NUMBER
PARMS DC C'DATAMAP2 DATAMAP NAME
*****
* DECLARES FOR SECOND 5 LINES OF DATA *
*****
LINE6 DS OCL19 SIXTH LINE
RDW6 DC X'00130000' RECORD DESCRIPTOR WORD
DATA6 DC CL15'+THIS IS LINE 6' CARRIAGE CONTROL AND DATA
.
.
PRINT DCB DSORG=PS,DDNAME=PRINT,MACRF=PM,BLKSIZE=25, X
LRECL=21,RECFM=VBA
END

```

Figure 33. Sample Application Program. This segment of program includes a structured field with line data.

XML Data

This section is intended to help you understand how PSF processes XML data. For a description of XML, see *Extensible Markup Language (XML) 1.0* on the World Wide Web Consortium website: <http://www.w3.org>.

The XML Descriptor structured field (XMD) contains information such as data position, text orientation, font selection, field selection, and conditional processing identification. It is used to format XML data, which consists of information delimited by start and end tags. To process XML data, PSF builds a *Qualified Tag* by concatenating XML start tags. PSF then compares these Qualified Tags to Qualified Tags in the Data Map. PSF builds Qualified Tags for each XMD in the Data Map by concatenating the separate XML Name triplets specified on each XMD. A separate XML Name triplet is specified on an XMD for each XML Start tag that has to be traversed in order to process the content of an XML element.

If an XMD with a matching Qualified Tag is found, the content of the XML element is formatted with that XMD. If an XMD with a matching Qualified Tag is not found, processing resumes with the next start tag. Note that as PSF parses the XML, it must buffer the XML start tags traversed in order to have a "current" Qualified Tag. Each time an end tag is found, the last matching start tag is removed. Consider this XML hierarchy:

```
<person>
  <name>
    <first>John</first>
    <last>Doe</last>
  </name>
</person>
```

The Qualified Tag for the element `<first>` is `{person name first}`. To process this "current" Qualified Tag, PSF looks for an XMD in the Data Map that has the same Qualified Tag. If found, that XMD is used to present the XML element content John on the page. PSF then repeats the process by building a Qualified Tag for the next start tag, `<last>`. This becomes the new "current" Qualified Tag. The Qualified Tag for last is `{person name last}`. Notice that the tag for element `<first>` was removed since its end was received prior to the start tag for element `<last>`.

The processing described in this section is similar to the way the 10-byte record identifier is used for record format line data. After PSF has determined which XMD is needed in order to process the XML element content, the processing is nearly identical to record format processing. For more information about formatting XML data, see *Advanced Function Presentation: Programming Guide and Line Data Reference*.

Element Content

When PSF parses the element content:

- Leading and trailing space characters are removed and sequences of space characters are replaced by a single space character. If a sequence of space characters are part of a CDATA section, the sequence is left intact.
- Any data that follows a nested element is ignored. For example:

```
<begin>Here is some data.
  <nested>This element is nested.
</nested>
  This follows a nested element.
</begin>
```

The data This follows a nested element. is ignored by PSF.

External Entities

PSF does not parse external entities.

Supported Encoding Schemes and Conversions

The encoding schemes supported by PSF for the XML data are:

- EBCDIC (single-byte only)
- ASCII (single-byte only)
- UTF-8
- UTF-16

XML data encoded in UTF-16 can use either *little endian order* or *big endian order*. PSF checks the first two bytes of the data for the Byte Order Mark. If the Byte Order Mark indicates little endian order, PSF converts the data to big endian order. PSF does not support fonts that support the little endian order.

The encoding schemes supported for font code pages in a page definition to print XML data are:

- EBCDIC (single-byte only)
- ASCII (single-byte only)
- Unicode Presentation (UTF-16 without surrogate support)

PSF checks the encoding of the XML data against the font encoding to see if the XML data needs to be converted to another encoding. PSF converts the XML data from:

- ASCII or UTF-8 to UTF-16 if the font encoding is Unicode Presentation. PSF assumes the ASCII or UTF-8 data will convert to UTF-16 data without surrogates.
- UTF-16 to UTF-8 if the font encoding is ASCII. PSF assumes the UTF-16 data will convert to the equivalent of single-byte ASCII when the data is converted to UTF-8. ASCII is a proper subset of UTF-8.

EBCDIC data requires EBCDIC fonts and, therefore, PSF does not convert it.

JCL Parameters

These JCL parameters are ignored when printing XML data:

- OPTCD=J
- TRC
- UCS
- CHARS

In addition, the carriage control character specification on the RECFM subparameter of the DCB parameter is also ignored. Carriage control characters are not valid in XML data.

For an explanation of the JCL parameters, see Chapter 6, “Using JCL for Advanced Function Presentation.”

MO:DCA-P Data

MO:DCA-P data sets contain only structured fields, whose type and sequence must meet the specifications of the AFP architecture as defined in *Mixed Object Document Content Architecture Reference*.

You can write your own MO:DCA-P data, or you can use a product that creates the data for you. The following IBM licensed programs produce MO:DCA-P data for output on page printers. When you use any of these licensed programs to create a document for printing on an AFP printer, the document is created as a data set consisting of structured fields.

Document Composition Facility (DCF)

A general-purpose text-processing program that supports full-page composition of documents, including graphics and images. DCF includes a text formatter, SCRIPT/VS, that processes documents marked up with its own control words as well as documents marked up with Generalized Markup Language (GML) tags. GML tags, which are shorthand text markup, format the elements of the document.

For information about formatting with DCF, see *Document Composition Facility: SCRIPT/VS Text Programmer's Guide*.

Publishing Systems BookMaster® (BookMaster)

An implementation of GML that uses the SCRIPT/VS formatter to control the formatting of documents for printing or viewing.

For information about formatting with BookMaster, see *Publishing Systems BookMaster User's Guide*.

AFP printer driver for Windows

An AFP printer driver that lets any Windows application generate MO:DCA-P output for printing on any printer defined to PSF on the host, or on the LAN to InfoPrint Manager for Windows.

To obtain downloads for Windows operating systems, including AFP printer drivers for Windows, and Network Printer Manager (NPM) for the Web, see the IBM Downloads web page: <http://www.ibm.com/support/entry/portal/Downloads>.

In AFP terms, a compound document is a collection of data objects that makes up the document's content, and the resources and formatting specifications that dictate the processing functions to be performed on that content. A MO:DCA-P document can contain a mixture of presentation text, image, graphics, and bar code data objects. This IBM product can assist application programmers in producing compound documents from the MO:DCA-P data stream:

AFP Toolbox

A program that provides access to sophisticated AFP functions through a callable C, C++, or COBOL interface. For more information, see *AFP Toolbox User's Guide*.

Formatted Data

MO:DCA-P data created by DCF, BookMaster, AFP printer driver, or AFP Toolbox contains in its structured fields all the information necessary to describe how the data should be formatted on a page. You do not need a page definition to print MO:DCA-P data; if you specify a page definition, PSF ignores it.

A form definition is required to define such functions as page positioning, duplex printing, and overlays, among others. You can use both DCF and AFP Toolbox to change copy groups in the form definition, enabling functions such as duplex printing selectively in a print data set. BookMaster does not provide a tag for changing copy groups.

Unless you specifically code a FORMDEF parameter in the JCL for your job, PSF uses a default form definition. The default might contain controls, such as duplex printing, bin (paper source) selection, and page presentation, different from those you want for your job. For information about the FORMDEF parameter, see “Specifying a Form Definition” on page 126. For information about the contents of a form definition, see “Form Definitions” on page 54.

Font Selection

The page output of DCF, BookMaster, AFP printer driver, and AFP Toolbox contains the names of the fonts to be used for the print data set.

JCL Parameters

When you print MO:DCA-P data, the RECFM subparameter of the DCB parameter must specify that the data set contains carriage control characters; for example, RECFM=VBA or RECFM=VBM. Because the only carriage control character used in MO:DCA-P data is the X'5A' for structured fields, you can specify either ANSI (VBA) or machine (VBM) controls.

These JCL parameters are ignored when you print MO:DCA-P data:

- FCB
- OPTCD=J
- PAGEDEF
- TRC
- UCS

For an explanation of the JCL parameters, see Chapter 6, “Using JCL for Advanced Function Presentation.”

AFP Conversion and Indexing Facility (ACIF)

AFP Conversion and Indexing Facility (ACIF) is a PSF batch application development utility that you can use for several purposes:

- To convert line data, XML data, or mixed data into MO:DCA-P data, which is an architected, device-independent data stream used for interchanging documents between different operating systems.

ACIF formats line data and XML data according to instructions in a page definition and converts it into an AFP data stream file. ACIF accepts any data stream that PSF can process, including line-printer data, XML data, the AFP data stream, and MO:DCA-P. The output can then be sent to any AFP-supported system for printing or to a workstation for viewing.

- To index a document to improve viewing, archiving, or retrieving individual pages or groups of pages from large documents; or to create a separate *index object file* from the indexing tags.
- To retrieve and package AFP resources needed for printing or viewing a document and place them in a separate file; to enable viewing and printing of the exact document, possibly years after its creation.

ACIF identifies and processes microfilm setup resources for creating AFP output to a microfilm device. For information about using ACIF, see *AFP Conversion and Indexing Facility User's Guide*.

Chapter 6. Using JCL for Advanced Function Presentation

This chapter describes the JCL statements and parameters you use to print a job with PSF, and gives abbreviated examples. For more complete task examples, see Chapter 7, “Printing Tasks and Examples.”

Each page printer is started with an assigned set of initialization parameters that identify resource libraries and establish the initial printing environment.¹⁴ You can specify JCL parameters in OUTPUT and DD statements to do tasks such as these:

- Assign OUTPUT statements to a DD statement.
- Select the printer.
- Indicate when checkpoints should be taken.
- Specify how error messages and data checks are to be handled during printing.
- Specify resources to be used.
- Specify output characteristics.
- Specify font information.
- Specify a form name for channel attached printers (except the 3820 printer).
- Specify a user resource library.
- Specify the resolution at which the output was formatted.
- Request that PSF notify you or another user when your print job is finished.
- Select a forms flash for the IBM 3800 printer.
- Override print-labeling defaults (for authorized users only). For more information about print labeling, see *PSF for z/OS: Security Guide*.
- Indicate whether to generate an AFP Statistics (AFPSTATS) report.
- Submit jobs to functions provided by Infoprint Server, including the Print Interface subsystem.

For more complete details about parameters and syntax, see the JCL reference publication for your operating system.

Note: If your installation has a license for the Infoprint Server feature of z/OS, you can specify AFP parameters to PSF on the **lp** command. See *z/OS Infoprint Server User's Guide*, for a description of the **lp** command.

Determining Printer Defaults

When JES starts a printer, JCL in the PSF startup procedure establishes libraries. The initial parameters for the printer are set up from Infoprint Server Printer Inventory or the startup procedure. These parameters become the default values for the system. For an explanation of the JCL in the startup procedure, the Printer Inventory, and a general description of how PSF selects resources, see *PSF for z/OS: Customization*.

Page Printer Defaults Form

Before submitting a file for printing, you need to know the defaults for each printer in your installation. At the minimum, you must know the printer selection parameters for the printer you want to use. See your system support group for this information.

¹⁴ PSF-supported printers are commonly, but not always, controlled by OUTPUT and data definition (DD) statements. For more information, see the JCL publications.

For a handy reference, you can copy the form in Appendix D, "Page-Printer Defaults Form," on page 237 and fill it in with the defaults for your installation. Complete a form for each printer you use. You can then select a printer with the defaults you need by referring to the information you have on the forms. You can also determine the parameters you must specify for your file. As an example, a completed form is shown in Figure 34.

PAGE-PRINTER DEFAULTS FORM

PAGE-PRINTER Type is: **InfoPrint 60**

Printer selection parameters: CLASS= **B**

DEST= **REMOTE**

FLASH=

1. Media or form usually loaded in printer:
 For continuous-forms printer, size of form usually loaded: _____
 For continuous-forms printer with a burster-trimmer-stacker (BTS), output usually burst? YES | NO
 For cut-sheet printer, type of media usually in each source:
 Bin 1 **8 1/2 x 11 (white paper)** Bin 2 **8 1/2 x 11 (blue paper)**
 Bin _____ Bin _____

2. DATAK = BLOCK | **UNBLOCK** | BLKCHAR | BLKPOS

3. CKPTPAGE = **0** or CKPTSEC = _____

4. PIMSG = **NO** | YES Message count = **16**

5. FORMDEF= **F1A10110**
 Copy Group= **F2A10110**
 Page Position= **0.165", 0.165"**
 Paper source for cut-sheet printers: **BIN1** | BIN2 | BIN _____
 Duplex: NO | **NORMAL** | TUMBLE | RNORMAL | RTUMBLE
 For 3800 printer: Flash activated? YES | NO

6. PAGEDEF = **P1A06462**
 Form size = **8 1/2 x 11**
 No. of print lines = **64**
 Printable area = **8.17" x 10.67"**
 Lines per inch = **6**
 Print direction: **ACROSS** | DOWN | BACK | UP

7. Default fonts are (listed in TRC sequence):
 0 = **60D8** 1 = _____ 2 = _____ 3 = _____
 If PAGEDEF is not specified in JCL:
 Fonts **CAN** | CANNOT be changed using CHARS *

8. Fonts supported by printer: Resident | Host | **Both**
 Double-byte fonts supported? **YES** | NO
 If yes, default PRMODE: **SOSI1** | SOSI2 | SOSI3 | SOSI4
 PSF Exit 7 has raster fonts automatically mapped to outline fonts for this printer: YES | **NO**

9. Printer attached to DPF or PSF Direct? YES | **NO**

10. Other characteristics of this printer: _____

11. COMSETUP = **H1SETUPD** (microfilm device only)

12. Where are the messages sent: **Printed with output** | Printed on printer | On output class

13. COLORMAP = **M1RESET**

* Fonts can be changed unless a JES default forms control buffer (FCB) (page definition) defined for this printer specifies fonts.

Figure 34. Page-Printer Defaults Form Example

Creating JCL for Direct-Printing Mode

When a job requires direct-printing mode, the PRINTDEV JCL statement is included in the JCL for the job. No PSF startup procedure is used. Some parameters can be specified in the PRINTDEV JCL statement rather than in an OUTPUT or DD statement. The PRINTDEV statement is described in *PSF for z/OS: Customization*.

Some of the parameters described in this chapter do not apply if the printer is in direct-printing mode. If a parameter does not apply, its description includes a statement to that effect.

Note: Some printers cannot be used in direct-printing mode. To see if your printer supports direct-printing mode, see the documentation provided with the printer.

Creating JCL for Microfilm Devices

PSF supports sending AFP data to microfilm¹⁵ devices. You can use the same data set for printing jobs on paper or microfilm by specifying a parameter in your JCL. For information about the JCL parameters, see “Specifying JCL Parameters for Microfilm Jobs” on page 165.

One physical AFP file can have multiple output destinations. JES does not purge the spool file until all outputs are satisfied. Because of this, separate OUTPUT statements can be designated, for instance, one for paper and one for microfilm, for the same print job on the JES spool. Your system programmer can provide the system setup. For more information about using AFP on microfilm devices, see *PSF for z/OS: Customization*.

Note: You cannot send AFP jobs to a microfilm device attached through the Distributed Print Function (DPF) of PSF. A microfilm device cannot be driven in direct-printing mode.

Assigning OUTPUT Statements to a DD Statement

To assign one or more OUTPUT statements to the DD statement, use the OUTPUT parameter in your DD statement. This causes the parameters on the OUTPUT statement to apply to that DD statement. The names of the OUTPUT statements are referred to by the OUTPUT parameter in the DD statement.

All OUTPUT statements assigned to a DD statement must precede the DD statement. The system processes a separate output data set for each OUTPUT statement listed in the OUTPUT parameter of a DD statement. This example shows the OUTPUT statements that are assigned to the DD1 DD statement:

EXAMPLE

```
//OUTPUT1 OUTPUT DEST=name  
//OUTPUT2 OUTPUT DEST=name,FORMDEF=fdefname,PAGEDEF=pdefname  
//DD1 DD SYSOUT=A,OUTPUT=(*.OUTPUT1,*.OUTPUT2)
```

In this example, the system produces separate output data sets for each of the OUTPUT statements: a data set for OUTPUT1, and a data set for OUTPUT2.

15. *Microfilm* can mean either microfiche or 16mm film.

Some parameters can be specified only in a DD statement, and some can be specified only in an OUTPUT statement. Others can be specified in either a DD statement or an OUTPUT statement. If you specify the same parameter in both statements, PSF uses the DD statement parameter rather than the OUTPUT statement parameter. For example, if you use this JCL, the printer destination selected is PRT0, not PRT1.

EXAMPLE

```
//OUTPUT1 OUTPUT DEST=PRT1
//DD1 DD SYSOUT=A,DEST=PRT0,OUTPUT=(*.OUTPUT1)
```

In this and other examples in this publication, DD statements use specifically assigned OUTPUT statements. However, an OUTPUT statement can be assigned to a DD statement by default by specifying DEFAULT=Y on the OUTPUT statement. For more information about this assignment or about the DD and OUTPUT statements, see the JCL reference publication for your operating system.

Specifying AFP Parameters in the JCL

AFP parameters for PSF printer tasks can be specified in JCL on the OUTPUT statement, in a DD statement, or both. Some parameters you specify on the OUTPUT JCL statement have equivalent parameters that you can specify in the DD statement. For some tasks (such as selecting a printer class), the parameter you specify in the DD statement is not the same as the parameter you would specify on the OUTPUT statement. For other tasks (such as selecting a printer destination name), the same parameter can be specified in either statement.

Notes:

1. If a parameter for the same task is specified in both a DD statement and an OUTPUT statement, PSF uses the parameter in the DD statement.
2. If you do not specify a JCL parameter, you can use defaults specified in the Printer Inventory, PSF startup procedure, or JES initialization statements. For details, see *PSF for z/OS: Customization*.

Table 4 shows the AFP parameters you can specify in the JCL and lists whether you can specify a parameter on the OUTPUT JCL statement, in the DD statement, or both.

Table 4. AFP Parameters in JCL

AFP Parameters	OUTPUT	DD	See Page...
AFPPARMS='dsname[(membername)]'	✓		94
AFPSTATS=YES NO	✓		94
BURST=YES NO	✓	✓	95
CHARS=(fontname1[,fontname2][,fontname3][,fontname4])	✓	✓	95
CKPTPAGE=pages	✓		96
CKPTSEC=seconds	✓		97
CLASS=name	✓		97
COLORMAP=membername	✓		98
COMSETUP=membername	✓		98
CONTROL=PROGRAM SINGLE DOUBLE TRIPLE	✓		99
COPIES=(nnn,(groupvalue,groupvalue...))	✓	✓	99
COPYCNT=(nnnnnnnnnn)	✓	✓	100

Table 4. AFP Parameters in JCL (continued)

AFP Parameters	OUTPUT	DD	See Page...
DATAACK=BLOCK UNBLOCK BLKCHAR BLKPOS	✓		101
DEST =[node.]name '[node.]IP:ipaddr'	✓	✓	102
DPAGELBL= YES NO	✓		103
DUPLEX= NO NORMAL TUMBLE	✓		103
FCB =pdefname	✓	✓	104
FLASH =(flashname,[count])	✓	✓	104
FORMDEF =fdefname	✓		105
FORMLEN =xx.yyIN xx.yyCM	✓		106
FORMS =formname	✓		107
INTRAY =nnn	✓		107
LINECT =nnn	✓		108
NOTIFY =(node.userid1[,node.userid2][,node.userid3][,node.userid4])	✓		108
OFFSETXB =nnnn[.mmm]unit	✓		109
OFFSETXF =nnnn[.mmm]unit	✓		110
OFFSETYB =nnnn[.mmm]unit	✓		110
OFFSETYF =nnnn[.mmm]unit	✓		111
OUTBIN =(1-65535)	✓		111
OVERLAYB =ovlyname	✓		112
OVERLAYF =ovlyname	✓		112
PAGEDEF =pdefname	✓		112
PIMSG = <u>YES</u> NO (YES,nnn) (NO,nnn) (,nnn)	✓		113
PRMODE =SOSI1 SOSI2 SOSI3 SOSI4 aaaaaaaaa	✓		114
PRTEROR =HOLD QUIT <u>DEFAULT</u>	✓		115
PRTQUEUE ='printqueueename'	✓		115
RESFMT =P240 P300	✓		116
SEGMENT =page-count		✓	116
SUBSYS =(subsystem_name, printer_definition_name, job_attributes)		✓	117
SYSAREA =YES NO	✓		118
SYSOUT =(class,,formname)		✓	118
TRC =YES <u>NO</u>	✓		119
UCS =fontname	✓	✓	119
USERLIB =('libname1', 'libname2', ... 'libname8')	✓		120
USERPATH =('libpath1', 'libpath2', ... 'libpath8')	✓		121

The user JCL parameters in Figure 35 on page 94 add information to the separator pages printed with an output data set and can help in distributing your printed output. You specify these parameters on the OUTPUT JCL statement.

```
ADDRESS=address
BUILDING=building
DEPT=dept
NAME=name
ROOM=room
TITLE=title
```

Figure 35. Additional JCL Parameters for Distributing Output

For a description of the parameters for distributing output, see “Additional Parameters to Help in Distributing Output” on page 122.

AFPPARMS

Specifies the data set that contains parameters for processing when the AFP Download Plus feature is installed.

Note: You must be using PSF with the AFP Download Plus feature to use this parameter.

An AFPPARMS data set that is specified must first be allocated. If you do not specify an AFPPARMS data set, AFP Download Plus uses default parameter values during processing. For more information about characteristics for the AFPPARMS data set, valid AFPPARMS parameters, and PTFs required for AFPPARMS Printer Inventory functions, see *PSF for z/OS: AFP Download Plus*.

Specify the AFPPARMS parameter in an OUTPUT statement, as follows:

```
AFPPARMS='dsname[(membername)]'
```

The values are:

dsname

Specifies the 1- to 44-character data set name that contains AFP Download Plus parameters.

membername

Specifies an optional eight-character member name that contains AFP Download Plus parameters.

The data set and member name can be a total of 4- to 54-characters (including the parentheses).

EXAMPLE

In this example, the parameters in the specified AFPPARMS data set are used for AFP Download Plus processing:

```
//OUT1 OUTPUT AFPPARMS='MY.OTHER.AFPPD.PARMS(PARMMBR)'  
//DD1 DD SYSOUT=A, OUTPUT=*.OUT1
```

AFPSTATS

Specifies whether you want to generate an AFPSTATS report. An AFPSTATS report gives you detailed information about the print file, such as where resources were found and what significant events happened. The report is generated as a softcopy file but can be formatted and printed by using a page definition provided by IBM. This option is ignored if the AFPSTATS repository is not set up by the system programmer or if the AFPSTATS bit (XTP7ASAP) in Exit 7 is set to OFF by the installation exit.

Specify the AFPSTATS parameter in an OUTPUT statement, as follows:

AFPSTATS=YES | NO

The values are:

Y or YES

Specifies that an AFPSTATS report is generated.

N or NO

Specifies that an AFPSTATS report is not generated. NO is the default.

EXAMPLE

In this example, an AFPSTATS report is requested:

```
//OUT1 OUTPUT AFPSTATS=YES
//PRINT1 DD SYSOUT=A, OUTPUT=*.OUT1
```

For more information about the AFPSTATS report, see Chapter 10, “Obtaining AFP Statistics.”

BURST

Specifies whether you want continuous-forms paper separated into single sheets with a post-processing device that bursts, trims, or stacks, or sent to the continuous-forms stacker. If your data set is printed on a cut-sheet printer, PSF ignores the BURST parameter.

Specify the BURST parameter either in a DD statement or in an OUTPUT statement. If you specify the parameter in both a DD statement and an OUTPUT statement, PSF uses the parameter in the DD statement. If you do not specify the BURST parameter, PSF uses the JES installation default.

BURST=YES | NO

The values are:

Y or YES

Specifies that the printed output is separated into separate sheets in the burster-trimmer-stacker (BTS).

N or NO

Specifies that the output is to be sent to the continuous-forms stacker (CFS) in continuous fanfold form.

For channel-attached printers, the printer operator receives a message that the output is burst. For SNA-attached and TCP/IP-attached printers, the Issue setup messages parameter in the Printer Inventory or the SETUP parameter on the PRINTDEV statement can be used to notify the printer operator that the output will be burst. For more information about these parameters, see *PSF for z/OS: Customization*.

See “Bursting and Stacking Continuous-Forms Paper” on page 156 for examples of using the parameter.

CHARS

Specifies the member name of the FOCA coded font that you want to use to print a data set. Coded fonts that can be used with the CHARS parameter are supplied with the IBM AFP Font Collection. For details about the available fonts and the naming conventions, see *IBM AFP Fonts: Font Summary for AFP Font Collection*.

Note: You cannot specify TrueType and OpenType fonts with this parameter. Instead, use “USERPATH” on page 121. See “TrueType and OpenType Fonts” on page 23 for information about referencing TrueType and OpenType fonts.

Specify the CHARS parameter either in a DD statement or in an OUTPUT statement, as follows:

CHARS=(*fontname1* [,*fontname2*] [,*fontname3*] [,*fontname4*])

The value is:

fontname

Specifies the one to four alphanumeric character name of a FOCA coded font (in a font library). When you use CHARS to specify the member name, do not include the two-character prefix of the coded-font name (X0 through XG).

Remember this when you specify fonts with CHARS:

- If PSF uses a default page definition that names a font, and that page definition is specified as the JES default FCB for your printer, you cannot use the CHARS parameter to override fonts specified in that page definition. See “Specifying and Selecting Fonts” on page 141 for the order in which PSF selects fonts.
- If you specify more than one font with the JCL CHARS parameter, you must use the TRC parameter to tell PSF which font to use for each line of data.
- The fonts you specify must reside in a library assigned to the printer you are using or in a user library specified with the JCL USERLIB parameter, or else they must be inline with the print data set.
- Raster versions of the outline fonts are used unless the system programmer specifies the Map to outline fonts parameter in the Printer Inventory, the MAP2OLN parameter in the PRINTDEV statement, or XTP7MTOF in PSF Exit 7, and the font name conforms to the CHARS naming convention. Generally, you should specify raster fonts in the CHARS parameter.
- You can use a CHARS parameter in jobs printed on 3800 line printers, without changing your JCL.

See “Specifying and Selecting Fonts” on page 141 for examples of using the CHARS parameter.

CKPTPAGE

Specifies how many pages you want between data-set checkpoints.

Specify the CKPTPAGE parameter in an OUTPUT statement, as follows:

CKPTPAGE=*pages*

The value is:

pages

1 to 32767

If you do not specify CKPTPAGE or if you specify both CKPTPAGE and CKPTSEC, PSF uses the JES installation default. See the JCL reference for your operating system.

See “Specifying Printer Checkpoints” on page 172 for examples of using the CKPTPAGE parameter and additional considerations.

Note: When sending output to a microfilm device, see Appendix E, “Microfilm Device Considerations.”

CKPTSEC

Specifies how many seconds you want between data-set checkpoints.

Specify the CKPTSEC parameter in an OUTPUT statement, as follows:

CKPTSEC=seconds

The value is:

seconds

1 to 32767

If you do not specify CKPTSEC or if you specify both CKPTPAGE and CKPTSEC, PSF uses the JES installation default. See the JCL reference for your operating system.

See “Specifying Printer Checkpoints” on page 172 for examples of using the CKPTSEC parameter and additional considerations.

Note: When sending output to a microfilm device, see Appendix E, “Microfilm Device Considerations.”

CLASS

Specifies the output print class for printing the data set.

To specify an output class, either use a SYSOUT parameter on the DD statement, or use a CLASS parameter on an OUTPUT statement assigned to that DD statement. You must specify a class in one statement or the other. If you specify a parameter in both a DD statement and an OUTPUT statement, PSF uses the parameter in the DD statement.

CLASS=name

The value is:

name

Specifies one alphanumeric character for the output print class name.

If a single printer is defined for an output class, CLASS is all you have to specify. If, however, an output class contains a group of printers, select a printer from the group by specifying a destination parameter (see “DEST” on page 102). If you do not, the system selects the first available printer in the class.

EXAMPLES

- To select a printer when only one printer is defined for an output class, specify this on the DD statement:

```
//DD1 DD SYSOUT=A
```

- The SYSOUT parameter on the DD statement overrides the OUTPUT JCL CLASS parameter. In order to use the OUTPUT JCL CLASS parameter, you must code a null class on the DD statement, like this: SYSOUT=(,).

```
//OUTPUT3 OUTPUT CLASS=C,FORMDEF=fdefname  
//DD3 DD SYSOUT=(,),OUTPUT=(*.OUTPUT3)
```

COLORMAP

Specifies the member name of the object container for the color mapping table resource. PSF uses the COLORMAP parameter only when sending output to a printer that supports color mapping table resources.

Specify the COLORMAP parameter in an OUTPUT statement, as follows:

COLORMAP=*membername*

The value is:

membername

Specifies one to eight alphanumeric or national characters for the color mapping table resource name. The first character cannot be numeric. The full member name must be specified; PSF does not add a prefix. IBM recommends a prefix of M1 for color mapping table resources.

If a job is sent to a printer that supports color mapping, and COLORMAP is not specified in the JCL, PSF uses the color mapping table specified in the Printer Inventory or PSF PRINTDEV as a system default. If no system default is specified, PSF uses the value M1RESET. A color mapping table named M1RESET is provided internally with PSF. This table resets all mapping to null. If a color mapping table named M1RESET is available in a user library or PSF object container library, it is used instead of the internal M1RESET table.

You can create your own color mapping table by using the Color Mapping Tool that is included with PSF (see “Creating Color Mapping Tables” on page 175) or you can use an existing resource created by your system programmer.

The color mapping table specified on the COLORMAP parameter must be stored in a PSF system object container library, in a user library specified by the USERLIB parameter, or coded inline as part of the print data set. See “Specifying Color Mapping Tables” on page 166 for examples of using the COLORMAP parameter, including what you need to do to use color mapping table resources inline or from a user library.

COMSETUP

Specifies the member name of the object container for the microfilm setup resource. PSF uses the COMSETUP parameter only when sending output to a microfilm device (see Appendix E, “Microfilm Device Considerations”).

Specify the COMSETUP parameter in an OUTPUT statement, as follows:

COMSETUP=*membername*

The value is:

membername

Specifies one to eight alphanumeric or national characters for the microfilm setup resource name. The first character cannot be numeric. The full member name must be specified; PSF does not add a prefix. IBM recommends a prefix of H1 for microfilm setup resources.

The microfilm setup resource must be stored in a PSF system library, in a PSF user library, or coded inline as part of the print data set. You can create your own microfilm setup resource (see the publications provided with your microfilm device) or use a resource already available on your system. See “Specifying JCL

Parameters for Microfilm Jobs” on page 165 for examples of using the COMSETUP parameter, including what you need to do to use microfilm setup resources inline or from a user library.

CONTROL

Specifies that each logical record in traditional line data starts with a carriage control (CC) character or that the output is printed with single, double, or triple line spacing.

Specify the CONTROL parameter in an OUTPUT statement, as follows:

CONTROL=PROGRAM | SINGLE | DOUBLE | TRIPLE

The values are:

PROGRAM

Specifies that the DCB=RECFM subparameter on the DD statement defines the type of CC character each logical record in the data set begins with. CC characters are either American National Standards Institute (ANSI) or machine code. PROGRAM is the default. See “Specifying Carriage Control and Table Reference Characters in Line Data” on page 148.

SINGLE

Specifies that the output is printed with single spacing.

DOUBLE

Specifies that the output is printed with double spacing.

TRIPLE

Specifies that the output is printed with triple spacing.

EXAMPLE

This example uses an OUTPUT statement and a DD statement to specify that the output data set is printed with a machine code CC character as the first character of each logical record:

```
//OUTPUT1 OUTPUT CONTROL=PROGRAM  
//DD2 DD SYSOUT=A,OUTPUT=*.OUTPUT1,DCB=RECFM=VBM
```

COPIES

Specifies the number of copies you want to print, up to 255 copies.

Specify the COPIES parameter in a DD statement or in an OUTPUT statement. If you specify the parameter in both a DD statement and an OUTPUT statement, PSF uses the parameter in the DD statement. If you do not specify the COPIES parameter (or you specify COPIES=0), and the COPYCNT parameter is not specified, the default is one copy printed.

COPIES=(*nnn*,(*groupvalue*,*groupvalue*...))

The values are:

nnn

Specifies the one- to three-digit decimal number from 1 to 255 that indicates the total number of collated copies you want to print. The data set is sent to the printer *nnn* times, and each copy is printed in page-number sequence. This parameter applies only to the user's data set. Only one transmission is processed for separator pages and for the PSF message data set.

See the COPYCNT parameter if you want to print more than 255 copies. If you specify a number value on both the COPIES and COPYCNT parameters, the value specified on COPYCNT is used. If a group value is specified on the COPIES parameter, PSF ignores the number value that is specified on the COPIES and COPYCNT parameters.

groupvalue

Specifies the one- to three-digit decimal number from 1 to 255 that indicates the number of copies of each page of the data set to be printed consecutively before the next page is printed. You can specify up to eight copy groups (group values), and the data set is sent to the printer one time for each group. The total number of copies equals the sum of the group values. No single group value can be more than 255.

If you specify one or more group values, PSF ignores the number value that is specified on the COPIES and COPYCNT parameters.

If a FORMDEF parameter is specified for the print data set, the number of group values specified determines the number of times the user's print data set is transmitted. Only one transmission is processed for separator pages and for the PSF message data set. In this case, group values following the first group value are ignored. However, the number of copies of each page is determined by information in the form definition. The effects of specifying FORMDEF and COPIES are described in "Using FORMDEF with COPIES or FLASH Parameters in JCL" on page 128.

For more information about printing multiple copies of the job header or the job trailer pages, see *PSF for z/OS: Customization*.

See "Printing More Than One Copy" on page 153 for examples of using the COPIES parameter.

Note: When specifying copies to a microfilm device, see Appendix E, "Microfilm Device Considerations."

COPYCNT

Specifies the number of copies you want to print, up to 2 GB (2,147,483,647) copies.

Specify the COPYCNT parameter in a DD statement or in an OUTPUT statement. If you specify the parameter in both a DD statement and an OUTPUT statement, PSF uses the parameter in the DD statement. If you do not specify the COPYCNT parameter (or you specify COPYCNT=0), and the COPIES parameter is not specified, the default is one copy printed.

COPYCNT=(nnnnnnnnnn)

The value is:

nnnnnnnnnn

Specifies the one- to ten-digit decimal number from 1 to 2147483647 that indicates the total number of collated copies you want to print. The data set is sent to the printer *nnnnnnnnnn* times, and each copy is printed in page-number sequence. This parameter applies only to the user's data set. Only one transmission is processed for separator pages and for the PSF message data set.

If you specify a number value on both the COPIES and COPYCNT parameters, the value specified on the COPYCNT parameter is used. If a group value is specified on the COPIES parameter, PSF ignores the number value that is specified on the COPIES and COPYCNT parameters.

DATAACK

Specifies whether you want the printer to block print-positioning and incorrect-character errors. A print-positioning error is an attempt to print outside the valid printable area. An incorrect-character error is an attempt to use a code point that is not assigned to a character.

Note: When specifying the DATAACK parameter to a microfilm device, see Appendix E, "Microfilm Device Considerations."

Specify the DATAACK parameter in an OUTPUT statement, as follows:

DATAACK=BLOCK | UNBLOCK | BLKCHAR | BLKPOS

The values are:

BLOCK

Specifies that the printer is not to report data-check errors. The printer does not return error messages to PSF, even if data is lost. No data check error messages are created. BLOCK is the default.

UNBLOCK

Specifies that the printer is to report all data-check errors. If a print-positioning error occurs, the exception is highlighted on the printed page to help you find the place at which the printer attempted to print outside the valid printable area.

BLKCHAR

Specifies that the printer is not to report incorrect-character errors. The printer reports print-positioning errors as usual, with exception highlighting to show the locations of the errors.

BLKPOS

Specifies that the printer is not to report print-positioning errors. The printer reports incorrect-character errors as usual.

EXAMPLE

This example uses an OUTPUT statement to specify that data-check errors are not to be blocked:

```
//OUTPUT1 OUTPUT DATAACK=UNBLOCK  
//DD1 DD SYSOUT=A,OUTPUT=(*.OUTPUT1)
```

When you specify a DATAACK parameter, remember this:

- Not all printers perform exception highlighting, and the types of highlighting differ among printers. To see if your printer supports exception highlighting, see the documentation provided with the printer.
- If you receive a message stating that a print-positioning error occurred, you can submit the print job again and specify BLOCK or BLKPOS for the DATAACK parameter to see how much of the job prints without the error. Output produced in this manner is sometimes acceptable.
- If you notice that data is missing from your output, and you specified DATAACK BLOCK or BLKPOS, you can submit the print job again, specifying UNBLOCK or BLKCHAR to receive PSF messages about any print-positioning errors that PSF finds. This method does not apply to incorrect-character errors.
- If you do not specify the DATAACK parameter, PSF uses the default from the PSF startup procedure. If you are using the Page-Printer Defaults form, the default is shown on the form. If no default is specified, PSF uses the default value, DATAACK=BLOCK.

Also, see the PIMSG parameter on page 113, which determines whether PSF prints the error messages that are generated by a data check.

DEST

Specifies a destination name or TCP/IP address for the print data set when you are using the Download for z/OS and AFP Download Plus features of PSF. For more information about using the DEST parameter with these features, see *PSF for z/OS: Download for z/OS* and *PSF for z/OS: AFP Download Plus*.

Specify the DEST parameter in a DD statement or in an OUTPUT statement, as follows:

DEST=[*node.*]name | '*[node.]IP:ipaddr*'

The values are:

node

Specifies a one to eight alphanumeric character node for a printer attached to a different system. The node is optional unless you are specifying a destination on a remote system.

name

Specifies a one to eight alphanumeric character name assigned to a printer on your system or, with the node, a printer attached to a different system.

Not every printer has an assigned destination name. To determine what destination name, if any, you should use for your printer, see Appendix D, "Page-Printer Defaults Form" or consult your system programmer.

IP:ipaddr

Specifies a TCP/IP destination address for a printer, where *ipaddr* is a character string of 1 to 124 printable characters. If *node* is used with the IP address, the entire value is limited to 127 characters. The IP address must be enclosed in single quotation marks.

Remember this about the DEST parameter:

- If you specify a DEST parameter both in the DD statement and in the OUTPUT statement, PSF ignores the parameter in the OUTPUT statement.
- When your job uses direct-printing mode, the DEST parameter does not apply.

EXAMPLES

- This is an example of a DD statement that specifies DEST:

```
//DD1 DD SYSOUT=A,DEST=PRT38
```

- In this example, the print data set specified on the DD statement selects the destination printer specified in the OUTPUT statement:

```
//OUT1 OUTPUT DEST=PRT19  
//DD2 DD SYSOUT=A,OUTPUT=(*.OUT1)
```

- In this example, JES sends the print data set to a node and printer name on a remote system:

```
//OUT2 OUTPUT DEST=SANJOSE.BLDPRT3
```

- In this example, JES sends the print data set to a printer at the specified IP address:

```
//OUT3 OUTPUT DEST='IP:9.117.84.53'
```

- In this example, JES sends the print data set to a node and IP address for a printer on a remote system:

```
//OUT4 OUTPUT DEST='AUSTIN.IP:9.118.96.54'
```

DPAGELBL

Specifies whether PSF prints the security identification label on each page of printed output. The identification label represents a security level and categories as defined to Resource Access Control Facility (RACF®).

The identification label that PSF prints is determined by the SECLABEL parameter of the JCL job card. If you do not specify SECLABEL on the job card, the identification label is printed for the security level of the print job. For more information about specifying the SECLABEL parameter, see *PSF for z/OS: Security Guide*.

You can specify the DPAGELBL parameter in an OUTPUT statement, as follows:

DPAGELBL=YES | NO

The values are:

Y or YES

Specifies that PSF prints a security identification label on each page of printed output.

N or NO

Specifies that PSF does not print a security identification label on each page of printed output.

EXAMPLE

In this example, the security identification label, specified on the SECLABEL parameter of the job statement, is printed on each page of output printed on forms named VP20:

```
//JOBA JOB 1,'JOHN DOE',SECLABEL=CONF
      .
      .
//VPRPT OUTPUT DPAGELBL=YES,FORMS=VP20
```

DUPLEX

Specifies whether printing is to be done on both sides of each sheet. If DUPLEX is not specified, the value specified in the form definition or the internal copy group is used.

You can specify the DUPLEX parameter in an OUTPUT statement, as follows:

DUPLEX=NO | NORMAL | TUMBLE

The values are:

NO

Specifies the printing is to be done on only the front side of each sheet.

NORMAL

Specifies printing is to be done on both sides of the sheet, after which the sheets can be bound on the long edge of the paper.

TUMBLE

Specifies printing is to be done on both sides of the sheet, after which the sheets can be bound on the short edge of the paper.

See “Specifying Duplex Printing” on page 131 for examples of using the DUPLEX parameter. For more information about duplex printing, see “Duplex Printing” on page 56.

FCB

Specifies the name of the page definition to be used in formatting a print data set. PSF adds the system prefix P1 to the forms control buffer (FCB) name you specify and uses it for the page definition.

You can specify the FCB parameter in a DD statement or in an OUTPUT statement, as follows:

FCB=*pdefname*

The value is:

pdefname

Specifies one to four alphanumeric characters for the page definition name. Do not use a P1 prefix.

When using the FCB parameter, remember:

- If you specify the parameter in both a DD statement and an OUTPUT statement, PSF uses the parameter in the DD statement.
- If both an FCB parameter and a PAGEDEF parameter are coded in your JCL, PSF ignores the FCB parameter. For information about the PAGEDEF parameter, see page 112.
- If you are using Line Mode Migration and an FCB parameter and a FORMLEN parameter are coded in your JCL, PSF uses the FORMLEN value and ignores the FCB parameter. For information about the FORMLEN parameter, see page 106. For more information about Line Mode Migration, see *PSF for z/OS: Customization*.
- Because the maximum length of a PAGEDEF parameter is six characters and the maximum length of an FCB parameter is four characters, you cannot use the FCB parameter to specify all page definitions. IBM recommends that you use the PAGEDEF parameter when you do not want any changes in the JCL and you are not converting jobs from line printers.

See “Specifying a Page Definition” on page 135 for examples of using the FCB parameter to specify page definitions.

FLASH

Specifies the name of the forms flash to be printed, and the number of copies on which the flash is to be printed. A forms flash is a 3800 printer hardware frame that prints a photographic negative on selected forms.

You can specify the FLASH parameter in a DD statement or in an OUTPUT statement, as follows:

FLASH=(*flashname*,*count*)

The values are:

flashname

Specifies the one to four alphanumeric character name of the forms flash.

count

Specifies the number of copies (from 1 to 255) on which the forms flash is to be printed. The default is 255; therefore, if this value is not specified, the forms flash is printed on all copies.

When you specify a forms flash, remember:

- If you specify the FLASH parameter in both a DD statement and an OUTPUT statement, PSF uses the parameter in the DD statement.
- A FLASH parameter specified in your JCL statement overrides any FLASH specified in the Form definition parameter in the Printer Inventory or the FORMDEF parameter in the PSF PRINTDEV statement. The PRINTDEV statement, which is set up by your system programmer, contains defaults for PSF to use for any parameters not specified in the JCL.
- If you specify a forms flash within the active copy-group definition, but do not specify a name with the FLASH parameter, PSF uses the forms-flash frame that is currently loaded.
- If you specify both the FORMDEF and FLASH parameters in your JCL, but the form definition does *not* specify FLASH, PSF ignores the FLASH parameter because the FORMDEF parameter overrides it. The forms flash is not printed on any of the copies of your data set. The effects of specifying FORMDEF and FLASH are described in “Using FORMDEF with COPIES or FLASH Parameters in JCL” on page 128.
- If you specify the *count* value in the JCL FLASH parameter, and PSF uses the default form definition because you did not specify the FORMDEF parameter, the modifications specified in the default form definition subgroup (number of copies, flash, overlay identifiers, and suppression identifiers) are not used. A form definition subgroup is described in “Subgroup Modifications” on page 64.
- The FLASH parameter is valid only for the IBM 3800 printer; PSF ignores FLASH for other printers. However, you can use overlays on any printer. Overlays are described in “Overlays” on page 32.
- If you are using the “Page-Printer Defaults” form, it indicates whether the default form definition activates forms flash (see Appendix D, “Page-Printer Defaults Form”).

See “Using a Forms Flash on a 3800 Printer” on page 132 for examples of using the FLASH parameter to specify a forms flash.

FORMDEF

Specifies the member name of the form definition you want to use. PSF adds the system prefix F1 to the member name you specify and uses it for the form definition.

A *form definition* specifies how a page of data is placed on a form, the number of copies of a page, any modifications to that group of copies, the paper source, and whether duplex printing is needed. For more information about the contents of a form definition, see “Form Definitions” on page 54 and Appendix A, “Form Definitions Supplied with PSF.”

You can specify the FORMDEF parameter in an OUTPUT statement, as follows:

FORMDEF=*fdefname*

The value is:

fdefname

Specifies one to six alphanumeric or national characters for the form definition member name. Do not use an F1 prefix.

When you specify a form definition, remember:

- If the FORMDEF parameter is not specified, PSF uses the default form definition specified in the PSF startup procedure or the Printer Inventory. If you are using

the “Page-Printer Defaults” form, this default is contained in the form. For a copy of this form, see Appendix D, “Page-Printer Defaults Form.”

- When the job uses direct-printing mode, you can specify the FORMDEF parameters in an OUTPUT statement or in a PRINTDEV JCL statement. The PRINTDEV statement is described in *PSF for z/OS: Customization*.

The form definition must be stored in a PSF system library, in a PSF user library, or coded inline as part of the print data set. You can create your own form definition or use a resource already available on your system. See “Specifying a Form Definition” on page 126 for examples of using the FORMDEF parameter, including what you need to do to use form definitions inline or from a user library.

FORMLEN

Specifies the paper length in inches or in centimeters. This parameter is used to change the paper length at the printer (physical paper) without reconfiguring the printer.

You can specify the FORMLEN parameter in an OUTPUT statement, as follows:

FORMLEN=xx.yyyIN | xx.yyyCM

The values are:

xx.yyyIN

Specifies up to two digits before the decimal point and up to three digits following the decimal point to indicate paper length in inches.

xx.yyyCM

Specifies up to two digits before the decimal point and up to three digits following the decimal point to indicate paper length in centimeters.

If the FORMLEN parameter is not specified, the printer's default paper length is used. If the printer does not support the Set Media Size command, the FORMLEN parameter is ignored.

The FORMLEN parameter should only be specified in the user's OUTPUT JCL statement. If the FORMLEN parameter is specified on an OUTPUT statement in the PSF startup procedure, it is ignored. The FORMLEN parameter value specified in the user's OUTPUT JCL statement is used for all pages in the data set including the job header, job trailer, data set header, message data set, and interrupt message page.

The FORMLEN parameter is not used for JESNEWS pages. JES creates a separate data set for JESNEWS that does not have the JCL values for the user data set. JES2 puts the JESNEWS on the job header page and the form length value comes from the FORMDEF for the job header. JES3 puts the JESNEWS on the job trailer page and the form length value comes from the FORMDEF for the job trailer.

If you are using Line Mode Migration and a FORMLEN parameter and an FCB parameter are coded in your JCL, PSF uses the FORMLEN value and ignores the FCB parameter. For information about the FCB parameter, see page 104. For more information about Line Mode Migration, see *PSF for z/OS: Customization*.

Note: PSF uses the XOH Set Media Size (SMS) command to set the printer's physical printable area in the length direction by using the FORMLEN value. Although some printers use the SMS values unconditionally, some do not. See your printer hardware documentation to determine how SMS is used by the printer.

EXAMPLE

In this example, a paper length of 9.5 inches is specified in the OUTPUT statement:

```
//OUTPUT1 OUTPUT FORMLen=9.5IN  
//DD1 DD SYSOUT=A,OUTPUT=(*.OUTPUT1)
```

FORMS

Specifies the name of the form that the print operator is notified to load. For channel-attached printers, the printer operator receives a message to load this form. For SNA-attached and TCP/IP-attached printers, the Issue setup messages parameter in the Printer Inventory or the SETUP parameter on the PRINTDEV statement can be used to notify the printer operator to load this form. For more information about these parameters, see *PSF for z/OS: Customization*.

This parameter can also be used to notify the operator that specific Selectable Medium Modifications should be enabled on a post processor. Examples of modifications are applying colored plates, cutting, perforating select pages of output, or using MICR fonts. Consult your system-support group for the paper sizes or Selectable Medium Modifications available on your printer and for the form identification that you use in JCL to specify the paper or Selectable Medium Modifications you want.

To specify the name of a form, either use a SYSOUT parameter on the DD statement or use the FORMS parameter on an OUTPUT statement assigned to that DD statement. You must specify a form in one statement or the other. If you specify a parameter in both a DD statement and an OUTPUT statement, PSF uses the parameter in the DD statement.

FORMS=*formname*

The value is:

formname

Specifies the one to eight alphanumeric character name of the form.

EXAMPLE

In this example, the form is specified in the OUTPUT statement:

```
//OUTPUT1 OUTPUT FORMS=FORM1  
//DD1 DD SYSOUT=A,OUTPUT=(*.OUTPUT1)
```

If you are using the Page-Printer Defaults form (see Figure 34 on page 90), the form typically loaded in the printer is shown.

Note: For information about printing to alternate paper sources, see “Specifying Bins (Paper Source)” on page 131.

INTRAY

Specifies the number that identifies the tray from which paper is to be selected. To determine the input tray identifiers for your printer, see the documentation provided with the printer.

You can specify the INTRAY parameter in an OUTPUT statement, as follows:

INTRAY=*nnn*

The value is:

nnn

Specifies the one- to three-digit decimal number from 1 to 255 that identifies the input tray.

If INTRAY is not specified, the value specified in the form definition is used. However, if no value is specified in the form definition, the printer's default source is used.

EXAMPLE

```
//OUTPUT1 OUTPUT INTRAY=4
//DDN DD SYSOUT=P,OUTPUT=(*.OUTPUT1)
```

Note: For information about Side and Edge Sensitive Paper Handling, see *PSF for z/OS: Customization*.

LINECT

Specifies the maximum number of lines PSF prints on each output page when the FCB parameter is used with line-mode conversion. PSF creates a page break and starts a new page when the number is reached. This parameter value is used if it is smaller than the value specified for the FCB line count.

You can specify the LINECT parameter in an OUTPUT statement, as follows:

LINECT=*nnn*

The value is:

nnn

Specifies the one- to three-digit decimal number from 0 to 255 that indicates the maximum number of lines printed on each page. If LINECT=0, PSF stores the document as one page.

EXAMPLE

In this example, PSF creates a page break and starts a new page after every 45 lines:

```
//PRNTDS OUTPUT LINECT=45
//DD1 DD SYSOUT=P,OUTPUT=(*.PRNTDS)
```

You can only use the LINECT parameter if the Line Mode Migration function is enabled in PSF and Exit 7 requests that the LINECT parameter is used to calculate the number of lines on a page (XTP7LCNT flag is set ON). For more information about Line Mode Migration, see *PSF for z/OS: Customization*.

NOTIFY

Specifies that you want PSF to notify up to four users when the printer finishes printing your job. The NOTIFY message advises a user that the job has been completed, successfully or unsuccessfully, and indicates which output is finished, incomplete, or unprintable. If the printer is attached through DPF, the message that PSF issues does not indicate that printing is complete; it means that PSF has finished the processing.

PSF sends the notice when an output group is stacked. An output group can contain multiple data sets.

You can specify the NOTIFY parameter in an OUTPUT statement, as follows:

NOTIFY=(*node.userid1*[, *node.userid2*][,*node.userid3*][,*node.userid4*])

The values are:

node

Specifies a one to eight alphanumeric character node for a system where the notification is to be sent. The node is optional if it is the same as the system that runs the print job.

userid

Specifies a one to eight alphanumeric character user ID of the person who is to receive the notification.

Even if you have specified the NOTIFY parameter in your print-job JCL, in these circumstances, you will not receive a message saying that your print job has been canceled:

- If a printer operator presses the printer CANCEL key while the first data set of a job containing multiple data sets is printing, the first data set is canceled, rather than the entire group or job. You will not receive a message saying that your print job has been canceled, but you will receive a message saying that your job is complete, even though the first data set is *not* complete. If the operator presses the CANCEL key while the last data set of a group is printing, you will receive a message saying that your print job has been canceled.
- If a printer operator types a JES CANCEL command that specifies your job number, and the job contains multiple data sets, your job is canceled, but you will not receive a message saying that your output has been canceled.

See “Specifying Notification When the Print Job Has Finished Printing” on page 163 for examples of using the NOTIFY parameter.

OFFSETXB

Specifies the offset in the x direction of the logical page origin from the media origin for the back side of each sheet. If OFFSETXB is not specified, the value specified in the form definition is used.

You can specify the OFFSETXB parameter in an OUTPUT statement, as follows:

OFFSETXB=*nnnn*[.*mmm*]*unit*

The values are:

nnnn

Specifies the one- to four-digit number that indicates the offset for the back side of each sheet.

mmm

Specifies the one- to three-digit decimal number that indicates the offset for the back side of each sheet.

unit

Specifies one of these measurement units:

IN	Inches
CM	Centimeters
MM	Millimeters
PELS	Picture elements (1/240 inch)
POINTS	Points (1/72 inch)

Note: If you specify the unit as PELS or POINTS, you must specify the value as a whole number with no decimal point.

OFFSETXF

Specifies the offset in the x direction of the logical page origin from the media origin for the front side of each sheet. If OFFSETXF is not specified, the value specified in the form definition is used.

You can specify the OFFSETXF parameter in an OUTPUT statement, as follows:

OFFSETXF=*nnnn*[*.mmm*]*unit*

The values are:

nnnn

Specifies the one- to four-digit number that indicates the offset for the front side of each sheet.

mmm

Specifies the one- to three-digit decimal number that indicates the offset for the front side of each sheet.

unit

Specifies one of these measurement units:

IN	Inches
CM	Centimeters
MM	Millimeters
PELS	Picture elements (1/240 inch)
POINTS	Points (1/72 inch)

Note: If you specify the unit as PELS or POINTS, you must specify the value as a whole number with no decimal point.

OFFSETYB

Specifies the offset in the y direction of the logical page origin from the media origin for the back side of each sheet. If OFFSETYB is not specified, the value specified in the form definition is used.

You can specify the OFFSETYB parameter in an OUTPUT statement, as follows:

OFFSETYB=*nnnn*[*.mmm*]*unit*

The values are:

nnnn

Specifies the one- to four-digit number that indicates the offset for the back side of each sheet.

mmm

Specifies the one- to three-digit decimal number that indicates the offset for the back side of each sheet.

unit

Specifies one of these measurement units:

IN	Inches
CM	Centimeters
MM	Millimeters

PELS	Picture elements (1/240 inch)
POINTS	Points (1/72 inch)

Note: If you specify the unit as PELS or POINTS, you must specify the value as a whole number with no decimal point.

OFFSETYF

Specifies the offset in the y direction of the logical page origin from the media origin for the front side of each sheet. If OFFSETYF is not specified, the value specified in the form definition is used.

You can specify the OFFSETYF parameter in an OUTPUT statement, as follows:

OFFSETYF=*nnnn*[.*mmm*]*unit*

The values are:

nnnn

Specifies the one- to four-digit number that indicates the offset for the front side of each sheet.

mmm

Specifies the one- to three-digit decimal number that indicates the offset for the front side of each sheet.

unit

Specifies one of these measurement units:

IN	Inches
CM	Centimeters
MM	Millimeters
PELS	Picture elements (1/240 inch)
POINTS	Points (1/72 inch)

Note: If you specify the unit as PELS or POINTS, you must specify the value as a whole number with no decimal point.

EXAMPLE

This JCL example sets the page origin to .5 inches, 1.1 inches on the front side, and 1.5 inches, 1.1 inches on the back side:

```
//OUT1 OUTPUT OFFSETXF=0.5IN,OFFSETYF=1.1IN,
//          OFFSETXB=1.5IN,OFFSETYB=1.1IN
//DDN DD SYSOUT=P,OUTPUT=(*.OUT1)
```

OUTBIN

Specifies the identifier of the output bin into which PSF places a print job. If the output bin is not specified, the value specified in the form definition is used. However, if the printer does not support the selection of an output bin, the job is stacked in the default output bin for the printer.

You can specify the OUTBIN parameter in an OUTPUT statement, as follows:

OUTBIN=*nnnnnn*

The value is:

nnnnn

Specifies the one- to five-digit decimal number from 1 to 65535 that identifies the output bin into which PSF places a print job.

EXAMPLE

In this example, OUTBIN is specified in the OUTPUT statement:

```
//OUTPUT OUTPUT OUTBIN=4
//DD2 DD SYSOUT=A,OUTPUT=(*.OUTPUT1)
```

OVERLAYB

Specifies the member name of a medium overlay to be placed on the back side of each sheet, in addition to overlays from other sources.

You can specify the OVERLAYB parameter in an OUTPUT statement, as follows:

OVERLAYB=*ovlyname*

The value is:

ovlyname

Specifies one to eight alphanumeric or national characters for the member name of a medium overlay. The complete name of the overlay member must be given; PSF does not add an O1 prefix.

See “Printing a Medium Overlay” on page 133 for examples of using the OVERLAYB parameter.

OVERLAYF

Specifies the member name of a medium overlay to be placed on the front side of each sheet, in addition to overlays from other sources.

You can specify the OVERLAYF parameter in an OUTPUT statement, as follows:

OVERLAYF=*ovlyname*

The value is:

ovlyname

Specifies one to eight alphanumeric or national characters for the member name of a medium overlay. The complete name of the overlay member must be given; PSF does not add an O1 prefix.

See “Printing a Medium Overlay” on page 133 for examples of using the OVERLAYF parameter.

PAGEDEF

Specifies the member name of the page definition you want to use. PSF adds the system prefix P1 to the member name you specify and uses it for the page definition.

A *page definition* defines the page format that PSF uses to compose line data into pages. For more information about the contents of a page definition, see “Page Definitions” on page 66 and Appendix B, “Page Definitions Supplied with PSF.”

You can specify the PAGEDEF parameter in an OUTPUT statement, as follows:

PAGEDEF=*pdefname*

The value is:

pdefname

Specifies one to six alphanumeric or national characters for the page definition member name. Do not use a P1 prefix.

When you select a page definition, remember this:

- If the PAGEDEF parameter is not specified, but an FCB parameter is coded in the JCL, PSF uses the page definition named in the FCB parameter. See page 104 for information about coding the FCB parameter.
- If neither a PAGEDEF parameter nor an FCB parameter is coded in your JCL, PSF uses the system default. If you are using the “Page-Printer Defaults” form, this default is shown on the form. For a blank copy of this form, see Appendix D, “Page-Printer Defaults Form.”
- PSF does not support the LINECT parameter on the /*JOBPARM and /*OUTPUT statements. The maximum number of lines to be printed on a page can be defined in a page definition.
- When your job uses direct-printing mode, you can specify the PAGEDEF parameter in an OUTPUT statement or in a PRINTDEV JCL statement. The PRINTDEV statement is described in *PSF for z/OS: Customization*.

The page definition must be stored in a PSF system library, in a PSF user library, or coded inline as part of the print data set. You can create your own page definition or use a resource already available on your system. See “Specifying a Page Definition” on page 135 for examples of using the PAGEDEF parameter, including what you need to do to use page definitions inline or from a user library.

PIMSG

Specifies whether you want PSF messages printed and also specifies the maximum number of errors that can occur before printing is stopped. PSF messages have these characteristics:

- A primary message and possibly other, associated environmental messages are generated for an error.
- A group of messages is generated for an error that stops a process. For example, the messages for an I/O error contain these:
 - A message identifier and the I/O error description
 - Additional message identifiers with their descriptions of the environment in which the error occurred
- Message groups are separated with a blank line in the printed output.

You can specify the PIMSG parameter in an OUTPUT statement, as follows:

PIMSG=YES | NO | (YES,*nnn*) | (NO,*nnn*) | (*nnn*)

The values are:

Y or YES

Specifies that all message groups generated in the processing of a data set are to be printed at the end of the data set, preceding any trailer pages. If a data set is left incomplete because of an error, message groups generated up to this error are printed, including the message group describing the error that stops processing the data set. YES is the default.

N or NO

Specifies that no message groups are to be printed unless an error occurs that forces printing to stop prematurely. If that happens, only the message group describing the error that stops processing is printed.

nnn

Specifies that PSF is to stop processing the data set after *nnn* message groups are generated. The default value is 16. The final count of printed messages might be larger than *nnn* if errors are reported for pages sent to the printer before the message count is reached. A value of 0 for *nnn* allows printing of the data set to continue regardless of the number of message groups generated, unless an error that stops processing occurs.

If PIMSG is not specified, the default is either of these:

- If a default is defined in the PSF startup procedure, PSF uses it. For the “Page-Printer Defaults” form used to record the system defaults, see Appendix D, “Page-Printer Defaults Form.”
- If a default is not defined in the PSF startup procedure, PSF uses PIMSG=(YES,16).

See “Specifying Whether You Want Error Messages to Be Printed” on page 156 for examples of using the PIMSG parameter.

PRMODE

Specifies the type of data in the print data set and whether PSF must perform optional processing of the data.

You can specify the PRMODE parameter in an OUTPUT statement, as follows:

PRMODE=SOSI1 | SOSI2 | SOSI3 | SOSI4 | aaaaaaaaa

The values are:

SOSI1

Specifies that each shift-out, shift-in code is to be converted to a blank and a Set Coded Font Local text control.

SOSI2

Specifies that each shift-out, shift-in code is to be converted to a Set Coded Font Local text control.

SOSI3

Specifies that the shift-in code is to be converted to a Set Coded Font Local text control and two blanks. A shift-out code is to be converted to a Set Coded Font Local text control.

SOSI4

Specifies that each shift-out, shift-in code is to be skipped and not counted when calculating offsets for the print data set. SOSI4 is used when double-byte character set (DBCS) text is converted from ASCII to EBCDIC. When SOSI4 is specified, the page definition offsets are correct after conversion; therefore, the user does not need to account for SOSI characters when computing FIELD offsets.

aaaaaaaa

Specifies any alphanumeric string defined in the JES initialization parameters as a selection criterion for a printer to process the data set. **LINE** and **PAGE** are examples of PRMODE values that JES uses for job routing information.

See “Specifying Shift-Out, Shift-In (SOSI) Codes” on page 152 for examples of using the PRMODE parameter. For more information about specifying SOSI codes, including the data conversion that PSF makes for SOSI1, SOSI2, SOSI3, and SOSI4, see “Shift-Out, Shift-In (SOSI) Codes” on page 78.

PRTERERROR

Specifies the disposition of the print data set to be used if an error occurs during printing for which PSF stops processing the data set.

Note: Your system programmer must enable the use of PRTERERROR in the PRINTDEV statement for PSF. See *PSF for z/OS: Customization*.

You can specify the PRTERERROR parameter in an OUTPUT statement, as follows:

PRTERERROR=HOLD | QUIT | DEFAULT

The values are:

HOLD

Specifies that if an error that stops processing occurs during printing, the data set is held on the JES spool until it is released by the system operator.

QUIT

Specifies that PSF releases the data set to JES, even if an error that stops processing occurs during printing. Then, JES disposes of the data set as though printing had completed successfully. For JES2, the data set is handled according to the OUTDISP value associated with the data set. For JES3, the data set is deleted from the spool.

DEFAULT

Specifies that the standard PSF action is taken if an error that stops processing occurs during printing. As the default, this option is assumed when no attributes are explicitly specified.

The PRTERERROR parameter on the OUTPUT statement is not recognized if any of these conditions exist:

- NO (default) is specified on the Error disposition supported parameter in the Printer Inventory
- NOTHONOR (default) is specified on the PRTERERROR parameter on the PRINTDEV statement
- Data sets are put on hold by PSF installation exits.
- Errors result in a PSF abend.
- Errors in direct-printing mode.
- Mandatory print labeling (MPL) is active.

PRTQUEUE

Specifies the name of the target print queue on a remote system when you are using the Download for z/OS and AFP Download Plus features of PSF. For more information about using the PRTQUEUE parameter with these features, see *PSF for z/OS: Download for z/OS* and *PSF for z/OS: AFP Download Plus*.

You can specify the PRTQUEUE parameter in an OUTPUT statement, as follows:

PRTQUEUE='printqueuename'

The value is:

printqueuename

Specifies a 1- to 127-character print queue name.

EXAMPLE

In this example, the PRTQUEUE parameter specifies a target print queue destination with the name 4019:

```
//OUTQUEUE OUTPUT PRTQUEUE='4019'  
//DDN DD SYSOUT=P,OUTPUT=(*.OUTQUEUE)
```

RESFMT

Specifies the resolution at which the output was formatted. PSF uses this information to choose the correct resolution system library. Your system programmer must define different resolution system libraries, as described in *PSF for z/OS: Customization*.

You can specify the RESFMT parameter in an OUTPUT statement, as follows:

RESFMT=P240 | P300

The values are:

P240

Specifies that PSF should use resources (fonts, overlays, and page segments) from the 240-pel resource libraries.

P300

Specifies that PSF should use resources from the 300-pel resource libraries.

EXAMPLE

This example specifies that the output is formatted at a resolution of 240 pels.

```
//OUT2 OUTPUT RESFMT=P240  
//DD2 DD SYSOUT=A,OUTPUT=(*OUT2)
```

See “Printing on Printers That Support Multiple Resolutions” on page 169 for more information about specifying format resolution to PSF and the order that PSF looks for the specification.

SEGMENT

Specifies that part of the output for a job is to be spooled to print while the job is still running, or specifies that different segments of a job are to be printed simultaneously on different printers. This parameter is optional and can be used only with line data, not with MO:DCA-P data.

You can specify the SEGMENT parameter in a DD statement, as follows:

SEGMENT=*page-count*

The value is:

page-count

Specifies the number of pages to be printed in this segment of the output data set. When the page-count is reached, JES prints that number of pages and begins counting the next segment of pages; it continues counting and printing until the remainder of the data set is printed.

EXAMPLE

This example shows how to print a large data set in segments of 100 pages each. When JES writes 100 pages to an output data set, the segment is scheduled for printing, and JES begins the second segment of 100 pages. The process continues until the entire data set is printed.

```
//DD1 DD SYSOUT=A,SEGMENT=100
```


Notes:

1. SEGMENT is supported only on JES2 systems. You might use SEGMENT when you need to print a large job but do not want to monopolize a single printer for a long time.
2. Using the SEGMENT parameter with conditional processing produces unexpected results, because conditional processing is not supported across data-set boundaries. The SEGMENT parameter causes a data set to be broken into what JES considers separate data sets, which causes conditional processing to stop at the end of the first segment (data set).

SUBSYS

Replaces SYSOUT as a way of submitting print jobs. SUBSYS provides a means of spooling jobs through batch that gives you access to functions provided by Infoprint Server. This lets you take advantage of any transforms Infoprint Server has available. To use SUBSYS, replace **SYSOUT=(class,,formname)** with **SUBSYS=(subsystem_name,...)** on the DD statement.

To use SUBSYS, you must have a license for the Infoprint Server feature of z/OS. For more information about using SUBSYS, see *z/OS Infoprint Server User's Guide*.

You can specify the SUBSYS parameter in a DD statement, as follows:

SUBSYS=(subsystem_name, printer_definition_name, job_attributes)

The values are:

subsystem_name

Specifies the subsystem name. The subsystem name is the name that is used in the PSF startup procedure to identify the Printer Inventory. This parameter is required and can be up to four characters long.

printer_definition_name

Specifies the name of the Infoprint Server printer definition. This value is case sensitive and needs to be entered exactly as specified in the Infoprint Server Printer Inventory. You must surround the name by single quotation marks if it contains lowercase letters. This parameter is optional but recommended. If not specified, the system default printer definition is used.

job_attributes

Specifies optional job attributes. This parameter is a quote-delimited string containing a set of blank-delimited pairs in the format 'job-attribute=value'. If the attribute value contains blanks or special characters, you must enclose the value in double quotation marks. See *z/OS Infoprint Server User's Guide* for a list of supported job attributes.

EXAMPLE

This example shows how to submit output to the subsystem named AOP1. The output is printed with printer definition myprinter, which is set up to start the PostScript to AFP transform. The output from the transform only includes pages 1-10.

```
//OUT1      OUTPUT COPIES=2
//DD1       DD      SUBSYS=(AOP1,'myprinter','filter-options="-p 1-10"'),
//          OUTPUT=(*.OUT1)
```

SYSAREA

Specifies whether an area on each page of printed output is reserved for the security label. The security label represents a security level and categories as defined to RACF. This parameter is used with the DPAGELBL parameter on the OUTPUT statement and the SECLABEL parameter on the job statement.

Note: When a system area is reserved for a security label, the printed output is shifted on each page. You cannot print output data in the reserved area.

You can specify the SYSAREA parameter in an OUTPUT statement, as follows:

SYSAREA=YES | NO

The values are:

Y or YES

Specifies that the area outside the user printable area is reserved for a security label and any attempt to print in the reserved area results in error messages.

N or NO

Specifies that the printable area is not restricted.

If your printer does not support guaranteed print labeling, this parameter must be set to NO. For more information about guaranteed print labeling, security labels, and the SECLABEL parameter, see *PSF for z/OS: Security Guide*.

EXAMPLE

In this example, the security label, specified on the SECLABEL parameter of the job statement, is printed in the system area on each page of output printed on forms named CSEC:

```
//JOB   JOB   1, 'JOHN DOE', SECLABEL=CONF
.
//PRESRPT OUTPUT DPAGELBL=YES, SYSAREA=YES, FORMS=CSEC
//DD1 DD SYSOUT=A, OUTPUT=(*.PRESRPT)
```

SYSOUT

Specifies the output class and, optionally, the form name for the print data set. The output class and the form name can also be specified in the CLASS and FORMS parameters of the OUTPUT statement. For information about using these parameters, see the CLASS parameter on page 97 and the FORMS parameter on page 107.

You can submit jobs to the Infoprint Server subsystem for processing and spooling by using the JCL SUBSYS parameter (you must have a license for the Infoprint Server feature of z/OS). For more information about the Print Interface subsystem, see *z/OS Infoprint Server User's Guide*.

You can specify the SYSOUT parameter in a DD statement, as follows:

SYSOUT=(class,formname)

The values are:

class

Specifies one alphanumeric character for the output print class name.

formname

Specifies the one to eight alphanumeric character name of the form.

You must specify a class value on either the CLASS parameter in the OUTPUT statement or the SYSOUT parameter in the DD statement. If the class or the form name is coded both in the OUTPUT statement and in the SYSOUT parameter, PSF uses the value coded in the DD statement.

EXAMPLE

This example specifies an output class of A. The form name is specified in the OUTPUT statement:

```
//OUT1 OUTPUT FORM=FORM1  
//DD1 DD SYSOUT=A,OUTPUT=(*.OUT1)
```

In the next example, both class and form are specified with the SYSOUT parameter:

```
//DD2 DD SYSOUT=(A,,FORM2)
```

To allow class to be specified in an OUTPUT statement, code the SYSOUT parameter as in this example:

```
//OUT3 OUTPUT CLASS=A  
//DD3 DD SYSOUT=(,),OUTPUT=(*.OUT3)
```

TRC

Specifies whether the print data set contains table reference characters (TRCs).

In traditional line data, you can use different fonts on different lines of a file by specifying TRCs at the beginning of each line after the carriage control characters, if any are present. This parameter cannot be used with record format line data.

To specify a TRC, either use DCB=OPTCD=J on the DD statement, or use the TRC parameter on an OUTPUT statement assigned to that DD statement. You must specify a TRC in one statement or the other. If you specify a parameter in both a DD statement and an OUTPUT statement, PSF uses the parameter in the DD statement.

TRC=YES | NO

The values are:

Y or YES

Specifies that the print data set contains TRCs.

N or NO

Specifies that the print data set does not contain TRCs. NO is the default.

See “Using Table Reference Characters to Select Fonts” on page 149 for examples of using the TRC parameter and guidelines for using TRCs.

UCS

Specifies the member name of the FOCA coded font that you want to use to print a data set. When a CHARS parameter is not specified in the output JCL, you can specify the universal character set (UCS) parameter to identify one font.

You can specify the UCS parameter in a DD statement or in an OUTPUT statement, as follows:

```
UCS=fontname
```

The value is:

fontname

Specifies the one to four alphanumeric character name of a FOCA coded font (in a font library). When you use UCS to specify the member name, do not include the 2-character prefix of the coded-font name (X0 through XG).

EXAMPLE

This example shows the UCS parameter in a DD statement:

```
//DD1 DD SYSOUT=A,UCS=60DB
```

When you specify the UCS parameter, remember:

- If you specify the parameter in both a DD statement and an OUTPUT statement, PSF uses the parameter in the DD statement.
- If you specify a page definition on the OUTPUT statement that specifies fonts for your data set, the UCS parameter is ignored. For more information, see “Fonts” on page 70.
- The UCS parameter is never used in deferred-printing mode under JES3.

USERLIB

Specifies the name, up to 44 characters, of one to eight cataloged MVS™ data sets (user libraries) containing AFP resources for processing the print data set.

PSF dynamically allocates the data sets and searches for resources in them in the order specified on the USERLIB statement. If PSF finds no resources, PSF searches the system libraries defined in the startup procedure. The libraries you specify can contain any of these AFP resources: FOCA fonts, page segments, overlays, page definitions, form definitions, or object container resources. If RACF is installed on your system, RACF checks the authority of the user ID requesting access to a user library.

You can specify the USERLIB parameter in an OUTPUT statement, as follows:

```
USERLIB=('libname1','libname2',... 'libname8')
```

The value is:

libname

Specifies the name of resource user libraries, such as
USERLIB=('USERA.RESOURCE', 'USERA.FONTST').

When you specify the USERLIB parameter, remember:

- For user data sets, PSF ensures that a USERLIB resource is used if USERLIB is specified, even if a resource (not from a USERLIB) with the same name is already loaded in the printer or in virtual storage.
- An inline resource overrides a resource of the same name contained in a USERLIB parameter.
- If you are printing on a printer driven by the Distributed Print Function of InfoPrint Manager for Windows or are using a printer that supports resident fonts, you can use a DPF-resident resource or a printer-resident font instead of your USERLIB resource. For a description of situations in which this can occur, see “Using Printer-Resident Fonts” on page 25.
- As soon as PSF finishes processing a data set, PSF deletes all the USERLIB resources from the printer or from memory. PSF deallocates USERLIB data sets at data set end to make them unavailable to another user.

Also, remember these constraints to dynamic allocation:

- Any libraries specified with the USERLIB parameter must be accessible on all systems on which output can be printed.
- The USERLIB parameter is not supported for direct-printing mode.

See “Printing with Resources from a User Library” on page 160 for examples of using the USERLIB parameter and for other guidelines.

USERPATH

Specifies the name, up to 255 characters, of one to eight UNIX file resource path libraries that contain extended code pages or any resource installed with a resource access table (RAT), such as TrueType and OpenType fonts and data object resources.

Extended coded pages can be installed in path libraries or PDS or PDSE libraries (see “Using Extended Code Pages” on page 159). RAT-installed resources must be installed in the path libraries that are specified with the USERPATH parameter (see “Using TrueType and OpenType Fonts” on page 157 for information about installing fonts or “Specifying Object Container Libraries in UNIX Files” on page 168 for information about installing data objects).

PSF uses z/OS UNIX System Services to access the resources in the user path libraries in the order specified on the USERPATH parameter. If PSF doesn’t find any resources in the user path libraries, it searches the system path libraries; for example, those defined on the FONTPATH parameter or the OBJCPATH parameter in the PSF startup procedure.

To use the USERPATH parameter, PSF must be Unicode-enabled with the PARM parameter on the EXEC statement in the PSF startup procedure or the Uni code enabled parameter in the Printer Inventory (see *PSF for z/OS: Customization*).

You can specify the USERPATH parameter in an OUTPUT statement, as follows:

```
USERPATH=(libpath1,libpath2,...libpath8)
```

The value is:

libpath

Specifies the name of UNIX file resource path libraries, such as
USERPATH=(*’/jdoe/fonts/truetype’,’/jdoe/fonts/truetype/myfonts/’*).


Notes:

1. Any path libraries specified with the USERPATH parameter must contain UNIX files that are accessible with z/OS UNIX System Services and PSF. UNIX files are those that are in a DFSMS Hierarchical File System (HFS) or the z/OS File System (zFS).
2. Make sure that user access permissions are set for any path libraries specified with the USERPATH parameter. Otherwise, PSF cannot obtain the resources from the UNIX files. See “Using TrueType and OpenType Fonts” on page 157 for information about setting permissions.
3. The USERPATH parameter is not supported for direct-printing mode.

See “Printing with Resources from a User Library” on page 160 for examples of using the USERPATH parameter and for other guidelines.

Additional Parameters to Help in Distributing Output

These user JCL parameters add information to the separator pages printed with an output data set. A sample separator page that uses these parameters is shown in Figure 36.

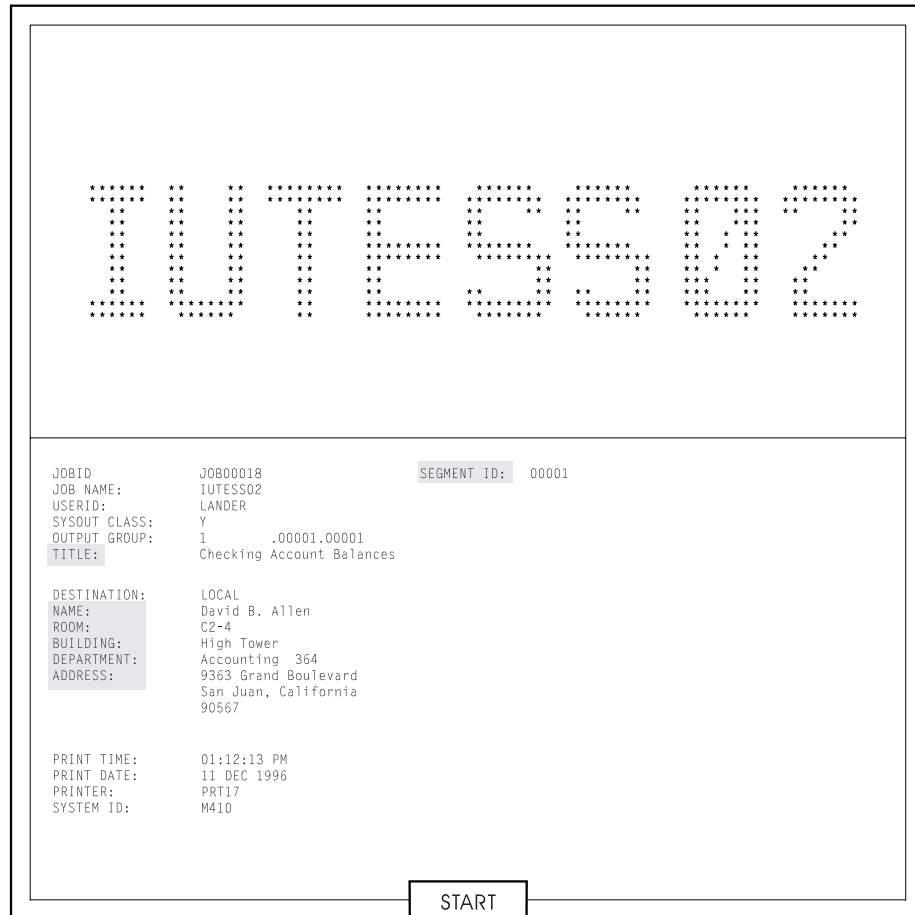

The figure shows a sample header page for a job. At the top, the job name 'JUTESS02' is displayed in a large, dotted, monospaced font. Below this, the page is divided into several sections of text. The first section contains job identification information: JOBID (JOB00018), JOB NAME (JUTESS02), USERID (LANDER), SYSOUT CLASS (Y), OUTPUT GROUP (1), and TITLE (Checking Account Balances). A 'SEGMENT ID: 00001' is also present. The second section provides destination information: DESTINATION (LOCAL), NAME (David B. Allen), ROOM (C2-4), BUILDING (High Tower), DEPARTMENT (Accounting 364), and ADDRESS (9363 Grand Boulevard, San Juan, California, 90567). The third section shows print details: PRINT TIME (01:12:13 PM), PRINT DATE (11 DEC 1996), PRINTER (PRT17), and SYSTEM ID (M410). At the bottom center of the page, there is a rectangular box containing the word 'START'.

Figure 36. Sample Header Page with Additional Distribution Information

If this is a multiple data set job, and each data set has different distribution information on its OUTPUT statement, the distribution information from the OUTPUT statement for the first data set in the job is in the job header, and the distribution information from the OUTPUT statement for the last data set in the job is in the job trailer.

If a data set has data-set-header pages (Exit 3), and the distribution information is being printed on them, they contain the distribution information from the OUTPUT statement for that data set.

ADDRESS=address

Specifies up to four 1-character to 60-character delivery addresses for an output data set. You can type a name in the address field when the name associated with an address is not the name associated with the output data set, which is specified in the NAME parameter. This parameter is optional.

EXAMPLES

- This example prints "J. Plant, 1234 Main Street, Boulder, CO 80301" on the separator pages of each data set that references OUTDS2:

```
//OUTDS2 OUTPUT ADDRESS=('J. Plant','1234 Main Street',  
// 'BOULDER, CO','80301')
```

The output is printed as follows:

```
J. Plant  
1234 Main Street  
Boulder, CO  
80301
```

- This example prints “57 Fair Lane, Omaha, NE 12121” on the separator pages of each data set that references OUTDS3. The first line reserved for the addressee's name is blank on the separator page. The ZIP Code does not require apostrophes, because it contains only characters that are valid without apostrophes:

```
//OUTDS3 OUTPUT ADDRESS=(,'57 Fair Lane','Omaha, NE',12121)
```

The output is printed as follows:

```
57 Fair Lane  
Omaha, NE  
12121
```

BUILDING=*building*

Specifies the name of a building, containing 1 to 60 characters, on the separator pages of the output data set. This can help in distributing output. This parameter is optional.

EXAMPLE

This example prints “920” on the line reserved for BUILDING on the separator pages of any output data set that references OUTDS4:

```
//OUTDS4 OUTPUT BUILDING='920'
```

DEPT=*department*

Specifies a department name, containing 1 to 60 characters, associated with the output data set. This can help in distributing output. This parameter is optional.

EXAMPLE

This example prints “PAYROLL” on the line reserved for DEPT on the separator pages of any output data set that references OUTDS5:

```
//OUTDS5 OUTPUT DEPT='PAYROLL'
```

NAME=*name*

Specifies a name, containing 1 to 60 characters, that is associated with the output data set. This can help in distributing output. This parameter is optional.

EXAMPLE

This example prints “R. ROPER” on the line reserved for NAME on the separator pages of any output data set that references OUTDS6:

```
//OUTDS6 OUTPUT NAME='R. ROPER'
```

Note: When sending output to a microfilm device, see Appendix E, “Microfilm Device Considerations.”

ROOM=*room*

Specifies the name, containing 1 to 60 characters, of the room to be associated with the output data set, which can help in distributing output. This parameter is optional.

EXAMPLE

This example prints “CONFERENCE ROOM” on the line reserved for ROOM on the separator pages of any output data set that references OUTDS7:

```
//OUTDS7 OUTPUT ROOM='CONFERENCE ROOM'
```

When sending output to a microfilm device, see Appendix E, “Microfilm Device Considerations.”

TITLE=*title*

Specifies a description, containing 1 to 60 characters, of the output data set. This can help in distributing output. This parameter is optional.

EXAMPLE

This example prints “ANNUAL REPORT” on the line reserved for TITLE on the separator pages of any output data set that references OUTDS8:

```
//OUTDS8 OUTPUT TITLE='ANNUAL REPORT'
```

Chapter 7. Printing Tasks and Examples

This chapter shows detailed examples of tasks requiring PSF to print data sets on AFP printers. If you need detailed reference information about using the JCL commands, see Chapter 6, “Using JCL for Advanced Function Presentation.”

This is a list of printing tasks in this chapter:

- “Printing on an AFP Printer” on page 126
- “Specifying a Form Definition” on page 126
- “Specifying Duplex Printing” on page 131
- “Specifying Bins (Paper Source)” on page 131
- “Using a Forms Flash on a 3800 Printer” on page 132
- “Printing with Overlays” on page 132
- “Printing Line Data or XML Data with Page Definition Options” on page 135
- “Using Multiple Copy Groups or Page Formats” on page 144
- “Printing Page Segments” on page 146
- “Printing MO:DCA-P Data” on page 147
- “Specifying Carriage Control and Table Reference Characters in Line Data” on page 148
- “Merging Data Lines into a Single Print Line” on page 151
- “Specifying Shift-Out, Shift-In (SOSI) Codes” on page 152
- “Printing More Than One Copy” on page 153
- “Bursting and Stacking Continuous-Forms Paper” on page 156
- “Specifying Whether You Want Error Messages to Be Printed” on page 156
- “Using TrueType and OpenType Fonts” on page 157
- “Processing Unicode Complex Text” on page 158
- “Using Extended Code Pages” on page 159
- “Printing with Resources from a User Library” on page 160
- “Printing with Inline Resources” on page 162
- “Specifying Notification When the Print Job Has Finished Printing” on page 163
- “Inhibiting Recovery of a Print Job” on page 164
- “Specifying Duplex-Page Offset” on page 164
- “Transmitting a Data Set to an IBM i System” on page 164
- “Specifying JCL Parameters for Microfilm Jobs” on page 165
- “Specifying Color Mapping Tables” on page 166
- “Specifying Object Container Libraries in UNIX Files” on page 168
- “Finishing Your Output” on page 168
- “Printing on Printers That Support Multiple Resolutions” on page 169
- “Using QR Code Bar Codes with SOSI Data” on page 171
- “Specifying Printer Checkpoints” on page 172

Printing on an AFP Printer

To print on an AFP printer, you send your z/OS print job to the AFP printer that your system programmer has defined to PSF. For most jobs, you can use the same JCL that you would use for non-AFP printers, changing only the MVS routing information to direct your job to the correct printer. If you do not require special AFP functions, you do not have to specify any AFP options for your print job; you can use the PSF defaults defined for your printer.

The examples in this section show how to select a printer by specifying the JCL class and destination parameters. You specify an output class either with a SYSOUT parameter in the DD statement for the data set, or with a CLASS parameter on an OUTPUT statement assigned to that DD statement (see "CLASS" on page 97). You must specify a class in one statement or the other.

In the first example, a single printer is defined for an output class; therefore, the CLASS parameter is all you need to specify. However, if an output class contains a group of printers, you also need to include a destination (DEST) parameter to select a specific printer from the group, as in the second example. You can specify DEST either in a DD statement or in an OUTPUT statement. If you do not specify the DEST parameter, and the output class contains more than one printer, the system selects the first available printer in the group.

EXAMPLES

1. This example shows how you use only a SYSOUT parameter in the DD statement to select a printer with print class defined as A.

```
//AFPUSERA JOB ...  
//STEP1 EXEC PGM=USERA  
//DD1 DD SYSOUT=A
```

2. This example shows how you select a specific 3820 printer from a group of printers, all of which are defined as CLASS B. You want the 3820 printer with destination name REMOTE1. For this example, the DEST option is coded on the OUTPUT statement.

```
//AFPUSERB JOB ...  
//STEP1 EXEC PGM=USERB  
//OUT2 OUTPUT DEST=REMOTE1  
//DD2 DD SYSOUT=B,OUT=(*.OUT2)
```

In both examples, the job prints according to the AFP defaults that PSF has specified for the printer. For jobs requiring special AFP options, see the examples in "Specifying a Form Definition."

Specifying a Form Definition

A form definition is a resource that defines numerous parameters, such as:

- The placement of a page of data on a form
- The number of copies of a page
- Any modifications to that copy group
- Whether you want a copy group stacked offset from the preceding group
- Whether you want any data fields suppressed (not printed)

You can create your own form definition or use a form definition already available on your system. To create a form definition, use an AFP utility product such as IBM Page Printer Formatting Aid (PPFA). For instructions on how to create a form definition specifying the options you require, see the publications for your utility product.

Using the forms completed with your installation's defaults, read the descriptions of the form definitions available to you. Also see Appendix A, "Form Definitions Supplied with PSF," for descriptions of form definitions provided with PSF. On the basis of this information, you can decide which form definition best meets your present printing requirements.

If your job requires special form-definition options, use the JCL for the print job to specify a form definition that contains those options. The name of the form definition, without its two-character prefix of "F1", is coded in the FORMDEF parameter of the OUTPUT statement (see "FORMDEF" on page 105).

EXAMPLES

PSF provides standard form definitions, which are listed in Appendix A, "Form Definitions Supplied with PSF." The form definition provided for the 3800 printer offsets the page down 0.5 inch to avoid the unprintable area of that printer. Form definitions for other AFP printers offset the page .167 inch across and down from the medium origin and provide different combinations of duplex and paper source options. These form definitions are referenced in these examples:

1. This example specifies a PSF-supplied form definition named F1A10111 to specify duplex printing on a cut-sheet printer. Notice that the prefix "F1" is not coded in the JCL.

```
//AFPUSERA JOB ...
//STEP1 EXEC PGM=USERA
//OUT1 OUTPUT FORMDEF=A10111
//DD1 SYSOUT=A,OUT=(*.OUT1)
```

2. This example specifies a user-created form definition named F1MYFDEF, as well as a page definition named P1MYPDEF. For more information about specifying page definitions, see "Specifying a Page Definition" on page 135.

```
//AFPUSERB JOB ...
//STEP1 EXEC PGM=USERB
//OUT1 OUTPUT FORMDEF=MYFDEF,PAGEDEF=MYPDEF
//DD1 SYSOUT=A,OUT=(*.OUT1)
```

The FORMDEF parameter can specify the resource name of the inline form definition or can specify the keyword DUMMY. If the name in the FORMDEF parameter does not match the name of an inline form definition, PSF uses the resource from the resource library that matches the name in the JCL. If the job does not specify the FORMDEF parameter, PSF uses the first inline form definition in the print data set.

3. In this example, form definition F1MYFDEF is coded inline in the print data set generated by program USERC. For information about coding inline resources, see *Advanced Function Presentation: Programming Guide and Line Data Reference*.

```
//AFPUSERC JOB ...
//STEP1 EXEC PGM=USERC
//OUT1 OUTPUT FORMDEF=DUMMY
//DD1 SYSOUT=A,OUT=(*.OUT1)
```

The form definition specified on the FORMDEF parameter must be stored in one of these places:

- In a PSF system library
- In a user library specified by the USERLIB parameter
- Inline in the print data set (except in XML data)

Using Form Definitions from a User Library:

You can instruct PSF to select a form definition from your user library rather than from a system library assigned to PSF. To use a form definition from a user library, do these:

1. Reference the user library containing the form definition in your JCL. For details, see the USERLIB parameter on page 120.
2. Specify the name of the form definition in the JCL FORMDEF parameter.

To use a form definition from a PSF user library, see “Printing with Resources from a User Library” on page 160.

Using Inline Form Definitions:

To use an inline form definition:

1. Include the inline form definition in the print data set.
2. If you specify the FORMDEF parameter in your JCL, ensure that the name of the inline form definition matches the form definition name specified in your JCL, or else specify FORMDEF=DUMMY in the JCL.
3. If a form definition resource is included inline with the data, ensure that the data set is identified as containing carriage control characters. If the length of the records in the form definition is less than or equal to the logical-record length defined for the data set, you can specify fixed-length records for the record format. If the length of the records in the form definition is greater than the logical-record length defined for the data set, you must specify variable-length records as variable-blocked with ANSI carriage control characters (VBA) or as variable-blocked with machine carriage control characters (VBM) for the record format.

Notes:

1. If you specify FORMDEF=DUMMY in your JCL, and you do not include an inline form definition, PSF uses the default form definition for your printer.
2. If you specify multiple inline form definitions in the print data set and you specify FORMDEF=DUMMY on the OUTPUT statement, PSF uses the last inline form definition in the print data set.
3. If you do not specify the FORMDEF parameter in your JCL, PSF selects the first inline form definition in the print data set.
4. You cannot use inline resources in XML data.

You can include more than one inline form definition in a print data set, and you can change the form definition name in the JCL for different printing jobs to test different form definitions. If the name of an inline form definition does not match the FORMDEF name specified in the JCL, PSF uses the form definition from the resource library that matches the name in the JCL. For more information about using inline form definitions, see *Advanced Function Presentation: Programming Guide and Line Data Reference*.

Using FORMDEF with COPIES or FLASH Parameters in JCL

If you specify a form definition by coding the FORMDEF parameter in the OUTPUT JCL statement, the number of copies and whether a forms flash is used is determined by the specifications in the subgroups of a copy group. If the JCL COPIES parameter is also specified, it is used only to determine how many times the data set is to be transmitted. If the JCL FLASH parameter is specified, PSF ignores it.

Specifying COPIES with the FORMDEF Parameter

The examples in this section show the effects on the number of copies printed when the JCL COPIES parameter is coded and the number of copies is specified in the form definition selected by FORMDEF. "COPIES" on page 100 shows how to code the JCL COPIES parameter.

1. In this example, assume that you have a two-page print job that uses a form definition that includes a copy group containing two subgroups. The first subgroup calls for two copies with a particular set of modifications, and the second subgroup calls for one copy with another set of modifications. In the JCL, you would specify COPIES=3. The data set is transmitted to the printer three times, and you get three collated copies of the entire job. The printed output would be as shown in Figure 37. Nine copies of page one are printed, and nine copies of page two are printed.

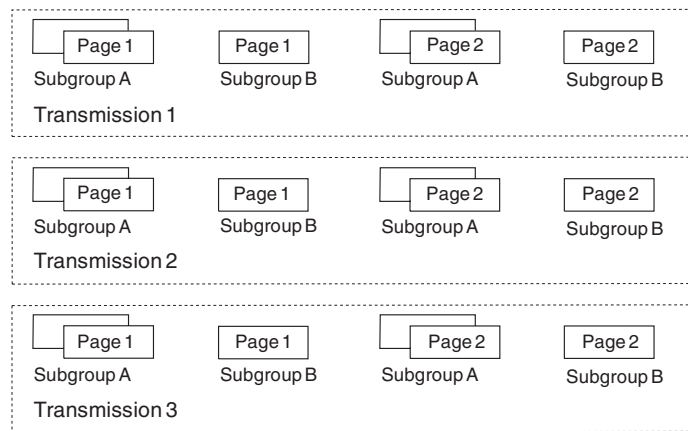


Figure 37. Output from Three Transmissions of a Two-Page Data Set

2. In this example, assume that you use the same form definition as in the first example: the first subgroup specifies two copies, and the second subgroup specifies one copy. In the JCL, specify COPIES=(,3,1,5,2).

The two-page data set is sent to the printer four times, because four *groupvalues* (3,1,5,2) are specified (see page 100). However, those group values have no effect on the number of copies printed, because that number is determined by the form definition specified in the JCL FORMDEF parameter; the number of copies printed would be exactly the same if you used an entirely different set of group values. When the data set has printed, 12 copies of page one are printed, and 12 copies of page two are printed, as Figure 38 on page 130 shows.

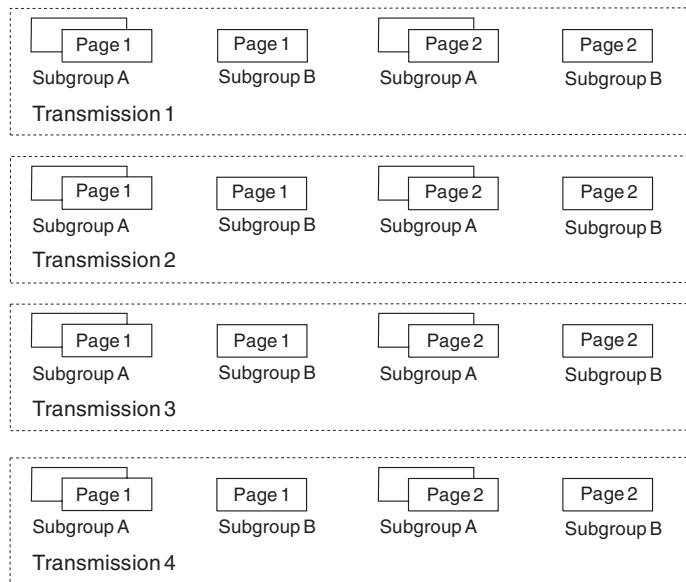


Figure 38. Output From Four Transmissions of a Two-Page Data Set

Specifying COPIES without the FORMDEF Parameter

If PSF uses the default form definition because you did not code the FORMDEF parameter, you can use the JCL COPIES parameter to specify the number of copies to be printed. The system interprets the COPIES parameter variables, *mm* and *groupvalue*, as described on page 100.

If you specify group values in the COPIES parameter, PSF uses only these modifications in the default form definition's subgroup:

- Maximum horizontal adjustment
- Offset stacking
- Edge marking

PSF ignores other modifications. If you specify group values in your JCL, the values override the copy group in the default form definition. A default form definition modified by the group value variable in the COPIES parameter is classified as a modified-default form definition. If you do not specify the COPIES parameter or the COPYCNT parameter, and no copy group values are specified in the active copy group in the form definition, PSF prints a single copy.

Specifying FLASH without the FORMDEF Parameter

If PSF uses the default form definition because you did not code the FORMDEF parameter, you can use the JCL FLASH parameter to specify whether the forms flash unit on your 3800 printer is to be used for your print job. The default form definition modified by the FLASH parameter is classified as a modified-default form definition. For more information about the FLASH parameter, see "Using a Forms Flash on a 3800 Printer" on page 132.

PSF uses only these modifications in the default form definition subgroup:

- Maximum horizontal adjustment
- Offset stacking
- Edge marking

PSF ignores other modifications. If you omit the FLASH parameter, PSF uses the default form definition without modification.

Specifying Duplex Printing

If your AFP printer is capable of printing in duplex mode (printing on both sides of the paper), use the DUPLEX parameter in the OUTPUT statement (see “DUPLEX” on page 103) or the form definition (see “Specifying a Form Definition” on page 126) to control duplexing for your print job.

Printing in duplex saves paper as well as the space required for storing blank forms and printed documents. You can compound the benefits of multiple-up or N_UP printing by printing more than one page of application data on one side of a sheet of paper. For more information, see “Specifying Multiple-Up Printing” on page 139.

EXAMPLES

1. In this example, DUPLEX is defined in the OUTPUT statement:

```
//OUT1 OUTPUT DUPLEX=NORMAL
//DDN DD SYSOUT=P,OUTPUT=(*.OUT1)
```

2. The job in this example uses PSF-supplied form definition F1A10112 to print tumble duplex on paper selected from the primary paper source:

```
//DUPLEX JOB ...
//STEP1 EXEC PGM=USERA
//OUT1 OUTPUT FORMDEF=A10112
//DD1 DD SYSOUT=A,OUTPUT=(*.OUT1)
/*
```

Form definition F1A10112 is described in Appendix A, “Form Definitions Supplied with PSF.”

If your output requires different page margins on the front and back of the form for binding, you can create a form definition that specifies different page offsets for the front and back of the page (see “Duplex-Page Offsets” on page 59). For more information about duplex printing, see “Duplex Printing” on page 56.

Specifying Bins (Paper Source)

Some AFP printers have multiple bins (paper sources) from which you can select the paper for printing your job. To control selecting the paper source, use the form definition. For additional information, see “Specifying a Form Definition” on page 126.

EXAMPLE

This job uses form definition F1A10120, supplied with PSF, to select paper from the alternate paper source.

```
//ALTBIN JOB ...
//STEP1 EXEC PGM=USERA
//OUT1 OUTPUT FORMDEF=A10120
//PRINT DD SYSOUT=A,OUTPUT=(*.OUT1)
/*
```

Form definition F1A10120 is described in “Form Definitions for Printers Other than the 3800, PCL4, and PPDS Printers” on page 194.

Note: For information about Side and Edge Sensitive Paper Handling, see *PSF for z/OS: Customization*.

Changing the Paper Source in a Document

In the example in “Specifying Bins (Paper Source)” on page 131, all the pages of the document are printed on paper from the same source. You might prefer to print your document on white paper from the main paper source and use sheets of colored paper from the alternate source as internal dividers.

To do this, use a form definition that contains multiple copy groups and tell PSF when to use each copy group. For an example of using a form definition that contains multiple copy groups, see “Using Multiple Copy Groups or Page Formats” on page 144.

Using a Forms Flash on a 3800 Printer

A forms flash is a 3800 hardware frame that prints a photographic negative on selected forms. You can use the FLASH parameter (see “FLASH” on page 104) to specify whether the 3800 prints a forms flash. The number of copies to be flashed might be different than the number of copies requested. For example, if the number of copies to be flashed is smaller than the total number of copies requested, the overlay is printed only on the number of copies specified by the FLASH parameter, beginning with the first copy. The following examples show how to use a forms flash on a 3800 printer.

EXAMPLES

1. In this example, the FLASH parameter is specified in the DD statement and requests that a forms flash named LOGO be printed on 15 copies. Because the total copies requested is only 10, the LOGO forms flash is printed on each copy.

```
//DD1 DD SYSOUT=A,FLASH=(LOGO,15),COPIES=10
```

2. In this example, 15 copies are requested, but the FLASH parameter specifies only 10 copies in the OUTPUT statement; therefore, the forms flash is only printed on the first 10 copies.

```
//OUT1 OUTPUT FLASH=(LOGO,10)
//DD1 DD SYSOUT=A,COPIES=15,OUTPUT=*.OUT1
```

3. In this example, the JCL specifies form definition F1UFLASH, a user-created form definition that specifies that a forms flash be used. The FLASH parameter specifies that the forms flash named FL001 is to be used on the first two transmissions of the data set.

```
//OUT2 OUTPUT FLASH=(FL001,2),FORMDEF=UFLASH
//DD2 DD SYSOUT=A,COPIES=3,OUTPUT=*.OUT2
```

If the JCL specifies a form definition that does not specify a forms flash, such as the IBM-supplied form definition F1A10110, PSF ignores the FLASH parameter.

Printing with Overlays

Electronic overlays can be called by the form definition. In addition, with PSF, you can call an overlay by using the OVERLAY subcommand in PPF. You can name and position overlays on the PRINTLINE, LAYOUT, or XLAYOUT command, so that at print time, PSF can access them and merge them with the variable data. Doing this eliminates the need to code Include Page Overlay (IPO) structured field records in the print application.

A *medium overlay* is an overlay called by a form definition; a *page overlay* is an overlay called by a page definition or an IPO structured field. For more information, see “Overlays” on page 32.

You can use a medium overlay to do jobs such as:

- Print the same overlay on every page of a data set.
- Print different overlays on different copies of the same page.
- Print different overlays on front and back of a duplexed data set.
- Print an overlay on either the back or the front of a duplexed form.
- Print an overlay on the back of a duplexed form, without printing application data on the back. For additional information, see “Constant Forms” on page 60.
- Print different overlays on different pages of a document by using medium overlays defined in multiple copy groups. For an example of using multiple copy groups, see “Changing Formatting within a Document” on page 144.

For an example of using a medium overlay, see “Printing a Medium Overlay.”

You can use a page overlay to do jobs such as:

- Print different overlays on different pages of the same job
- Print the same overlay at different positions on different pages of the data set
- In multiple-up applications, use different arrangements of overlays on the “subpages” of a physical form

For an example of using a page overlay, see “Printing a Page Overlay” on page 134.

Printing a Medium Overlay

A medium overlay can be called on the JCL OUTPUT statement or in the form definition. To print a medium overlay:

1. Create an overlay resource. You can create an overlay by using an AFP utility such as IBM Overlay Generation Language (OGL). For more information, see *Overlay Generation Language User’s Guide and Reference*.
2. Use the overlay by one of these methods:
 - Specify the overlay name on the OVERLAYF parameter, the OVERLAYB parameter, or both parameters on the JCL OUTPUT STATEMENT.
 - Use a form definition that names that overlay for printing. You can build the form definition by using an AFP utility such as IBM Page Printer Formatting Aid (PPFA). For more information about building form definitions, see *Page Printer Formatting Aid: User’s Guide*.

EXAMPLE

This example specifies that medium overlay O1FRONT is printed on the front side of each sheet and medium overlay O1BACK is printed on the back side of each sheet:

```
//AFPUSER JOB ...
//STEP1 EXEC PGM=MYAPPL
//OUT1 OUTPUT OVERLAYF=O1FRONT,OVERLAYB=O1BACK
//PRINT DD SYSOUT=A,OUTPUT=(*.OUT1)
/*
```

Printing a Page Overlay

A page overlay is called either by adding the Include Page Overlay (IPO) structured field in the print data or by referencing the overlay in the page definition used for line data or XML data. To print page overlays with a line data or XML data application:

1. Create an overlay resource. You can use, for example, an AFP utility such as IBM Overlay Generation Language (OGL). For more information, see *Overlay Generation Language User's Guide and Reference*.
2. Use the overlay, by either of these methods:
 - Use a page definition that names the overlay for printing. Then specify the name of the page definition in your JCL. You can create the page definition by use of an AFP utility such as IBM Page Printer Formatting Aid (PPFA). For more information, see *Page Printer Formatting Aid: User's Guide*.
 - Code an IPO structured field in the print job, except in XML data.

EXAMPLE

This example, which is applicable to traditional line data only, shows you how to print an overlay named O1PAGE1 on page one of the output and an overlay named O1PAGE3 on page three of the output. This example includes the print records as part of the print job and uses the system utility IEBGENER to send them to the printer.

```
//PAGOVLY JOB ...
//STEP1 EXEC PGM=IEBGENER
//SYSPRINT DD SYSOUT=*
//OUT1 OUTPUT PAGEDEF=P1USEROV
//SYSIN DD DUMMY
//SYSUT2 DD SYSOUT=A,DCB=(RECFM=FBA,BLKSIZE=80),OUTPUT=*.OUT1
//SYSUT1 DD *
1This is print record 1 of page 1.
!.....O1PAGE1.....
This is print record 2 of page 1.
This is print record 3 of page 1.
1This is print record 1 of page 2.
This is print record 2 of page 2.
This is print record 3 of page 2.
1This is print record 1 of page 3.
!.....O1PAGE3.....
This is print record 2 of page 3.
This is print record 3 of page 3.
1This is print record 1 of page 4.
This is print record 2 of page 4.
This is print record 3 of page 4.
```

The IPO structured field contains unprintable hexadecimal coding, represented by periods in the example. For information about coding the IPO structured field, see *Mixed Object Document Content Architecture Reference*; see also “AFP Structured Fields Included in Line Data” on page 79.

MO:DCA data also requires an IPO structured field to call a page overlay. The coding of the IPO structured field is identical with the coding for line data. The name of the page overlay to be used on a page has to be specified in the Map Page Overlay (MPO) structured field of the Active Environment Group for that page. If the MO:DCA application is created by a text-formatting product, that product might automatically create both the MPO and IPO records when the page overlay is requested. If you are writing the Active Environment Group records, see *Mixed Object Document Content Architecture Reference* for the content and structure of the MPO structured field.

Positioning a Page Overlay

If you use an IPO structured field to include an overlay, you specify in the structured field the position at which the overlay is to print. If you use the page definition `OVERLAY` subcommand to include an overlay, you specify the position as a parameter on that command. This position includes the offset coded within the overlay resource. For ease of positioning, page overlays should be created with an internal overlay offset of 0,0.

Take care when positioning page overlays in a page that has a rotated print direction, such as `DOWN` (90°), `BACK` (180°), or `UP` (270°). PSF positions the overlay relative to the logical page origin, which does not change when the print direction (that is, the text orientation) is changed. In addition, PSF positions the physical, top-left corner of the overlay. This means that in a page with a `DOWN` print direction, the IPO position is measured from what appears to be the bottom left corner of the page to the bottom left corner of the overlay, as shown in Figure 39.

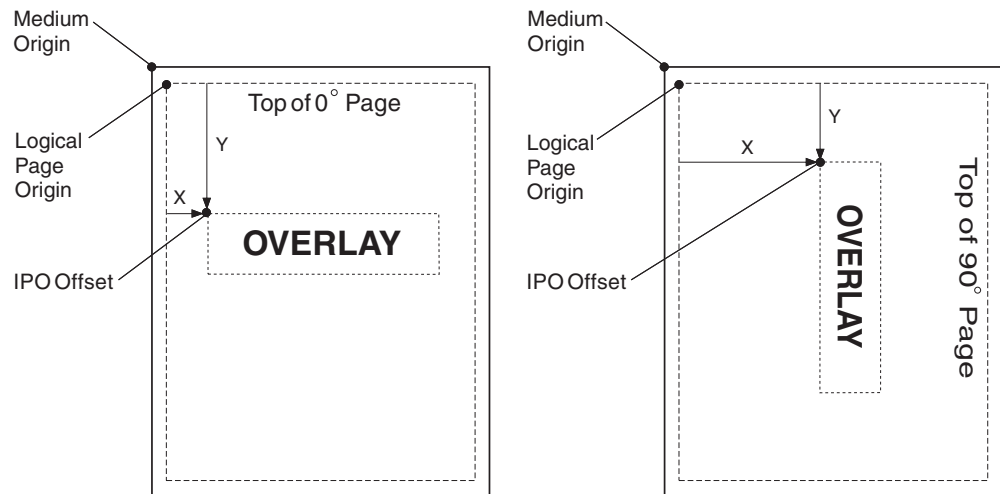


Figure 39. Positioning a Page Overlay

For more information about coding page overlays, see *Overlay Generation Language User's Guide and Reference*.

Printing Line Data or XML Data with Page Definition Options

Line data and XML data are printed according to instructions in the page definition used for printing the data set. A page definition coded in the `PAGEDEF` or the `FCB` parameter must be contained in one of the libraries available to the target printer. For additional information, see “Line Data” on page 75 or “XML Data” on page 83.

To print line data, you can use the default page definition defined for your printer, or you can specify your own page definition. A default page definition can also be used to print XML data. However, since the page definition is tightly coupled to the XML data to be printed, it is more likely that you will specify your own page definition.

Specifying a Page Definition

If your job requires special page definition options, specify a page definition containing those options in the JCL for the print job. To do this, code the page

definition name, without its two-character prefix of "P1", in the PAGEDEF parameter of the OUTPUT statement (see "PAGEDEF" on page 112). For compatibility with non-AFP printers, you can code the page definition name in the FCB parameter of the DD or OUTPUT statement (see "FCB" on page 104). The name coded in the FCB parameter cannot be more than four characters long.

The page definition must be stored in a private user library, a PSF user library (if supported for your system), or inline as part of the print data set (except in XML data). You can create your own page definition or use a page definition already available on your system. To use a page definition from a PSF user library, see "Printing with Resources from a User Library" on page 160.

PSF provides standard page definitions for traditional line data, which are listed in Appendix B, "Page Definitions Supplied with PSF." Page definitions are provided to fit standard paper sizes for AFP printers. These page definitions provide different combinations of line spacing and print direction, as well as some multiple-up definitions. The page definitions are referred to in the following examples.

EXAMPLES

1. This example specifies a user-created page definition named P1MYPDEF, as well as a form definition named F1MYFDEF, in the OUTPUT statement. Do not code the prefixes P1 and F1 in your JCL.

```
//AFPUSERA JOB ...
//STEP1 EXEC PGM=USERA
//OUT2 OUTPUT PAGEDEF=MYPDEF,FORMDEF=MYFDEF
//DD2 DD SYSOUT=A,OUT=(*.OUT2)
```

To create a page definition, use an AFP utility product such as IBM Page Printer Formatting Aid (PPFA). For information about how to use PPFA to create page definitions, see *Page Printer Formatting Aid: User's Guide*. For information about form definitions, see "Specifying a Form Definition" on page 126.

2. In this example, a page definition named P1STD1, supplied with PSF for compatibility with non-AFP printers, is specified with the FCB parameter in the DD statement. Because no form definition is selected for this job, the PSF default form definition for the printer is used.

```
//AFPUSERB JOB ...
//STEP1 EXEC PGM=USERB
//DD2 DD SYSOUT=A,FCB=STD1
```

3. In this example, an FCB is specified in the OUTPUT statement:

```
//AFPUSERD JOB ...
//STEP1 EXEC PGM=USERD
//OUTPUT1 OUTPUT FCB=STD1
//DD1 DD SYSOUT=A,OUTPUT=(*.OUTPUT1)
```

4. In this example, page definition P1MYPDEF is coded inline in the print data set generated by the program USERC. For information about coding inline resources, see *Mixed Object Document Content Architecture Reference*.

```
//AFPUSERC JOB ...
//STEP1 EXEC PGM=USERC
//OUT1 OUTPUT PAGEDEF=DUMMY
//DD1 DD SYSOUT=A,OUT=(*.OUT1)
```

The PAGEDEF parameter must specify either the resource name of the inline page definition or the keyword DUMMY. If the name in the PAGEDEF parameter does not match the name of an inline page definition, PSF uses the

resource from the resource library that matches the name in the JCL. If the PAGEDDEF parameter is not specified in the JCL, PSF selects the first inline page definition in the print data set.

You can store the page definition in any of these places:

- In a system library assigned to PSF for your printer
- In a user library referenced in your JCL
- Inline in the print data set, except in XML data

Using Page Definitions from a User Library:

You can instruct PSF to select a page definition from your user library rather than from a system library assigned to PSF. To use a page definition from a user library, do these:

1. Include in your JCL a reference to the user library that contains the page definition. For details, see the USERLIB parameter on page 120.
2. Specify the name of the page definition in the JCL PAGEDDEF parameter or the FCB parameter of your JCL.

Using Inline Page Definitions:

To use an inline page definition:

1. Include the inline page definition in the print data set.
2. If you specify the PAGEDDEF parameter or the FCB parameter in your JCL, ensure that the name of the inline page definition matches the name of the page definition name specified in your JCL, or else specify PAGEDDEF=DUMMY in the JCL.
3. If a page definition resource is included inline with the data, ensure to identify the data set as containing carriage control characters. If the length of the records in the page definition is less than or equal to the logical-record length defined for the data set, you can specify fixed-length records for the record format. If the length of the records in the page definition is greater than the logical-record length defined for the data set, you must specify variable-length records variable-blocked with ANSI carriage control characters (VBA) or variable-blocked with machine carriage control characters (VBM) for the record format.

Notes:

1. If you specify PAGEDDEF=DUMMY in your JCL, and you do not include an inline page definition, PSF uses the default page definition for your printer.
2. If you specify multiple inline page definitions in the print data set and you specify PAGEDDEF=DUMMY on the OUTPUT statement, PSF uses the last inline page definition in the print data set.
3. If you do not specify the PAGEDDEF or FCB parameter in your JCL, PSF selects the first inline page definition in the print data set, unless a JES default page definition exists.
4. You cannot use inline resources in XML data.

You can include more than one inline page definition in a print data set, and you can change the page definition name in the JCL on different printing jobs to test different page definitions. If, however, the name of an inline page definition does not match the PAGEDDEF name specified in the JCL, PSF uses the page definition

from the resource library that matches the name in the JCL. For more information about using inline page definitions, see *Advanced Function Presentation: Programming Guide and Line Data Reference*.

Using Page Definitions Converted from FCBs:

PSF supports line data applications designed for line printers, so that those jobs can be processed on a page printer with no need to change the application program or its JCL. If you do not specify a PAGEDEF parameter, but you do specify a forms control buffer (FCB) parameter, PSF uses the FCB name as the page definition name.

If you have been using line printers, you have probably used some of the FCB modules provided by IBM. Those FCBs have been converted to page definitions and are provided in the system page definition library. If you used other FCB modules for your line printer, check with your system support group to see whether the FCBs have been converted to page definitions before you attempt to use them.

For more information about the function of a page definition in printing, see “Page Definitions” on page 66.

Specifying Print Direction

For line data or XML data, the page definition can specify a print direction of ACROSS, DOWN, BACK, or UP. For a description of AFP print directions, see “Print Direction” on page 68. In the following examples, PSF-supplied page definitions are used to control the print direction.

EXAMPLES

1. This example specifies printing in the DOWN direction on a 3800 printer loaded with forms measuring 12 inches wide by 8.5 inches high. The resulting output prints in the portrait format; that is, the page is turned so that its top is the short (8.5-inch) edge of the form.

```
//AFPUSERA JOB ...
//STEP1 EXEC PGM=USERA
//OUT1 OUTPUT PAGEDEF=06061
//PRINT DD SYSOUT=A,OUTPUT=(*.OUT1)
/*
```

2. This example specifies printing in the ACROSS direction on a cut-sheet printer. The resulting output is in portrait format because the top of the page will be the shorter, 8.5-inch side of the form. For IBM cut-sheet printers such as the 3825 printer, the top of an ACROSS page is always the short side of the form.

```
//AFPUSERB JOB ...
//STEP1 EXEC PGM=USERB
//OUT1 OUTPUT PAGEDEF=A06462
//PRINT DD SYSOUT=A,OUTPUT=(*.OUT1)
/*
```

3. This example specifies printing in the ACROSS direction on a 3835 printer. Because the 3835 printer has the “Page Presentation Compatibility” feature, the output will be in portrait format unless the form definition used affects page compatibility. For more information, see “Page-Presentation Compatibility” on page 62.

```

//AFPUSERC JOB ...
//STEP1 EXEC PGM=USERC
//OUT1 OUTPUT PAGEDEF=A06462
//PRINT DD SYSOUT=A,OUTPUT=(*.OUT1)
/*

```

Specifying Lines per Inch Spacing

For line data and XML data print jobs, the page definition controls the spacing of the print lines on the page. The following examples use page definitions supplied with PSF to specify different lines per inch (lpi) spacing for traditional line data.

EXAMPLES

1. This example specifies printing at 8 lpi on a 3800 printer. Page definition P106080 prints 60 lines in the ACROSS direction on forms 12 inches wide and 8.5 inches high. The job also specifies the GT12 font, recommended for this page definition.

```

//AFPUSERA JOB ...
//STEP1 EXEC PGM=USERA
//OUT1 OUTPUT PAGEDEF=06080
//PRINT DD SYSOUT=A,OUTPUT=(*.OUT1),CHARS=GT12
/*

```

2. This example prints at 8.5 lpi on a non-3800 printer. Page definition P1V06683 prints 66 lines in the DOWN print direction on letter-sized paper. The job also specifies the 60D8 font, recommended for this page definition as suitable for printing at 8.5-lpi spacing.

```

//AFPUSERB JOB ...
//STEP1 EXEC PGM=USERB
//OUT1 OUTPUT PAGEDEF=V06683
//PRINT DD SYSOUT=A,OUTPUT=(*.OUT1),CHARS=60D8
/*

```

Specifying Multiple-Up Printing

For traditional line data print jobs, the page definition can specify the arrangement of print lines to enable multiple pages of application data to fit on a single printed page. This is called *multiple-up* printing, which is **not** the same as N_UP printing. For additional information about N_UP printing, see “N_UP Printing: Printing Multiple Pages on a Sheet” on page 140.

Multiple-up printing reduces the number of pages required to print a file and can also increase the throughput (that is, the number of pages of application data per minute) of your printer, freeing your printer for other work. In addition to saving paper, multiple-up printing saves space required to store blank forms and printed output. To compound these benefits, see “Specifying Duplex Printing” on page 131.

The following examples use page definitions supplied with PSF to specify multiple-up printing. When printing multiple-up, be careful to select a font small enough to allow the data to fit on the page.

EXAMPLES

1. This example specifies printing two side-by-side application pages of 66 lines each on a 3800 printer. Page definition P1M13280 is designed for forms 12 inches wide and 8.5 inches high. No font is specified in the JCL for the print job, because the page definition itself specifies that font GT24 is to be used for printing.

```
//AFPUSERA JOB ...
//STEP1 EXEC PGM=USERA
//OUT1 OUTPUT PAGEDEF=M13280
//PRINT DD SYSOUT=A,OUTPUT=(*.OUT1)
/*
```

2. This example specifies using page definition P1W120C2 to print two over/under application pages of 60 lines each on a non-3800 printer. Page definition P1W120C2 is designed for letter-size cut-sheet paper or continuous-forms paper 12 inches wide by 8.5 inches long.

Program listings, dumps, and similar application output that are typically printed at 229 impressions per minute (ipm) on a 3900 printer (1 up) will still be printed at or near the same ipm, but will be printed at two pages, rather than one page, per impression. By printing multiple-up (with two pages on each side of a sheet), you can effectively print as many as 458 pages of application data per minute.

```
//AFPUSER1 JOB ...
//STEP1 EXEC PGM=USER1
//OUT1 OUTPUT PAGEDEF=W120C2,FORMDEF=C10110
//PRINT DD SYSOUT=A,OUTPUT=(*.OUT1), CHARS=GT20
```

N_UP Printing: Printing Multiple Pages on a Sheet

With PSF, you can print up to four pages on a sheet printed in simplex mode, or up to eight pages on a sheet printed in duplex mode, by creating a new form definition containing the PPFA N_UP subcommand. To create an application such as the one described in this section, you need a printer that supports N_UP printing, such as an InfoPrint printer. You can use the PPFA program to create the required form definition.

As an example, you might want to print pages one and two of a letter side by side on a single sheet of paper, and then print pages three and four on a second sheet, thus printing a four-page letter on two sheets of paper, as shown in Figure 40. You might also want to specify different overlays or page segments for each page. For example, page one of your letter might contain a company logo, and page four a signature. To avoid printing pages too small to read, you might want to print on a 3935 or a 3900-0W1 printer, either of which can print data up to 17 inches wide.

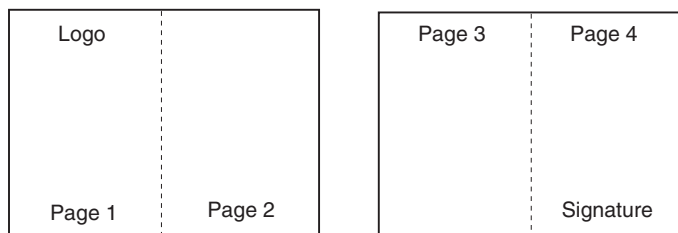


Figure 40. Printing Four Pages on Two Sheets

To create a job similar to that diagrammed in Figure 40, begin by using PPFA to create a form definition that specifies these:

- The N_UP subcommand
- The ACROSS printing direction
- The PORTRAIT page presentation
- A font of the correct size to allow your text to fit in the page area

The *Page Printer Formatting Aid: User's Guide* describes the types of N_UP printing you can perform, shows the command syntax, and provides numerous examples

for basic N_UP printing as well as the commands and syntax for enhanced N_UP printing. For the N_UP 2 form definitions supplied with PSF, see Table 15 on page 195.

EXAMPLE

In this example, SYSOUT A prints on the 3900-0W1 printer. No font is specified in the JCL, because your page definition names a font.

```
//AFPUSER JOB...
//STEP1 EXEC PGM=USERA
//OUTPUT1 OUTPUT PAGEDEF=nupppdef,FORMDEF=nupfdef
//PRINT DD SYSOUT=A,OUTPUT=(*.OUTPUT1)
/*
```

Suppressing Print Data

For line data and XML data, you can tell PSF not to print certain fields in the print records you send to the printer. You do this by using either selective field formatting or print suppression.

You can format selective fields by using a page definition to format only the fields in the print record that you wish to print. Fields that you omit from the format descriptions in the page definition will not be sent to the printer by PSF.

To suppress print data, use a page definition to format the fields *and* label the fields as eligible for suppression. Then use a form definition to specify which of the labeled fields are not to be printed. The suppressed fields are not sent to the printer. Use this method of suppression when you are printing multiple copies of a page and you want the fields printed on some copies but suppressed on other copies.

To create page definitions and form definitions that format fields and suppress data, use an AFP program such as IBM Page Printer Formatting Aid (PPFA). For more information, see *Page Printer Formatting Aid: User's Guide*.

EXAMPLES

1. This example uses a user-created page definition to format only the first 80 bytes of a 120-byte record.

```
//AFPUSERA JOB ...
//STEP1 EXEC PGM=USERA
//OUT1 OUTPUT PAGEDEF=FORMAT
//PRINT DD SYSOUT=A,OUTPUT=(*.OUT1)
/*
```

2. In this example, a user-created page definition formats all the fields to be printed and labels a *Salary* field for suppression. The user-created form definition prints two copies of each page, suppressing the *Salary* field on the first copy.

```
//AFPUSERA JOB ...
//STEP1 EXEC PGM=USERA
//OUT1 OUTPUT PAGEDEF=SUPSAL,FORMDEF=SUPSAL
//PRINT DD SYSOUT=A,OUTPUT=(*.OUT1)
/*
```

Specifying and Selecting Fonts

To use fonts with PSF, you make two choices: you *specify* fonts and *select* fonts. You specify fonts to print the entire print data set. You select fonts to print individual lines or fields of data.

For MO:DCA-P data, you specify and select the fonts within the data stream. For data that PSF has to compose into pages, the fonts are specified either in a page definition or in JCL with the CHARS parameter, but not in both. For a single data set, you cannot mix fonts specified in a page definition with fonts specified in JCL. Select fonts with table reference characters (TRCs), with AFP control records, or in a page definition.

For printing traditional line data, you can specify FOCA fonts in your JCL or all AFP fonts, including TrueType and OpenType fonts, in the page definition. If you do not specify fonts, PSF uses the default font for the printer. In record format line data and XML data, you can only specify fonts in the page definition. If fonts are needed by a record format or XML page definition and none are specified, PSF issues an error message.

If you want the entire data set printed in a single direction, you can specify fonts only in JCL. PSF uses the fonts that have 0° character rotation for the specified direction. When a data set requires fonts with more than one print direction or character rotation, you must specify the fonts in the page definition. To verify whether fonts can be specified in JCL for the default page definition, see the “Page-Printer Defaults” form. Not all printers can print in all four directions. For information about the print directions your printer supports, see the documentation provided with the printer.

This hierarchy shows the order in which PSF selects fonts:

1. Fonts specified in a page definition or FCB that is specified with the PAGEDEF or FCB parameter on the OUTPUT statement. For more information, see “Fonts” on page 70.
2. CHARS parameter specified on a DD statement.
3. CHARS parameter specified on an OUTPUT statement.
4. UCS¹⁶ parameter specified on a DD statement.
5. UCS parameter specified on an OUTPUT statement.
6. JES installation default fonts defined for your printer. See your system programmer for more information. If you are using the “Page-Printer Defaults” form, the default fonts are identified.
7. Fonts specified in a default page definition that is specified with the PAGEDEF parameter in the PRINTDEV statement or the Page definition parameter in the Printer Inventory.

Select a font that is of the correct size for the amount of data and the lines per inch spacing of your print job. Recommended FOCA fonts are listed with the page definition descriptions in Appendix B, “Page Definitions Supplied with PSF.” This appendix also contains tables that list the line-spacing values for some of the page definitions supplied with PSF. See “Page Definition Line-Spacing Values and Fonts” on page 211.

The following examples apply only to fonts used in traditional line data applications. In MO:DCA-P documents or overlays, fonts are defined in structured fields within the document or overlay. See the reference publication for the AFP utility you used to create the overlay or document, or see *Mixed Object Document Content Architecture Reference*.

16. The UCS parameter is never used in deferred-printing mode under JES3.

For additional information about fonts, see “Fonts” on page 18; for information about referencing page definitions, see “Specifying a Page Definition” on page 135.

EXAMPLES

1. In this example, the JCL CHARS parameter is specified in the DD statement:

```
//DD1 DD SYSOUT=A,CHARS=(60D8,50FB,GT12)
```

2. In this example, the JCL CHARS parameter is specified in the OUTPUT statement:

```
//OUT1 OUTPUT CHARS=(60D8,50FB,GT12)
//DD1 DD SYSOUT=A,OUTPUT=(*.OUT1)
```

3. In this example, the JCL CHARS parameter is used to select font 60D8. Because no font is specified in page definition P1V06683, PSF uses the font specified in the CHARS parameter.

```
//AFPUSERB JOB ...
//STEP1 EXEC PGM=USERB
//OUT1 OUTPUT PAGEDEF=V06683
//PRINT DD SYSOUT=A,OUTPUT=(*.OUT1),CHARS=60D8
/*
```

4. This example uses a page definition that contains a font specification. The specified font can be a FOCA font or a TrueType and OpenType font. You do not need to code a CHARS parameter in your JCL. If you do code the CHARS parameter in your JCL, PSF ignores it and uses the font specified in the page definition.

```
//AFPUSERA JOB ...
//STEP1 EXEC PGM=USERA
//OUT1 OUTPUT PAGEDEF=M13280
//PRINT DD SYSOUT=A,OUTPUT=(*.OUT1)
/*
```

5. This example uses the default page definition for the printer and specifies font 60D8 in the JCL.

```
//AFPUSERA JOB ...
//STEP1 EXEC PGM=USERA
//PRINT DD SYSOUT=A,CHARS=60D8
/*
```

Whether the 60D8 font is used depends on how the default page definition is defined for your printer. Your system programmer might have provided this information on the form shown in Appendix D, “Page-Printer Defaults Form.”

For the examples in this chapter, assume that the printer is defined so that specifications of fonts in the CHARS parameter in the JCL override specifications of fonts in the default page definition.

6. In this example, multiple fonts are listed in the JCL CHARS parameter. This lets you select fonts by using table reference characters (TRC) in the print data records. The presence of TRCs in the print data is indicated in the TRC parameter of the OUTPUT statement. If TRCs are not specified in the print data, all the data will print in the first font in the list, 60D8.

```
//AFPUSERA JOB ...
//STEP1 EXEC PGM=USERA
//OUT1 OUTPUT TRC=YES
//PRINT DD SYSOUT=A,CHARS=(60D8,50FB)
/*
```

Fonts for TRC selection can also be specified in the page definition. For additional information, see “Using Table Reference Characters to Select Fonts” on page 149.

Changing Formatting within a Document

In the examples in “Specifying and Selecting Fonts” on page 141, the same formatting specifications are used for all the pages of the line data set. But suppose you want to change some of the formatting in the middle of your data set. For example, suppose you want some pages printed at six lines per inch and other, summary pages printed at 8 lines per inch.

To change page definition options, such as print direction, line spacing, or record formatting in a print job, you have to use a page definition that contains multiple page formats. You also must tell PSF when to use which page format. For an example that shows how to do this, see “Using Multiple Copy Groups or Page Formats.”

Using Multiple Copy Groups or Page Formats

If your print job requires you to change copy group options, such as medium overlays or paper source, for different pages in the data set, do these:

1. Create a form definition that contains multiple copy groups, with the options you want for different pages coded in different copy groups.
2. Identify that form definition in the JCL of your print job by the method described in “Specifying a Form Definition” on page 126.
3. In your print data, include an Invoke Medium Map (IMM) structured field in front of any page on which you want to change the copy groups.
4. Alternatively, you might be able to use conditional processing in a page definition to trigger the use of a new copy group determined by the content of data fields in the application. This eliminates the need to code IMM structured fields in the data.

Note: Instead of defining a copy group in a form definition, you can define a copy group in the print data set. See “Internal Copy Groups” on page 53 for more information.

Similarly, if your job requires different page definition options for different pages in the data set, such as lines per inch spacing or print direction, do these:

1. Create a page definition that contains multiple page formats, with the options you want for different pages coded in different page formats.
2. Identify that page definition in the JCL of your print job, as described in “Specifying a Page Definition” on page 135.
3. In your print data, include an Invoke Data Map (IDM) structured field in front of any page on which you want to change the page formats.
4. Alternatively, you might be able to use conditional processing in a page definition to use a new page formats base on data fields in the application. This eliminates the need to code IDM structured fields in the data.

You can include the IMM and IDM structured fields yourself, or you can call them by using the Conditional Processing function of the page definition. For additional information, see “Conditional Processing” on page 71 and “AFP Structured Fields Included in Line Data” on page 79.

EXAMPLE

In the following example, pages 1, 2, and 4 are printed at a line spacing of six lines per inch (lpi) on paper from the main paper source. Page three is printed at a spacing of 8 lpi on blue paper from the alternate paper source.

Form definition F1MUCG has been created containing two copy groups:
Page format F2MUMAIN prints on paper from the main paper source.
Page format F2MUALTB prints on paper from the alternate paper source.

Page definition P1MUFMT has been created containing two page formats:
Page format P2MU6LPI prints pages at six lpi.
Page format P2MU8LPI prints pages at 8 lpi.

This example shows the IMM and IDM structured fields coded in the traditional line data print data set. The IMM and IDM structured fields contain unprintable hexadecimal fields, which are represented as periods in the coding shown above. The format of these records is described in *Mixed Object Document Content Architecture Reference*.

For this example, the print records have been included as part of the print job, and the system IEBGENER utility is used to send them to the printer. Because the data set contains structured fields, the record format has to be defined with carriage control (RECFM=FBA).

```
//AFPIDM JOB ...
//STEP1 EXEC PGM=IEBGENER
//SYSPRINT DD SYSOUT=*
//OUT1 OUTPUT FORMDEF=MUCG,PAGEDEF=MUFMT
//SYSIN DD DUMMY
//SYSUT2 DD SYSOUT=A,DCB=(RECFM=FBA,BLKSIZE=80),OUTPUT=*.OUT1
//SYSUT1 DD *
!.....F2MUMAIN
!.....P2MU6LPI
1This is print record 1 of page 1.
 This is print record 2 of page 1.
 This is print record 3 of page 1.
1This is print record 1 of page 2.
 This is print record 2 of page 2.
 This is print record 3 of page 2.
!.....F2MUALTB
!.....P2MU8LPI
1This is print record 1 of page 3.
 This is print record 2 of page 3.
 This is print record 3 of page 3.
!.....F2MUMAIN
!.....P2MU6LPI
1This is print record 1 of page 4.
 This is print record 2 of page 4.
 This is print record 3 of page 4.
```

If the IMM and IDM structured fields are omitted before page one of the data set, PSF begins printing with the first copy group in the form definition and with the first page format in the page definition.

If conditional processing were used for this application, IMM and IDM structured fields would not be required in the print data. For more information about using conditional processing, see “Conditional Processing” on page 71.

Printing Page Segments

You can include page segments to be printed as part of an overlay resource, or you can include them as part of the data by using an Include Page Segment (IPS) structured field or an Include Object (IOB) structured field. The IPS and IOB structured fields that name and position the page segment are included as a record in the print data set.

When using IPS structured fields in line data sets, you can also map the page segment in the page definition to retain it in the printer while your data set is printing. This can speed performance if the page segment is used multiple times in the same print job.

EXAMPLES

1. In this example, page segment S1LOGO is specified in an overlay. The overlay is referenced in the form definition F1USERA.

```
//AFPUSERA JOB ...
//STEP1 EXEC PGM=USERA
//OUT1 OUTPUT FORMDEF=USERA
//PRINT DD SYSOUT=A,OUTPUT=(*.OUT1)
/*
```

For information about form definitions and overlays, see “Specifying a Form Definition” on page 126 and “Printing a Medium Overlay” on page 133. For information about specifying page segments in an overlay, see the publications for the AFP utility product used to create your overlay.

2. In this example, page segments are called by using IPS records in a traditional line data set. Page segment S1LOGO is printed on all four pages of the document. Page segment S1MAP is printed only on pages two and four. The user listed S1LOGO in the page definition but did not list S1MAP in the page definition.

This shows how a hard page segment is coded by naming it in the page definition Segment List.

```
setunits 10 cpi 6 lpi linesp 6 lpi ;
pagedef nxxx0 width 8.3 in height 10.8 in replace no ;
font fnorm cr10 ;
font fbold cb10 ;

pageformat p2nxxx0 direction across ;
trcref 0 font fnorm ;
trcref 1 font fbold ;
segment S1LOGO ;

    printline channel 1 repeat 1 position 5 5 font fnorm;
/* name */ field start 6 length 20 position current current ;
/* acct */ field start 1 length 5 position 20 current font fbold;
/* acct */ field start 1 length 5 position 70 -4 direction down ;

printline      repeat      3 position 0 next font fnorm ;

printline channel 2 repeat 55 position 0 next ;
```

For this example, the print records are included as part of the print job, and the system IEBGENER utility is used to send them to the printer. Because structured field records are included in the data set, the record format must be defined with carriage control (RECFM=FBA).

```
//AFPIPS JOB ...
/*ROUTE PRINT DL3820B
//STEP1 EXEC PGM=IEBGENER
//SYSPRINT DD SYSOUT=*
```

```

//OUT1  OUTPUT PAGEDEF=USERB
//SYSIN  DD  DUMMY
//SYSUT2  DD  SYSOUT=A,DCB=(RECFM=FBA,BLKSIZE=80),OUTPUT=*.OUT1
//SYSUT1  DD  *
1This is print record 1 of page 1.
!.....S1LOGO.....
  This is print record 2 of page 1.
  This is print record 3 of page 1.
1This is print record 1 of page 2.
!.....S1LOGO.....
!.....S1MAP.....
  This is print record 2 of page 2.
  This is print record 3 of page 2.
1This is print record 1 of page 3.
!.....S1LOGO.....
  This is print record 2 of page 3.
  This is print record 3 of page 3.
1This is print record 1 of page 4.
!.....S1LOGO.....
!.....S1MAP.....
  This is print record 2 of page 4.
  This is print record 3 of page 4.

```

Because S1LOGO is listed in the page definition, it will be loaded in the printer at the beginning of page one and used for all four pages. S1MAP, which is not listed in the page definition, will be loaded in the printer at page 2, and loaded again for page 4.

The IPS structured field contains unprintable hexadecimal coding, which is represented by periods in the example. For information about coding the IPS structured field, see *Mixed Object Document Content Architecture Reference* and see “AFP Structured Fields Included in Line Data” on page 79.

Printing MO:DCA-P Data

MO:DCA-P data is printed according to instructions in the MO:DCA-P structured fields in the data set. To change the formatting of a page document, you change the structured fields. For a description of the structured fields used in page applications, see *Mixed Object Document Content Architecture Reference* or the publication for the product used in creating your MO:DCA-P data.

EXAMPLE

This example shows the code for submitting the output of a page application to an AFP printer.

```

//AFPPAGE JOB ...
//STEP1 EXEC PGM=PAGEA
//OUT1  OUTPUT FORMDEF=A10111
//PRINT DD SYSOUT=A,OUTPUT=(*.OUT1),
//  DCB=(RECFM=VBA,LRECL=1993,BLKSIZE=32760)
/*

```

No page definition or fonts are specified in the JCL, because the MO:DCA-P data contains its own internal formatting commands and font definitions. A form definition, however, is required. If you do not specify a form definition in the JCL, PSF uses the default form definition for the printer. For more information, see “Specifying a Form Definition” on page 126.

MO:DCA-P data must be defined with carriage controls, which are specified in the RECFM parameter. MO:DCA-P data is typically written as variable-length blocked records, with RECFM coded as either VBA or VBM. Record size and block size might vary.

Specifying Carriage Control and Table Reference Characters in Line Data

Traditional line data can contain CC characters, TRCs, both, or neither. You can use either of two types of CC characters: American National Standards Institute (ANSI) or machine code. To indicate that the records contain CC characters, and to indicate which type is being used, specify A or M in the DCB=RECFM subparameter.

To indicate that TRCs are contained in the records, specify TRC=YES in the OUTPUT JCL statement (see "TRC" on page 119) or DCB=OPTCD=J in the DD statement.

Using Carriage Control Characters in Line Data Records

CC characters are used in traditional line data to control writing, spacing, and skipping operations as the data is being formatted. The FCB is used to map CC characters to the physical actions that line printers perform to format print data vertically. For page printers, the page definition replaces the function of the FCB. If you are using a page definition with a page printer to replace an FCB, the page definition must specify the same number of lines per inch and have the same actions defined for CC characters as the FCB used with the line printer.

You can use the Page Printer Formatting Aid (PPFA) product to create page definitions that specify exactly the same skipping and spacing instructions as the FCBs used with existing traditional line data applications.

Table 5 lists the hexadecimal CC characters you can use. The decimal representations of the ANSI codes are in parentheses.

Table 5. Carriage Control Characters

Action	Machine Code Control Characters Action After Printing	Machine Code Control Characters Action Only (Immediate)	ANSI Control Characters Action Before Printing
Print (no space)	01	-	4E (+)
Space 1 line	09	0B	40 ()
Space 2 lines	11	13	F0 (0)
Space 3 lines	19	1B	60 (-)
Skip to Channel 1	89	8B	F1 (1)
Skip to Channel 2	91	93	F2 (2)
Skip to Channel 3	99	9B	F3 (3)
Skip to Channel 4	A1	A3	F4 (4)
Skip to Channel 5	A9	AB	F5 (5)
Skip to Channel 6	B1	B3	F6 (6)
Skip to Channel 7	B9	BB	F7 (7)
Skip to Channel 8	C1	C3	F8 (8)
Skip to Channel 9	C9	CB	F9 (9)
Skip to Channel 10	D1	D3	C1 (A)
Skip to Channel 11	D9	DB	C2 (B)
Skip to Channel 12	E1	E3	C3 (C)

Note: PSF ignores these hexadecimal machine CC characters: 02 through 07, 0A, 12, 23, 43, 63, 6B, 73, 7B, EB, F3, and FB. PSF prints data lines containing these characters in single-spacing mode.

If your application creates line data records containing CC characters that skip to a channel, the page definition used to print the application output must contain instructions for processing those channel codes. If the skipping or spacing actions you have specified in a page definition move the print position past the last line of the current page, PSF starts a new page at the first print position indicated by the page format. PSF does not carry skipping or spacing over to the new page.

An alternative to using CC characters or channel codes in line data records is to define data placement entirely within the page definition by using line count or field formatting.

Using Table Reference Characters to Select Fonts

You can use TRCs in traditional line data records to select the font to be used in printing full lines or text in a line. To select fonts for full lines, code a TRC in each output data line. When traditional line data contains both CC characters and TRCs, the CC character precedes the TRC, as in Figure 31 on page 76. The TRC (0, 1, 2, or 3) selects the font corresponding to the order in which you have specified the font names with the JCL CHARS parameter.

You can also code TRCs that correspond to font names specified in a font list defined for the page definition. When coding TRCs, your COPYGROUP must reference FOCA fonts only or TrueType and OpenType fonts only. You cannot have a mixture of both types of fonts. Although you can specify 128 fonts in a page definition, the printer can allow fewer fonts per page than that.

Examples of Selecting Fonts with TRCs

1. This example shows how to use TRCs to specify fonts in line data. The example uses column 1 for the CC character and column 2 for the TRC (0, 1, 2, or 3).
12This line should print in a bold font.
1This is a normal print line.
2. This example creates printing resources by using the PPFA PAGEDEF TRCREF command. Values different from the default values are specified in the DIRECTION and ROTATION subcommands of the TRCREF command.

Page definition source code example:

```
SETUNITS LINESP 8 LPI;

FORMDEF rhdr (form definition name)
  REPLACE yes
  OFFSET .5 in .5 in
  DUPLEX NORMAL;

PAGEDEF rhdr (page definition name)

  WIDTH 8.5 IN
  HEIGHT 10.0 IN
  LINEONE 1.0 IN 1.0 IN
  DIRECTION ACROSS
  REPLACE YES;

  FONT normal 70D0 ROTATION 0;
  FONT heading 60D8 ;
```

```

PAGEFORMAT rhdr;

TRCREF 1 FONT normal;
TRCREF 2 FONT heading DIRECTION DOWN ROTATION 270 ;

PRINTLINE CHANNEL 1
  POSITION 8.0 IN 1.0 IN
  DIRECTION DOWN;

PRINTLINE
  POSITION MARGIN 2.0 IN
  DIRECTION ACROSS
  REPEAT 60;

```

Input for page definition code example:

```

=====
12Chapter 1 should be printed in font 60D8.
1This is a normal print line and should be printed in font 70D0.
1
1Some normal text for illustration, chapter 1.
12Chapter 2 should be printed in font 60D8.
1This is a normal print line and should be printed in font 70D0.
1
1Some normal text for illustration, chapter 2.
=====

```

3. This example uses the TRC parameter in the OUTPUT statement to specify that the traditional line data set contains TRCs:

```

//OUT2 OUTPUT CHARS=(60D8,60D0),TRC=YES
//DD2 DD SYSOUT=A,OUTPUT=*.OUT2

```

4. This example uses the DCB subparameter of the DD statement to specify that the data set contains TRCs:

```

//OUT2 OUTPUT CHARS=(60D8, 60D0)
//DD2 DD SYSOUT=A,OUTPUT=*.OUT2,DCB=OPTCD=J

```

The order in which the fonts are specified in the CHARS parameter establishes which number is assigned to each associated TRC. For example, the reference characters for the fonts in this example are 0 for the first font name listed and 1 for second font name.

Rules for Coding Table Reference Characters

PSF uses the TRC from the output line to select a font. When you are coding a TRC in an output data line, remember these:

- For TRCs corresponding to font names specified in the CHARS parameter:
 - The valid TRCs are 0, 1, 2, and 3. These are called compatibility TRCs, for compatibility with the 3800 Model 1 printer. PSF ignores the left-most four bits of the TRCs. Thus, X'F0' and X'00' are both valid representations for zero.
 - A TRC that refers to a font with a number higher than the number loaded by use of the CHARS parameter defaults to 0. For example, if two fonts are specified with CHARS, a TRC of 2 (referring to a third font) defaults to 0 and selects the first font specified. A number that is not valid, such as 4, also defaults to 0.
- For TRCs corresponding to font names specified in a page definition:
 - Valid TRCs are from 0 to 127, inclusive. If four or fewer fonts are specified, they are treated as compatibility TRCs, and the left-most four bits of the TRC are ignored. In this case, X'F0' and X'00' are both valid representations for 0. If

more than four fonts are specified, PSF treats them the same as non-compatibility TRCs and reads all eight bits. In this case, X'00' is 0, but X'F0' is decimal 240.

- A TRC that refers to a font with a number higher than the number of fonts specified in the page definition defaults to the first font in the page definition.
- A TRC of 0 selects the first font defined in the page definition.
- A TRC higher than 127 selects the first font defined in the page definition.
- If both TRC=NO and DCB=OPTCD=J are specified, PSF ignores the TRC=NO parameter and expects the line data to contain multiple fonts.
- If TRC=YES or DCB=OPTCD=J is specified, but the data set contains no TRCs, the first character of each line (or the second character if carriage control characters are used) is interpreted as the font identifier. Consequently, the font used to print each line of the data set might not be the one you expect.
- If you do not specify TRC=YES or DCB=OPTCD=J in the JCL, but your line data contains a TRC as the first character of each line (or the second character if carriage control characters are used), the TRC is not used as a font identifier, but is printed as a text character.

Merging Data Lines into a Single Print Line

PSF can merge multiple input data records to print a single print line. Thus you can print composite characters with line data. You can also use this function to create printed lines in which different fields are printed in different fonts.

If you type a print-with-no-space control character at the beginning of an input data line, that line is superimposed on the next. The print-with-no-space control character indicates that no lines should be skipped before or after this line is printed. You can superimpose as many lines as you like by typing that control character at the beginning of each of those lines, except for the last line. If you are coding with machine-code print control characters, the print-with-no-space control character is X'01'. If you are coding with ANSI control characters, the print-with-no-space control character is X'4E' or the "+" sign.

Note: If a data set containing merged lines is created for printing on a line printer, a page printer might not produce the same results.

When you use PSF to merge lines that use fonts with different pitches or typographic fonts, be aware that lines are merged pel by pel, not character by character. When the job is printed, 10 characters in the first line align with 10 characters in the second line *only* if the characters in both lines have the same pel width. Otherwise overprinting can occur, as in Figure 41, where the data in the third record is superimposed on the data from the second record.



```
I AM THE FIRST LINE TO BE PRINTED
I AM THE SECOND LINE TO BE PRINTED
```

Figure 41. Output Containing Merged Lines Printed with a Typographic Font

Example of Merging Data Lines

The application in Figure 42 on page 152 shows three input data records, of which two are to be merged into a single print line.

```

//MERGEIT JOB
//STEP1 EXEC PGM=IEBGENER
//SYSPRINT DD SYSOUT=A
//SYSIN DD DUMMY
//SYSUT2 DD SYSOUT=S,DCB=(RECFM=FBA,LRECL=80,BLKSIZE=2000)
//SYSUT1 DD *
1THIS IS THE FIRST LINE ON THE PAGE
  THIS IS THE SECOND LINE
+
/*
- THIS FRAGMENT IS MERGED WITH THE SECOND LINE
//

```

Figure 42. IEBGENER Example of Merging Two Print Lines

The resulting printed output lines are:

```

THIS IS THE FIRST LINE ON THE PAGE
THIS IS THE SECOND LINE - THIS FRAGMENT IS MERGED WITH THE SECOND LINE

```

In the example in Figure 42, to achieve the *merged* output line, blanks are entered in the third input data record to place “- THIS FRAGMENT IS MERGED WITH THE SECOND LINE” in the correct position.

By using different fonts in lines to be merged, you can highlight or subordinate data in a print line, or you can print different columns of data across a page in different styles or sizes. Or, alternatively, you can select fonts in a page definition and then specify their use for specific fields in a record.

Specifying Shift-Out, Shift-In (SOSI) Codes

To change from one kind of character code to another in a data set, PSF provides special SOSI processing. PSF uses the process mode values SOSI1, SOSI2, SOSI3, and SOSI4 to print data sets containing both single-byte and double-byte fonts. You can specify the SOSI codes on one of these:

- PRMODE parameter of the OUTPUT JCL statement (see “PRMODE” on page 114)
- Default process mode parameter in the Printer Inventory
- XTP7PRMD in Exit 7
- PRMODE parameter on the PRINTDEV statement

See *PSF for z/OS: Customization* for information about specifying PRMODE on the PRINTDEV statement, specifying a default PRMODE in Exit 7, or specifying the Default process mode parameter in the Printer Inventory.

You can specify a particular single-byte and double-byte font pair for a line or field, or you can use the same single-byte and double-byte font pair for the entire page. If you specify a specific single-byte and double-byte font pair for a line or a field, you must use the font list in a page definition to specify the single-byte fonts and double-byte fonts you want to use for the page. Then, you can use more than one single-byte font and more than one double-byte font per page.

If you use the same single-byte and double-byte font pair for the entire page, you must specify the single-byte font first and the double-byte font second. Using the JCL CHARS parameter or the font list in a page definition, specify a single-byte font as font 0 and a double-byte font as font 1. If you do not place font 0 and font 1 in this sequence, PSF generates an error message and stops the printing process. You can also use the SOSIFONTS subcommand on the PPFA PAGEDEF or

PAGEFORMAT command to ensure that a single-byte font is mapped first and a double-byte font is mapped second. See *Page Printer Formatting Aid: User's Guide*.

The following example tells PSF to use a particular data-scanning mode when printing line data. Both single-byte fonts and double-byte fonts are to be used for printing. The first font specified is 60D8, a single-byte font; the second is G24F, a double-byte font. The single-byte coded font should be named X060D8, and the double-byte font file should be named X0G24F.

EXAMPLE

This example uses the PRMODE parameter in the OUTPUT statement to specify that the SOSI1 process mode is to be set up for a data set that is printed on a specific 3820 printer:

```
//OUT1 OUTPUT CHARS=(60D8,G24F),PRMODE=SOSI1  
//DD1 DD SYSOUT=B,DESTINATION=(REMOTE1),OUTPUT=(*.OUT1)
```

Notes:

1. The SOSI process must be started when the printer is started. If you are using the Page-Printer Defaults form (see Figure 34 on page 90), it shows whether the process is active or not.
2. For the process to work correctly, the first font specified in the CHARS parameter (or in a page definition font list) must be the single-byte font, and the second font must be the double-byte font.
3. When you use the same single-byte and double-byte font pair for the entire page, IBM does not recommend mixing the use of shift-out, shift-in processing with the use of table reference characters in line data. This is because of the rules used in the scanning process and because the fonts used for the shift-in and shift-out codes are always font 0 and font 1.
4. When you use the same single-byte and double-byte font pair for the entire page, IBM does not recommend mixing the use of shift-out, shift-in processing with the use of font lists in page definitions, for the reasons given in Note 1. If you follow this, you must know exactly what the data and the font list contain.
5. If your print job consists of multiple steps that alternate among PRMODE=SOSI1, PRMODE=SOSI2, PRMODE=SOSI3, and PRMODE=SOSI4, JES2 and JES3 reorder the steps to group together all those with the same PRMODE value. The resulting output is different for JES2 and JES3 systems.
6. IBM recommends that shift-in codes and shift-out codes alternate in a given record.
7. When the PRMODE parameter is specified in the OUTPUT JCL, it overrides the default process mode specified in the Printer Inventory, Exit 7, or the PRINTDEV statement.
8. When a default PRMODE is specified for both the initialization call and the begin-data-set calls (BDSC) in Exit 7, the BDSC specification overrides the initialization specification of PRMODE.

For more information about SOSI codes, including the data conversion that PSF makes for SOSI1, SOSI2, SOSI3, and SOSI4, see "Shift-Out, Shift-In (SOSI) Codes" on page 78.

Printing More Than One Copy

To print more than one copy of your AFP data, you can use these methods:

- You can transmit the data set to the printer any number of times, producing a copy of the entire data set for each transmission. You can specify collated copies either by using the JCL COPIES or COPYCNT parameters or by using multiple OUTPUT statements in the JCL.
- You can print multiple copies of each page in turn. You can specify page copies in the form definition, or you can code them as subgroups on the JCL COPIES parameter.

You can include copies from both methods in a single data set. For more information about these options and the relationships between them, see the descriptions of the COPIES parameter on page 99 and “Using FORMDEF with COPIES or FLASH Parameters in JCL” on page 128.

EXAMPLES

1. In this example, the COPIES parameter is specified in the DD statement. Fourteen copies of the data set are to be printed in page number sequence.

```
//AFPUSERA JOB ...
//STEP1 EXEC PGM=USERA
//PRINT DD SYSOUT=A,COPIES=14
/*
```

The data set is sent to the printer 14 times. If the data set contains three pages, the output is like the example in Figure 43.

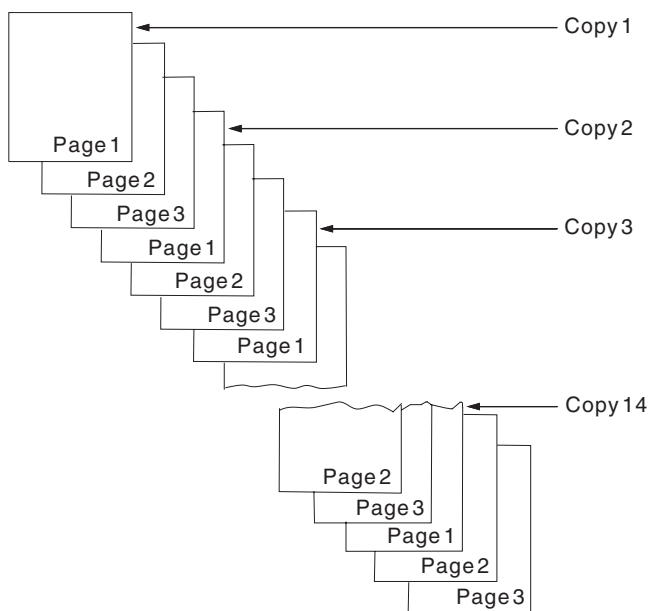


Figure 43. Sample Output for COPIES=14

2. This example uses a user-created form definition, named F1UCOPY2, that specifies two copies of each page. These two copies can be defined in the form definition with different overlays, suppressions, or flash options.

```
//AFPUSERB JOB ...
//STEP1 EXEC PGM=USERB
//OUT1 OUTPUT FORMDEF=UCOPY2
//DD1 DD SYSOUT=A,OUTPUT=(*.OUT1)
/*
```

The data set is transmitted one time and will contain two copies of each page.

- This example uses both the COPIES parameter and the user form definition named F1UCOPY2.

```
//AFPUSERC JOB ...
//STEP1 EXEC PGM=USERC
//OUT1 OUTPUT FORMDEF=UCOPY2
//DD1 DD SYSOUT=A,OUTPUT=(*.OUT1),COPIES=3
/*
```

The data set is transmitted three times, as specified in the COPIES parameter. Each of those transmissions contains two copies of each page, as specified in the form definition.

- In this example, the COPIES parameter is specified in the OUTPUT statement. Three copy groups are to be printed, producing a total of six copies of the data set. The group values are set so that the first group contains one copy of each page, the second contains three copies, and the third contains two copies.

```
//AFPUSERD JOB ...
//STEP1 EXEC PGM=USERD
//OUT2 OUTPUT COPIES=(, (1,3,2))
//DD2 DD SYSOUT=(,),OUTPUT=(*.OUT2)
```

The data set is sent to the printer three times, once for each group value. If the data set contains three pages, the output is like that in Figure 44. Notice that in the second and third copy groups, all the copies of a given page are printed before the next page is printed.

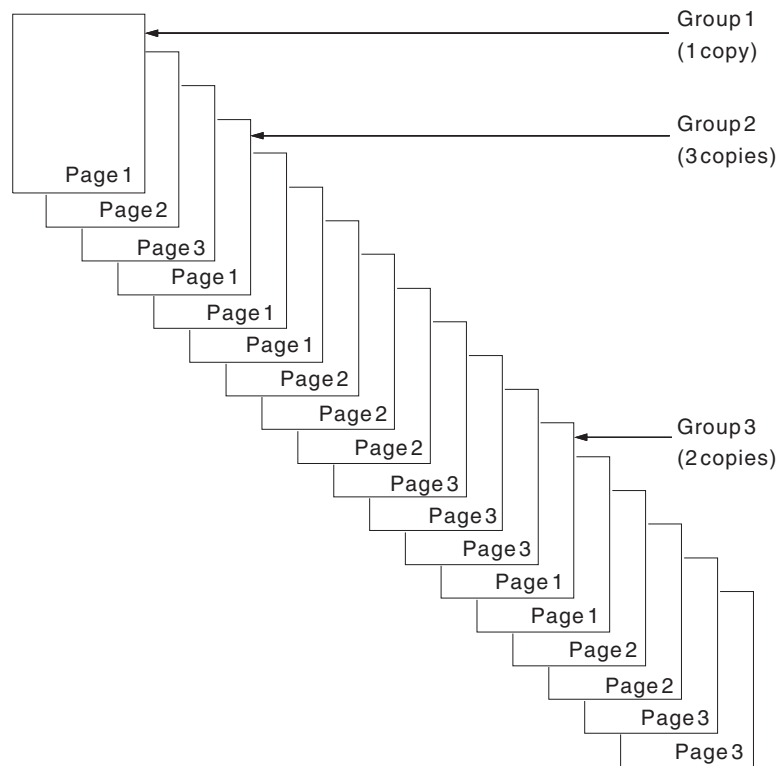


Figure 44. Sample Output for COPIES=(, (1,3,2))

- In this example, you use multiple OUTPUT statements in the JCL to print multiple copies of a data set, each with different AFP formatting.

```

//AFPUSERE JOB ...
//STEP1 EXEC PGM=USERE
//OUT1 OUTPUT PAGEDEF=USER1,FORMDEF=USER1
//OUT2 OUTPUT PAGEDEF=USER2
//DD1 DD SYSOUT=A,OUTPUT=(*.OUT1,*.OUT2)
/*

```

The job will first print the data set according to the page definition and form definition specified in the OUT1 OUTPUT statement. Then the job will print the data set again, this time using the page definition specified in the OUT2 OUTPUT statement. Because this statement does not specify a form definition, the default form definition is used.

Bursting and Stacking Continuous-Forms Paper

Bursting paper means separating the continuous-forms paper into individual sheets. The 3800, 3900, or InfoPrint 4000 printer must be equipped with an optional burster-trimmer-stacker (BTS) device. If the printer does not have a BTS, the forms go to a continuous-forms stacker.

Note: If you are using the “Page-Printer Defaults” form, it indicates whether a specific continuous-forms printer has a BTS. See Figure 52 on page 237.

Use the BURST parameter to specify whether you want the output paper to go to the BTS or to the continuous-forms stacker (see “BURST” on page 95). If your data set is printed on a cut-sheet-paper printer, PSF ignores the BURST parameter.

EXAMPLES

1. This example is for printing on a 3900 printer with a BTS installed. The BURST parameter is specified in the DD statement to indicate that you want the output burst into separate sheets:

```
//DD1 DD SYSOUT=A,DEST=PR3900,BURST=YES
```

2. In this example, the BURST parameter is specified in the OUTPUT statement:

```
//OUTPUT1 OUTPUT BURST=YES,FORMDEF=USER1
//DD1 DD SYSOUT=A,OUTPUT=(*.OUTPUT1)
```

Specifying Whether You Want Error Messages to Be Printed

The PIMSG parameter (see page 113) specifies whether you want error messages to be printed and also specifies the maximum number of errors that can occur before printing is stopped. The PIMSG count applies only to errors that would not, in themselves, cause the data set to stop printing. Data set printing is always stopped if an error occurs that stops processing, regardless of the setting of PIMSG.

Values for the PIMSG parameter are assigned in the PSF startup procedure. To override these values, code the PIMSG parameter in the JCL for your print job.

EXAMPLES

1. The first example specifies that all error messages are to be printed and that printing is to be stopped after 10 errors occur.

```
//OUT1 OUTPUT PIMSG=(YES,10)
//DD1 DD SYSOUT=A,OUTPUT=*.OUT1
```

2. For this example, the system does not print messages unless an error occurs that stops printing, and then prints only the message group caused by that error. The PIMSG count, which is not coded, defaults to 16. If 16 errors that do

not stop processing occur, printing is stopped because the PIMSG count was exceeded. The only message group printed indicates that PIMSG count was exceeded.

```
//OUT2 OUTPUT PIMSG=NO  
//DD2 DD SYSOUT=A,OUTPUT=*.OUT2
```

3. This example sets the PIMSG count to zero and specifies that no messages are to be printed unless an error that stops processing occurs, so that the data set continues to print regardless of how many errors that do not stop processing occur. If an error that stops processing occurs, PSF prints the message group caused by that error.

```
//OUT3 OUTPUT PIMSG=(NO,0)  
//DD3 DD SYSOUT=A,OUTPUT=*.OUT3
```

PSF issues messages to one or more of these destinations, depending on which is the most appropriate:

Operator's console

Messages that the operator or system programmer must address.

Security administrator's console

Messages reporting security violations or errors in the processing of security functions.

Job submitter's console

Messages reporting the completion of a job or its failure to print.

In the printed output

Messages reporting the position from which data is retransmitted during a recovery.

Following the printed output or elsewhere

Messages describing data stream errors. Also, a duplicate copy of any message issued within the printed output.

Note: Your system programmer might have redirected the messages associated with your print job. Consult your programmer to determine where the messages for your job are sent.

Using TrueType and OpenType Fonts

TrueType and OpenType fonts are stored in UNIX files (HFS or zFS files). These fonts can reside in the printer, inline in the print data set, in user path libraries, or in system font path libraries. TrueType and OpenType fonts are referenced in the print data set by using the Map Data Resource (MDR) structured field. PSF only supports TrueType and OpenType fonts in deferred-printing mode, and on printers that support Unicode. See your printer documentation to determine whether your printer supports Unicode.

To use TrueType and OpenType fonts with PSF, you or the system administrator must perform these steps:

1. Make sure z/OS conversion services are set up to support required Unicode conversions. For more information, see *PSF for z/OS: Customization*.
2. Specify that PSF is Unicode-enabled with the PARM parameter on the EXEC statement of the PSF startup procedure or the Unicode enabled parameter in the Printer Inventory. See *PSF for z/OS: Customization*.
3. Install IBM's WorldType Fonts for AFP Print Servers optional feature of Infoprint Fonts for Multiplatforms (Program Number 5648-E77) or a TrueType

and OpenType font package from a company such as Agfa, Monotype, or Linotype. See *IBM Infoprint Fonts: Font Summary* for more information about Infoprint Fonts for Multiplatforms.

4. Use a resource installer program, such as the Font Installer for AFP Systems (an optional feature of Infoprint Fonts for Multiplatforms) or the InfoPrint AFP Resource Installer (Program Number 5639-EE2), to install and build resource access tables (RATs) for the TrueType and OpenType fonts from Step 3 on page 157 and install the fonts in path libraries. The resource installer program can also enable fonts for capture and link fonts. Be sure the resource installer is set up with the correct permissions to access the path libraries.

Attention: PSF can successfully process RATs that are created with either the Font Installer for AFP Systems or the InfoPrint AFP Resource Installer. However, a RAT created with the Font Installer for AFP Systems is not compatible with a RAT created with the AFP Resource Installer. Though the AFP Resource Installer can process a RAT created with the Font Installer for AFP Systems and migrate it into the new format, the opposite is not true. When the Font Installer for AFP Systems processes a RAT created with the AFP Resource Installer, it might lose the RAT information or an error might occur. Therefore, IBM recommends that you do not use the Font Installer for AFP Systems after you have created a RAT with the AFP Resource Installer.

5. Identify the path libraries where the fonts are found:
 - Identify the system font path libraries in the PSF startup procedure with the FONTPATH parameter on the PRINTDEV statement. See *PSF for z/OS: Customization*.
 - Identify user path libraries with the USERPATH parameter on the OUTPUT JCL statement. See “USERPATH” on page 121.
6. Use z/OS UNIX System Services to set access permissions to the directories and files in the user path and font path libraries. PSF must have read permissions set for each path directory and file it is accessing. If the permissions for each directory or file are not set correctly, PSF cannot access the path library. For more information about z/OS UNIX System Services, see *z/OS UNIX System Services Command Reference*.

For more information about TrueType and OpenType fonts, see *Using OpenType Fonts in an AFP System*.

Processing Unicode Complex Text

PSF supports input data sets that contain complex text, which is Unicode-encoded text that cannot be translated with the traditional one-code-point to one-glyph method; for example, bidirectional Arabic text or combined Hindi characters.

Complex text requires:

- Extra processing.
- Identification with a PTOCA Unicode Complex Text or Glyph Layout Control (GLC) control sequence.
- A layout engine that examines runs of code points and maps these to runs of glyph indexes and their positions.
- TrueType and OpenType fonts.

Font layout tables contain script-specific information about glyph substitution, glyph positioning, justification, and baseline positioning, all of which are used by the layout engine to translate complex text.

For PSF to correctly process GLC control sequences, the TrueType and OpenType fonts that are used must be placed inline in the print data set. PSF looks in the inline resource group for the font referenced in the Map Data Resources (MDR) structured field. If PSF cannot find the font inline, the complex text is not processed.

Using Extended Code Pages

Extended code pages are code pages that include multiple encodings within a single code page. Traditional code pages include EBCDIC or ASCII encoding only, but extended code pages can contain EBCDIC or ASCII encodings along with the Unicode equivalent value. Each code point can be mapped to one or more Unicode values so a printer can print with TrueType and OpenType fonts. The Code Page Control (CPC) structured field in the code page indicates whether the code page contains Unicode values. If an extended code page contains Unicode values, PSF can send the values to a printer that supports extended code pages. If a printer does not support extended code pages, the Unicode values are removed from the code page before PSF sends it to the printer.

Extended code pages can be stored in partitioned data sets (PDS or PDSE) in user or system font libraries, or in UNIX files (zFS files) in user path or system font path libraries. The recommended file name prefix for extended code pages is T1. When stored in UNIX files, extended code pages must have a .ECP file extension in uppercase format.

PSF uses these methods to access extended code pages:

- PSF can use z/OS UNIX System Services to access extended code pages that are installed in user path libraries specified in the USERPATH parameter on the OUTPUT JCL statement or in system font path libraries specified with the FONTPATH parameter on the PRINTDEV statement of the PSF startup procedure. PSF must be Unicode-enabled before it can search for path libraries specified with the FONTPATH and USERPATH parameters.
- PSF can access extended code pages that are installed in PDS or PDSE libraries specified in the USERLIB parameter on the OUTPUT JCL statement or with the FONTDD parameter on the PRINTDEV statement of the PSF startup procedure.

To create, modify, or install extended code pages:

1. If you are storing extended code pages in UNIX files, do these:
 - Make sure z/OS conversion services are set up to support required Unicode conversions.
 - Specify that PSF is Unicode-enabled with the PARM parameter on the EXEC statement of the PSF startup procedure or with the Unicode enabled parameter in the Printer Inventory.

See *PSF for z/OS: Customization*.

2. Use a resource installer program, such as the InfoPrint AFP Resource Installer (Program Number 5639-EE2) to create, modify, and install extended code pages in UNIX path libraries. The InfoPrint AFP Resource Installer contains extended code pages that are built with Unicode values.

Notes:

- a. Be sure the resource installer is set up with the correct permissions to access the path libraries.
- b. The resource installer does not create resource access table (RAT) entries for files with a .ECP extension.

- c. You might need PTF IP23012 when using extended code pages support in the InfoPrint AFP Resource Installer. See the InfoPrint Solutions Company web page for PTF IP23012: www.infoprint.com.
 - d. You can obtain the InfoPrint AFP Resource Installer extended code pages at no extra charge from the IBM Extended Code Pages web page: <http://www-01.ibm.com/support/docview.wss?uid=psd1P4000878>.
3. To place extended code pages in a PDS or PDSE, transfer the code pages from the UNIX files to the partitioned data set and run the AFRREBLK program. See Chapter 9, "Using the AFP Reblocking Program," on page 181.

Note: Do not use file transfer protocol (FTP) to store an extended code page in a partitioned data set. You should only use FTP to transfer an extended code page to a UNIX file.

4. Identify the resource libraries where the extended code pages are found:
 - For code pages in a PDS or PDSE:
 - Identify user libraries with the USERLIB parameter on the OUTPUT JCL statement. See "USERLIB" on page 120.
 - Identify system font libraries in the PSF startup procedure with the FONTDD parameter on the PRINTDEV statement. See *PSF for z/OS: Customization*.
 - For code pages in UNIX files:
 - Identify user path libraries with the USERPATH parameter on the OUTPUT JCL statement. See "USERPATH" on page 121.
 - Identify the system font path libraries in the PSF startup procedure with the FONTPATH parameter on the PRINTDEV statement.
5. Use z/OS UNIX System Services to set access permissions to the directories and files in the user path and font path libraries. PSF must have read permissions set for each path directory and file it is accessing. If the permissions for each directory or file are not set correctly, PSF cannot access the path library. For more information about z/OS UNIX System Services, see *z/OS UNIX System Services Command Reference*.

Printing with Resources from a User Library

You can access any PSF resource from user libraries that are not defined to other PSF jobs for that printer. You can specify a maximum of eight user libraries in the USERLIB or USERPATH parameter of the OUTPUT statement (see "USERLIB" on page 120 or "USERPATH" on page 121).

Because PSF does not retain copies of resources from user libraries between print jobs, user libraries are useful for testing new resources and for protecting secure resources.

PSF does not use resources from a user's libraries for security page labeling or for processing separator pages or message data sets.

If a resource in a user library is marked PUBLIC and it exists in the printer, PSF uses the resident version of the resource. To use a page definition or a form definition from a user library, you must specify the name of the page definition or form definition in the user JCL.

PSF tells the printer not to capture resources loaded from user libraries. If you want them made resident in the printer, then you must directly install the

resources into the printer, if your printer has this capability, or you must put the resources in a system library. PSF allows only PUBLIC resources from system libraries to be captured.

If you are using fonts from user libraries, the font resolution must be supported by the printer. You can look at the IM-IMAGE AND CODED-FONT RESOLUTION SELF-DEFINING FIELD in the PSF display printer information report to determine what pel resolutions the printer supports. If the printer doesn't support a font resolution, you must scale the font to fit the printer's supported pel resolution. For information about the display printer information function or information about how to convert fonts, see *PSF for z/OS: Customization*. Converting fonts is a task typically done by a system programmer.

Object container resources and FOCA extended code pages can reside in partitioned data set (PDS or PDSE) libraries and UNIX file path libraries. PSF accesses object containers and extended code pages in user libraries specified with the USERLIB and USERPATH parameters. If both parameters are specified on the OUTPUT statement, PSF uses this order to find the resource:

1. User path libraries specified with USERPATH
2. User libraries specified with USERLIB

For the complete order that PSF uses to search for object container resources, see "Searching for Resources Specified by a Print Job" on page 14.

EXAMPLES

1. In this example, the USERLIB parameter in the OUTPUT statement tells PSF to search the library specified on the USERLIB statement for the specified data sets. If the data sets are not found, PSF searches the system libraries defined in the startup procedure.

```
//OUT1 OUTPUT USERLIB=('USERA.IMAGES', 'USER.AFP.RESOURCES')
//DD1 DD SYSOUT=A,OUTPUT=(*.OUT1)
```

2. In this example, the USERPATH parameter in the OUTPUT statement specifies the path libraries for the TrueType and OpenType fonts and extended code pages that PSF needs to print the document. If the fonts are not found, PSF searches the system libraries defined with the FONTPATH parameter in the PSF startup procedure.

```
//OUT1 OUTPUT USERPATH=('/jdoe/fonts/truetype', '/jdoe/fonts/truetype/myfonts/')
//DD1 DD SYSOUT=*,OUTPUT=(*.OUT1)
```

3. This example specifies user libraries that will be searched for resources before the PSF system libraries are searched. These resources are specified for the print job:

- Form definition F1USERA is in user library USERA.RESOURCE.
- Overlay O1USERA, referenced in F1USERA, is also in user library USERA.RESOURCE.
- Page definition A06462 is in a PSF system library. The page definition identifies the fonts needed to print a job.
- FOCA fonts are in PDS user library USERA.FONTSD and extended code pages and TrueType and OpenType fonts are in user path libraries /jdoe/fonts/truetype and /jdoe/fonts/truetype/myfonts/.
- Fonts referenced in the overlay are in the system library.

```
//AFPUSERA JOB ...
//STEP1 EXEC PGM=USERA
//OUT1 OUTPUT FORMDEF=USERA,PAGEDEF=A06462,
```

```
// USERLIB=('USERA.RESOURCE','USERA.FONT'),
// USERPATH=('/jdoe/fonts/truetype','/jdoe/fonts/truetype/myfonts/')
//PRINT DD SYSOUT=A,OUTPUT=(*.OUT1)
/*
```

Note: You do not define the system libraries in the JCL for your print job. Your system programmer has already defined system libraries to PSF for all jobs that use the printer.

Printing with Inline Resources

For an inline form definition, a page definition, a color mapping table resource, or a microfilm setup resource, you can do any of these:

- Specify the resource name in a JCL parameter. See “COLORMAP” on page 98, “COMSETUP” on page 98, “FORMDEF” on page 105, or “PAGEDEF” on page 112.
- Specify the name DUMMY.
- Specify no parameters.

If you have specified the inline resource name in the FORMDEF, PAGEDEF, COLORMAP, or COMSETUP parameter, and your data set contains that inline resource, PSF uses the inline resource. If the name in the FORMDEF, PAGEDEF, COLORMAP, or COMSETUP parameter does not match the name of an inline resource, PSF uses the resource from the resource library that matches the name in the JCL.

If you have not specified the FORMDEF, PAGEDEF, COLORMAP, or COMSETUP parameter, and your data set contains inline resources, PSF uses the first inline resource (FORMDEF, PAGEDEF, COLORMAP, or COMSETUP) encountered in the data set.

If you send several resources with the same name inline, PSF uses the last resource received for processing the data set.

If you use an outline font as an inline resource in your data stream, consider including the equivalent raster version of the font, to ensure that your job can be printed, in case the target printer supports only one type of font technology. For more information about font mapping and how PSF selects resources, see *PSF for z/OS: Customization*.

Keep in mind that the maximum length of any record in an inline resource is 32752. The maximum size of each inline resource that PSF can handle is about 1GB (a gigabyte is 1073741824 bytes).

For more information about using inline resources, see “Specifying a Form Definition” on page 126, “Specifying a Page Definition” on page 135, “Specifying JCL Parameters for Microfilm Jobs” on page 165, and “Specifying Color Mapping Tables” on page 166.

EXAMPLE

This example specifies two inline resources for PSF to use. PSF searches the system libraries for the other resources. These resources are specified for the print job:

- Form definition F1INFDEF is sent inline with the data set.
- Overlay O1INLOV, referenced in F1INFDEF, is also sent inline.
- Page definition P1A06462 is in a PSF system library.

- Font 60D8 is in the PSF system font library.

```
//AFPUSERB JOB ...
//STEP1 EXEC PGM=USERB
//OUT1 OUTPUT FORMDEF=INFDEF,PAGEDEF=A06462
//PRINT DD SYSOUT=A,OUTPUT=(*.OUT1),CHARS=60D8
/*
```

PSF uses the inline form definition and overlay and takes the page definition and the font from the system library. You need not define the system libraries in the JCL for your print job; your system programmer has already defined system libraries to PSF for all the jobs that use the printer.

Note: XML data does not support inline resources.

Specifying Notification When the Print Job Has Finished Printing

If you want PSF to send a notification message when the printer has finished your job, specify the NOTIFY option in the OUTPUT statement (see “NOTIFY” on page 108).

PSF issues a print-complete message with these variables:

- JOBNAME
- STEP
- ID
- SYSTEM

If the NOTIFY message is sent to a z/OS node, the message is saved until the user logs on.

EXAMPLES

1. This example shows how to specify the NOTIFY parameter in an OUTPUT statement:

```
//OUTPUT1 OUTPUT NOTIFY=(DEST01.USERID1)
//DD1 DD SYSOUT=N,OUTPUT=(*.OUTPUT1)
```

2. This example specifies that a print-complete message is to be sent to four users at the same node:

```
//GO.OUT1 OUTPUT NOTIFY=(DEST01.USERID1,DEST01.USERID2,
// DEST01.USERID3,DEST01.USERID4)
//GO.SYSOUT1 DD SYSOUT=N,DCB=(RECFM=VBM,BLKSIZE=8192),
// OUTPUT=*.OUTPUT1
```

3. This example specifies that a print-complete message is to be sent to 16 users at the originating node (the system that runs the print job):

```
//GO.OUTPUT1 OUTPUT NOTIFY=(USERID1,USERID2,USERID3,USERID4)
//GO.OUTPUT2 OUTPUT NOTIFY=(USERID5,USERID6,USERID7,USERID8)
//GO.OUTPUT3 OUTPUT NOTIFY=(USERID9,USERID10,USERID11,USERID12)
//GO.OUTPUT4 OUTPUT NOTIFY=(USERID13,USERID14,USERID15,USERID16)
//GO.SYSUT1 DD SYSOUT=N,DCB=(RECFM=VBM,BLKSIZE=8192),
// OUTPUT=(*.OUTPUT1,*.OUTPUT2,*.OUTPUT3,*.OUTPUT4)
```

To determine whether your installation supports the print-notify function, contact your system programmer.

Inhibiting Recovery of a Print Job

The normal PSF error recovery actions include resetting the printer to the point in the data path at which an exception is reported, and resending the data from this point. Any pages that are reprinted are in the portion of the printer's paper path where they might be damaged or imperfect, and they should be discarded.

The `Inhibit` recovery parameter in the Printer Inventory or the PSF Exit 7 routine can request that PSF inhibit recovery for a job. This means that PSF is not to resend any portion of the job that has already printed. If an error does occur that requires recovery for pages that have been printed, such as for a paper jam, processing of the job is stopped. This can be used to prevent the reprinting of sensitive data, such as checks. If you need this function, consult your system programmer.

Specifying Duplex-Page Offset

EXAMPLES

1. This example shows how to use the duplex-page offset function. The data is specified first, followed by a form definition created by using Page Printer Formatting Aid (PPFA).

```
THIS IS PRINT LINE 1
THIS IS PRINT LINE 2
.
.
THIS IS PRINT LINE 70
```

2. This example shows the form definition, which specifies that both the back and the front of the duplexed page are to be offset, possibly to accommodate hole-punching or binding.

```
FORMDEF D011
  REPLACE YES
  DUPLEX NORMAL ;
COPYGROUP CPNAME
  OFFSET .94 in 1 in .81 in 1 in ;
```

Transmitting a Data Set to an IBM i System

You can transmit a data set to an IBM i system and print it on an IPDS printer.

The steps for setting up the IBM i system to receive and print files are:

1. Correctly define AFP printers to the IBM i system.
2. Configure the printers according to instructions in *AS/400 Printer Device Programming*.
3. Make resources available by using these commands:
 - CRTFORMDF (form definition)
 - CRTOVL (overlays)
 - CRTPAGSEG (page segments)
 - CRTPAGDEF (page definition)
 - CRTFNTRSC (fonts)
4. Use the CRTDEVPRT or CHGDEVPRT command to specify the correct default form definition and font and to specify the printer as an AFP printer.
5. Start the printer writer to print the job.

For information about IBM i commands, see *AS/400 Command Language Reference*.

EXAMPLE

In this example, assume that OS400SYS is the destination name of the IBM i system. Replace USER.DATASET, *.MYOUT, and class J with your own values.

```
//MYJOB JOB (A,BC), 'TEST',MSGCLASS=H
//INSTR PROC
//SPOOL EXEC PGM=IEBGENER
//MYOUT OUTPUT DEST=OS400SYS.USERID,
//          COPIES=1
//SYSPRINT DD SYSOUT=*
//SYSUT2 DD SYSOUT=J,OUTPUT=*.MYOUT
//SYSUT1 DD DSN=USER.DATASET,DISP=SHR
//SYSIN DD DUMMY
// PEND
//SAMPLE EXEC PROC=INSTR
```

Specifying JCL Parameters for Microfilm Jobs

When you send output to a microfilm device, you should identify the microfilm setup resource to distinguish the special microfilm options. If you do not, the system will use the default COMSETUP parameter that your system programmer specified in the Printer Inventory or the PRINTDEV statement. The full name of the microfilm setup resource is coded in the COMSETUP parameter of the OUTPUT statement (see “COMSETUP” on page 98).

EXAMPLES

1. This is an example of JCL in which the COMSETUP parameter is specified in the OUTPUT statement for data sent to a microfilm device:

```
//OUTPUT1 OUTPUT DEST=REMOTE1,FORMDEF=mi fdef,PAGEDEF=mipdef,
//          COMSETUP=HIMICRO
//DD1 DD SYSOUT=q,OUTPUT=(*.OUTPUT1)
```

2. This is an example of JCL in which two OUTPUT statements are specified for data sent to a microfilm device and to a printer:

```
//OUTPUT1 OUTPUT CLASS=m,FORMDEF=fdef1,PAGEDEF=A06462,
//          COMSETUP=HIMICRO
//OUTPUT2 OUTPUT CLASS=A,FORMDEF=fdef1,PAGEDEF=A06462,
//DD1 DD SYSOUT=q,OUTPUT=(*.OUTPUT1,*.OUTPUT2)
```

3. This is an example of JCL in which two different FORMDEF parameters are specified for data sent to a microfilm device and to a printer. This example specifies three printed copies and one microfilm copy:

```
//OUTPUT1 OUTPUT CLASS=m,FORMDEF=fdef1,PAGEDEF=A06462,
//          COMSETUP=HIMICRO
//OUTPUT2 OUTPUT CLASS=A,FORMDEF=A10111,PAGEDEF=A06462,
//          COPIES=3
//DD1 DD SYSOUT=q,OUTPUT=(*.OUTPUT1,*.OUTPUT2)
```

Check with your system programmer to find out which CLASS or DEST to use for sending AFP output to the microfilm device.

The microfilm setup resource must be in a PSF system library, in a PSF user library, or inline as part of the print data set. You can create your own microfilm setup resource (see the publications provided with your microfilm device) or use a resource already available on your system.

Using Microfilm Setup Resources from a User Library: You can instruct PSF to select a microfilm setup resource from your user library rather than from a system library assigned to PSF. To use a microfilm setup resource from a user library, do these:

1. Reference the user library containing the microfilm setup resource in your JCL. For details, see the description of the USERLIB parameter on page 120.
2. Specify the name of the microfilm setup resource in the JCL COMSETUP parameter.

Using Inline Microfilm Setup Resources: To use a microfilm setup resource inline:

1. Include an inline microfilm setup resource in the print data set, except in XML data.
2. If you specify the COMSETUP parameter in your JCL, the name of the inline microfilm setup resource must match the COMSETUP name specified in your JCL, or else you must specify COMSETUP=DUMMY in the JCL.
3. If you specify multiple inline microfilm setup resources in the print data set and you specify COMSETUP=DUMMY on the OUTPUT JCL statement, PSF uses the last inline microfilm setup resource in the print data set.
4. If you do not specify the COMSETUP parameter in your JCL, PSF selects the first inline COMSETUP in the print data set.
5. If a microfilm setup resource is included inline with the data, the data set must be identified as containing carriage control characters. If the length of the records in the microfilm setup resource is less than or equal to the logical-record length defined for the data set, you can specify fixed-length records for the record format. If the length of the records in the microfilm setup resource is greater than the logical-record length defined for the data set, you must specify variable-length records variable-blocked with ANSI carriage control characters (VBA) or variable-blocked with machine carriage control characters (VBM) for the record format.

You can include more than one inline microfilm setup resource in a print data set, and you can change the microfilm setup resource name in the JCL on different printing jobs to test different microfilm setup resources. If, however, the name of a inline microfilm setup resource does *not* match the COMSETUP name specified in the JCL, PSF uses the microfilm setup resource from the resource library that matches the name in the JCL.

See Appendix E, “Microfilm Device Considerations” for more information about sending output to a microfilm device.

Specifying Color Mapping Tables

When you send output to a printer that supports the color mapping table resource, you can specify a color mapping table to map color translations to the printer. The full name of the color mapping table is coded in the COLORMAP parameter of the OUTPUT JCL statement (see “COLORMAP” on page 98).

If you do not code a COLORMAP parameter on your OUTPUT JCL statement, PSF uses the default parameter that your system programmer specified in the Printer Inventory or the PRINTDEV JCL statement. If no system default is specified and a color mapping table resource is not coded inline in the print data set, PSF uses the value M1RESET, which is a reset color mapping table resource that is provided internally with PSF. For information about the reset color mapping table resource, see *InfoPrint Hi-Lite Color Application Design Reference* (available from your IBM marketing representative), or *Mixed Object Document Content Architecture Reference*.

EXAMPLE

This is an example of JCL in which the COLORMAP parameter is specified in the OUTPUT JCL statement for data to be printed on a printer that supports color mapping tables. In this example, the COLORMAP member name, M1COLOR, is in a PSF system object container library:

```
//OUTPUT1 OUTPUT DEST=REMOTE1,FORMDEF=A10111,PAGEDEF=A06462,  
//          COLORMAP=M1COLOR  
//DD1 DD SYSOUT=q,OUTPUT=(*.OUTPUT1)
```

Check with your system programmer to find out which DEST to use for sending print data sets to a printer that supports color mapping tables.

You can create your own color mapping table by using the Color Mapping Tool that is included with PSF (see “Creating Color Mapping Tables” on page 175) or you can use an existing resource created by your system programmer. The color mapping table resource specified on the COLORMAP parameter must be stored in one of these places:

- In a PSF system object container library
- In a user library specified by the USERLIB parameter
- Inline in the print data set (except in XML data)

Using Color Mapping Table Resources from a User Library:

You can instruct PSF to select a color mapping table resource from a user library rather than from a system library assigned to PSF. To use a color mapping table resource from a user library, do these:

1. Reference the user library containing the color mapping table resource in the OUTPUT JCL statement. For details, see the description of the USERLIB parameter on page 120.
2. Specify the name of the color mapping table resource in the JCL COLORMAP parameter.

Using Inline Color Mapping Table Resources:

To use a color mapping table resource inline:

1. Include an inline color mapping table resource in the print data set.
2. If you specify the COLORMAP parameter in your JCL, the name of the inline color mapping table resource must match the COLORMAP name specified in the JCL, or else you must specify COLORMAP=DUMMY in the JCL.
3. If you specify multiple inline color mapping table resources in the print data set and you specify COLORMAP=DUMMY on the OUTPUT JCL statement, PSF uses the last inline color mapping table resource in the print data set.
4. If you do not specify the COLORMAP parameter in your JCL, PSF selects the first inline COLORMAP from the print data set.
5. If a color mapping table resource is included inline with the data, the data set must be identified as containing carriage control characters. If the length of the records in the color mapping table resource is less than or equal to the logical-record length defined for the data set, you can specify fixed-length records for the record format. If the length of the records in the color mapping table resource is greater than the logical-record length defined for the data set, you must specify variable-length records. For variable-blocked records with machine carriage control characters, use VBM for the record format.

You can include more than one inline color mapping table resource in a print data set and you can change the name in the COLORMAP parameter in the

JCL on different printing jobs to test different color mapping table resources. If, however, the name specified in the COLORMAP parameter in the JCL does not match any names of inline color mapping tables resources, PSF looks for the color mapping table resource in the user library or in the object container library.

Specifying Object Container Libraries in UNIX Files

Data object resources, including color management resources (CMRs), that have been installed with resource access tables (RATs) are stored in the printer, inline in the print data set, or in object container path libraries in UNIX files (HFS or zFS files). PSF uses z/OS UNIX System Services to access data object resources in path libraries specified in the OBJCPATH parameter on the PRINTDEV statement of the PSF startup procedure or the USERPATH parameter on the OUTPUT JCL statement.

Note: PSF only supports the OBJCPATH parameter in deferred-printing mode and on printers that support Unicode. See your printer documentation to determine whether your printer supports Unicode.

To specify object container path libraries for RAT-installed data object resources, you or the system administrator must perform these steps:

1. Make sure z/OS conversion services are set up to support required Unicode conversions. For more information, see *PSF for z/OS: Customization*.
2. Specify that PSF is Unicode-enabled with the PARM parameter on the EXEC statement of the PSF startup procedure or the Unicode enabled parameter in the Printer Inventory. See *PSF for z/OS: Customization*.
3. Use the InfoPrint AFP Resource Installer (Program Number 5639-EE2) or a similar product to install data object resources in path libraries. The Resource Installer creates RATs, in the appropriate resource directories, that map the data objects to a path and file name that PSF can access. Be sure the Resource Installer is set up with the correct permissions to access the path libraries.
4. Identify the path libraries where the resources are found:
 - Identify the system object container path libraries in the PSF startup procedure with the OBJCPATH parameter on the PRINTDEV statement. See *PSF for z/OS: Customization*.
 - Identify user path libraries with the USERPATH parameter on the OUTPUT JCL statement. See "USERPATH" on page 121.
5. Use z/OS UNIX System Services to set access permissions to the directories and files in the user path and object container path libraries. PSF must have read permissions set for each path directory and file it is accessing. If the permissions for each directory or file are not set correctly, PSF cannot access the path library. For more information about z/OS UNIX System Services, see *z/OS UNIX System Services Command Reference*.

For information about CMRs and color printing, see Appendix F, "Color and grayscale printing," on page 243.

Finishing Your Output

You can specify a form definition that requests specific finishing functions if you are sending output to an AFP printer with finishing capabilities (for example, an InfoPrint 60 with the finisher feature).

Note: Suppressing interrupt message pages is suggested when PSF is attached to a printer with finisher capability; otherwise, interrupt message pages will separate finished documents into two finished groups with the inserted page in the middle.

EXAMPLES

1. This is an example of a form definition that requests that each document within a data set be stapled in the top left corner.

```
FORMDEF STAPLE REPLACE YES
FINISH SCOPE ALL OPERATION CORNER REFERENCE TOPLEFT
BIN 1 DUPLEX NO
OFFSET 0 0 ;
```

For more information about coding finishing in your form definitions, see *Page Printer Formatting Aid: User's Guide*.

2. This example shows the JCL used to call the form definition with the finishing function.

```
//AFPUSER JOB ...
//STEP1 EXEC PGM=USERA
//OUT1 OUTPUT FORMDEF=STAPLE
//PRINT DD SYSOUT=A,OUTPUT=(*.OUT1)
```

For additional information about form definitions with the finishing function, see Appendix A, "Form Definitions Supplied with PSF."

You can also use a form definition to specify finishing functions on a copy group. These finishing functions apply only to the copy group in which they are specified.

3. This is an example of a copy group in a form definition that requests the data set be stapled in the top left corner.

```
FORMDEF MEDC8 REPLACE YES
      OFFSET .5 in .5 in
      PRESENT PORTRAIT
      DIRECTION ACROSS;
COPYGROUP STAPLES
      FINISH SCOPE BEGCOLL OPERATION CORNER;
COPYGROUP STAPLEC
      FINISH SCOPE CONTCOLL OPERATION CORNER;
```

Note: When the finisher is installed, and the form definition requests a finishing option, the InfoPrint 60 uses the appropriate output bin by default; therefore, you do not need to specify the output bin when you submit the print job.

It is also possible for you to configure PSF to finish the entire job, including the header, data set separator, message, and trailer pages. This function is called *print job finishing* and is set up by your system programmer.

See *PSF for z/OS: Customization* for more information about print job finishing and interrupt message pages.

Printing on Printers That Support Multiple Resolutions

When printing on a printer that can print at more than one resolution (pel density), you might see fidelity imperfections in your printed output. Fidelity problems arise when your data was formatted with resources (for example, fonts) at one resolution, but the printer used resources at a different resolution to print the job. Some fidelity problems that can occur are:

- Data no longer exactly fits in a box on a form.
- Columns for tabular data overlap or are spaced wider than intended.
- Right-aligned data might show a ragged right margin.
- Minor typeface differences might occur.

To avoid fidelity problems in such cases, your system programmer can define separate resource libraries for each resolution that the printer supports. For example, your system programmer can define 240-pel font, overlay, and page-segment libraries and 300-pel font, overlay, and page-segment libraries. When printing on printers that support multiple resolutions (that is, printers printing in automatic mode), PSF can select resources from the appropriate resource library.

In order to select the correct resource library, PSF must know the resolution of the resources that you used when you formatted your data. The format resolution can be specified in several ways:

- Your system programmer can use the PSF installation exit APSUX07 to specify a format resolution.
- For fonts mapped in MO:DCA-P data, the application can specify the Font Resolution and Metric Technology triplet (X'84') on the MCF2 structured field directly in the print data set or resource to indicate the resolution. See *Mixed Object Document Content Architecture Reference* for more information about this triplet. Two applications that generate this triplet are DCF with APAR PW07945 and OGL with APAR PQ07878. See the documentation for your application for more information.

PSF uses the resolution in the MCF2 structured field to select the font library only; PSF does not use this resolution to select the overlay or page segment library.

- You can specify the RESFMT keyword on the OUTPUT statement (see “RESFMT” on page 116).
PSF uses the resolution format specified in the RESFMT parameter to select the overlay and page segment libraries. PSF used the RESFMT parameter to select the font library only if the MCF2 structured field does not specify a font resolution.
- You can let PSF use the default system library.

If the printer is in automatic mode and, therefore, is capable of accepting resources at multiple resolutions, PSF looks for the first specification of the format resolution in these areas and order:

1. The PSF installation Exit 7 for Resource Management begin-data-set call
2. The Printer Inventory or the PSF installation Exit 7 for Resource Management initialization call
3. The data stream in the Map Coded Font format 2 (MCF2) structured fields in the Font Resolution and Metric Technology triplet (X'84')
4. The JCL OUTPUT statement RESFMT keyword

If the printer is not in automatic mode and, therefore, is accepting resources at a single resolution only, PSF uses the resolution reported by the printer to select the resource libraries.

PSF uses the determined format resolution only when selecting a system library to search for resources. If inline resources exist or if you specify a user library, PSF searches them first.

Whether or not you specify the format resolution to PSF, you can control what action PSF takes if PSF finds a mismatch between the resolution of the fonts used to format the data and the resolution of the fonts used to print the data. A font-resolution mismatch might occur if, for example, the printer is not printing in automatic mode or the system programmer has not set up separate resource libraries for each resolution. In the event of a font-resolution mismatch, the default action is that PSF continues processing the data set.

EXAMPLE

In this example, a print data set that was formatted and an overlay that was created by using 240-pel fonts are to be printed on an InfoPrint 4000 printer, which can print in automatic mode. Automatic mode means that the printer can accept resources at multiple resolutions. Assume that your system programmer has defined a 240-pel font library and a 240-pel overlay library. Because font fidelity is important to this application, you want PSF to stop processing the page if PSF finds a font-resolution mismatch.

This example specifies these resources and parameters:

- Font GT10, which resides in the 240-pel PSF system font library.
- An overlay named O1FOVLY, which resides in the 240-pel PSF system overlay library. (This overlay is to be placed on the front side of each sheet.)
- A form definition named F1STOP, which requests that PSF stop processing if the fonts are not 240-pel fonts.
- A resolution of 240-pels in the RESFMT parameter, which tells PSF to use resources (fonts and overlays) from the 240-pel resource libraries.

```
//AFPUSERB JOB ...  
//STEP1 EXEC PGM=USERA  
//OUT1 OUTPUT CHARS=GT10,RESFMT=P240,OVERLAYF=O1FOVLY,FORMDEF=STOP,PAGEDEF=A06462  
//PRINT DD SYSOUT=A,OUTPUT=(*,OUT1)
```

For a complete description of how to handle printing on printers that support multiple resolutions, including a description of the system programmer tasks involved, see *PSF for z/OS: Customization*.

Using QR Code Bar Codes with SOSI Data

The Quick Release (QR) Code bar code is defined to contain Shift_Jis data (ASCII data that can be a mixture of single-byte and double-byte data). However, if the line data used for the bar code is shift-out, shift-in (SOSI) data (single-byte and double-byte EBCDIC data separated with SOSI controls), PSF must convert the EBCDIC data to ASCII data before sending the bar code to the printer.

To use QR Code bar codes with SOSI data on PSF, you or the system administrator must perform these steps:

1. Make sure z/OS conversion services are set up to support required conversions.
2. Specify that PSF is Unicode-enabled with the PARM parameter on the EXEC statement of the PSF startup procedure or the Unicode enabled parameter in the Printer Inventory.

For more information, see *PSF for z/OS: Customization*.

Specifying Printer Checkpoints

Use the CKPTPAGE or CKPTSEC parameter on the OUTPUT statement (see page 96) to specify when you want the checkpoint data recorded.

EXAMPLES

1. This example specifies that the printer checkpoint is at 20 pages. For printing a large data set, see “Considerations”.

```
//OUT2 OUTPUT CKPTPAGE=20  
//DD2 DD SYSOUT=class,OUTPUT=(*.OUT2)
```

2. This example specifies that the printer checkpoint is at 120 seconds:

```
//OUT1 OUTPUT CKPTSEC=120  
//DD1 DD SYSOUT=class,OUTPUT=(*.OUT1)
```

Considerations

- CKPTPAGE and CKPTSEC do not apply to direct-printing mode.
- Do not specify both CKPTPAGE and CKPTSEC. If you do, the parameter used depends on the defaults for your installation. See the JCL reference publication for your operating system.
- If you specify neither the CKPTPAGE nor the CKPTSEC parameter, JES uses the system default. If you are using the “Page-Printer Defaults” form, the default checkpoint values for the system are shown. See Appendix D, “Page-Printer Defaults Form” for a blank form. If no system default is given, PSF does not record checkpoints.
- PSF takes internal checkpoints at the specified intervals and transmits a request to JES to record the checkpoint data it gathers. The operator can use these internal checkpoints when issuing commands to the printer.
- A smaller checkpoint interval causes more internal checkpoints to be taken during the processing of a data set. This enables PSF to find the target of the operator command with less processing overhead. However, too small a checkpoint interval can cause excessive use of virtual storage. Be aware of the need to balance between the overhead for processing operator commands and the use of virtual storage.
- If a system failure occurs, PSF does not guarantee that checkpoint information is used to restart the data set.
- When the PSF attachment is Systems Network Architecture (SNA) or TCP/IP, the checkpoint interval specifies the maximum number of pages or amount of time after which PSF requests an acknowledgment from the printer. If acknowledgments are requested too often, printing performance can be adversely affected.
- When the PSF attachment is SNA or TCP/IP and after a session is ended, PSF restarts printing from the most recent checkpoint. Therefore, more frequent checkpoints can reduce the number of pages reprinted after restart.

Chapter 8. Using Color Mapping Tables

With PSF, you can use color mapping tables for printers that support them. A color mapping table is a printer resource object that defines a translation from certain MO:DCA structured fields to new color structured fields used by printers. You can define translations from non-color fields to color, old color fields to new color fields, and from new color fields to different new color fields. Therefore, you can use existing applications and documents with new color fields without having to change the documents or applications. Also, you can use various color mappings with a single document to print the document by using color in different ways without changing the original document.

Note: When you are using both color mapping tables and color management resources (CMRs) for a job, the color mapping is applied first and then the CMRs are applied to the mapped colors.

Understanding Color Mapping Tables

A color mapping table consists of a base part, a set of source groups, and a set of target groups. The base part identifies the color mapping table with a type of reset or normal.

The simplest possible color mapping table is a reset color mapping table, which tells the printer to do no transformations on the color information found in the document. A reset color mapping table has no source or target groups; all other color mapping tables have at least one source and one target group.

Source Groups

Each source group has an identification (ID) number, which is used to match the source group with a corresponding target group. You can have unique ID numbers; however, if you create the color mapping table without the Color Mapping Tool and want to map several source groups to a single target group, you can use the same ID number on multiple source groups. Valid ID values are 1 to 127.

Note: The Color Mapping Tool generates pairs of sources and targets and assigns increasing, sequential IDs to each pair. For more information about the Color Mapping Tool, see “Creating Color Mapping Tables” on page 175.

Each source group must be classified as one of these color spaces:

Highlight color

Highlight color is used when your existing documents describe color in terms of the percent to be covered and the percent to be shaded for a color number. The colors are device dependent. For example, you might have a printer that allows the use of three colors for highlighting. You could specify percent coverage and percent shading for colors 1, 2, or 3. Your printer setup would determine what those colors would be.

Standard Object Content Architecture (OCA)

Standard OCA uses defined combinations of red, green, and blue to create: blue, red, pink/magenta, green, turquoise/cyan, and yellow. Standard OCA also defines several defaults such as white

on a black medium, black on a white medium, and the same color as the medium. The medium could be, for example, paper or a display.

GOCA pattern fill

GOCA pattern fill defines patterns for filling areas that you might want to map to colors with a color mapping table.

See *Mixed Object Document Content Architecture Reference* for detailed explanations about these color spaces.

You can use a color mapping table to pick specific object types to map, such as:

- Object area
- IM image data
- PTOCA data
- Page presentation space
- GOCA data
- Overlay presentation space
- BCOCA data
- IOCA data (bi-level, FS10)
- All PTOCA, GOCA, BCOCA, IOCA FS10, and IM object data
- All objects, object areas, and presentation spaces

After you pick the color spaces and object types you want to map, you can specify exact values for the fields you want to map.

Using Target Groups

If you create the color mapping table without the Color Mapping Tool, you must specify a target group ID number to match the source groups for a target. Valid ID values are 1 to 127.

Note: The color mapping table tool generates pairs of sources and targets and assigns increasing, sequential IDs to each pair. For more information about the Color Mapping Tool, see “Creating Color Mapping Tables” on page 175.

Each target group must be classified as a color space, which is the kind of color you want as output. The color spaces defined in the matching source groups are transformed to this color space. The color mapping table allows RGB, CMYK, highlight, and CIELAB, but your actual hardware determines your available choices. For example, if your printer supports only highlight color, then your target group must use highlight color.

You can specify exact values for output colors. For example, if your printer supports three highlight colors, you can specify colors 1, 2, or 3 with coverage and shading percentages that are supported by your printer.

Other publications that have helpful references regarding color devices include:

- *PSF for z/OS: Customization*
- *InfoPrint Hi-Lite Color Application Design Reference*, available from your IBM marketing representative
- *InfoPrint 4000 HC Introduction and Planning Guide*

Creating Color Mapping Tables

You can create a color mapping table on z/OS with the Color Mapping Tool.

Color Mapping Tool Components

This tool is supplied with PSF and includes:

APSRCMT

Load module for the color mapping table; located in SYS1.LINKLIB

APSRRCMT

Sample JCL to run the Color Mapping Tool; located in SYS1.SAMPLIB

APSRSCMT

Sample input source file for the color mapping table; located in SYS1.SAMPLIB

Using the Color Mapping Tool

To use the Color Mapping Tool to create a color mapping table:

1. Copy the sample input source file (APSRSCMT) and edit it to reflect your color mapping needs (see Figure 46 on page 177).
2. Copy the sample JCL (APSRRCMT) to call the Color Mapping Tool (see Figure 45 on page 176) and make these changes:
 - Change the JOB card to reflect your ID and system information.
 - Change the STDIN statement to point to the input source data set for the color mapping table.
 - Change the STDOUT statement to point to the output data set in the PSF object container library.

Note: The PARM statement is case sensitive; therefore, lowercase and uppercase characters in the PARM statement are very important.

```

//APSRRCMT JOB 'account #','name',MSGLEVEL=(1,1)
/**START OF SPECIFICATIONS*****
/**
/**      NAME: APSRRCMT
/**
/**      DESCRIPTIVE NAME: JCL to run the Color Mapping Table Tool
/**
/**      FUNCTION: This JCL will invoke Color Mapping Table Tool.
/**
/**      Licensed Materials - Property of IBM
/**      5655-B17
/**      (C) Copyright IBM Corp. 1999, 2000
/**
/**      NOTES:
/**      - Change the JOB card to meet installation requirements
/**      - Replace 'hlq' with your high-level qualifier
/**      - Replace 'vvvvvv' with the volume serial number for
/**        the output data set
/**      - Note that the PARM field is case-sensitive:
/**        lower and upper case characters are important
/**
/**      CHANGE ACTIVITY:
/**      $00=LAPS0008,HPRF320,000425,BDKULMM: Initial version
/******END OF SPECIFICATIONS*****
/**
//CMT      EXEC PGM=APSRRCMT,REGION=4M,
//          PARM='/-i //DD:STDIN -o //DD:STDOUT'
//STDIN    DD DSN=hlq.MYCMT.SOURCE(M1COLOR),DISP=SHR
//STDOUT   DD DSN=hlq.CMT.AFPDS(M1COLOR),
//          DISP=(NEW,CATLG),
//          DCB=(RECFM=VBM,LRECL=8205,BLKSIZE=8209),
//          UNIT=SYSALLDA,VOL=SER=vvvvvv,SPACE=(TRK,(5,1,2))
//SYSUDUMP DD SYSOUT=*

```

Figure 45. Sample JCL for Color Mapping Tool

3. Submit the APSRRCMT JCL. The Color Mapping Tool reads the source statements and generates a color mapping table object data set.
4. In order for PSF to find the new color mapping table object, you must do one of these:
 - Have your system programmer put the new color mapping table object in an existing object container library that the PSF startup procedure already uses.
 - Put the new color mapping table object in a new partitioned data set. Then, have your system programmer add the partitioned data set to the list of object container libraries in the startup procedure.
 - Specify the new color mapping table data set on the USERLIB parameter in the OUTPUT JCL statement of your print-submission job request.
 - Code the color mapping table inline in the print data set.
5. Specify your color mapping table object name on the COLORMAP parameter in the OUTPUT JCL statement of your print-submission job request.

Sample Color Mapping Table Source File

Figure 46 on page 177 shows a sample input file that the Color Mapping Tool uses as the source file for the color mapping table.

```

#-----
#
# Licensed Materials - Property of IBM
# 5655-B17
# (C) Copyright IBM Corp. 1999,2000
#
# This file is a Color Mapping Table source file. One uses it to
# create CMT mappings from source colors to target colors with the
# APSRCMT utility.
#
# Attributes appear in Attribute/Values pairs. If you choose the
# default value, do not provide the Attribute (Comment it out by
# placing the # character in front of the Attribute).
# Unnecessary values following an attribute will be ignored.
#
# Attribute values are not case sensitive.
#
# The color mapping table generated in this particular example is the
# same as the color mapping table shipped with InfoPrint Manager
# for AIX in /usr/lpp/psf/reslib/cmtsampl.
# This example is the same color mapping table that
# a highlight color printer comes up with after cycling power.
#
#-----

#-----
# BeginMappingDef:
# Required, starts a Color Mapping Definition.
# One definition for each Source to Target mapping
#-----
BeginMappingDef:

#-----
# BeginSourceDef:
# Required, starts the Source Parameters
#-----
BeginSourceDef:

#-----
# ColorSpace:
# Required, values = OCA | Highlight | GOCA
#-----
ColorSpace: OCA

#-----
# ColorValue:
# Required, values depend on Color Space, see manual page for cmt
#-----
ColorValue: BLUE

```

Figure 46. Sample Color Mapping Table Source File (Part 1 of 3)

```

#-----
# ObjectType:
# Optional, values = ObjArea | ImageData | IocaData | PTOCAData |
#   GOCADData | BCOCADData | AllOCA | Page | Overlay | ObjsAll
# default = ObjsAll
#-----
#ObjectType:

#-----
# PercentShading:
# Optional, only valid for SourceColorSpace: Highlight,
# values = 0 .. 100, 255 (all percentages), default = 100
#-----
#PercentShading:

#-----
# PercentCoverage:
# Optional, only valid for SourceColorSpace: Highlight,
# values = 0 .. 100, 255 (all percentages), default = 100
#-----
#PercentCoverage:

#-----
# EndSourceDef:
# Required, ends the Source Parameters
#-----
EndSourceDef:

#-----
# BeginTargetDef:
# Required, starts the Target Parameters
#-----
BeginTargetDef:

#-----
# ColorSpace:
# Required, values = RGB | CMYK | Highlight | CIELAB
#-----
ColorSpace: Highlight

#-----
# ColorValue:
# Required, values depend on Color Space, see manual page for cmt
#-----
ColorValue: 1

#-----
# PercentShading:
# Optional, only valid for TargetColorSpace: Highlight,
# values = 0 .. 100, default = 100
#-----
#PercentShading:

```

Figure 46. Sample Color Mapping Table Source File (Part 2 of 3)

```

#-----
# PercentCoverage:
# Optional, only valid for TargetColorSpace: Highlight,
# values = 0 .. 100, default = 100
#-----
#PercentCoverage:

#-----
# EndsTargetDef:
# Required, ends the Target Parameters
#-----
EndTargetDef:

#-----
# EndMappingDef:
# Required, ends a Color Mapping Definition
#-----
EndMappingDef:

#
# Map OCA RED to Highlight 2
#
BeginMappingDef:
  BeginSourceDef:
    ColorSpace:  OCA
    ColorValue:  RED
  EndSourceDef:
  BeginTargetDef:
    ColorSpace:  Highlight
    ColorValue:  2
  EndTargetDef:
EndMappingDef:

#
# Map OCA PINK to Highlight 3
#
BeginMappingDef:
  BeginSourceDef:
    ColorSpace:  OCA
    ColorValue:  PINK
  EndSourceDef:
  BeginTargetDef:
    ColorSpace:  Highlight
    ColorValue:  3
  EndTargetDef:
EndMappingDef:

```

Figure 46. Sample Color Mapping Table Source File (Part 3 of 3)

Chapter 9. Using the AFP Reblocking Program

When you transfer AFP files from your workstation to the z/OS host, the file transfer program blocks the data records so all record lengths are equal. PSF for z/OS cannot process AFP files in this format and, therefore, cannot send them to the printer. A program included with PSF, however, can convert the records to a format that can be used by PSF. This program, the AFP Reblocking Program (AFRREBLK), reblocks the AFP file data that is transferred from your workstation to the z/OS system. You can then print this reblocked data in the same way you print other z/OS documents.

The AFP Reblocking Program includes:

AFRREBLK

A profile that the user can optionally set up to specify the default naming conventions used when an AFP file is reblocked. Found in the SYS1.SAMPLIB library.

AFRREBLK

The exec that reblocks AFP files. Found in the SYS1.SAPSEXEC library.

AFRREMSG

The exec that provides status and error messages. Found in the SYS1.SAPSEXEC library.

This chapter describes:

- “How the Reblocking Program Works”
- “Setting Up the AFRREBLK Profile” on page 183
- “Uploading AFP Files to z/OS” on page 184
- “Reblocking Data Sets on z/OS” on page 184

How the Reblocking Program Works

To reblock AFP file data, you use the AFRREBLK command, which specifies an input data set and, optionally, an output data set. If the output data set is not specified on the AFRREBLK command, the reblocking program determines the type of AFP object that is to be reblocked, such as overlay or object container, and then creates a reblocked data set in one of these ways:

- The reblocking program uses the AFRREBLK profile to select the data set name for the AFP object type. For example, this line in the AFRREBLK profile (see Figure 47 on page 183),

```
Doc240 userid().afrreblk.doc240                /* 240 pel Document Names */
```

indicates that when a document formatted for a 240 pel resolution printer is encountered, the reblocked file becomes a member of the partitioned data set *userid.afrreblk.doc240*, where *userid* is your user ID. Therefore, when AFRREBLK reblocks the input data set *userid.GRTNOVEL.UPLD*, it recognizes the file as a 240-pel document from fields in the AFP data and changes its name, according to the AFRREBLK profile, to *userid.afrreblk.doc240(GRTNOVEL)*. The second qualifier of the input data set, *GRTNOVEL*, becomes the member name of the output data set.

The profile can also specify a sequential data set by using only one qualifier. For example, if the profile specifies:

the file being reblocked is renamed *userid.dsname.DOC240*, where *dsname* is the second qualifier of the input data set. Therefore, the input data set, *userid.GRTNOVEL.UPLD*, is reblocked with the name *userid.GRTNOVEL.DOC240*.

- If no profile exists or if no data set can be determined from the profile, the reblocking program allocates a sequential output data set with a first qualifier of your user ID, the same second qualifier as the input data set, and a third qualifier determined by the AFP object type. For example:

userid.dsname.objtype

Table 6 shows the third qualifier values that the reblocking program associates with the default AFP object types. The list also shows the profile keywords associated with the AFP object types.

Table 6. Data Set Values for Default AFP Object Types

AFP Object Type	Third Qualifier	Profile Keyword
Unbounded Box Font	FONT3820	FontUB
240 Bounded Box Font	FONT3820	Font240
300 Bounded Box Font Name	FONT300	Font300
Outline Font Name	FONTOLN	FontOLN
Page Definition Name	PDEF38PP	PageDef
Form Definition Name	FDEF38PP	FormDef
240 pel Document Name	LIST3820	Doc240
Resolution Independent Document	LISTAFP	DocAFP
240 pel Overlay	OVL38PP	Ovly240
Resolution Independent Overlay	OVLAFP	OvlyAFP
IOCA Image	IOCA	IOCA
Object Container	AFPOBJ	AFPOBJ
Page Segment-240 pel IM1 Image	PSEG3820	Pseg240
Page Segment-300 pel IM1 Image	PSEGAFF	PsegAFP

Therefore, when AFRREBLK reblocks the input data set *userid.OVERLAY.UPLD*, it recognizes the file as a 240-pel overlay from fields in the AFP data and changes its name, according to the default AFP object type list, to *userid.OVERLAY.OVL38PP*.

- If the reblocking program does not recognize the AFP object type, it sets the third qualifier in the sequential output data set to **AFPDS**. For example if the type of AFP data set is not recognized, the reblocking program uses:

userid.dsname.AFPDS

where *userid* is the user identifier of the person reblocking the document and *dsname* is the second qualifier of the input data set being reblocked. Therefore, if *userid.UNKNOWN.UPLD* is reblocked and not recognized by the profile or in the default AFP object type list, the data set is named *userid.UNKNOWN.AFPDS*. The second qualifier (UNKNOWN) is the same as the data set being reblocked. The third qualifier is always AFPDS.

FONT240	Library for 240-pel font objects
FONT300	Library for 300-pel font objects
FONTOLN	Library for AFP outline font objects
PAGEDEF	Library for page definitions
FORMDEF	Library for form definitions
DOC240	Library for 240-pel documents
DOCAFP	Library for resolution-independent documents
OVLY240	Library for 240-pel overlays
OVLYAFP	Library for resolution-independent overlays
IOCA	Library for IOCA images
AFPOBJ	Library for color mapping table object container and wrapped EPS object container
PAGESEG	Library for page segments
PSEG240	Library for 240-pel image descriptor
PSEGAFP	Library for resolution-independent image descriptor
LRECL	Record length for the output data set
BLKSIZE	Block size for the output data set

Uploading AFP Files to z/OS

Before you can use the reblocking program, you must upload the AFP files from your workstation to the z/OS system. You can use any file transfer program to do this; however, keep these in mind:

- AFP files must be uploaded as binary files.
- The record format must be variable.
- The most efficient logical record length is 32756.

This command shows how to upload an AFP file called GRTNOVEL.AFP (created with the AFP Printer Driver for Windows) if you are using eNetwork Personal Communications file transfer program:

```
SEND d:\directoryname\GRTNOVEL.AFP sessionid:'userid.GRTNOVEL.UPLD' LRECL(32756)
```

Reblocking Data Sets on z/OS

After you have uploaded the AFP files to z/OS, you can reblock one or more data sets with the AFRREBLK command.

Note: If you are reblocking to a partitioned data set, you must preallocate the partitioned data set.

AFRREBLK Command

You can issue the AFRREBLK command on the TSO command line or from a data set selection list in ISPF 3.4. The command syntax for the AFRREBLK command is:

AFRREBLK *input_dsn* [*output_dsn*] [([FONTLIB *fontlib*] [NOMSG] [DEL] [LL] [TSOERROR])]

The values are:

input_dsn

Specifies the name of the sequential or partitioned data set that is to be reblocked. Partitioned data set names must include a member name.

For example, if you uploaded GRTNOVEL.UPLD from your workstation to z/OS, you would issue this command to reblock the file:

```
AFRREBLK userid.GRTNOVEL.UPLD
```

Note: PSF reserves **AFPDS** for use as an output data set extension; therefore, you must *not* use it as the third qualifier for the input data set name.

output_dsn

Specifies an optional output data set name. It should be the fully-qualified name of a sequential or partitioned data set, without quotes. Partitioned data set names must include a member name.

If the output data set name exists, it is used as a fully-qualified name. Otherwise, a new data set is allocated, prefixed by the user ID. To change the user ID, refer to the customize information in the AFRREBLK REXX program.

If this value is not specified, the value in the AFRREBLK profile is used. If no value can be determined from the profile, a sequential output data set is allocated with a first qualifier of your user ID, the same second qualifier as the input data set, and a third qualifier determined by the AFP object type. If the reblocking program does not recognize the AFP object type, it sets the third qualifier to AFPDS.

FONTLIB *fontlib*

Specifies the output font library, where *fontlib* is: UB, 240, 300, or OLN.

FONT is prefixed to the *fontlib* value to form a keyword that is used to find the library name in the AFRREBLK profile. For example, when 240 is specified, the data set specified by the FONT240 keyword in the profile is used by the reblocking program.

You must specify this value if the file is a code page or coded font, because, unlike other AFP objects, code pages and coded fonts do not contain any information that lets AFRREBLK determine the library. AFRREBLK prompts you for the FONTLIB value if you do not specify it for code pages and coded fonts. For other files, the FONTLIB value is ignored if you specify it.

NOMSG

Specifies that messages are not displayed.

DEL

Specifies that a sequential input data set is deleted after processing. DEL is ignored if the input data set is partitioned.

LL Specifies that each record is preceded by a two-byte logical length field. The logical length field is stripped from the output.

TSOERROR

Specifies that the TSO message facility should be turned on to display any error messages from TSO commands that this program uses.

Reblocking More Than One Data Set at a Time

If you upload a large number of files to z/OS but do not want to separately enter the AFRREBLK command to reblock each data set, you can use ISPF to display the names of the data sets, and then enter **AFRREBLK** one time in the command section to reblock all the data sets.

For example, if you uploaded numerous AFP documents to the host, all with a third qualifier of UPLD, UPLD240, or UPLD300, go to ISPF 3.4 and specify a DSNAME LEVEL that corresponds to your uploaded data sets, such as:

```
userid.*.UPLD*
```

In the command section of the listing, enter **AFRREBLK** to the left of the first data set you want to reblock and **=** to the left of any other data sets you want to reblock (see Figure 48).

```
DSLIST - DATA SETS BEGINNING WITH userid.*.UPLD* ----- ROW 1 OF 8
COMMAND ==>                                     SCROLL ==> CSR
```

COMMAND	NAME	MESSAGE	VOLUME
AFRREBLK	<i>userid.C0428000.UPLD240</i>		USER25
=	<i>userid.C0428000.UPLD300</i>		MIGRAT
=	<i>userid.F1FRMDEF.UPLD</i>		USER25
=	<i>userid.GRTNOVEL.UPLD</i>		USER25
=	<i>userid.01OVERLY.UPLD</i>		USER25
=	<i>userid.P1PGEDEF.UPLD</i>		USER25
=	<i>userid.S1PGESEG.UPLD</i>		USER25
=	<i>userid.T1000850.UPLD</i>		USER25
=	<i>userid.X0423210.UPLD</i>		USER21
***** END OF DATA SET LIST *****			

Figure 48. Reblocking Numerous Data Sets in ISPF

Chapter 10. Obtaining AFP Statistics

The AFP Statistics (AFPSTATS) option lets a user obtain detailed information about a print file. You specify it individually for each print file and you can view the data online or print it. PSF presents the data in an AFPSTATS report, which provides details to let you:

- Determine in which resource library PSF found each resource.
- Diagnose some resource selection problems.
- Obtain statistical data about how a print file printed, such as the total number of pages, the number of times a specific resource was referenced, and the number of significant events. It is important to note that these statistics might contain some inaccuracies caused by error recovery and repositioning within the print file. Therefore, these statistics should not be used for accounting purposes.
- Diagnose some print file printing performance problems.

The AFPSTATS report summarizes these resource types:

- Character set
- Coded font
- Code page
- Form definition
- Object container
- Overlay
- Page definition
- Page segment
- TrueType and OpenType fonts

Note: When the AFPSTATS report is active, PSF is collecting data and writing it to the AFPSTATS repository. These extra activities during PSF processing could cause degraded performance. Whenever you experience a problem with performance, first ensure that all extra activity, such as PSF traces and reports, are disabled before confirming the performance problem.

The AFPSTATS Repository

Before an AFPSTATS report can be generated, the system programmer must change the PSF startup procedure to define the AFPSTATS repository (the file where AFPSTATS reports are written) and then allocate the data set. This repository must be an existing PDSE data set. For information about defining the AFPSTATS repository, see *PSF for z/OS: Customization*.

PSF adds a new member to this data set for every request it gets to produce an AFPSTATS report. PSF generates the member name and records this name in the message data set with message APS4001I. See the messages at the end of the print data set to determine where PSF placed the AFPSTATS report.

Requesting an AFPSTATS Report

You can request an AFPSTATS report for any PSF print file you own. The AFPSTATS report option is only activated if your system programmer has added the appropriate AFPSTATS DD statement to the PSF startup procedure. There are two ways to request an AFPSTATS report:

- Use the AFPSTATS keyword on the OUTPUT JCL statement (see “AFPSTATS” on page 94). The valid values for AFPSTATS are YES, Y, NO, and N. NO is the default:

```
//OUT1 OUTPUT AFPSTATS=YES,...
//PRINT1 DD SYSOUT=A,OUTPUT=*.OUT1...
//
```

- Use installation Exit 7. The bit XTP7ASAP in the Exit 7 control structure specifies whether an AFPSTATS report is generated. For information about using Exit 7 to request an AFPSTATS report, see *PSF for z/OS: Customization*.

Note: Any value you specify for AFPSTATS in the OUTPUT JCL can be overridden by the XTP7ASAP bit in Exit 7. If the value is overridden by Exit 7, message APS7004I is printed in the message data set.

This example shows a job stream that produces a print file and an AFPSTATS report.

```
//JOB1 JOB ...
//STEP1 EXEC PGM=MYAPPL
//OUTMP OUTPUT AFPSTATS=YES
//MYPRINT DD SYSOUT=A,OUTPUT=*.OUTMP
//
```

The softcopy AFPSTATS report is stored on your system in the AFPSTATS repository and can be viewed or you can format it and print a hardcopy version.

The Softcopy Report

This version of the AFPSTATS report is stored on your system in the AFPSTATS repository and can be viewed or formatted and printed. PSF generates a unique member name for the report and records this name in message APS4001I in the message data set for the print file.

Format

The softcopy report is composed of variable-length records, with a maximum length of 512 characters per record. All records begin with a 10-character Layout ID or format identifier. Table 7 describes the overall format of a softcopy record. Individual AFPSTATS records are described in Table 8 on page 189 and detailed information about the AFPSTATS softcopy report format is listed in “Softcopy Record Details” on page 215.

Table 7. The Basic Format of the Softcopy AFPSTATS Report

Offset	Length	Field Content	Description
0	10	Layout ID	This is the 10-byte record format ID for the formatting PAGEDEF. This value can also help identify the record type within the report. See Table 8 on page 189.
10	2	Reserved	Reserved
12	1		Column separator – blank
13	1–499	Record specific	This data varies by record type. See “Softcopy Record Details” on page 215.

Records

The softcopy report is composed of records that begin with a 10-character Layout ID. Table 8 lists all the possible softcopy records and describes how the records are used.

Table 8. Softcopy AFPSTATS Records

Layout ID	Purpose
COMMENT	This record is used to add a text string to the report; typically blank lines to make the report more readable.
EVENT	This record identifies significant events that occurred during PSF processing. For example, a "Repositioning" event indicates that PSF is repositioning itself to a different point in the input data stream, possibly because of an operator request to backspace, an I/O error, or typical PSF processing.
EVENTFM	This record identifies when PSF maps a font from one type of supported font to another type of supported font. The supported font mappings are: GRID to raster font names, GRID to outline font names, outline font to raster font, and raster font to outline font. Note: If a font has previously been mapped to a font, that map event will not be recorded again in this record.
EVENT-LIST	This record is used to list all of the events that occurred while processing the print file.
EVENTRL	This record identifies the result of a resource reload request that occurred during Exit 7 processing.
EVENTRS	This record identifies the result of a resource substitution request that occurred during Exit 7 processing.
HEADING	This record contains the headings for report sections that are presented in a tabular format.
HEADING-DP	This record contains the headings for the Disposition Summary subsection.
HEADING-EL	This record contains the headings for the Significant Events subsection.
HEADING-LC	This record contains the headings for the Location Summary subsection.
HEADING-RF	This record contains the headings for the Reference Summary subsection.
HEADING-SP	This record contains the headings for the Summary of Pages subsection.
HEADING-UU	This record contains the headings for the unused inline resources subsection.
NOTE	This record is used to add important comments to the report.
PAGEFOOTER	This record is used to identify the page footer that is used in the hardcopy report. It is typically the same as the TITLE record section.
PRINTFILE	This record identifies the print file being processed when the report was generated. It also presents some information about PSF and identifies the printer.
REPORTLVL	This record identifies the specific report format level, which could change because of service and future PSF development.
RESOURCE	This record identifies individual resources used and the order PSF processes them.

|
|

Table 8. Softcopy AFPSTATS Records (continued)

Layout ID	Purpose
RESOURCEDF	This record identifies the first use of a TrueType font resource that has a name longer than eight characters.
RESOURCEDO	This record identifies the first use of a data object resource or extended code page.
RESOURCEGR	This record identifies the first use of a GRID font that is activated in the printer without being mapped.
SECTION	This record identifies when a report section is divided into a subsection.
SUMM-DISP	This record identifies a resource type and how PSF satisfied the resource request for that type of resource.
SUMM-DSN	This record identifies a repository or data set from which PSF has retrieved a resource. PSF obtains resources from resource repositories identified to it in the PSF startup procedure or in the USERLIB parameter on the OUTPUT JCL statement.
SUMM-DSN-R	This record contains a list of up to six resources that were retrieved from the resource repository defined in a SUMM_DSN record.
SUMM-LOC	This record identifies a resource type and where PSF found the resources for that type. PSF can locate resources in various resource repositories, including inline, user specified libraries, and system libraries.
SUMM-NAME	This record identifies a resource and provides statistics about how the resource was introduced, where PSF found the resource, and how PSF satisfied the resource request. This record is for all resources except GRID font, TrueType font, and OpenType font.
SUMM-NAMEX	This record identifies a GRID font, TrueType font, or OpenType font resource and provides statistics about how the resource was introduced, where PSF found the resource, and how PSF satisfied the resource request.
SUMM-PAGE	This record provides statistics about the source print file, including number of pages processed, page size, and number of records.
SUMM-PATH	This record identifies a path directory from which PSF retrieves a resource while processing a print file. PSF obtains resources from resource path libraries identified to it in the USERPATH parameter on the OUTPUT JCL statement.
SUMM-PTH-R	This record identifies the resource name that is found in the path directory. The resource name is cross-referenced to the resource name in the RESOURCEDF record, which contains the resource file name.
SUMM-REF	This record identifies a resource type and the various ways it was referenced.
TITLE	This record identifies the report sections found in the AFPSTATS report.
UIR-LIST	This record identifies an inline resource in the inline resource group that is not used during data set processing.

Example

For an example of the softcopy report, see “Sample Softcopy Report” on page 228.

The Hardcopy Report

The hardcopy report contains the same information as the softcopy report, but it is formatted in sections and has page numbers. Each section is formatted to 8.5 x 11 inches in a combination of landscape and portrait orientation. Table 9 lists the sections that make up a hardcopy report:

Table 9. Sections in the Hardcopy AFPSTATS Report

Report Section Title	Description	Corresponding Softcopy Records
Print File Information	Contains data collected about the print file, PSF, and the printer	PRINTFILE
Processing Detail	Contains data about the first reference to each resource used by the print file	RESOURCE, RESOURCEDF, RESOURCEGR
	Contains a record of significant events that occurred while processing this print file, including when PSF maps a font from one type of supported font to another type of supported font, the result of a resource reload request, and the result of a resource substitution request	EVENT, EVENTFM, EVENTRL, EVENTRS
Resource Summary by Name	Contains summary data about each resource referenced by the print file	SUMM-NAME, SUMM-NAMEX
Resource Summary by Data Set	Lists all the objects retrieved from the specified data sets; lists the resource name that is found in the specified path directory	SUMM-DSN, SUMM-DSN-R, SUMM-PATH, SUMM-PTH-R
Resource Summary by Resource Type	Contains summary information about the print file by resource type	SUMM-REF, SUMM-LOC, SUMM-DISP
Processing Summary	Summarizes the pages processed, lists the processing events, and lists unused inline resources	SUMM-PAGE, EVENT-LIST, UIR-LIST

Generating a Hardcopy Report

To generate a hardcopy AFPSTATS report, use the following IBM-supplied page definition and form definition to format the softcopy report:

- Page definition: P1ASAP02
- Form definition: F1ASAP01

The recommended page definition uses PPFA record formatting and conditional processing constructs to define the resulting AFPSTATS report. It uses proportional spaced, sans-serif fonts from AFP Font Collection, Program Number 5648-B33.

This example shows a job stream that formats an existing AFPSTATS report for printing:

```
//JOB1      JOB      ...
//STEP1     EXEC     PGM=IEBGENER
//SYSPRINT  DD      SYSOUT=*
//SYSIN     DD      DUMMY
//OUTRL     OUTPUT   PAGEDDEF=ASAP02,FORMDEF=ASAP01
//SYSUT2    DD      SYSOUT=*, OUTPUT=*.OUTRL
//SYSUT1    DD      DSN=WRTE$600.AFPSTATS(A0317900),DISP=SHR
//
```

Example

See “Sample Hardcopy Report” on page 230 for an example of the hardcopy report.

Appendix A. Form Definitions Supplied with PSF

This appendix describes the form definitions that IBM supplies with PSF.

The source modules are stored in the SYS1.SAPSPDFD library. You can use the source code to customize form definitions and page definitions for your organization.

Form Definition Naming Convention

Table 10 shows the naming conventions for the form definitions supplied with PSF that have up to eight positions in the form definition names, such as F1A00010. If you begin at the left character (F) and count positions from left to right, you can determine the meaning of the form definition characters. For example, F1A00010 means:

F1: Form definition

A0: An AFP printer other than the 3800

00: Offset 0,0

1: Bin 1

0: None (Simplex)

Table 10. Form definition naming convention from left to right

Positions	Values	Description
1-2	F1	Form definition
3-4	A1 or A0 CP C1 or C0 H1 FC FE FS FZ N2	All AFP printers other than the 3800 HP printers (PCL4, PCL5) through InfoPrint Manager for Windows 3800 compatibility 3-hole punched paper Finisher with corner staple Finisher with edge stitch Finisher with saddle stitch Finisher with Z-fold N_UP (2 up)
5-6	00 01 10 11 12	Offset 0,0 Offset 0.0165,0.0165 Offset 0,0; Duplex=None (Simplex) Offset 0,0; Duplex=Normal (Duplex) Offset 0,0; Duplex=Tumble (Duplex)
7-8	LA LD PA PD	Landscape across Landscape down Portrait across Portrait down
7	E M n	Envelope Manual Bin number
8	0 1 2	None (Simplex) Normal (Duplex) Tumble (Duplex)

Form Definition for the 3800 Printer

Table 11 describes the form definition supplied with PSF for the 3800 printer. The form definition specifies:

- One copy
- No overlays
- No offset stacking or copy marking

Table 11. Form Definition for the 3800

Form Definition Name	Copy Group	Page Position in Inches	Flash
F10101	F20101	0.0, 0.5	No

Form Definitions for Printers Other than the 3800, PCL4, and PPDS Printers

Many of the form definitions in the tables in this section use Bin 1. By default, a 64xx printer and a 65xx printer emulates a 4234 printer, which only supports bin number 255. Using these form definitions with a 4234 printer or a 64xx or 65xx printer emulating a 4234 printer causes an error. Before using these form definitions with a 64xx printer or a 65xx printer, configure the 64xx printer to emulate a 64xx printer and configure the 65xx printer to emulate a 6408 printer, not a 4234 printer.

Table 12 describes the form definitions for printers other than the 3800, PCL4, and PPDS printers, with the name and a description of each. Note that on some printers printing near the edge of the paper can result in poor print quality in the border area. If the printer has a third paper source, you can use it with some of the form definitions. For the limitations on your printer, see the publications for your printer. Each of these form definitions specifies:

- One copy
- No overlays
- No offset stacking or copy marking

Table 12. Form Definitions for All Printers Other than the 3800, PCL4, and PPDS Printers

Form Definition Name	Copy group	Page Position in Inches	Duplex	Paper Source
F1A10110	F2A10110	0.165, 0.165	Duplex off	Primary
F1A10120	F2A10120	0.165, 0.165	Duplex off	Alternate
F1A10130	F2A10130	0.165, 0.165	Duplex off	Third
F1A10111	F2A10111	0.165, 0.165	Normal duplex	Primary
F1A10121	F2A10121	0.165, 0.165	Normal duplex	Alternate
F1A10131	F2A10131	0.165, 0.165	Normal duplex	Third
F1A10112	F2A10112	0.165, 0.165	Tumble duplex	Primary
F1A10122	F2A10122	0.165, 0.165	Tumble duplex	Alternate
F1A10132	F2A10132	0.165, 0.165	Tumble duplex	Third
F1A10140	F2A10140	0.165, 0.165	Duplex off	Fourth
F1A10141	F2A10141	0.165, 0.165	Normal duplex	Fourth
F1A10142	F2A10142	0.165, 0.165	Tumble duplex	Fourth

Note: The 3820 lines up B4-size paper differently from other paper because of the B4 paper length. To compensate for this, you can create a form definition with a page position of 0.10, 0.00 inch.

Table 13 lists form definitions that let you print envelopes or use the manual input bin on the 4028 printer.

Table 13. Form Definitions for Printing Envelopes on the 4028

Form Definition Name	Copy group	Page Position in Inches	Duplex	Paper Source
F1A101E0	F2A101E0	0.165,0.165	Duplex off	Envelope
F1A000E0	F2A000E0	0,0	Duplex off	Envelope
F1A101M0	F2A101M0	0.165,0.165	Duplex off	Manual
F1A000M0	F2A000M0	0,0	Duplex off	Manual

Table 14 lists form definitions that specify a 0,0 offset. These form definitions are for printing on printers other than the 3800 printer.

Table 14. Form Definitions with a 0,0 Offset

Form Definition Name	Copy group	Page Position in Inches	Duplex	Paper Source
F1A00010	F2A00010	0,0	Duplex off	Primary
F1A00011	F2A00011	0,0	Normal duplex	Primary
F1A00012	F2A00012	0,0	Tumble duplex	Primary
F1A00020	F2A00020	0,0	Duplex off	Alternate
F1A00021	F2A00021	0,0	Normal duplex	Alternate
F1A00022	F2A00022	0,0	Tumble duplex	Alternate
F1A00030	F2A00030	0,0	Duplex off	Third
F1A00031	F2A00031	0,0	Normal duplex	Third
F1A00032	F2A00032	0,0	Tumble duplex	Third
F1A00040	F2A00040	0,0	Duplex off	Fourth
F1A00041	F2A00041	0,0	Normal duplex	Fourth
F1A00042	F2A00042	0,0	Tumble duplex	Fourth

Table 15 lists form definitions for N_UP 2 printing. These form definitions define two pages on a side of a sheet. For more information about using the N_UP subcommand to create N_UP form definitions, see *Page Printer Formatting Aid: User's Guide*.

Table 15. Form Definitions for N_UP 2 Printing

Form Definition Name	Copy group	Page Position in Inches	Duplex	Paper Source
F1N20110	F2N20110	0.165,0.165	Duplex off	Primary
F1N20111	F2N20111	0.165,0.165	Normal duplex	Primary
F1N20112	F2N20112	0.165,0.165	Tumble duplex	Primary
F1N20130	F2N20130	0.165,0.165	Duplex off	Third
F1N20131	F2N20131	0.165,0.165	Normal duplex	Third

Table 15. Form Definitions for N_UP 2 Printing (continued)

Form Definition Name	Copy group	Page Position in Inches	Duplex	Paper Source
F1N20132	F2N20132	0.165,0.165	Tumble duplex	Third

Table 16 lists form definitions to use with three-hole punched paper when printing with page definitions also designed for use with three-hole punched paper. You can use any of these form definitions with any of the page definitions for three-hole punched paper.

Table 16. Form Definitions for Three-Hole Punched Paper

Form Definition Name	Copy group	Page Position in Inches	Duplex	Paper Source
F1H10110	F2H10110	1.000,0.165	Duplex off	Primary
F1H10111	F2H10111	1.000,0.165 0.165,0.165	Normal duplex	Primary
F1H10112	F2H10112	1.000,0.165 1.000,0.165	Tumble duplex	Primary
F1H10120	F2H10120	1.000,0.165	Duplex off	Alternate
F1H10121	F2H10121	1.000,0.165 0.165,0.165	Normal duplex	Alternate
F1H10122	F2H10122	1.000,0.165 1.000,0.165	Tumble duplex	Alternate
F1H10130	F2H10130	1.000,0.165	Duplex off	Third
F1H10131	F2H10131	1.000,0.165 0.165,0.165	Normal duplex	Third
F1H10132	F2H10132	1.000,0.165 1.000,0.165	Tumble duplex	Third
F1H10140	F2H10140	1.000,0.165	Duplex off	Fourth
F1H10141	F2H10141	1.000,0.165 0.165,0.165	Normal duplex	Fourth
F1H10142	F2H10142	1.000,0.165 0.000,0.165	Tumble duplex	Fourth

Table 17 lists form definitions to use when you want to rotate pages on the paper. These form definitions are for printing on printers other than the 3800.

Table 17. Form Definitions for Rotating Pages on the Paper

Form Definition Name	Presentation Mode	Print Direction	Page Position in Inches	Duplex
F1A010LA	Landscape	Across	0,0	Duplex off
F1A010LD	Landscape	Down	0,0	Duplex off
F1A010PA	Portrait	Across	0,0	Duplex off
F1A010PD	Portrait	Down	0,0	Duplex off
F1A011LA	Landscape	Across	0,0	Normal duplex
F1A011LD	Landscape	Down	0,0	Normal duplex
F1A011PA	Portrait	Across	0,0	Normal duplex

Table 17. Form Definitions for Rotating Pages on the Paper (continued)

Form Definition Name	Presentation Mode	Print Direction	Page Position in Inches	Duplex
F1A011PD	Portrait	Down	0,0	Normal duplex
F1A012LA	Landscape	Across	0,0	Tumble duplex
F1A012LD	Landscape	Down	0,0	Tumble duplex
F1A012PA	Portrait	Across	0,0	Tumble duplex
F1A012PD	Portrait	Down	0,0	Tumble duplex

Table 18 lists form definitions that can be used to select print quality at a 64xx printer or a 65xx printer. To facilitate printing edge-to-edge, these form definitions specify a page position of 0,0. These form definitions also specify a bin number of 1.

Note: By default, a 64xx printer emulates a 4234 printer, which only supports a bin number of 255. These form definitions specify bin number 1; therefore, using these form definitions with a 64xx printer emulating a 4234 printer causes an error. Before using these form definitions with a 64xx printer, configure the printer to emulate a 64xx printer and not a 4234 printer. The 65xx printer also defaults to emulate a 4234 printer. Before using these form definitions with a 65xx printer, configure the 65xx printer to emulate a 6408 printer and not a 4234 printer.

Table 18. Form Definitions used to Select Print Quality on a 64xx or 65xx Printer

FORMDEF	Page position in inches	Print Quality	Duplex
F1Q10010	0.0, 0.0	Draft	Duplex off
F1Q50010	0.0, 0.0	DP	Duplex off
F1QA0010	0.0, 0.0	NLQ	Duplex off

Form Definitions for HP PCL4 and PPDS Printers

Table 19 describes the form definitions supplied with PSF for printing on HP PCL4 or PPDS printers through InfoPrint Manager for Windows. These form definitions must be used in combination with page definitions intended for these printers. The form definitions specify:

- One copy
- No overlays
- No offset stacking or copy marking

Table 19. Form Definitions for HP PCL4 and PPDS Printers

Form Definition Name	Copy group	Page Position in Inches	Duplex	Paper Source
F1CP0110	F2CP0110	0.250,0.200	Duplex off	Primary
F1CP0120	F2CP0120	0.250,0.200	Duplex off	Alternate
F1CP0111	F2CP0111	0.250,0.200	Normal duplex	Primary
F1CP0121	F2CP0121	0.250,0.200	Normal duplex	Alternate
F1CP0112	F2CP0112	0.250,0.200	Tumble duplex	Primary
F1CP0122	F2CP0122	0.250,0.200	Tumble duplex	Alternate

Compatibility Form Definitions

Table 20 and Table 21 describe compatibility form definitions supplied with PSF that can be used to print data formatted for the 3800 or cut-sheet printers on an AFCCU™ continuous-forms printer such as a 3900, InfoPrint 3000, or InfoPrint 4000/4100. Use one of the compatibility form definitions when printing these on a continuous-forms printer:

- Data formatted for landscape presentation on a cut-sheet printer.
- Data formatted for either portrait or landscape presentation on a 3800 printer. The form definition used depends on whether the data was formatted for printing on wide or narrow paper.

These form definitions specify:

- One copy group ¹⁷
- One copy
- No offset stacking or copy marking
- Primary paper source
- No overlays

Table 20. Compatibility Form Definitions for AFCCU Continuous-Forms Printers

Form Definition Name	Compatible with	Presentation Mode	Print Direction	Duplex	Page Position in Inches
F1C10110	Cut-sheet printers	Landscape	Down	Duplex off	0.165, 0.165
F1C10111	Cut-sheet printers	Landscape	Down	Normal duplex	0.165, 0.165
F1C10112	Cut-sheet printers	Landscape	Down	Tumble duplex	0.165, 0.165
F10101PD	3800 printer wide forms	Portrait	Down	Duplex off	0.00, 0.50
F10101LA	3800 printer wide forms	Landscape	Across	Duplex off	0.00, 0.50
F10101PA	3800 printer narrow forms	Portrait	Across	Duplex off	0.00, 0.50
F10101LD	3800 printer narrow forms	Landscape	Down	Duplex off	0.00, 0.50

Table 21. N_UP Compatibility Form Definitions for AFCCU Continuous-Forms Printers

Form Definition Name	Compatible with	Presentation Mode	Print Direction	Duplex	Page Position in Inches	N_UP
F1N201PD	3800 printer wide forms (N_UP of None)	Portrait	Down	Duplex off	0.00, 0.50	2

17. The name of the copy group is the same as the name of the form definition, except for the prefix. For example, form definition F10101PA contains one copy group named F20101PA.

Table 21. N_UP Compatibility Form Definitions for AFCCU Continuous-Forms Printers (continued)

Form Definition Name	Compatible with	Presentation Mode	Print Direction	Duplex	Page Position in Inches	N_UP
F1N201LA	3800 printer wide forms (N_UP of None)	Landscape	Across	Duplex off	0.00, 0.50	2
F1N201PA	3800 printer narrow forms (N_UP of None)	Portrait	Across	Duplex off	0.00, 0.50	2
F1N201LD	3800 printer narrow forms (N_UP of None)	Landscape	Down	Duplex off	0.00, 0.50	2

Note: The use of the N_UP form definitions in this table on the 3800 printer cause PSF to issue message APS283I or APS284I. The output is printed appropriately.

Table 22 describes compatibility form definitions supplied with PSF that can be used to print data formatted for the 3800 printer on a cut-sheet printer, such as the InfoPrint 11xx series, InfoPrint 2000, and InfoPrint 2085 and 2105. When printing on a cut-sheet printer, use one of the compatibility form definitions with data formatted for either portrait or landscape presentation on a 3800 printer. The form definition you use depends on whether the data was formatted for printing on wide or narrow paper.

Table 22. 3800 Compatibility Form Definitions for Cut-Sheet Printers

Form Definition Name	Compatible with	Presentation Mode	Print Direction	Duplex	Page Position in Inches
F1C010LA	3800 printer wide forms	Landscape	Across	Duplex off	0.00, 0.50
F1C010PD	3800 printer wide forms	Portrait	Down	Duplex off	0.00, 0.50
F1C010LD	3800 printer narrow forms	Landscape	Down	Duplex off	0.00, 0.50
F1C010PA	3800 printer narrow forms	Portrait	Across	Duplex off	0.00, 0.50
F1C011LA	3800 printer wide forms	Landscape	Across	Normal duplex	0.00, 0.50
F1C011PD	3800 printer wide forms	Portrait	Down	Normal duplex	0.00, 0.50
F1C011LD	3800 printer narrow forms	Landscape	Down	Normal duplex	0.00, 0.50
F1C011PA	3800 printer narrow forms	Portrait	Across	Normal duplex	0.00, 0.50
F1C0102LA	3800 printer wide forms	Landscape	Across	Tumble duplex	0.00, 0.50
F1C012PD	3800 printer wide forms	Portrait	Down	Tumble duplex	0.00, 0.50

Table 22. 3800 Compatibility Form Definitions for Cut-Sheet Printers (continued)

Form Definition Name	Compatible with	Presentation Mode	Print Direction	Duplex	Page Position in Inches
F1C012LD	3800 printer narrow forms	Landscape	Down	Tumble duplex	0.00, 0.50
F1C012PA	3800 printer narrow forms	Portrait	Across	Tumble duplex	0.00, 0.50

For more information about compatibility form definitions, see “Page-Presentation Compatibility” on page 62.

Form Definitions for Special Purpose Jobs

Table 23 describes the form definitions supplied with PSF for all special purposes except finishing. You can use these form definitions on any AFP printers. Each of these form definitions specifies:

- One copy
- No offset stacking or copy markings
- Primary paper source
- Duplex off
- No forms flash

Table 23. Form Definitions Supplied for Special Purposes

Form Definition Name	Copy Group	Page Position in Inches	Overlay
F1IBM	IBM	0.0, 0.5	O1IBM
F1OGL	OGL	0.0, 0.0	none

Form definition F1IBM is provided for use in verifying the installation and prints a supplied overlay that contains the IBM logo. This form definition would ordinarily be used only during system installation, to verify that the PSF product is working correctly.

F1OGL is provided for use with the Overlay Generation Language (OGL) program. Use F1OGL to print the overlay sample created during the processing of your OGL statements. The overlay sample is a page, identical with the overlay resource, that can be sent directly to the printer. F1OGL positions the overlay sample page at the medium origin (0.0, 0.0), which ensures that the print position of the overlay sample matches the print position of the overlay resource when it is called for printing by a user-specified form definition. For more information about using OGL to produce overlays and overlay samples, see *Overlay Generation Language User's Guide and Reference*.

You can use F1OGL for printing any job in which you want the page to be positioned at the medium origin. However, if you position a page at the medium origin, you must ensure that data in the page does not fall outside the printable area of the sheet. For more information about the areas on which your printer can print, see the documentation provided with the printer.

Form Definitions for Finishing Your Output

Table 24 describes the form definitions supplied with PSF for printers that support finishing operations. You cannot use these form definitions to specify finishing operations on individual copy groups.

Table 24. Form Definitions for Printers That Support Finishing

Form Definition Name	Copy Group	Finishing	Page Position in Inches	Paper Source	Duplex
F1FC0010	F1FC0010	Top left corner staple	0,0	Bin 1	Duplex Off
F1FC0011	F1FC0011	Top left corner staple	0,0	Bin 1	Normal duplex
F1FC0012	F1FC0012	Top left corner staple	0,0	Bin 1	Tumble duplex
F1FE0010	F1FE0010	Left edge stitch	0,0	Bin 1	Duplex off
F1FE0011	F1FE0011	Left edge stitch	0,0	Bin 1	Normal duplex
F1FE0012	F1FE0012	Left edge stitch	0,0	Bin 1	Tumble duplex
F1FS0010	F1FS0010	Saddle stitch	0,0	Bin 1	Display On
F1FS0011	F1FS0011	Saddle stitch	0,0	Bin 1	Normal duplex
F1FZ0030	F1FZ0030	Z-fold	0,0	Bin 3	Normal duplex

Table 25 describes additional form definitions supplied with PSF for printers that support finishing operations. These form definitions are exceptions to the naming convention formula.

Table 25. Additional Form Definitions for Printers That Support Finishing

Form Definition Name	Copy Group	Finishing	Page Position in Inches	Paper Source	Duplex
F1FEC010	F1FEC010	Left edge stitch, cover sheet	0,0	Bin 7	None simplex
F1FEL010	F1FEL010	Left edge staple	0,0	Bin 1	None simplex
F1FER010	F1FER010	Right edge staple	0,0	Bin 1	None simplex
F1FEZ010	F1FEZ010	Edge stitch with Z fold	0,0	Bin 3	None simplex

Table 25. Additional Form Definitions for Printers That Support Finishing (continued)

Form Definition Name	Copy Group	Finishing	Page Position in Inches	Paper Source	Duplex
F1FS2030	F1FS2030	Saddle stitch, 2 up	0,0	Bin 3	Normal duplex
F1FZ1021	F1FZ1021	Z-fold ledger, 1_Up, Landscape	0,0	Bin 2	Normal duplex
F1FZ2021	F1FZ2021	Z-fold ledger, 2_Up, Portrait	0,0	Bin 2	Normal duplex

For coding examples and detailed information about finishing, see *InfoPrint 60 Finisher Application Design Guide*.

Form Definitions for Printing PSF Reports

Table 26 describes the form definitions supplied with PSF for printing PSF reports.

Table 26. Form Definitions for Printing PSF Reports

Form Definition Name	Report Type
F1ASAP01	AFP Statistics (AFPSTATS)
F1DPI01	Printer Information
F1PPCT01	Tier Level (produced by the Point Counting Tool)

Appendix B. Page Definitions Supplied with PSF

This appendix describes the page definitions supplied with PSF. These page definitions only work with traditional line data. Page definitions are available for the various paper sizes used by the printers supported by PSF. For information about the paper sizes your printer uses, see the publications for your printer.

Page Definitions for the 3800 Printer

The forms control buffer (FCB) modules available with the 3800 Model 1 (a line printer) have been converted to page definitions for the 3800 page printers (Models 3, 6, and 8). Table 27 lists the FCBs and the names of the corresponding page definitions with their descriptions. In the tables, the abbreviation *lpi* stands for lines per inch.

Table 27. 3800 Model 1 FCBs and Corresponding Page Definitions for 14.88 x 11-Inch Paper

FCB	Page Definition Name	Printable Area: Width by Height, in Inches	Print Lines Per Page	Page Position: ¹⁸ Down/Across	Recommended Font	Printing Direction	Page Presentation
FCB3STD1	P1STD1	13.87 x 8.5	51 at 6 lpi	29/0	GT10	Across	Landscape
FCB3STD2	P1STD2	13.87 x 10.0	60 at 6 lpi	29/0	GT10	Across	Landscape
FCB3STD3	P1STD3	13.87 x 10.0	80 at 8 lpi	23/0	GT12	Across	Landscape
FCB36	P16	13.87 x 8.5	51 at 6 lpi	29/0	GT10	Across	Landscape
FCB38	P18	13.87 x 8.5	68 at 8 lpi	23/0	GT12	Across	Landscape

Additional page definitions for the 3800 printer are available for formatting three of the more common paper sizes, 12 x 8.5, 9.5 x 11, and 14.88 x 11 inches, and for 2-up printing applications (placing two pages of application data on a form).

Many of these page definitions have 5-character names following the P1 prefix. To specify such a page definition with an FCB parameter, you must first rename the page definition with a 1- to 4-character name following the P1 prefix.

Each of these page definitions specifies a channel-1 (carriage) control character to position printing at the top of the next page.

Table 28 describes the page definitions for paper that measures 12 x 8.5 inches.

Table 28. Page Definitions for 12 x 8.5-Inch Paper

Page Definition Name	Printable Area: Width by Height, in Inches	Print Lines Per Page	Page Position: ¹⁸ Down/Across	Recommended Font	Printing Direction	Page Presentation
P104560	11.0 x 7.5	45 at 6 lpi	29/0	GT10	Across	Landscape
P106061	7.5 x 10.0	60 at 6 lpi	29/0	GT10	Down	Portrait

18. Position down and position across are shown in logical units, with 240 logical units per inch. For example, 24 logical units is equal to 0.10 inch. Measurements specified in logical units are the same for all the printers PSF supports, regardless of the resolution or pel-density of the printer.

Table 28. Page Definitions for 12 x 8.5-Inch Paper (continued)

Page Definition Name	Printable Area: Width by Height, in Inches	Print Lines Per Page	Page Position: ¹⁸ Down/Across	Recommended Font	Printing Direction	Page Presentation
P106080	11.0 x 7.5	60 at 8 lpi	23/0	GT12	Across	Landscape
P108081	7.5 x 10.0	80 at 8 lpi	23/0	GT12	Down	Portrait
P1075A0	11.0 x 7.5	75 at 10 lpi	19/0	GT20	Across	Landscape
P1100A1	7.5 x 10.0	100 at 10 lpi	19/0	GT20	Down	Portrait
P1090C0	11.0 x 7.5	90 at 12 lpi	15/0	GT20	Across	Landscape

Table 29 describes the page definitions for paper that measures 9.5 x 11.0 inches.

Table 29. Page Definitions for 9.5 x 11-Inch Paper

Page Definition Name	Printable Area: Width by Height, in Inches	Print Lines Per Page	Page Position: ¹⁸ Down/Across	Recommended Font	Printing Direction	Page Presentation
P106060	8.5 x 10.0	60 at 6 lpi	29/0	GT10	Across	Portrait
P105161	10.0 x 8.5	51 at 6 lpi	29/0	GT10	Down	Landscape
P108080	8.5 x 10.0	80 at 8 lpi	23/0	GT12	Across	Portrait
P106881	10.0 x 8.5	68 at 8 lpi	23/0	GT12	Down	Landscape
P1100A0	8.5 x 10.0	100 at 10 lpi	19/0	GT20	Across	Portrait
P1085A1	10.0 x 8.5	85 at 10 lpi	19/0	GT20	Down	Landscape
P1120C0	8.5 x 10.0	120 at 12 lpi	15/0	GT20	Across	Portrait
P1102C1	10.0 x 8.5	102 at 12 lpi	15/0	GT20	Down	Landscape

Table 30 describes the page definitions for paper that measures 14.88 x 11.0 inches.

Table 30. Page Definitions for 14.88 by 11-Inch Paper

Page Definition Name	Printable Area: Width by Height, in Inches	Print Lines Per Page	Page Position: ¹⁸ Down/Across	Recommended Font	Printing Direction	Page Presentation
P1L06060	13.88 x 10.0	60 at 6 lpi	29/0	GT10	Across	Landscape
P1L08080	13.88 x 10.0	80 at 8 lpi	23/0	GT12	Across	Landscape
P1L100A0	13.88 x 10.0	100 at 10 lpi	19/0	GT20	Across	Landscape
P1L120C0	13.88 x 10.0	120 at 12 lpi	15/0	GT20	Across	Landscape

Table 31 describes the page definitions for multiple-up printing.

19. P1M16080 prints 80 characters per line when using a 12-pitch font, and 100 characters per line when using a 15-pitch font.

20. Font GT24 is specified in this page definition; any CHARS option is ignored.

21. Font GT20 is specified in this page definition; any CHARS option is ignored. When used with traditional line data that contains no carriage controls, this page definition prints with no break between subpages.

Table 31. Page Definitions for Multiple-Up Printing

Page Definition Name	Form Size: Width by Height, in Inches	Printable Area: Width by Height, in Inches	Print Lines Per Page	Page Position: ¹⁸ Down/Across	Recommended Font	Printing Direction	Page Presentation
P1M12060	14.88 x 11.0	13.88 x 10.0	60 at 6 lpi 60 at 6 lpi	29/0 29/1728	GT12	Across	Landscape: Side-by-Side
P1M120C1	12 x 8.5	7.5 x 10.0	60 at 12.5 lpi 60 at 12.5 lpi	15/0 1197/0	GT20	Down	Portrait: Over/Under
P1M120C0	9.5 x 11.0	8.5 x 10.0	60 at 12.5 lpi 60 at 12.5 lpi	15/0 1245/0	GT20	Across	Portrait: Over/Under
P1M16080 ₁₉	14.88 x 11.0	13.88 x 10.0	80 at 8 lpi 80 at 8 lpi	23/0 23/1728	¹⁹	Across	Landscape: Side-by-Side
P1M13280 ₂₀	12 x 8.5	11.0 x 7.5	66 at 8.8 lpi 66 at 8.8 lpi	15/72 15/1380	GT24	Across	Landscape: Side-by-Side
P1M132C1 ₂₁	12 x 8.5	7.5 x 11.0	66 at 12.1 lpi 66 at 12.1 lpi	15/0 next/0	GT20	Down	Portrait: Over/Under

The phrases *Side-by-Side* and *Over/Under* in Table 31 describe the placement of the subpages, which appear as separate logical pages on the physical sheet, as Figure 49 shows.

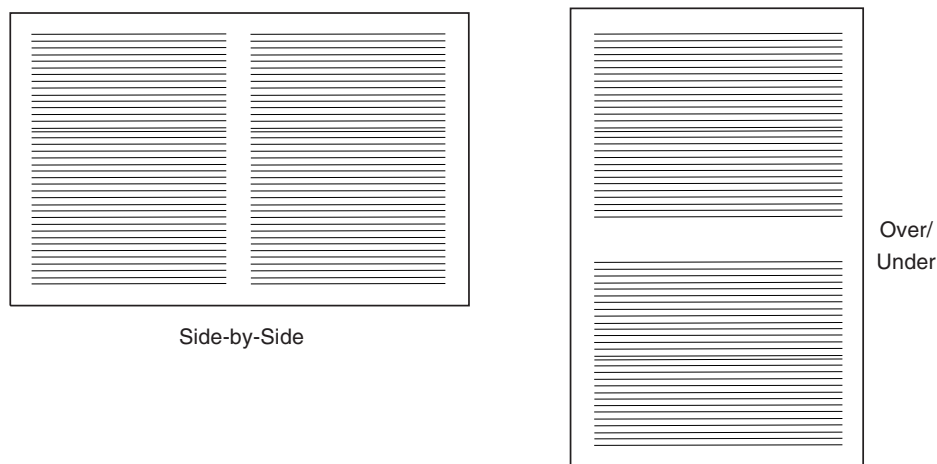


Figure 49. Placement of Two Subpages on a Single Physical Sheet

Page Definitions for the 4224, 4230, 4234, 4247, and 6400 Printers

Page definitions for the 4224, 4230, 4234, 4247, and 6400 printers are supplied for formatting some of the more common paper sizes, as the tables in this section show. These page definitions are designed for printing on continuous-forms paper on any of the printers named. They are not designed for printing with cut-sheet paper or with the document-on-demand feature.

The 4224, 4230, 4234, 4247, and 6400 printers support different fonts, depending on the print-quality level set for the printer. Therefore, select a font that is supported at the print-quality level set for your printer. To see the print-quality level set for your printer, see the documentation provided with the printer. Each of these page definitions assigns a channel-1 (carriage) control character to the first line of the page.

Table 32 describes the page definitions for continuous-forms paper that measures 12 x 8.5 inches.

Table 32. Page Definitions for Continuous-Forms Paper 12 x 8.5 inches

Page Definition Name	Printable Area: Width by Height, in Inches	Print Lines Per Page	Page Position: ¹⁸ Down/Across	Recommended Font	Printing Direction	Page Presentation
P1J04964	10.67 x 8.17	49 at four lpi	30/0	GT10	Across	Landscape
P1J06484	10.67 x 8.17	64 at 8.01 lpi	30/0	GT12	Across	Landscape

Table 33 describes the page definitions for continuous-forms paper that measures 9.5 x 11 inches.

Table 33. Page Definitions for Continuous-Forms Paper 9.5 x 11 inches

Page Definition Name	Printable Area: Width by Height, in Inches	Print Lines Per Page	Page Position: ¹⁸ Down/Across	Recommended Font	Printing Direction	Page Presentation
P1A06462	8.17 x 10.67	64 at 6 lpi	30/0	GT10	Across	Portrait
P1A08584	8.17 x 10.67	85 at 8.01 lpi	30/0	GT12	Across	Portrait

Table 34 describes the page definitions for continuous-forms paper 14.88 x 11 inches. The width of the printable area in these page definitions is 13.2 inches, because the 4224, 4230, 4234, 4247, and 6400 printers have a maximum line length of 13.2 inches. To print records having a line length of 13.2 inches (for example, 132-byte records printed with a GT10 font), you must use a form definition that positions the page at the left margin. For example, you can use form definition F1OGL, described in Table 23 on page 200.

Table 34. Page Definitions for Continuous-Forms Paper 14.88 x 11 inches

Page Definition Name	Printable Area: Width by Height, in Inches	Print Lines Per Page	Page Position: ¹⁸ Down/Across	Recommended Font	Printing Direction	Page Presentation
P1L06464	13.2 x 10.67	64 at 6 lpi	30/0	GT10	Across	Landscape
P1L08584	13.2 x 10.67	85 at 8.01 lpi	30/0	GT12	Across	Landscape

Page Definitions for HP-CL4 and PPDS Printers

Page definitions for HP-CL4 and PPDS printers are supplied for formatting some of the more common paper sizes, as the tables in this section show. For information about the paper sizes supported for your printer, see the publications for your printer.

Each of these page definitions specifies a channel-1 (carriage) control character to position at the top of the next page.

Table 35 describes the page definitions for cut-sheet A4 paper, which is 8.27 inches wide by 11.69 inches high.

Table 35. Page Definitions for A4 Paper

Page Definition Name	Printable Area: Width by Height, in Inches	Print Lines Per Page	Page Position: ¹⁸ Down/Across	Recommended Font	Printing Direction	Page Presentation
P1Q09182	7.77 x 11.29	91 at 8.2 lpi	25/0	GT12	Across	Portrait
P1X04763	10.60 x 7.77	47 at 6.1 lpi	30/0	GT10	Down	Landscape
P1X06483	10.60 x 7.77	64 at 8.2 lpi	24/0	GT12	Down	Landscape
P1X06683	10.60 x 7.77	66 at 8.5 lpi	24/224 (28)	GT15	Down	Landscape.

Table 36 describes the page definitions for cut-sheet B4 paper, which is 10.12 inches wide by 14.33 inches high.

Table 36. Page Definitions for B4 Paper

Page Definition Name	Printable Area: Width by Height, in Inches	Print Lines Per Page	Page Position: ¹⁸ Down/Across	Recommended Font	Printing Direction	Page Presentation
P1T08362	9.62 x 13.93	83 at 6 lpi	30/0	GT10	Across	Portrait
P1T11382	9.62 x 13.93	113 at 8.2 lpi	24/0	GT10	Across	Portrait
P1T05963	13.93 x 9.62	59 at 6.1 lpi	30/0	GT10	Down	Landscape
P1T07983	13.93 x 9.62	79 at 8.2 lpi	24/0	GT 12	Down	Landscape

Table 37 describes the page definitions for cut-sheet letter paper, which is 8.5 inches wide by 11 inches high.

Table 37. Page Definitions for Cut-Sheet Letter Paper

Page Definition Name	Printable Area: Width by Height, in Inches	Print Lines Per Page	Page Position: ¹⁸ Down/Across	Recommended Font	Printing Direction	Page Presentation
P1P06362	8.00 x 10.60	63 at 6 lpi	30/0	GT10	Across	Portrait
P1P08682	8.00 x 10.60	86 at 8.2 lpi	24/0	GT12	Across	Portrait
P1X04763	10.60 x 7.77	47 at 6.1 lpi	30/0	GT10	Down	Landscape
P1X06483	10.60 x 7.77	64 at 8.2 lpi	24/0	GT12	Down	Landscape
P1X06683	10.60 x 7.77	66 at 8.5 lpi	24/224 (28)	GT15	Down	Landscape

Table 38 describes the page definitions for cut-sheet legal paper, which is 8.5 inches wide by 14 inches high.

Table 38. Page Definitions for Cut-Sheet Legal Paper

Name	Printable Area: Width by Height, in Inches	Print Lines Per Page	Page Position: ¹⁸ Down/Across	Recom- mended Font	Printing Direction	Page Presentation
P1R08162	8/00 x 13.60	81 at 6 lpi	30/0	GT10	Across	Portrait
P1R11082	8.00 x 13.60	110 at 8.2 lpi	24/0	GT12	Across	Portrait
P1R04763	13.60 x 8.00	47 at 6 lpi	30/0	GT10	Down	Landscape
P1R06683	13.60 x 8.00	66 at 8.2 lpi	24/0	GT12	Down	Landscape

Page Definitions for All Other Printers Supported by PSF

Table 39 describes the page definitions supplied with PSF for all printers other than the 3800, 4224, 4230, 4234, 4247, 6400, PCL4, and PPDS printers. PSF provides common page definitions for printers other than these, to promote the interchange of documents between different printers.

PSF provides page definitions to format the commonly used cut-sheet and continuous-forms paper sizes. The tables in this section show the page definitions for each paper size. For information about the paper sizes supported for your printer, see the publications for your printer.

Each of these page definitions specifies a channel-1 (carriage) control character to position at the top of the next page.

Table 39 describes the page definitions for cut-sheet A4 paper, which is 8.27 inches wide by 11.69 inches high.

Table 39. Page Definitions for A4 Paper

Page Definition Name	Printable Area: Width by Height, in Inches	Print Lines Per Page	Page Position: ¹⁸ Down/Across	Recom- mended Font	Printing Direction	Page Presentation
P1C09182	7.94 x 11.36	91 at 8.2 lpi	25/0	GT12	Across	Portrait
P1V04863	10.67 x 7.94	48 at 6.1 lpi	30/0	GT10	Down	Landscape
P1V06483	10.67 x 7.94	64 at 8.2 lpi	24/0	GT12	Down	Landscape
P1V06683	10.67 x 7.94	66 at 8.5 lpi	24/224 ²²	GT15	Down	Landscape

Table 40 describes the page definitions for cut-sheet B4 paper, which is 10.12 inches wide by 14.33 inches high.

Table 40. Page Definitions for B4 Paper

Page Definition Name	Printable Area: Width by Height, in Inches	Print Lines Per Page	Page Position: ¹⁸ Down/Across	Recom- mended Font	Printing Direction	Page Presentation
P1D08462	9.79 x 14	84 at 6 lpi	30/0	GT10	Across	Portrait
P1D11382	9.79 x 14	113 at 8.2 lpi	24/0	GT12	Across	Portrait

22. The user printable area is 9.74 x 7.94 because of the 224-logical-unit offset in Position Down/Position Across column.

Table 40. Page Definitions for B4 Paper (continued)

Page Definition Name	Printable Area: Width by Height, in Inches	Print Lines Per Page	Page Position: ¹⁸ Down/Across	Recommended Font	Printing Direction	Page Presentation
P1D06063	14 x 9.79	60 at 6.1 lpi	30/0	GT10	Down	Landscape
P1D08083	14 x 9.79	80 at 8.2 lpi	24/0	GT12	Down	Landscape

Table 41 describes the page definitions for any of these paper sizes:

- Cut-sheet: Letter, which is 8.5 inches wide by 11 inches high
- Continuous-forms: 12 inches wide by 8.5 inches high
- Continuous-forms: 9.5 inches wide by 11 inches high

Table 41. Page Definitions for Letter and Continuous-Forms Paper 12 x 8.5 inches or 9.5 x 11 Inches

Page Definition Name	Printable Area: Width by Height, in Inches	Print Lines Per Page	Page Position: ¹⁸ Down/Across	Recommended Font	Printing Direction	Page Presentation
P1A06462	8.17 x 10.67	64 at 6 lpi	30/0	GT10	Across	Portrait
P1A08682	8.17 x 10.67	86 at 8.2 lpi	24/0	GT12	Across	Portrait
P1V04863	10.67 x 7.94	48 at 6.1 lpi	30/0	GT10	Down	Landscape
P1V06483	10.67 x 7.94	64 at 8.2 lpi	24/0	GT12	Down	Landscape
P1V06683	10.67 x 7.94	66 at 8.5 lpi	24/224 ²²	GT15	Down	Landscape

Table 42 describes the page definitions for any of these paper sizes:

- Cut-sheet: Legal, which is 8.5 inches wide by 14 inches high
- Continuous-forms: 14.88 inches wide by 11 inches high

Table 42. Page Definitions for Legal and Continuous-Forms Paper 14.88 x 11 inches

Page Definition Name	Printable Area: Width by Height, in Inches	Print Lines Per Page	Page Position: ¹⁸ Down/Across	Recommended Font	Printing Direction	Page Presentation
P1B08262	8.17 x 13.67	82 at 6 lpi	30/0	GT10	Across	Portrait
P1B11082	8.17 x 13.67	110 at 8.2 lpi	24/0	GT12	Across	Portrait
P1B04963	13.67 x 8.17	49 at 6 lpi	30/0	GT10	Down	Landscape
P1B06683	13.67 x 8.17	66 at 8.2 lpi	24/0	GT12	Down	Landscape

Table 43 on page 210 describes the page definitions for multiple-up printing on any of these paper sizes:

- Cut-sheet: Letter, which is 8.5 inches wide by 11 inches high
- Cut-sheet: A4, which is 8.27 inches wide by 11.69 inches high
- Continuous-forms: 12 inches wide by 8.5 inches high
- Continuous-forms: 9.5 inches wide by 11 inches high

Table 43. Multiple-up Page Definitions

Page Definition Name	Printable Area: Width by Height, in Inches	Print Lines Per Page	Page Position: ¹⁸ Down/Across	Recommended Font	Printing Direction	Page Presentation
P1W120C2	7.94 x 10.67	60 at 12 lpi 60 at 12 lpi	16/160 1344/160	GT20	Across	Portrait: Over/Under
P1W12883	10.67 x 7.94	64 at 8.2 lpi 64 at 8.2 lpi	24/0 24/1281	GT15	Down	Landscape: Side-by-Side
P1W240F3	10.67 x 7.94	60 at 15.2 lpi 60 at 15.2 lpi 60 at 15.2 lpi 60 at 15.2 lpi	16/48 968/48 16/1322 968/1322	GT24	Down	Landscape: Over/Under Side-by-Side

The phrases *Side-by-Side* and *Over/Under* in Table 43 describe the placement of the subpages, which appear as separate logical pages on the physical page, as seen in Figure 50.

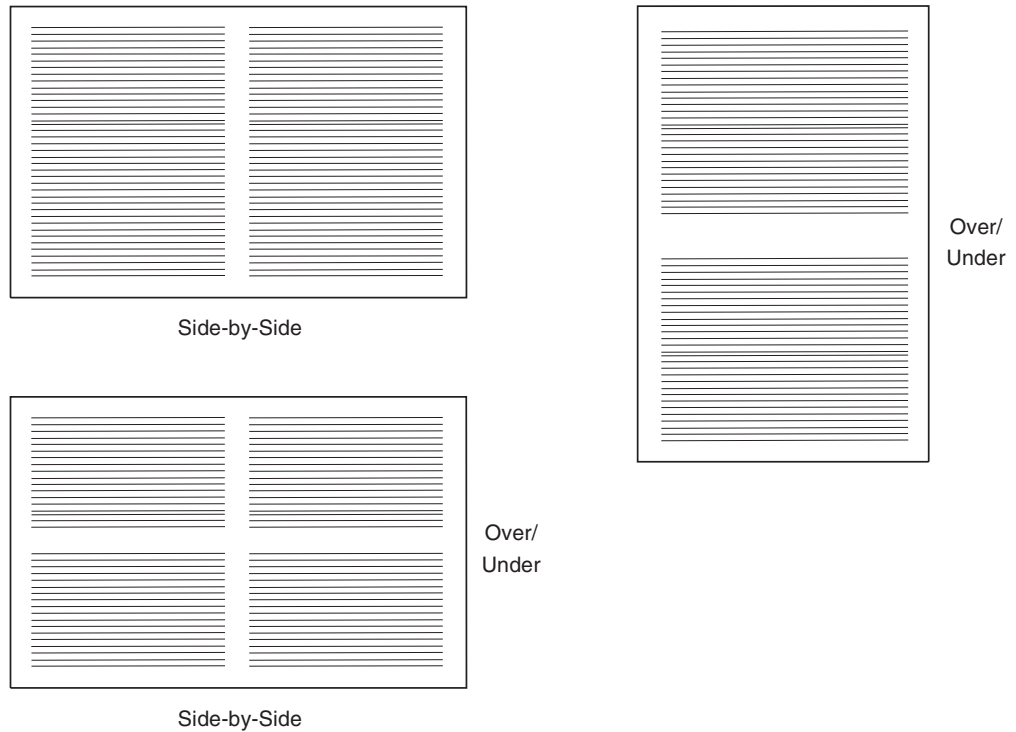


Figure 50. Placement of Multiple-Up Logical Pages on the Physical Sheets

Table 44 on page 211 lists page definitions for printing on a variety of sizes of three-hole punched paper. The page definitions specify that the printing direction is Up, and they offset printing to accommodate three-hole punched paper. You must use these page definitions with the form definitions whose names begin with F1H.

Table 44. Page Definitions for Printing on Three-Hole Punched Paper

Page Definition Name	Printable Area: Width by Height, in Inches	Print Lines Per Page	Page Position: ¹⁸ Down/Across	Recommended Font	Printing Direction	Page Presentation
P1B0446B	13.67 x 7.34	44 at 6 lpi	30/0	GT10	Up	Landscape
P1B0608B	13.67 x 7.34	60 at 8.2 lpi	24/0	GT12	Up	Landscape
P1D0556B	14.0 x 8.96	55 at 6.1 lpi	30/0	GT10	Up	Landscape
P1D0748B	14.0 x 8.96	74 at 8.2 lpi	24/0	GT12	Up	Landscape
P1V0436B	10.67 x 7.11	43 at 6.1 lpi	30/0	GT10	Up	Landscape
P1V0588B	10.67 x 7.11	58 at 8.2 lpi	24/0	GT12	Up	Landscape
P1V0608B	10.67 x 7.11	60 at 8.5 lpi	24/224	GT15	Up	Landscape
P1W1168B	10.67 x 7.11	58 at 8.2 lpi 58 at 8.2 lpi	24/0 24/1281	GT15	Up	Landscape
P1W216FB	10.67 x 7.11	54 at 15.2 lpi 54 at 15.2 lpi 54 at 15.2 lpi 54 at 15.2 lpi	16/48 890/48 16/1322 890/1322	GT24	Up	Landscape

Page Definitions for Printing PSF Reports

Table 45 describes the page definitions you can use to format PSF reports for printing.

Table 45. Page Definitions for Printing PSF Reports

Page Definition Name	Report Type
P1ASAP02	AFP Statistics (AFPSTATS)
P1DPI01	Printer Information
P1PPCT01	Tier Level (produced by the Point Counting Tool)

Page Definition Line-Spacing Values and Fonts

The tables in this section list the line-spacing values for some of the page definitions supplied with PSF. The tables also list FOCA fonts by group according to the lines per inch at which each font is printed.

Table 46 shows the line-spacing values for the 3800 printer.

23. P1M13280 specifies font GT24, which is printed at 8.8 lines per inch. Any CHARS option is ignored.

24. Fonts AE20 and GT20 are printed at 12.8 lines per inch. Page definition P1M132C1 defines printing at 12.1 lines per inch, specifying font GT20. If you specify any other font with a CHARS option, the specification is ignored. To print an application with font AE20, use PPF A to change the source for P1M132C1, specifying font AE20. Rename the object and store it in the system page definition library.

Table 46. Cross-Reference of Line Spacing and Page Definitions for the 3800 Printer

Line Spacing	Page Definition Name
6 lpi	P104560 P105161 P106060 P106061 P1L06060 P1M12060 P1STD1 P1STD2 P16
8 lpi	P106080 P106881 P108080 P108081 P1L08080 P1M16080 P1STD3 P18
10 lpi	P1075A0 P1085A1 P1100A0 P1100A1 P1L100A0
12 lpi	P1090C0 P1120C0 P1102C1 P1L120C0
12.5 lpi	P1M120C0 P1M120C1
Special	P1M13280 ²³ P1M132C1 ²⁴

Table 47 shows the line-spacing values for each of the page definitions for the 4224, 4230, 4234, 4247, and 6400 printers.

Table 47. Cross-Reference of Line Spacing and Page Definitions for the 4224, 4230, 4234, 4247, and 6400 Printers

Line Spacing	Page Definition Name
6 lpi	P1J04964 P1J06462 P1L06464
8.01 lpi	P1J06484 P1A08584 P1L08584

Table 48 shows the line-spacing values for each of the page definitions for cut-sheet A4 paper for the PCL4 and PPDS printers.

Table 48. Cross-Reference of Line Spacing and Page Definitions for Cut-Sheet A4 Paper for the PCL4 and PPDS Printers

Line Spacing	Page Definition Name
6.1 lpi	P1X04763

Table 48. Cross-Reference of Line Spacing and Page Definitions for Cut-Sheet A4 Paper for the PCL4 and PPDS Printers (continued)

Line Spacing	Page Definition Name
8.2 lpi	P1Q09182 P1X06483
8.5 lpi	P1X06683

Table 49 shows the line-spacing values for each of the page definitions for cut-sheet B4 paper for the PCL4 and PPDS printers.

Table 49. Cross-Reference of Line Spacing and Page Definitions for Cut-Sheet B4 Paper for the PCL4 and PPDS Printers

Line Spacing	Page Definition Name
6 lpi	P1T08362
6.1 lpi	P1T05963
8.2 lpi	P1T11382 P1T07983

Table 50 shows the line-spacing values for each of the page definitions for all other printers.

Table 50. Cross-Reference of Line Spacing and Page Definitions for Other Printers

Line Spacing	Page Definition Name
6 lpi	P1D08462 P1B08262 P1B04963 P1A06462 P1B0446B
6.1 lpi	P1D06063 P1V04863 P1D0556B P1V0463B
8.2 lpi	P1C09182 P1D11382 P1D08083 P1A08682 P1V06483 P1B11082 P1B06683 P1W12883 P1D0748B P1V0588B P1W1168B
8.5 lpi	P1V06683 P1V0608B
12 lpi	P1W120C2
15.2 lpi	P1W240F3 P1W216FB

Any font that can be printed at the specified line spacing (or at a larger line-spacing value) can be used with a page definition. Table 51 describes the line spacing for commonly used monospace FOCA fonts provided with PSF.

Table 51. Cross-Reference of Line Spacing and Commonly Used PSF Monospaced Fonts

Line Spacing	FOCA Fonts
6 lpi	CE10 CE12 CI10 CR10 GB10 GF10 GS10 GT10 LB12 LR12 PB12 PI12 PR10 PR12
8 lpi	GB12 GF12 GF15 GI12 GP12 GS12 GS15 GT12 GT15
10 lpi	GC15
12 lpi	GFC GSC GUC
Special	AE20 ²⁵ GT20 ²⁵ GT24 ²⁶

For more information about these fonts or about fonts not listed in this table, see the font technical references and the font samples publications listed in “Bibliography” on page 287.

25. Fonts AE20 and GT20 are printed at 12.8 lines per inch. Font GT20 is specified in page definition P1M132C1. To print an application with font AE20, you can use the PPFa program to change the source for P1M132C1 to specify font AE20. Rename the page definition and store it in the system page definition library.

26. Font GT24 is printed at 8.8 lines per inch as defined in page definition P1M13280.

Appendix C. AFPSTATS Report

This appendix contains softcopy record details for the AFPSTATS report and sample softcopy and hardcopy reports.

Softcopy Record Details

This section gives detailed information about the AFPSTATS softcopy report format. It lists each record that can be in the report, along with a detailed description.

COMMENT record is used to strategically place text throughout the report.

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
0	(0)	10	Layout ID. Value: COMMENT
10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	499	Record comment up to 499 characters.

REPORTLVL record identifies the AFP Statistics report level, which can be used to identify changes to the AFP Statistics report format.

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
0	(0)	10	Layout ID. Value: REPORTLVL
10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	8	Report ID. Value: AFPSTATS
21	(15)	1	Column separator.
22	(17)	8	PSF version. Example: 4.4.0
30	(1E)	1	Column separator.
31	(1F)	4	Report level. Example: 0001
35	(23)	1	Column separator.
36	(24)	30	Report description. Value: PSF AFP Statistics Report

TITLE record provides report titles so the report is more readable.

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
0	(0)	10	Layout ID. Value: TITLE
10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	499	Record title up to 499 characters. Values: Print File Information. Processing Detail. Resource Summary by Name. Resource Summary by Data Set. Resource Summary by Resource Type. Processing Summary.

SECTION record identifies report sections so the report is more readable.

```
=====
```

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
0	(0)	10	Layout ID. Value: SECTION
10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	499	Record section up to 499 characters. Values: Inline in Print File. User Libraries. Security Libraries. System Libraries. PSF Default. Printer Resident. Reference Summary. Location Summary. Disposition Summary. Summary of Pages. Significant Events. Unused Inline Resource. System Path. Summary of Events.

HEADING record provides column headings for the softcopy report.

```
=====
```

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
0	(0)	10	Layout ID. Values: HEADING HEADING-DP HEADING-EL HEADING-LC HEADING-RF HEADING-SE HEADING-SP HEADING-UU
10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	499	Record heading up to 499 characters. Values vary by HEADING record.

PAGEFOOTER record provides footing text for the hardcopy report.

```
=====
```

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
0	(0)	10	Layout ID. Value: PAGEFOOTER
10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	499	Record footer up to 499 characters. Values: Print File Information. Processing Detail. Resource Summary by Name. Resource Summary by Data Set. Resource Summary by Resource Type. Processing Summary.

NOTE record provides notes at appropriate places in the softcopy report.

```
=====
```

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
-------------------	---------------	--------	-------------

0	(0)	10	Layout ID. Value: NOTE
10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	499	Record note up to 499 characters. Value: The statistics in this report may contain inaccuracies caused by error recovery and operator actions making it unsuitable for accounting purposes.

PRINTFILE record identifies the print file. There is one PRINTFILE record at the beginning of each softcopy report.

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
0	(0)	10	Layout ID. Value: PRINTFILE
10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	8	JES job identifier.
21	(15)	1	Column separator.
22	(16)	8	Job name for the print file from JCL.
30	(1E)	1	Column separator.
31	(1F)	8	Step name for the print file from JCL.
39	(27)	1	Column separator.
40	(28)	18	Data source. Values: Application direct Deferred-spool
58	(3A)	1	Column separator.
59	(3B)	10	Print date in mm/dd/yyyy format.
69	(45)	1	Column separator.
70	(46)	10	Print time in hh:mm:ss format.
80	(50)	1	Column separator.
81	(51)	20	PSF version and release.
101	(65)	1	Column separator.
102	(66)	18	PSF attachment. Values: Deferred-printing Direct-printing
120	(78)	1	Column separator.
121	(79)	7	Printer name.
128	(80)	1	Column separator.
129	(81)	24	Printer type name.
153	(99)	1	Column separator.
154	(9A)	8	System name.
162	(A2)	1	Column separator.
163	(A3)	12	CPU identifier.
175	(AF)	1	Column separator.
176	(B0)	7	Printer type and model.
183	(B7)	1	Column separator.
184	(B8)	12	Intermediate device between PSF and printer. Values: DPF None PSF Direct RPM2 RPM3 WPM
196	(C4)	1	Column separator.
197	(C5)	10	Printer physical attachment. Values: CHANNEL TCP/IP VTAM
207	(CF)	1	Column separator.
208	(D0)	12	Printer port number.
220	(DC)	1	Column separator.
221	(DD)	64	Printer identifier: IP address, LU name, or CUU.
285	(11D)	1	Column separator.

	286	(11E)	30	Remote system name.
	316	(13C)	1	Column separator.
	317	(13D)	30	Remote operating system.
	347	(15B)	1	Column separator.
	348	(15C)	30	Remote system version.
	378	(17A)	1	Column separator.
	379	(17B)	30	Remote system compile date.
	409	(199)	1	Column separator.
	410	(19A)	15	Interchange set.

RESOURCE record identifies the first use of one unique resource for this print file.

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION	
0	(0)	10	Layout ID. Value: RESOURCE	
10	(A)	2	Reserved.	
12	(C)	1	Column separator.	
13	(D)	8	Resource member name.	
21	(15)	1	Column separator.	
22	(16)	18	Resource type. Values: Character Set Coded Font Code Page Form Definition Object Container Overlay Page Definition Page Segment	
40	(28)	1	Column separator.	
41	(29)	8	Library type where the resource was found. Values: Inline PSF default Resident Security System User	
49	(31)	1	Column separator.	
50	(32)	14	Size of incoming resource in bytes.	
64	(40)	1	Column separator.	
65	(41)	14	Relative page number in this document.	
79	(4F)	1	Column separator.	
80	(50)	44	Data set name where resource was found (blank when resource is inline, default, or resident).	
124	(7C)	1	Column separator.	
125	(7D)	6	Volume serial number.	
131	(83)	1	Column separator.	
132	(84)	20	How resource was handled. Values: Activated Already processed Download Integrated into page PSF memory ?	
	152	(98)	1	Column separator.
	153	(99)	14	Transmission count.
	167	(A7)	1	Column separator.
	168	(A8)	14	Page number.

RESOURCEGR record identifies the first use of one unique GRID font for this print file.

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
0	(0)	10	Layout ID. Value: RESOURCEGR

10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	8	Global resource identifier (GRID). If > 8 characters, first 5 characters and '...' show name continuation.
21	(15)	1	Column separator.
22	(16)	18	Resource type. Value: GRID Font
40	(28)	1	Column separator.
41	(29)	8	Library type. Value: Resident
49	(31)	1	Column separator.
50	(32)	14	Size of incoming resource in bytes.
64	(40)	1	Column separator.
65	(41)	14	Relative page number in this document.
79	(4F)	1	Column separator.
80	(50)	9	Resource keyword. Value: Resource=
89	(59)	16	Resource GRID.
105	(69)	1	Column separator.
106	(6A)	13	Transmission keyword. Value: Transmission
119	(77)	14	Transmission count.
133	(85)	1	Column separator.
134	(86)	12	Page number keyword. Value: Page number=
146	(92)	14	Page number.

RESOURCEDF record identifies the first use of one unique resource that can have a name longer than eight characters for this print file.

```
=====
```

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
=====	=====	=====	=====
0	(0)	10	Layout ID. Value: RESOURCEDF
10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	8	Resource name. If > 8 characters, first 5 characters and '...' show name continuation.
21	(15)	1	Column separator.
22	(16)	18	Resource type. Value: True/Open Type
40	(28)	1	Column separator.
41	(29)	8	Library type. Values: Inline Resident Security System User ?
49	(31)	1	Column separator.
50	(32)	14	Size of incoming resource in bytes.
64	(40)	1	Column separator.
65	(41)	14	Relative page number in this document.
79	(4F)	1	Column separator.
80	(50)	6	Font collection index keyword. Value: Index=
86	(56)	4	Font index or "N/A".
90	(5A)	1	Column separator.
91	(5B)	13	Font relationship keyword. Value: Relationship=
104	(68)	10	Relationship of font. Values: Base Font Linked Font
114	(72)	1	Column separator.
115	(73)	12	Font disposition keyword. Value: Disposition=
127	(7F)	17	Disposition of the font. Values: Activate Already Processed Download
144	(90)	1	Column separator.
145	(91)	9	Resource keyword. Value: Resource=
154	(9A)	90	Resource long name.
244	(F4)	10	Resource file name keyword. Value: File Name=

254	(FE)	90	Resource file name including extension, if any.
344	(158)	5	Resource path keyword. Value: Path=
349	(15D)	100	Resource path.
449	(1C1)	1	Column separator.
450	(1C2)	13	Transmission keyword. Value: Transmission
463	(1CF)	14	Transmission count.
477	(1DD)	1	Column separator.
478	(1DE)	12	Page number keyword. Value: Page number=
490	(1EA)	14	Page number.

RESOURCEDO record identifies the first use of one data object resource for this print file.

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
0	(0)	10	Layout ID. Value: RESOURCEDO
10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	8	Resource name. If > 8 characters, first 5 characters and '...' show name continuation.
21	(15)	1	Column separator.
22	(16)	18	Resource type. Values: Inline PSF Default Resident Security System User ?
40	(28)	1	Column separator.
41	(29)	8	Library type. Values: Code Page Object Container
49	(31)	1	Column separator.
50	(32)	14	Size of incoming resource in bytes.
64	(40)	1	Column separator.
65	(41)	14	Relative page number in this print file.
79	(4F)	1	Column separator.
80	(50)	12	Disposition keyword. Value: Disposition=
92	(5C)	17	How resource was handled. Values: Activated Already processed Download Integrated into page PSF memory ?
109	(6D)	1	Column separator.
110	(6E)	9	Resource name keyword. Value: Resource=
119	(77)	90	Resource long name.
209	(D1)	1	Column separator.
210	(D2)	10	Resource file name keyword. Values: Data Set= File Name=
220	(DC)	90	Resource file name or "?".
310	(136)	1	Column separator.
311	(137)	5	Path keyword. Values: Path= VSER=
316	(13C)	100	Path of the font or "?".
416	(1A0)	1	Column separator.
417	(1A1)	13	Transmission keyword.
430	(1AE)	14	Transmission count.
444	(1BC)	1	Column separator.
445	(1BD)	12	Page number keyword.
457	(1C9)	14	Page number.
471	(1D7)	1	Column separator.

472	(1D8)	9	Color management resource (CMR) scope keyword. Value: CMRScope=
481	(1E1)	9	CMR scope. Values: Document Object Overlay Printfile Sheet n/a
490	(1EA)	1	Column separator.
491	(1EB)	10	CMR PRMODE keyword. Value: CMRPRMode=
501	(1F5)	11	CMR processing mode. Values: Audit Instruction Link n/a

EVENT records identify significant processing exceptions that occur while processing the print file.

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
0	(0)	10	Layout ID. Value: EVENT
10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	6	Event keyword. Value: Event=
19	(13)	24	Event identification. Values: Early termination Processing complete PSF - Reclaiming HAIDS Repositioning Resource not found Terminate Page
43	(2B)	1	Column separator.
44	(2C)	5	Page number keyword. Value: Page=
49	(31)	14	Relative page number.
63	(3F)	1	Column separator.
64	(40)	9	Resource name keyword. Value: Resource=
73	(49)	8	Resource name or "?".
81	(51)	1	Column separator.
82	(52)	13	Transmission keyword. Value: Transmission=
95	(5F)	14	Transmission count.
109	(6D)	1	Column separator.
110	(6E)	12	Page number keyword. Value: Page number=
122	(7A)	14	Page number.

EVENTRL records identify resource reload event requests that occur during EXIT 7 processing.

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
0	(0)	10	Layout ID. Value: EVENTRL
10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	6	Event keyword. Value: Event=
19	(13)	24	Event ID. Values: Complete Ignored-Can not unload Ignored-GRID font n/s Ignored-Included n/s Ignored-Inline resource Ignored-OC reload n/s Ignored-Required res Ignored-Resource in OEG Ignored-Select del n/s

43	(2B)	1	Column separator.
44	(2C)	5	Page number keyword. Value: Page=
49	(31)	14	Relative page number.
63	(3F)	1	Column separator.
64	(40)	9	Resource name keyword. Value: Resource=
73	(49)	19	Resource name.
92	(5C)	1	Column separator.
93	(5D)	14	Resource type keyword. Value: Resource Type=
107	(6B)	18	Resource type. Values: Character Set Coded Font Code Page Object Container Overlay Page Segment
125	(7D)	1	Column separator.
126	(7E)	13	Transmission keyword. Value: Transmission
139	(8B)	14	Transmission count.
153	(99)	1	Column separator.
154	(9A)	12	Page number keyword. Value: Page number=
166	(A6)	14	Page number.

EVENTFM records identify when PSF maps one type of supported font for another type of supported font.

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
0	(0)	10	Layout ID. Value: EVENTFM
10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	6	Event keyword. Value: Event=
19	(13)	24	Event ID. Values: Map GRID to Outline Map GRID to Raster Map Outline to Raster Mapped CPGID to CP name Map Raster to Outline
43	(2B)	1	Column separator.
44	(2C)	5	Page number keyword. Value: Page=
49	(31)	14	Relative page number.
63	(3F)	1	Column separator.
64	(40)	14	Resource name keyword. Value: From Resource=
78	(4E)	19	Original resource name, GRID name, or the value "CP/FN Pair".
97	(61)	1	Column separator.
98	(62)	3	Code page keyword. Value: CP=
101	(65)	8	Code page name.
109	(6D)	1	Column separator.
110	(6E)	3	Font name keyword. Value: FN=
113	(71)	8	Character set name.
121	(79)	1	Column separator.
122	(7A)	12	Resource name keyword. Value: To Resource=
134	(86)	19	Mapped resource name, GRID name, or the value "CP/FN Pair".
153	(99)	1	Column separator.
154	(9A)	3	Code page keyword. Value: CP=
157	(9D)	8	Code page name.
165	(A5)	1	Column separator.
166	(A6)	3	Font name keyword. Value: FN=
169	(A9)	8	Character set name.
177	(B1)	1	Column separator.
178	(B2)	13	Transmission keyword. Value: Transmission=
191	(BF)	14	Transmission count.
205	(CD)	1	Column separator.
206	(CE)	12	Page number keyword. Value: Page number=
218	(DA)	14	Page number.

EVENTRS records identify resource substitution event requests that occur during EXIT 7 processing.

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
0	(0)	10	Layout ID. Value: EVENTRS
10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	6	Event keyword. Value: Event=
19	(13)	24	Event ID. Values: Ignored-Inline resource Ignored-OC map by name Ignored-OC map by OID Ignored-OC not system Ignored-OC secondary Ignored-User library Substitution successful
43	(2B)	1	Column separator.
44	(2C)	5	Page number keyword. Value: Page=
49	(31)	14	Relative page number.
63	(3F)	1	Column separator.
64	(40)	14	Resource name keyword. Value: From Resource=
78	(4E)	19	Original resource name or GRID.
97	(61)	1	Column separator.
98	(62)	12	Resource name keyword. Value: To Resource=
110	(6E)	19	Substituted resource name or GRID.
129	(81)	1	Column separator.
130	(82)	14	Resource type keyword. Value: Resource Type=
144	(90)	18	Resource type. Values: Character Set Coded Font Code Page Form Definition Object Container Overlay Page Definition Page Segment
162	(A2)	1	Column separator.
163	(A3)	13	Transmission keyword. Value: Transmission=
176	(B0)	14	Transmission count.
190	(BE)	1	Column separator.
191	(BF)	12	Page number keyword. Value: Page number=
203	(CB)	14	Page number.

SUMM-NAME records contain information about a resource by resource name.

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
0	(0)	10	Layout ID. Value: SUMM-NAME
10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	8	Resource member name.
21	(15)	1	Column separator.
22	(16)	18	Resource type. Values: Character Set Coded Font Code Page Form Definition Object Container Overlay Page Definition Page Segment
40	(28)	1	Column separator.

41	(29)	12	Library type. Values: Inline PSF Default Resident Security System User ?
53	(35)	1	Column separator.
54	(36)	14	Total references to this resource.
68	(44)	1	Column separator.
69	(45)	14	Number of mapped references.
83	(53)	1	Column separator.
84	(54)	14	Number of included references.
98	(62)	1	Column separator.
99	(63)	14	Number of JCL references to this resource.
113	(71)	1	Column separator.
114	(72)	14	Number of other references.
128	(80)	1	Column separator.
129	(81)	14	Number of resources integrated on the page.
143	(8F)	1	Column separator.
144	(90)	14	Number of resources downloaded to the printer.
158	(9E)	1	Column separator.
159	(9F)	14	Number activated as printer resident resources.
173	(AD)	1	Column separator.
174	(AE)	14	Number of resources loaded into PSF memory only.
188	(BC)	1	Column separator.
189	(BD)	14	Number of resources processed by prior reference.

SUMM-NAMEX record contains information about resources that can have a name longer than eight characters.

```
=====
```

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
=====	=====	=====	=====
0	(0)	10	Layout ID. Value: SUMM-NAMEX
10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	8	Resource name. If > 8 characters, first 5 characters and '...' show name continuation.
21	(15)	1	Column separator.
22	(16)	18	Resource type. Values: GRID Font True/Open Type
40	(28)	1	Column separator.
41	(29)	12	Library type. Values: Inline PSF Default Resident System User ?
53	(35)	1	Column separator.
54	(36)	14	Total references to this resource.
68	(44)	1	Column separator.
69	(45)	14	Number of mapped references.
83	(53)	1	Column separator.
84	(54)	14	Number of included references.
98	(62)	1	Column separator.
99	(63)	14	Number of JCL references to this resource.
113	(71)	1	Column separator.
114	(72)	14	Number of other references.
128	(80)	1	Column separator.
129	(81)	14	Number of resources integrated on the page.
143	(8F)	1	Column separator.
144	(90)	14	Number of resources downloaded to the printer.

158	(9E)	1	Column separator.
159	(9F)	14	Number activated as printer resident resources.
173	(AD)	1	Column separator.
174	(AE)	14	Number of resources loaded into PSF memory only.
188	(BC)	1	Column separator.
189	(BD)	14	Number of resources processed by prior reference.
203	(CB)	1	Column separator.
204	(CC)	9	Resource keyword. Value: Resource=
213	(D5)	125	Resource long name.

SUMM-DSN records identify the data sets from which resources are obtained while processing this print file.

```
=====
```

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
0	(0)	10	Layout ID. Value: SUMM-DSN
10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	9	Data set keyword. Value: Data set=
22	(16)	44	Data set name.
66	(42)	9	Column separator.
75	(4B)	8	Volume keyword. Value: VOL=SER=
83	(53)	6	Volume serial number.

SUMM-DSN-R records identify the resources found in each data set while processing this print file.

```
=====
```

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
0	(0)	10	Layout ID. Value: SUMM-DSN-R
10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	8	Resource name.
21	(15)	4	Column separator.
25	(19)	8	Resource name.
33	(21)	4	Column separator.
37	(25)	8	Resource name.
45	(2D)	4	Column separator.
49	(31)	8	Resource name.
57	(39)	4	Column separator.
61	(3D)	8	Resource name.
69	(45)	4	Column separator.
73	(49)	8	Resource name.
81	(51)	4	Column separator.

SUMM-PATH records identify the paths from which resources are obtained while processing this print file.

```
=====
```

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
0	(0)	10	Layout ID. Value: SUMM-PATH
10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	5	Path keyword. Value: Path=
18	(12)	255	Path name.

SUMM-PTH-R records identify the resources found in each path while processing this print file.

```
=====
```

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
-------------------	---------------	--------	-------------

0	(0)	10	Layout ID. Value: SUMM-PTH-R
10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	9	Resource keyword. Value: Resource=
22	(16)	125	Resource name.

SUMM-REF record identifies the totals for all resource references by resource type.

```
=====
OFFSET  OFFSET
DECIMAL  HEX
=====  =====
0        (0)          10      Layout ID. Value: SUMM-REF
10       (A)          2        Reserved.
12       (C)          1        Column separator.
13       (D)         18      Resource type. Values:
          All resource types
          Character Set
          Coded Font
          Code Page
          Form Definition
          Object Container
          Overlay
          Page Definition
          Page Segment
          True/Open Type
31       (1F)          1        Column separator.
32       (20)         14      Number of unique resources of this type.
46       (2E)          1        Column separator.
47       (2F)         14      Number of JCL references for resources of this type.
61       (3D)          1        Column separator.
62       (3E)         14      Number of mapped references for resources of
          this type.
76       (4C)          1        Column separator.
77       (4D)         14      Number of included references for resources of
          this type.
91       (5B)          1        Column separator.
92       (5C)         14      Number of other references for resources of
          this type.
106      (6A)          1        Column separator.
107      (6B)         14      Number of total references for resources of
          this type.
=====
```

SUMM-LOC record identifies the totals for where resources were found for each resource type.

```
=====
OFFSET  OFFSET
DECIMAL  HEX
=====  =====
0        (0)          10      Layout ID. Value: SUMM-LOC
10       (A)          2        Reserved.
12       (C)          1        Column separator.
13       (D)         18      Resource type. Values:
          All resource types
          Character Set
          Coded Font
          Code Page
          Form Definition
          Object Container
          Overlay
          Page Definition
          Page Segment
          True/Open Type
31       (1F)          1        Column separator.
32       (20)         14      Number of unique resources of this type.
46       (2E)          1        Column separator.
47       (2F)         14      Number of inline resources of this resource type.
=====
```

61	(3D)	1	Column separator.
62	(3E)	14	Number of user resources of this resource type.
76	(4C)	1	Column separator.
77	(4D)	14	Number of security resources of this resource type.
91	(5B)	1	Column separator.
92	(5C)	14	Number of system resources of this resource type.
106	(6A)	1	Column separator.
107	(6B)	14	Number of PSF default resources of this resource type.
121	(79)	1	Column separator.
122	(7A)	14	Number of printer resident resources of this type.

SUMM-DISP record identifies the totals of how the resource requests were handled for each resource type.

```
=====
```

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
=====	=====	=====	=====
0	(0)	10	Layout ID. Value: SUMM-DISP
10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	18	Resource type. Values: All resource types Character Set Coded Font Code Page Form Definition Object Container Overlay Page Definition Page Segment True/Open Type
31	(1F)	1	Column separator.
32	(20)	14	Number of unique resources of this type.
46	(2E)	1	Column separator.
47	(2F)	14	Number of soft resources that were integrated with page data and then sent to the printer.
61	(3D)	1	Column separator.
62	(3E)	14	Number of resources downloaded to the printer as a resource.
76	(4C)	1	Column separator.
77	(4D)	14	Number of resources activated instead of downloaded to the printer.
91	(5B)	1	Column separator.
92	(5C)	14	Number of resources that are not printer objects and only get loaded into PSF memory.
106	(6A)	1	Column separator.
107	(6B)	14	Number of resources that had already been processed.

SUMM-PAGE record Contains statistics about the page data for the print file.

```
=====
```

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
=====	=====	=====	=====
0	(0)	10	Layout ID. Value: SUMM-PAGE
10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	14	Total number of pages in the source print file.
27	(1B)	4	Column separator.
31	(1F)	14	Number of records in the source print file.
45	(2D)	4	Column separator.
49	(31)	14	Number of bytes in the source print file.
63	(3F)	4	Column separator.
67	(43)	14	Average source file page size in bytes.

81	(51)	4	Column separator.
85	(55)	14	Smallest source file page size in bytes.
99	(63)	4	Column separator.
103	(67)	14	Largest source file page size in bytes.
117	(75)	4	Column separator.
121	(79)	14	Relative page number of the smallest page.
135	(87)	4	Column separator.
139	(8B)	14	Relative page number of the largest page.
153	(99)	4	Column separator.
157	(9D)	14	Transformed bytes.

EVENT-LIST records provide information about one significant event that occurred while processing this print file.

```
=====
```

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
0	(0)	10	Layout ID. Value: EVENT-LIST
10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	14	Relative page number.
27	(1B)	1	Column separator.
28	(1C)	24	Event identification. Values vary by EVENT, EVENTFM, EVENTRL, and EVENTRS records.
52	(34)	1	Column separator.
53	(35)	63	Offending resource name, GRID number, or "?".

UIR-LIST records identify unused inline resources.

```
=====
```

OFFSET DECIMAL	OFFSET HEX	LENGTH	DESCRIPTION
0	(0)	10	Layout ID. Value: UIR-LIST
10	(A)	2	Reserved.
12	(C)	1	Column separator.
13	(D)	18	Resource type. Value: Character Set Coded Font Code Page Form Definition Object Container Overlay Page Definition Page Segment True/Open Type NONE ?
31	(1F)	1	Column separator.
32	(20)	125	Resource name.

Sample Reports

This section contains sample softcopy and hardcopy reports.

Sample Softcopy Report

Because each record of the report can be 512 characters wide, you might have to scroll to see all of the information. The example in Figure 51 on page 229 has been truncated to fit on the page.


```

REPORTLVL AFPSTATS 4.4.0 0001 PSF AFP Statistics Report
TITLE Print File Information.
PAGEFOOTER Print File Information.
HEADING Job ID Jobname Stepname Data Source Print Date Print Time Level PSF Attachment Printer Printer Title System CPU ID Type Intm Device
PRINTFILE JOB00001 ASAPDEG STEP1 Deferred-spool 09/30/2011 17:29:50 PSF 4.4.0 FOR z/OS Deferred-printing PRT619 4000, IBM INFOPRINT 4000 DEV5 FF1200354381 4000-0c None
COMMENT
TITLE Processing Detail.
PAGEFOOTER Processing Detail.
HEADING Res Name Resource Type Lib Type Resource Size Relative Page Data Set Name Volume Disposition Transmission Page Number
RESOURCE P1ASAP02 Page Definition User 41,449 1 DEQUELL.RESOURCE USR007 PSF memory 1 1
RESOURCE F1ASAP02 Form Definition User 406 1 DEQUELL.RESOURCE USR007 PSF memory 1 1
RESOURCE T1V10500 Code Page System 2,175 1 PSFMVS.RMARK.RESOURCE PSFDVT Download 1 1
RESOURCE C0H400H0 Character Set System 245 1 FONTS.FC21.FONT300 FONTS0 Download 1 1
RESOURCE C0H500F0 Character Set System 245 1 FONTS.FC21.FONT300 FONTS0 Download 1 1
RESOURCE C0H200B0 Character Set System 245 1 FONTS.FC21.FONT300 FONTS0 Download 1 1
RESOURCE C0H400B0 Character Set System 245 1 FONTS.FC21.FONT300 FONTS0 Download 1 1
RESOURCE C0H200B0 Character Set System 245 1 FONTS.FC21.FONT300 FONTS0 Download 1 1
RESOURCE C0H400B0 Character Set System 245 3 FONTS.FC21.FONT300 FONTS0 Download 1 3
RESOURCECF Arial... True/Open Type User 35,568 1 Index= N/A Relationship=Base Font Disposition=Download Resource=Arial
RESOURCEGR 20390... GRID Font Resident N/A 1 Resource=2039050023080081 Transmission= 1 Page number=6
RESOURCE S1RES60N Page Segment System 143 6 COMMON.SEGMENT 1 6
EVENT Event=Repositioning Page= 6 Transmission= 1 Page number= 6
EVENT Event=PSF - Reclaiming HAIDs Page= 6 Transmission= 1 Page number= 6
EVENT Event=Complete Page= 6 Resource=X0xxxxxx Resource Type=Coded Font Transmission= 1 Page number= 6
EVENTRL Event=Ignore-Included n/s Page= 6 Resource=X0xxxxxx Resource Type=Coded Font Transmission= 1 Page number= 6
EVENTFM Event=Map Raster to Outline Page= 6 From Resource=CP/FN Pair CP=T1V10037 FN=C050CR10 To Resource=XZxxxxxx CP= FN= Transmission=
EVENTFM Event=Map GRID to Raster Page= 6 From Resource=2039050023080080 CP= FN= To Resource=X0xxxxxx CP= FN= Transmission=
EVENTS Event=Substitution successful Page= 6 From Resource=X0xxxxxx To Resource=XZxxxxxx Resource Type=Coded Font Transmission= 1 Page number=
EVENTS Event=Ignore-Inline resource Page= 6 From Resource=XZxxxxxx To Resource=X0xxxxxx Resource Type=Coded Font Transmission= 1 Page number=
EVENT Event=Repositioning Page= 6 Transmission= 1 Page number= 6
EVENT Event=Processing complete Page= 7 Transmission= 1 Page number= 7
COMMENT
NOTE The statistics in this report may contain inaccuracies caused by error recovery and operator actions making it unsuitable for accounting purposes.
COMMENT
TITLE Resource Summary by Name.
PAGEFOOTER Resource Summary by Name.
HEADING Res Name Resource Type Lib Type Total Mapped Included JCL Other Soft Download Activate Memory
SUMM-NAME C0H200B0 Character Set System 4 4 0 0 0 0 0 1 0 0
SUMM-NAME C0H200B0 Character Set System 9 9 0 0 0 0 0 1 1 0
SUMM-NAME C0H400H0 Character Set System 9 9 0 0 0 0 0 1 1 0
SUMM-NAME C0H400B0 Character Set System 3 3 0 0 0 0 0 1 1 0
SUMM-NAME C0H400B0 Character Set System 8 8 0 0 0 0 0 1 1 0
SUMM-NAME C0H500F0 Character Set System 9 9 0 0 0 0 0 1 1 0
SUMM-NAME F1ASAP02 Form Definition User 1 0 0 1 0 0 0 0 0 1
SUMM-NAME P1ASAP02 Page Definition User 1 0 0 1 0 0 0 0 0 1
SUMM-NAME S1RES60N Page Segment System 1 0 1 0 0 0 0 0 0 1
SUMM-NAME T1V10500 Code Page System 42 42 0 0 0 0 0 6 5 0
SUMM-NAMEX 20390... GRID Font Resident 1 1 0 0 0 0 0 0 0 1
SUMM-NAMEX Arial... True/Open Type User 1 1 0 0 0 0 0 0 0 1
NOTE The statistics in this report may contain inaccuracies caused by error recovery and operator actions making it unsuitable for accounting purposes.
COMMENT
TITLE Resource Summary by Data Set.
PAGEFOOTER Resource Summary by Data Set.
COMMENT
SECTION User Libraries.
SUMM-DSN Data set=DEQUELL.RESOURCE VOL=SER=USR007
SUMM-DSN-R F1ASAP02 P1ASAP02
COMMENT
SUMM-PATH Path=/usr/Fonts/PSF/TrueType/
SUMM-PTH-R Resource=Arial Bold Italic
COMMENT
SECTION System Libraries.
SUMM-DSN Data set=FONTS.FC21.FONT300 VOL=SER=FONTS0
SUMM-DSN-R C0H200B0 C0H200B0 C0H400H0 C0H400B0 C0H500F0
COMMENT
SUMM-DSN Data set=PSFMVS.RMARK.RESOURCE VOL=SER=PSFDVT
SUMM-DSN-R T1V10500
COMMENT
NOTE The statistics in this report may contain inaccuracies caused by error recovery and operator actions making it unsuitable for accounting purposes.

```

Figure 51. AFPSTATS softcopy report (Part 1 of 2)

```

COMMENT
TITLE Resource Summary by Resource Type.
PAGEFOOTER Resource Summary by Resource Type.
COMMENT
SECTION Reference Summary.
HEADING-RF Resource Type Unique JCL Mapped Included Other Total
SUMM-REF Page Definition 1 1 0 0 0 1
SUMM-REF Form Definition 1 1 0 0 0 1
SUMM-REF Coded Font 0 0 0 0 0 0
SUMM-REF Character Set 6 0 42 0 0 42
SUMM-REF Code Page 1 0 42 0 0 42
SUMM-REF Page Segment 0 0 0 0 0 0
SUMM-REF Overlay 0 0 0 0 0 0
SUMM-REF Object Container 0 0 0 0 0 0
SUMM-REF True/Open Type 0 0 0 0 0 0
COMMENT
SUMM-REF All resource types 9 2 84 0 0 86
COMMENT
SECTION Location Summary.
HEADING-LC Resource Type Unique Inline User Security System PSF Default Resident
SUMM-LOC Page Definition 1 0 1 0 0 0 0
SUMM-LOC Form Definition 1 0 1 0 0 0 0
SUMM-LOC Coded Font 0 0 0 0 0 0 0
SUMM-LOC Character Set 6 0 0 0 6 0 0
SUMM-LOC Code Page 1 0 0 0 1 0 0
SUMM-LOC Page Segment 0 0 0 0 0 0 0
SUMM-LOC Overlay 0 0 0 0 0 0 0
SUMM-LOC Object Container 0 0 0 0 0 0 0
SUMM-LOC True/Open Type 0 0 0 0 0 0 0
COMMENT
SUMM-LOC All resource types 9 0 2 0 7 0 0
COMMENT
SECTION Disposition Summary.
HEADING-DP Resource Type Unique Soft Download Activate Memory Exists
SUMM-DISP Page Definition 1 0 0 0 1 0
SUMM-DISP Form Definition 1 0 0 0 1 0
SUMM-DISP Coded Font 0 0 0 0 0 0
SUMM-DISP Character Set 6 0 6 5 0 36
SUMM-DISP Code Page 1 0 6 5 0 36
SUMM-DISP Page Segment 0 0 0 0 0 0
SUMM-DISP Overlay 0 0 0 0 0 0
SUMM-DISP Object Container 0 0 0 0 0 0
SUMM-DISP True/Open Type 0 0 0 0 0 0
COMMENT
SUMM-DISP All resource types 9 0 12 10 2 72
COMMENT
NOTE The statistics in this report may contain inaccuracies caused by error recovery and operator actions making it unsuitable for accounting purposes.
COMMENT
TITLE Processing Summary.
PAGEFOOTER Processing Summary.
COMMENT
SECTION Summary of Pages.
HEADING-SP Total Pages Records File Size Avg Page Size Smallest Largest Small Page Large Page Xform Bytes
SUMM-PAGE 7 109 9,802 1,633 609 4,601 1 5
COMMENT
NOTE The statistics in this report may contain inaccuracies caused by error recovery and operator actions making it unsuitable for accounting purposes.
COMMENT
SECTION Significant Events.
HEADING-EL Page number Event type Resource
EVENT-LIST 6 Repositioning
EVENT-LIST 6 PSF - Reclaiming HAIDs
EVENT-LIST 6 Complete
EVENT-LIST 6 Ignored-Included n/s
EVENT-LIST 6 Map Raster to Outline
EVENT-LIST 6 Map GRID to Raster
EVENT-LIST 6 Substitution successful
EVENT-LIST 6 Ignored-Inline resource
EVENT-LIST 6 Repositioning
EVENT-LIST 7 Processing complete
COMMENT
SECTION Unused Inline Resource.
HEADING-IU Resource Type Res Name
UIR-LIST Object container MIRESET

```

Figure 51. AFPSTATS softcopy report (Part 2 of 2)

Sample Hardcopy Report

Note: The fonts in the printed version of your AFPSTATS might be different than those shown here.

PSF AFP Statistics Report - 4.4.0 Level 0001

Print File Information

<u>Print File Identifier</u>		<u>PSF Environment</u>		<u>Printer Environment</u>	
Job ID	JOB00090	Level	PSF 4.4.0 for z/OS	Type	4100
Jobname	SOFTPSEG	Printer	PRT619	Printer Title	44100-ttf
Stepname	STEP01	System	DEV5	Intm Device	None
Data Source	Deferred-spool	CPU ID	FF1200354381	Attachment	TCP/IP
Print Date	09/30/2011	PSF Attachment	Deferred-printing	Port Number	6001
Print Time	15:37:44			Identifier	9.99.10.70
Interchange Set	Unknown			Remote System	PSFforZOS

Print File Information

Page - 1

Processing Detail

P1A06462
 Resource type=Page Definition
 Size= 3,345
 Transmission= 1
 Library type=System
 Volume=USR013
 Page number= 1
 Relative page= 1 Disposition=PSF memory
 DSN=PSEMVS.DVT.R410.RESOURCE

F1A10131
 Resource type=Form Definition
 Size= 328
 Transmission= 1
 Library type=System
 Volume=PSF220
 Page number= 1
 Relative page= 1 Disposition=PSF memory
 DSN=SYS1.PSF220.FDFEFLIB

Resource Reload Event=Complete Page= 1 Resource=F1A10131
 Transmission count= 1 Page number= 1

T1V10037
 Resource type=Code Page
 Size= 2,175
 Transmission= 1
 Library type=System
 Volume=FONTSO
 Page number= 1
 Relative page= 1 Disposition=Download
 DSN=FONT.S.FC21.FONT300

C0S0CR10
 Resource type=Character Set
 Size= 416
 Transmission= 1
 Library type=System
 Volume=PSF000
 Page number= 1
 Relative page= 1 Disposition=Activated
 DSN=COMMON.FNT4028.RMARK

Font Mapped Event=Mapped GRID to Raster
 Page= 1 From: Resource=2039050023080080
 To: Resource=X0A075DC
 Page number= 1

2039050023080081
 Resource type=GRID Font
 GCSGID=2039 CPGID=055 FGID=2308 Font Width=0081
 Size= N/A
 Transmission= 1 Page number= 1
 Relative page= 1

Arial Bold Italic
 Resource type=True/Open Type
 Size= 56,973
 Full Path=/usr/Fonts/PSF/TrueType/arialbi.ttf
 Transmission= 1 Page number= 1
 Library type=System
 Index= N/A
 Relative page= 1 Disposition=Download
 Relationship=Base Font

Event=Processing complete Page= 2

Note: The statistics in this report may contain inaccuracies caused by error recovery and operator actions making it unsuitable for accounting purposes.

Processing Detail

Resource Summary by Name

<u>Res Name</u>	<u>Resource Type</u>	<u>Lib Type</u>	<u>Reference</u>				<u>Disposition</u>					
			<u>Total</u>	<u>Mapped</u>	<u>Included</u>	<u>JCL</u>	<u>Other</u>	<u>Soft</u>	<u>Download</u>	<u>Activate</u>	<u>Memory</u>	<u>Exists</u>
2039050023080081	GRID Font	N/A	1	1	0	0	0	0	0	1	0	0
Arial Bold Italic	Data Object Font	System	1	1	0	0	0	0	1	0	0	0
C0S0CR10	Character Set	System	1	1	0	0	0	0	0	1	0	0
F1A10131	Form Definition	System	1	0	0	1	0	0	0	0	1	0
P1A06462	Page Definition	System	1	0	0	1	0	0	0	0	1	0
T1V10037	Code Page	System	1	1	0	0	0	0	1	0	0	0

Note: The statistics in this report may contain inaccuracies caused by error recovery and operator actions making it unsuitable for accounting purposes.

Resource Summary by Data Set

System Libraries

Data set=COMMON.FNT4028.RMARK	VOL=SER=PSF000
<hr/>	
C0S0CR10	
Data set=FONT.SFC21.FONT300	VOL=SER=FONTSO
<hr/>	
T1V10037	
Data set=PSFMVS.DVT.R410.RESOURCE	VOL=SER=USR013
<hr/>	
P1A06462	
Data set=SYS1.PSF220.FDEFLIB	VOL=SER=PSF220
<hr/>	
F1A10131	

System Paths

Path=/usr/Fonts/PSF/TrueType/
<hr/>
Arial Bold Italic

Note: The statistics in this report may contain inaccuracies caused by error recovery and operator actions making it unsuitable for accounting purposes.

Resource Summary by Resource Type

Reference Summary

<u>Resource Type</u>	<u>Unique</u>	<u>JCL</u>	<u>Mapped</u>	<u>Included</u>	<u>Other</u>	<u>Total</u>
Page Definition	1	1	0	0	0	1
Form Definition	1	1	0	0	0	1
Coded Font	0	0	0	0	0	0
Character Set	1	0	1	0	0	1
Code Page	1	0	1	0	0	1
Page Segment	0	0	0	0	0	0
Overlay	0	0	0	0	0	0
Object Container	0	0	0	0	0	0
True/Open Type	1	0	1	0	0	1
All resource types	5	2	3	0	0	5

Location Summary

<u>Resource Type</u>	<u>Unique</u>	<u>Inline</u>	<u>User</u>	<u>Security</u>	<u>System</u>	<u>PSF Default</u>	<u>Resident</u>
Page Definition	1	0	0	0	1	0	0
Form Definition	1	0	0	0	1	0	0
Coded Font	0	0	0	0	0	0	0
Character Set	1	0	0	0	1	0	0
Code Page	1	0	0	0	1	0	0
Page Segment	0	0	0	0	0	0	0
Overlay	0	0	0	0	0	0	0
Object Container	0	0	0	0	0	0	0
True/Open Type	1	0	0	0	1	0	0
All resource types	5	0	0	0	5	0	0

Disposition Summary

<u>Resource Type</u>	<u>Unique</u>	<u>Soft</u>	<u>Download</u>	<u>Activate</u>	<u>Memory</u>	<u>Exists</u>
Page Definition	1	1	0	0	0	1
Form Definition	1	1	0	0	0	1
Coded Font	0	0	0	0	0	0
Character Set	1	0	1	0	0	1
Code Page	1	0	1	0	0	1
Page Segment	0	0	0	0	0	0
Overlay	0	0	0	0	0	0
Object Container	0	0	0	0	0	0
True/Open Type	1	0	1	0	0	1
All resource types	5	2	3	0	0	5

Note: The statistics in this report may contain inaccuracies caused by error recovery and operator actions making it unsuitable for accounting purposes.

Processing Summary

Summary of Pages

Total pages	2				
Records	23				
File size	1,050				
Average page size	525				
Smallest size	425	Transmission count=	1	Page number=	2
Largest page size	267	Transmission count=	1	Page number=	1

Note: The statistics in this report may contain inaccuracies caused by error recovery and operator actions making it unsuitable for accounting purposes.

Significant Events

Transmission count	Page number	Event type	Resource
1	2	Processing complete	

Unused Inline Resources

<u>Resource Type</u>	<u>Resource Name</u>
True/Open Type	Times New Roman
Page Segment	IBMLOGO

Appendix D. Page-Printer Defaults Form

You can copy the page-printer defaults form in Figure 52 and complete it with the defaults assigned to the printers in your installation. Obtain the default information from your system-support group, and complete a copy for each different CLASS, DEST, FLASH, and FORM value for each printer or group of printers that has a unique set of defaults.

<p>PAGE-PRINTER DEFAULTS FORM</p> <p>PAGE-PRINTER Type is: _____</p> <p>Printer selection parameters:CLASS= _____</p> <p>DEST= _____</p> <p>FLASH= _____</p> <p>1. Media or form usually loaded in printer: For continuous-forms printer, size of form usually loaded: _____ For continuous-forms printer with a burster-trimmer-stacker (BTS), output usually burst? YES NO For cut-sheet printer, type of media usually in each source: Bin 1 _____ Bin 2 _____ Bin _____ Bin _____</p> <p>2. DATABACK = BLOCK UNBLOCK BLKCHAR BLKPOS</p> <p>3. CKPTPAGE = _____ or CKPTSEC = _____</p> <p>4. PIMSG = NO YES Message count = _____</p> <p>5. FORMDEF= _____ Copy Group= _____ Page Position= _____ Paper source for cut-sheet printers: BIN1 BIN2 BIN _____ Duplex: NO NORMAL TUMBLE RNORMAL RTUMBLE For 3800 printer:Flash activated? YES NO</p> <p>6. PAGEDEF = _____ Form size = _____ No. of print lines = _____ Printable area = _____ Lines per inch = _____ Print direction:ACROSS DOWN BACK UP</p> <p>7. Default fonts are (listed in TRC sequence): 0 = _____ 1 = _____ 2 = _____ 3 = _____ If PAGEDEF is not specified in JCL: Fonts CAN CANNOT be changed using CHARS *</p> <p>8. Fonts supported by printer: Resident Host Both Double-byte fonts supported? YES NO If yes, default PRMODE: SOSI1 SOSI2 SOSI3 SOSI4 PSF Exit 7 has raster fonts automatically mapped to outline fonts for this printer: YES NO</p> <p>9. Printer attached to DPF or PSF Direct? YES NO</p> <p>10. Other characteristics of this printer: _____</p> <p>11. COMSETUP = _____ (microfilm device only)</p> <p>12. Where are the messages sent: Printed with output Printed on printer On output class</p> <p>13. COLORMAP = _____</p> <p>* Fonts can be changed unless a JES default forms control buffer (FCB) (page definition) defined for this printer specifies fonts.</p>
--

Figure 52. Page-Printer Defaults Form

Appendix E. Microfilm Device Considerations

With PSF, you can use the same data set for printing jobs on paper output or on microfilm. You should specify the COMSETUP parameter in your JCL to transfer microfilm setup resource data to the microfilm device for processing (see “Specifying JCL Parameters for Microfilm Jobs” on page 165); otherwise the host default setup resource that your system programmer created will be used, and your output might not appear as you expected. For information about creating a microfilm setup resource, see *PSF for z/OS: Customization*.

This appendix presents considerations for when you are creating a microfilm job both for printing to paper and for sending to microfilm devices.

Images on a Page

Image data representing characters cannot be accessed as extracted text on the microfilm device. Data used in text extraction processing must be defined by code point.

Carefully consider the shading patterns used in the job. Jobs printed on paper can use much finer gradations of shading than jobs printed on microfilm. For microfilm jobs, IBM recommends that jobs use only three shading patterns: none, 15% for 50% shading, and 30% to 100% for 100% shading.

Complicated images that use different gray levels might not print on microfilm with the same quality as on paper. This quality consideration applies to logos created as bitmaps (raster images) or with graphic drawing orders.

Graphics on a Page

Graphic data representing characters cannot be accessed as extracted text on the microfilm device.

Complicated graphics that use different gray levels might not print on microfilm with the same quality as on paper. This quality consideration applies to logos created as bitmaps (raster images) or with graphic drawing orders.

Form Definitions

If you are printing on cut-sheet printers, use a form definition with N_UP 1 or PORTRAIT ACROSS. Otherwise your output can rotate incorrectly.

If you are printing on a 3800 printer, your application must be compatible with the 3900 continuous-forms printers. Otherwise your output can rotate incorrectly. See “Page-Presentation Compatibility” on page 62.

Consider using different form definitions and page definitions for AFP print jobs and for microfilm jobs. For example, print jobs might need to contain constant forms, but microfilm jobs might not. Also, microfilm devices print in simplex mode.

A form definition, a page definition, and the microfilm setup resource data interact together to present an AFP page on microfilm. Coordination between resources is necessary, and in some cases a test run is recommended. Work with your system programmer to set up a test run.

If you use N_UP to place multiple pages in partitions on a sheet, your output might be unreadable on a microfilm device.

Using FOCA Fonts

Carefully consider the point size of the fonts used in your job. Fonts smaller than six points might produce unreadable data.

Work with your system programmer to set up different job classes for 120-pel or 240-pel resolution jobs and for 300-pel resolution jobs.

Using 120-pel resolution will give a higher printing rate than a higher resolution, but it might not produce the quality of output you need. Run some valid samples before archiving the data at 120-pel resolution.

Fonts for printing on microfilm devices must contain global resource identifier (GRID) data. If you are using fonts in user libraries or inline in your data stream, consult your system programmer to make sure that the fonts include GRID data. To see if your printer supports fonts with GRID data, see the documentation provided with the printer.

Page Segments

Text data in a page segment that is not in AFP text (PTOCA) format cannot be used for text extraction on a microfilm device.

Overlays

Text data (image or graphic) in an overlay that is not in AFP text (PTOCA) format cannot be used for text extraction on a microfilm device.

Specifying Parameters

Specify `COMSETUP=your comsetup` in your JCL. This COMSETUP parameter must reside in a system library, in a specified user library, or inline in your data stream. For more information on the COMSETUP parameter, see “Microfilm Setup Resource” on page 30.

To prevent data checks from being reported, specify `DATAACK=BLOCK` in your JCL.

Avoid using checkpointing (the CKPTPAGE and CKPTSEC JCL parameters) for microfilm jobs.

Specify `COPIES=1`; specifying multiple copies will produce extra copies on the microfilm.

Additional Parameters to Help in Distributing Output

This information can be passed to a microfilm device for extraction and is accessible through commands in your microfilm setup resource:

- NAME=*name*
- ROOM=*name*

See “Additional Parameters to Help in Distributing Output” on page 122.

Printing Constant Forms

Specifying CONSTANT BACK and COPIES in your form definition causes extra pages on microfilm. You might not want constant data on microfilm.

Other Considerations

Your system programmer might have caused the error messages that PSF prints at the end of your print data sets to be redirected to another destination. To ensure that the data set printed as you expected, consult your system programmer to determine the destination.

If you are using InfoPrint Manager for AIX, use Advanced Facility Presentation: Conversion and Indexing Facility (ACIF) to package the resources. For more information, see the publications about InfoPrint Manager for AIX.

Appendix F. Color and grayscale printing

Printing documents in full color or with very high-quality black and white (grayscale) images is more complex than printing black and white or spot-color documents. Understanding some of the principles of color and grayscale printing and how various products can fit into color and grayscale solutions can help you integrate color and grayscale printing with your current operations or expand to implement new color workflows.

AFP color and grayscale solutions

You can assemble printing products in different configurations to support Advanced Function Presentation (AFP) color and grayscale printing, including configurations that use the AFP Color Management Object Content Architecture (CMOCA) to provide optimal performance and color accuracy in high-speed color printing.

Color printing without explicit color management

You can include color images or specify colors for AFP objects in your print jobs and send them to an AFP color printer. The color images and objects print in color, based on the default settings in your print server and printer.

If you like the colors that the default color management settings provide, or if it is not essential that you print in exactly the right colors, you probably do not need to implement a full color management solution. However, if you want better control over the consistency and accuracy of your colors for devices, you might consider color management at some point in the future.

To understand some of the basic concepts about color printing, see:

- “Color printing concepts” on page 244
- “Grayscale printing concepts” on page 248

Resources included inline

Most often, print bureaus use document composition software to generate highly customized and personalized color output. AFP color management is largely built into the document composition tools that support their processes. The software puts all the resources that the printer needs into the print job and sends it to a print server. The print server sends the print job to the printer, and the printer uses the resources as appropriate.

By using this method, you know that the required resources, including the resources required for color management, are available for any print job that is sent to the printer. However, including all the resources can make the print job very large, and moving large print jobs through your system might slow down system performance. Also, you might not be able to save resources that are downloaded with a print job on the printer so they can be reused without being downloaded later.

For more information about color printing, see:

- General information about color printing and color management:

- “Color printing concepts”
- “Color management” on page 249
- “Tips for images” on page 261

For a list of the companies that participate in the AFP Consortium and support AFP color management in their products, see:

<http://www.afpcinc.org>

Resources stored and managed centrally

To take full advantage of the AFP CMOCA, you can store your color and image resources in a central resource library, and let your print system manage those resources. This option optimizes system performance by:

- Creating some of the color management resources for you automatically
- Reducing the number of color conversion resources that the system creates at print time by generating link color conversion color management resources in advance
- Reducing the size of some images by removing embedded profiles when you store them, yet still retaining the association between the image and the profile
- Letting you mark resources as *capturable*, so they can be saved on the printer and used in other print jobs without being downloaded again

For an introduction to the full AFP CMOCA and how you might implement it, see:

- General information about color and grayscale printing and color management:
 - “Color printing concepts”
 - “Grayscale printing concepts” on page 248
 - “Color management” on page 249
- “AFP color management” on page 251
- “InfoPrint AFP Resource Installer” on page 262

Color printing concepts

Color printing is significantly more complicated than black and white printing. If you understand some of the complexities, you can make the transition from black and white printing to grayscale or color printing more smoothly.

Color spaces and ICC profiles

Presentation devices, such as computer monitors and printers, create colors differently. Because of these differences, colors must be described differently for each device. The different methods of describing colors are called *color spaces*. In addition, each device might have one or more International Color Consortium (ICC) profiles associated with it. ICC profiles are used when an image or another object is converted to the color space of a different device.

Each device has its own individual color space and range of colors that it can display or print. The color space specifies how color information is represented in an image when it is displayed on a particular device. As the image is passed from one device to the next, the color information about the image is converted from the color space of the source device to the color space of the destination device. Because color spaces do not exactly match between devices, some of the color information can be lost or modified in the conversion process.

A *color space* is a representation of the individual colors that can be combined to create other colors. Some color spaces that are relevant to printing are:

- **RGB**

In an RGB color space, red, green, and blue light are combined in different amounts and intensities to create different colors. RGB colors are often specified as single-byte integers numbered from 0 through 255. You can specify 256 levels of intensity for each of the three colors. For example:

- R=0, G=0, B=0 yields black
- R=255, G=255, B=255 yields white
- R=251, G=254, B=141 yields a pale yellow
- R=210, G=154, B=241 yields a light purple

Devices such as monitors, digital cameras, and scanners generally use RGB color spaces to describe colors. Two standard implementations of RGB color spaces are **sRGB**, which is most often used for web graphics, and **Adobe® RGB (1998)**, which IBM recommends for graphics that are printed.

- **CMYK**

In a CMYK color space, cyan (bright blue), magenta (bright red-pink), yellow, and black pigments are combined to create different colors. CMYK values are often represented as a percentage. The percentage represents the portion of a particular area of paper that is covered by ink or toner. For example:

- C=0%, M=0%, Y=0%, K=100% yields black
- C=0%, M=0%, Y=0%, K=0% yields a blank area on the page
- C=1.6%, M=0%, Y=44.7%, K=.4% yields a pale yellow
- C=17.6%, M=39.6%, Y=5.5%, K=5.5% yields a light purple

Color printers use the CMYK color space; they are loaded with ink or toner in each color. When the printer places dots of the correct sizes next to and on top of each other on a page, your eye interprets them as the intended color.

Implementations of the CMYK color space vary from printer to printer and from paper to paper. Because the original color space of most images is an RGB color space, it is best to leave images in an RGB color space so they retain their original characteristics. That way, your print server or printer has as much of the original color information as possible when it converts the images to the most appropriate CMYK color space for the printer and paper combination.

If you save an image by using the CMYK color space, make sure that you either save an ICC profile for that color space or use a standard non-device specific CMYK color space like **SWOP** or **Coated FOGRA27** and associate the appropriate ICC profile with the image.

Note: Both RGB and CMYK values can be expressed in different ways. For example, in the PostScript data stream, the values range from 0.0 to 1.0, while in some graphic arts programs they can be expressed in hexadecimal numbers or as percentages.

An *ICC profile* contains information for converting an image between a device-specific color space and a *device-independent color space*. A device-independent color space is a color space that does not depend on or relate to the characteristics of any particular device, but rather contains all colors for all gamuts. The ICC identified a specific profile connection space (PCS) as the target device-independent color space for all ICC profiles.

You can use an input ICC profile to translate color data created on one device (such as a digital camera) into the PCS. Then you can use an output ICC profile to convert from the PCS into the native color space of a different device (such as a printer). Converting images from one color space to another is process-intensive and can affect performance in your print system, although it is the best way to maintain consistent color for the devices in your system.

For more information, see “ICC profiles” on page 249.

Gamut and rendering intent

Every device has a *gamut*, a range of colors or shades of colors that it can display or print. Some devices have larger gamuts than others; some devices have gamuts that are similar sizes, but that contain slightly different colors. When an image or a print job is created on a device with a gamut that is different from the printer, you can use a *rendering intent* to tell the printer how to adjust the colors that are outside the gamut of the printer.

The gamut of a printer is almost always significantly smaller than the gamut of a monitor, digital camera, or scanner. Images or graphics nearly always have to be adjusted to print appropriately because some of the colors that they require might be outside the gamut of the printer.

A rendering intent tells the printer how to adjust the image when it encounters colors that it cannot reproduce. Each rendering intent has different benefits and trade-offs, so you can choose one based on how the print output should look.

For more information, see “Rendering intents” on page 250.

Color mixing and calibration

Four standard colors (cyan, magenta, yellow, and black) are blended to create all the colors in the gamut of a printer. A printer mixes colors by printing four layers of a page or an image, one in each color. If the printer registration is not set correctly, the images do not line up properly and the colors appear wrong. In addition, the printer must be calibrated to ensure that all its systems are functioning correctly and that it is in a known good state.

By using the color information described in its color space, each device determines the amount of cyan, magenta, yellow, or black to use. Dots of each color are printed in overlapping patterns that, when interpreted by your eyes, blend the colors appropriately. To ensure the colors are created accurately, the color planes must be perfectly aligned. If they are not, you might see *moire patterns*, unintended patterns in the printed images, or poorly blended colors, which are especially noticeable on the edges of your images.

Color printers must be calibrated regularly, in some cases daily, to ensure that the colors they produce are consistent. In addition, follow the recommended printhead maintenance procedures and schedule to ensure that the printer operates optimally. Even when a printer is calibrated correctly, its gamut is much smaller than that of any monitor, so images do not look the same when they are printed as they do when they are displayed on a monitor.

Halftones and tone transfer curves

Halftones are used to convert images (such as photographs, drawings, logos, or charts) from the continuous tones that you see on a monitor into a pattern of dots

that a printer can put on paper. Tone transfer curves are used to modify the values of a particular color component and thus adjust the look and feel of some of the colors. For example, you can apply a tone transfer curve to emphasize the brightest parts of an image.

Halftones and tone transfer curves are used with both color and grayscale print jobs.

There are several different kinds of halftones, including clustered-dot, stochastic, and error diffusion. For simplicity, this discussion only covers clustered-dot halftones.

Clustered-dot halftones are generally characterized by:

- **Line screen frequency**

Line screen frequency is a measure of the resolution of a halftone, expressed in lines per inch (lpi). A low line screen frequency, such as 80 lpi, creates coarser images because they use larger halftone dots. A high line screen frequency, such as 150 lpi, can produce higher quality images by using smaller halftone dots.

- **Halftone pattern**

Halftone dots are printed in various shapes and patterns. For example, dots can generally be round, elliptical, or square, and they can be arranged in slightly different orientations. The halftone pattern also describes how the size of the dot is increased to cover a larger percentage of the total area and yield darker colors. Different patterns might produce better results for some print jobs.

- **Rotation**

Lines of halftone dots do not run parallel with the top or side of the paper because that could cause unintended patterns to emerge, resulting in lower quality output.

In addition, the dots for each of the four colors in a CMYK printer cannot all be printed at the same angle because they would overlap incorrectly and the colors would not appear as intended. Instead, the lines of dots are printed on the page at specific angles so your eye blends them appropriately.

For example, the black layer of an image might be printed so the lines of dots run across the page at a 45 degree angle to the top of the paper, while the cyan layer is printed so that its lines of dots are at a 105 degree angle to the top of the paper.

Tone transfer curves are most often used to offset the effects of dot gain. *Dot gain* is the tendency for printed dots to be larger than intended, often because of the way ink reacts with paper. If the ink soaks into the paper and spreads out, the resulting dot is much larger (and possibly much lighter in color) than the printer intended it to be. Tone transfer curves can increase or reduce the amount of ink used in proportion to the dot gain.

File size

Color print jobs can have a file size that is much larger than black and white print jobs. The larger file size can lead to longer processing times and increased traffic on your network.

Because color images must contain data about each layer of color, the file might contain three to four times more information than a grayscale file and over 24 times more information than a black and white file. In addition, ICC profiles are embedded in some file types (such as TIFF images). While ICC profiles by

themselves might not be very large, they do increase the size of an image. If you only have one image repeated throughout a print job, and if you construct your job so the image is downloaded only once, the embedded profile is of little concern.

However, if you use a variety of different images, each with an embedded profile, or if you construct your print job so that each image is downloaded every time it appears, the embedded profiles can add unnecessary volume to the print job. If you plan to use a wide variety of color images, create or save them with the same color space so they all use the same ICC profile. You can also install color images in a resource library so they can be reused.

Grayscale printing concepts

With grayscale printing you can reproduce color images as high-quality black and white images by using many shades of gray to represent subtle variations in color and light. Printing solutions that produce high-quality grayscale output use color printing concepts with a black and white printer that supports them to achieve that effect.

Moving to grayscale printing might be a first step in a migration to full color printing. You can start to create color print jobs and print them on an existing printer until you are ready to invest in color printers. In addition, you can use a grayscale printer as a backup system for a full color printer.

Some color concepts are much less important in grayscale printing than they are in color printing:

- The gamut of a black and white printer is much smaller than that of a color printer; essentially all the colors in an image must be adjusted.
- The rendering intent you choose has little effect on the appearance of the image because the colors are already being changed significantly.
- Page registration is less important. Because the printer only uses one color, you do not have to line up the color planes to create the correct color.
- Paper characteristics have minimal effect on grayscale output; one output profile is usually adequate for all types of paper.

Other color concepts are more essential to grayscale printing.

Color spaces and ICC profiles

The color space of a black and white printer is much smaller than that of a color printer. Even so, printers that can print grayscale images have output ICC profiles, just like color printers. The ICC profiles for black and white printers map colors from the profile connection space (PCS) to shades of gray. Otherwise, the color conversion process is the same.

The print job should specify the appropriate input profile; if there is no input ICC profile, the printer uses a reasonable default. The printer has its own default ICC profile installed and available; it should be adequate for nearly all print jobs.

Halftones

Grayscale printers apply halftones to print jobs to print them; halftones let the printer produce many shades of gray and high-quality images. Generally, the most important characteristic to consider for halftones in grayscale printing is line screen frequency, expressed in lines per inch (lpi). Each printer supports a set of line

screen frequencies natively; when you specify the desired line screen frequency in a print job, the printer chooses the available line screen frequency that best matches it.

Tone transfer curves

Tone transfer curves are used in grayscale printing to adjust the amount of toner that is used at different levels of gray, thus adjusting the appearance of images. You can use the appearance value of a tone transfer curve in grayscale printing to indicate how much the tone transfer curve should adjust the color values. Some sample appearance values could be:

- Dark
- Highlight Midtone
- Standard

Color management

Images, graphics, and photographs often appear different depending on the monitor or the printer you use. The colors printed by one printer might not match the colors printed on another printer, even if they came from the same source. If it is important that colors stay consistent from camera, scanner, or monitor to printer, you must use *color management* practices.

It is virtually impossible to accurately reproduce the colors that you see on your monitor on a printed page. Because printers typically have smaller color gamuts than other devices, some of the colors must always be adjusted when images are transformed for printing. With color management, you can control the adjustments so they are less noticeable than they might be if you use the default settings of your image creation software, print server, and printer.

Several factors play significant roles in color management, including ICC profiles, rendering intents, and paper characteristics.

ICC profiles

The International Color Consortium (ICC) is an organization that has established open standards for color management. These standards help products work together by identifying a device-independent color space and defining the elements of an ICC profile.

The device-independent color space that the ICC defined is called the profile connection space (PCS). The PCS is a color space large enough to include all the color gamuts of different input, display, and output devices. An ICC profile contains methods that map the colors that a device can create or display to the values of the corresponding colors in the PCS. The ICC profile can be used to convert an image from a device-specific color space to the PCS, or from the PCS to a device-specific color space.

Product manufacturers create ICC profiles that you can use with their devices. For example, if you take a photograph with a digital camera, you can associate the photograph with the ICC profile for your camera. Then, when you want to print that photograph, the color management system converts the color data from the camera into the PCS. The printer then uses its ICC profile to convert the photograph data from the PCS into its color space, and prints the photograph as accurately as it can.

For more information about the ICC, ICC profiles, and the PCS, see the ICC website:

<http://www.color.org>

Rendering intents

Rendering intents indicate what you want a printer to do with colors that are outside its gamut.

ICC profiles support these rendering intents:

- **Perceptual**

If an image includes any colors that are out-of-gamut for the printer, the printer adjusts all the colors in the image, even those that are already in the gamut of the printer, so they are all in-gamut and maintain their color relationships to each other. The result is an image that is visually pleasing, but is not colorimetrically accurate. The perceptual rendering intent is useful for general reproduction of images, particularly photographs.

- **Saturation**

If a print job includes colors that are out-of-gamut for the printer, the printer replaces the out-of-gamut color with the nearest color in the gamut. It also adjusts the in-gamut colors so that they are more vivid. Saturation is the least used rendering intent, but it is useful for business graphics, such as images that contain charts or diagrams.

- **Media-relative colorimetric**

If a print job includes colors that are out-of-gamut for the printer, the printer substitutes the nearest in-gamut color; in-gamut colors are not adjusted. Colors printed on papers with different media white points might not match visually. The *media white point* is the color of the paper that the print job is printed on. For example, if you print an image on white paper, on off-white paper, and on blue paper by using the media-relative colorimetric rendering intent, the printer uses the same amount of ink or toner for each one and the resulting color is technically the same. However, the images might seem different because your eyes adjust to the color of the background and interpret the color differently. This rendering intent is typically used for vector graphics.

- **Absolute colorimetric**

All colors are mapped by using the same method as the media-relative colorimetric rendering intent, however, all colors are adjusted for the media white point. For example, if you print an image on white paper, on off-white paper, and on blue paper by using the absolute colorimetric rendering intent, the printer adjusts the ink or toner used for each one. The resulting color is technically not same, but the images might look the same because of the way your eyes interpret them in relationship to the color of the paper. The absolute colorimetric rendering intent is typically used for logos.

Paper characteristics

The paper that you use has a significant impact on the colors that you see. Even if you use the same ICC profile and the same printer, printing on a different paper can result in a very different color appearance.

Colors can change from paper to paper, particularly if you change from coated to uncoated paper or from sheet-fed to continuous forms paper. The changes can be so noticeable that printer manufacturers generally test and certify papers with certain characteristics for use with their printers. They also create different ICC

profiles for their printers based on paper characteristics. Some ICC profiles can be used for groups of papers that have similar characteristics.

When you load paper, you set certain paper characteristics on the printer. When the printer chooses the correct device-specific output profile to use, it takes the characteristics into consideration. The paper characteristics are:

- **Media brightness**
The percentage of light that the paper reflects
- **Media color**
The color of the paper
- **Media finish**
The characteristics of the surface of the paper, such as: glossy, satin, matte
- **Media weight**
The basic weight of the paper

AFP color management

You can use various ways to print color data with Advanced Function Presentation (AFP). However, to implement an AFP color printing solution with full color management, you must use color management resources (CMRs). IBM also recommends that you install all of your color images as data objects and associate CMRs with them.

Color management resources

Color management resources (CMRs) are the foundation of color management in AFP print systems. They are AFP resources that provide all the color management information, such as ICC profiles and halftones, that an AFP system needs to process a print job and maintain consistent color from one device to another.

CMRs share some characteristics with other AFP resources, but are different in some important ways.

CMRs are similar to other AFP resources in these ways:

- CMRs can be associated with elements of a print job at various levels of the hierarchy.
Typical hierarchy rules apply, so CMRs specified at lower levels override those at the higher level. For example, a CMR set on a data object overrides a default CMR set on a print file.
- CMRs can be included in a print job in an inline resource group and referenced in a form definition, page environment, object environment, or an include Object (IOB) structured field.

Note: CMRs can vary in size from several hundred bytes to several megabytes. If your print job uses relatively few CMRs, including them in the print file might not have an impact on the performance of your system. However, if your print job uses more than 10 CMRs, the size of the print job can increase so much that file transfer rates and network traffic are affected.

- CMRs can be stored centrally in a resource library, so you do not need to include them in every print job.
You can configure all your print servers so they can access the CMRs.
- For the print server to find CMRs, the resource library must be listed in the AFP resource search path on the print server.

CMRs are different from other AFP resources in these ways:

- You cannot copy CMRs into a resource library as you can other AFP resources. To store CMRs in a central resource library, you must install them by using an application such as AFP Resource Installer.
- CMRs and data objects must be stored in resource libraries that have resource access tables (RATs).
AFP Resource Installer creates the RAT when CMRs and data objects are installed. IBM recommends that CMRs and data objects be installed in separate resource libraries and that you store resources that do not require RATs (such as form definitions, page definitions, and overlays) in other resource libraries. For more information, see “InfoPrint AFP Resource Installer” on page 262.
- CMRs installed in a resource library can have names longer than 8 characters, and you can use the names in the print data stream.
These names are created when you install the CMR by using AFP Resource Installer and are UTF-16BE encoded.

See “Resource library management” on page 260 for more information about characteristics of resource libraries.

Types of CMRs

Different situations call for different types of CMRs. Some CMRs are created by product manufacturers so you can download and use them, while others are created by your printer or other color management software. If you have the appropriate information, you can also create CMRs yourself.

Some CMRs are used to interpret input files (similar to the function performed by ICC input profiles), while others are used to prepare the final print job output for a specific printer (similar to the function performed by ICC output profiles).

Color conversion CMRs:

Color conversion (CC) CMRs are used to convert colors to and from the ICC profile connection space (PCS), a device-independent color space. You can use them to prepare images for color or grayscale printing.

Color conversion CMRs are an essential element of any AFP color management system because they are ICC profiles encapsulated in AFP structures. The AFP structures add information that your color management system can use, but it leaves the ICC profile unaltered.

You can use color conversion CMRs to produce consistent colors on different devices. In a color system, they help ensure that the colors on your monitor are as close as possible to those that are printed. If you move the print job to a different printer, the colors are adjusted again to match the new printer.

In a grayscale system, color conversion CMRs map colors to appropriate shades of gray to produce high-quality black and white images.

Passthrough CMRs are color conversion CMRs that indicate that no color processing should be done if the color space of the presentation device is the same as the color space of the CMR. Passthrough CMRs contain no data.

Link color conversion CMRs:

Link color conversion CMRs combine the processing information required to directly convert an image from the color space of an input device to the color space of the output device. Essentially, link color conversion CMRs replace a pair of color conversion CMRs.

Converting color images to and from the PCS takes a significant amount of processing resources, in part because the process includes two conversions. Link color conversion CMRs combine the two conversions and make them more efficient. The printer can use the link color conversion CMR to convert colors directly from the color space of the input device to the color space of the output device with the same color fidelity they would have if the printer did both of the conversions. As a result, link color conversion CMRs can improve system performance.

The two types of link color conversion CMRs are:

Link CMRs

Link (LK) CMRs are unique. You cannot create a link CMR yourself and you do not include references to link CMRs in your print jobs. The print system creates and uses link CMRs automatically.

If you use AFP Resource Installer, link CMRs are generated automatically when you create or install a color conversion CMR. As a result, your resource library always contains link CMRs for every combination of color conversion CMRs in audit (input) and instruction (output) processing modes. When link CMRs are created, AFP Resource Installer marks them as *capturable*, so the printer can save them to be used in other print jobs.

If you do not use AFP Resource Installer, your printer might create link CMRs when it processes print jobs. For example, if you send a print job to an InfoPrint 5000, the printer controller looks at the audit color conversion CMRs that are specified. Then, the print controller looks at the link CMRs that it has available to find one that combines the audit color conversion CMR with the appropriate instruction color conversion CMR. If it does not find one, the print controller creates the link CMR and uses it. The print controller might save the link CMRs that it creates, but they can be removed during normal operation; for example, if the printer runs out of storage or is shut down. If the link is removed, the printer must create a new link CMR the next time it is needed.

When a link CMR is created, the print system evaluates the conversion algorithms to and from the PCS. The system then combines the algorithms, so a data object can be converted directly from one color space to the other without actually being converted to the PCS.

Device link CMRs

Device link (DL) CMRs use an ICC device link profile to convert directly from an input color space to an output color space without reference to an audit-mode or instruction-mode CMR. An ICC device link profile is a special kind of ICC profile that is used to convert the input device color space to the color space of an output or display device. ICC device link profiles are not embedded in images.

You can create, install, and uninstall device link CMRs yourself. Device link CMRs are referenced in the MO:DCA data stream and take precedence over audit color conversion CMRs. A device link CMR specifies its own rendering intent, which is indicated in the header of the ICC device link profile. This rendering intent overrides any other rendering intent that is active.

The biggest advantage of using device link CMRs is that they preserve the black channel (K component) of the input color space when converting from CMYK to CMYK.

Halftone CMRs:

Halftone (HT) CMRs carry the information that a printer uses to convert print jobs into a pattern of dots that it can put on paper. Halftone CMRs can be used with both color and grayscale print jobs.

Halftone CMRs generally specify the line screen frequency, halftone pattern, and rotation of the halftone that they carry. Device-specific halftone CMRs might also include the printer resolution.

A printer that uses AFP color management to print color or grayscale print jobs must use a halftone CMR to convert the print job into a format that the printer can reproduce in ink or toner. If a halftone CMR is not specified in the print job, the printer applies a default halftone CMR.

Note: If you send your color print jobs to an InfoPrint 5000 printer, halftones are applied by the print engine. As a result, the printer ignores halftone CMR requests.

You can associate device-specific halftone CMRs or generic halftone CMRs with print jobs:

- If you know which printer is printing the job, you can associate a device-specific halftone CMR with the print job (or with AFP resources inside the print job). The printer uses the halftone CMR that you specify.
- If you do not know which printer is printing the job, but you want to ensure that it uses a halftone CMR that has certain characteristics, such as a specific line screen frequency, you can associate a generic halftone CMR with the print job.

Because it is difficult to know which halftone CMRs should be used for the current conditions on the current printer, IBM recommends that you specify halftone CMRs generically and let the printer choose the most appropriate CMR that it has available.

Generic halftone CMRs

You can use generic halftone CMRs when you want to choose one or more characteristics of the halftone CMR for a print job, but you do not know exactly which halftone CMRs are available.

When a print job specifies a generic halftone CMR, the print server looks in the resource library for halftone CMRs that match the printer device type and model. If the print server finds an appropriate CMR, it sends the device-specific halftone CMR to the printer with the print job. If the print server does not find an appropriate halftone CMR, it sends the generic halftone CMR to the printer.

If a print job arrives at the printer requesting a generic halftone CMR, the printer compares the requested characteristics with the available device-specific halftone CMRs. If there is a match, the printer uses the selected device-specific halftone CMR when it processes the print job. If there is no match, the printer uses the halftone CMR whose line screen frequency value is closest to the one requested.

The Color Management Object Content Architecture (CMOCA) has defined a variety of generic halftone CMRs, which cover the most common line screen frequencies and halftone types. A print server that supports CMOCA can interpret generic halftone CMRs if it has device-specific halftone CMRs available to it in a resource library. If you use AFP Resource Installer, the generic halftone CMRs are installed in every resource library that you create and populate by using AFP Resource Installer.

Printers that support CMOCA should be able to interpret those generic CMRs and associate them with device-specific halftone CMRs.

Indexed CMRs:

Indexed (IX) CMRs map indexed colors in the data to presentation device colors or colorant combinations.

Indexed CMRs provide rules about how to render indexed colors. Indexed CMRs apply to indexed colors that are specified by using the highlight color space. They do not apply to indexed colors found within PostScript or other non-IPDS data objects. For Indexed CMRs, both instruction and audit processing modes are valid. However, only indexed CMRs with an instruction processing mode are used; those with an audit processing mode are ignored. The tags in the indexed CMR let the CMR use various color spaces in the descriptions. These color spaces can be grayscale, named colorants, RGB, CMYK or CIELAB.

Tone transfer curve CMRs:

Tone transfer curve (TTC) CMRs are used to carry tone transfer curve information for an AFP print job, so you can modify the values of a particular color component and adjust the appearance of some of the colors by increasing or decreasing the amount of ink used to emphasize or reduce the effects of dot gain on the final output.

Like halftone CMRs, tone transfer curve CMRs are associated with print jobs specifically or generically. If they are specified generically, the print server looks in the resource library for tone transfer curve CMRs that match the printer device type and model. If the print server finds an appropriate CMR, it sends the device-specific tone transfer curve CMR to the printer with the print job. If the print server does not find an appropriate tone transfer curve CMR, it sends the generic tone transfer curve CMR to the printer.

If a print job arrives at the printer requesting a generic tone transfer curve CMR, the printer compares the requested characteristics with the device-specific tone transfer curve CMRs that it has available. If there is a match, the print server or printer uses the selected device-specific tone transfer curve CMR when it processes the print job. If the printer cannot find a good match for the generic tone transfer curve CMR, it ignores the request and uses its default tone transfer curve CMR.

The Color Management Object Content Architecture (CMOCA) defines several generic tone transfer curve CMRs with different appearance values. You can use the appearance values to specify how to print your job with regard to the reported dot gain of the printer.

Generic tone transfer curves can be used to select these appearance values:

- **Dark**

The output is adjusted to show a dot gain of 33% for a 50% dot.

- **Accutone**

The output is adjusted to show a dot gain of 22% for a 50% dot.

- **Highlight Midtone**

The output is adjusted to show a dot gain of 14% for a 50% dot. This appearance might be used to emphasize the brightest part of an image.

- **Standard**

The output is adjusted just enough to account for the effects of dot gain, effectively counteracting the dot gain.

If you use AFP Resource Installer, it installs the generic tone transfer curve CMRs on your system automatically.

CMR processing modes

CMR processing modes tell the print system how to apply a CMR to the print data it is associated with. You specify a CMR processing mode whenever you specify a CMR, although not all modes are valid for all CMR types.

Audit processing mode:

CMRs with the audit processing mode refer to processing that has already been applied to a resource. In most cases, audit CMRs describe input data and are similar to ICC input profiles.

The audit processing mode is used primarily with color conversion CMRs. In audit processing mode, those CMRs indicate which ICC profile must be applied to convert the data into the profile connection space (PCS).

For example, to take a photograph with a digital camera and then include the photograph in an AFP print job, you can use AFP Resource Installer to:

1. Create a color conversion CMR by using the ICC profile of your camera.
2. Install your photograph in a resource library.
3. Associate the color conversion CMR with the data object, indicating the audit processing mode.

Then, you create a print job that includes the data object. When processing the print job, the system uses the color conversion CMR to convert the colors in the image into the PCS. The colors can then be converted into the color space of the printer that is printing it.

Instruction processing mode:

CMRs with the instruction processing mode refer to processing that is done to prepare the resource for a specific printer that uses a certain paper or another device. Generally, instruction CMRs refer to output data and are similar to ICC output profiles.

The instruction processing mode is used with color conversion, tone transfer curve, and halftone CMRs. In instruction processing mode, these CMRs indicate how the system must convert a resource so it prints correctly on the target printer. The manufacturer of your printer should provide ICC profiles or a variety of CMRs that you can use. Those ICC profiles and CMRs might be installed in the printer controller, included with the printer on a CD, or available for download from the manufacturer's website.

If you send a color AFP print job to a printer that supports AFP Color Management, color conversion and tone transfer curve CMRs in instruction processing mode can be associated with the job. When the printer processes the print job, it applies the CMRs in this order:

1. Color conversion CMRs in audit processing mode to convert the resources into the ICC profile connection space (PCS).
2. Color conversion and tone transfer curve CMRs in instruction processing mode to convert the resources into the color space of the printer.
3. Halftone CMR in instruction processing mode to convert the job pages from their digital format into the pattern of dots that the printer can produce.

In some cases, CMRs that are usually used as instruction CMRs can be used as audit CMRs. For example, if you send a very large print job to a high-speed printer, the images in the print job are converted into the color space of that printer by using a color conversion CMR with the instruction processing mode. However, if you have to reprint part of the job on a different printer, the system must convert the print job into the color space of the second printer. In that case, the color conversion CMR of the first printer is used in the audit processing mode to move the images back into the PCS. Then, the system uses a color conversion CMR of the second printer in instruction mode to convert the images into its color space.

Link processing mode:

CMRs with the link processing mode are used to link an input color space in the presentation data (sometimes defined by an audit CMR) to the output color space of the presentation device (sometimes defined by an instruction CMR). Only link (LK) and device link (DL) CMRs can be used in link processing mode.

Whenever you install or uninstall audit or instruction color conversion CMRs in your resource library by using AFP Resource Installer or a similar software product, the AFP Resource Installer automatically creates or deletes link (LK) CMRs for every combination of audit and instruction color conversion CMR.

When a print job calls for a given audit-instruction combination, the print server checks the resource library for a link (LK) CMR for that combination. If the print server finds an appropriate link CMR, it sends the CMR to the printer with the print job. Your printer can use the link (LK) CMRs whenever a print job indicates that it uses a particular combination of audit and instruction CMRs.

If you do not use AFP Resource Installer or a similar program to install your resources, your color printer must either create link (LK) CMRs while it processes your print jobs or convert the colors in your jobs twice, first from the original color space to the PCS and then from the PCS to the color space of the printer.

CMR creation and installation

Device manufacturers and groups that support AFP color standards create CMRs that you can use in your color printing systems. You can also create CMRs yourself, based on your needs.

The AFP Consortium, the group that defined the AFP Color Management Object Content Architecture (CMOCA), identified a set of color conversion CMRs that are most often used in audit processing mode. The set includes color conversion CMRs for common color spaces, such as:

- Adobe RGB (1998)

- sRGB
- SMPTE-C RGB
- SWOP CMYK

The standard CMRs are included with AFP Resource Installer, although they are not installed by default. You can install the standard CMRs that you plan to use. In addition, AFP Resource Installer automatically installs all the generic halftone and tone transfer curve CMRs in any resource library you create.

You can download device-specific CMRs from the printer manufacturer's website.

If you need more CMRs, you can create them by using wizards provided in AFP Resource Installer. See the online help for details about the wizard.

If you use AFP Resource Installer to create a CMR, the software automatically installs the CMR in a resource library. You can also use AFP Resource Installer to install CMRs that you get from your printer manufacturer.

Data objects

Presentation data objects contain a single type of data (such as GIF, JPEG, PNG, and TIFF images) and can be used in your print jobs. These data objects can be placed directly in a page or overlay or can be defined as resources and included in pages or overlays. Using a data object as a resource is more efficient when that object appears more than once in a print job; resources are downloaded to the printer just once and referenced as needed.

Data objects can either be included inline with a print job or installed in a resource library by using software such as AFP Resource Installer. If you install your data objects in a resource library, you can associate color conversion CMRs with them. For more information, see “InfoPrint AFP Resource Installer” on page 262.

See “Resource library management” on page 260 for more information about characteristics of resource libraries.

Types of data objects

Image data objects can be stored in a number of different formats, including AFPC JPEG Subset, EPS, GIF, IOCA, PDF, PNG, and TIFF. These image types are device-independent so they can be used by different systems and still be interpreted consistently.

- AFPC JPEG Subset (JPEG)

AFPC (AFP Consortium) JPEG Subset files, formerly called JPEG File Interchange Format (JFIF) files, are bitmap image files that are compressed by using Joint Photographic Experts Group (JPEG) compression. As a result, AFPC JPEG Subset files are most commonly referred to as JPEG files. JPEG files most commonly use the file extension .jpg, but can also use .jpeg, .jpe, .jfif, and .jif. JPEG compression deletes information that it considers unnecessary from images when it converts them. JPEG files vary from having small amounts of compression to having large amounts of compression. The more an image is compressed, the more information is lost. If the image is compressed only once, there usually is no noticeable effect on the image. However, if the image is compressed and decompressed repeatedly, the effects of deleting information become more noticeable.

JPEG compression is commonly used for photographs, especially photographs that are transmitted or displayed on web pages. The compression makes the files small enough to transmit on a network efficiently, but leaves enough information that the image is still visually appealing.

- Encapsulated PostScript (EPS)

EPS is a PostScript graphics file format that follows conventions that Adobe Systems defined. EPS files support embedded ICC profiles.

- Graphics Interchange Format (GIF)

GIF files are bitmap image files that are limited to a palette of 256 RGB colors. Because of the limited color range that it can contain, GIF is not a good format for reproducing photographs, but it is generally adequate for logos or charts. GIF images are widely used on the Internet because they are usually smaller than other image formats. GIF files use the file extension .gif.

- Image Object Content Architecture (IOCA)

IOCA is an architecture that provides a consistent way to represent images, including conventions and directions for processing and exchanging image information. The architecture defines image information independently of all data objects and environments in which it might exist and uses self-identifying terms; each field contains a description of itself along with its contents.

- Portable Document Format (PDF)

PDF is a standard file format that Adobe Systems developed.

PDF files can be used and stored on various operating systems and contain all the required image and font data. Design attributes in a PDF are kept in a single compressed package.

| **Note:** Single-page and multiple-page PDF files can be used as data objects in
| AFP print jobs.

- Portable Network Graphics (PNG)

| PNG files are bitmap image files that support indexed colors, palette-based
| images with 24-bit RGB or 32-bit RGBA colors, grayscale images, an optional
| alpha channel, and lossless compression. PNG is used for transferring images on
| the Internet, but not for print graphics. PNG files use the file extension .png.

- Tagged Image File Format (TIFF)

| TIFF files are bitmap image files that include headers to provide more
| information about the image. TIFF files use the file extensions .tif or .tiff.

| TIFF files support embedded ICC profiles. If an ICC profile is embedded in a
| file, the characteristics of the input color space are known whenever the file is
| used; however, the profiles increase the file size. When you save a file in the
| TIFF format, you can use various compression algorithms.

| **Note:** Single-image and multiple-image TIFF files can be used as data objects in
| AFP print jobs.

Not all printers support all types of data objects.

The embedded ICC profiles in EPS, JPEG, and TIFF files contain the information that a printer uses to convert colors in the image from an input color space into the profile connection space (PCS). The input color space might be an industry-standard space or it can describe the color reproduction capabilities of a device, such as a scanner, digital camera, monitor, or printer.

Data object creation and installation

You can use a wide variety of software applications to create or manipulate images to include in print jobs. If you want to store them in central resource repositories, you can use AFP Resource Installer to install them.

Data object creation

Most types of data objects are images of some kind. They might be photographs taken with a digital camera, charts or diagrams generated by a software tool, or digital drawings created by using graphics software. Regardless of how images are created, you generally need to manipulate them to include them in print jobs.

The changes include:

- Convert the image into a file type that is appropriate for printing. For example, the file types that many graphics applications (such as Adobe Illustrator, CorelDRAW, and Corel Paint Shop Pro) use to store images while you work on them are not appropriate for printing. To use images that you create from any of those programs, you can save or export those files as a different file type, such as EPS, JPEG, or TIFF.
- Make sure that your image files are associated with an appropriate color space or input profile. Follow the instructions provided with your graphics software to set up color management, including installing and using ICC profiles for digital cameras and monitors, and customizing color management settings. The instructions should also explain how to change the color profile that an image uses and how to save an image with an embedded profile.
- Follow the tips and best practices provided in the other sections below for creating images and managing them as data object resources.

Data object installation

You can use AFP Resource Installer to install your images in a resource library. AFP Resource Installer includes wizards that can guide you through the process of installing an image as a data object. When you install an EPS, JPEG, or TIFF image with an embedded ICC profile by using AFP Resource Installer, you can choose how you want to handle the profile:

- Leave the profile in the file without creating a CMR.
- Leave the profile in the file, but also copy the profile and create a CMR from the copy. Associate the new CMR with the data object.
- Remove the profile from the file (to reduce the file size) and make the profile into a CMR. Associate the new CMR with the data object.

Resource library management

If you store CMRs and data objects in central resource libraries, you must understand some of the characteristics of resource libraries to make sure that your resources are available when and where you need them.

Resource libraries that AFP Resource Installer creates use a *resource access table* (RAT) as the index of the resource library. The index is stored as a file in the library that it refers to. You must store CMRs in resource libraries that use a RAT. IBM recommends that you store data objects in resource libraries that use a RAT as well.

When you use AFP Resource Installer to create a resource library, it creates a RAT and stores it in the library. When you install a CMR or data object, AFP Resource

Installer updates the RAT with information about the resource. When a print server looks in a resource library for a resource, it first looks in the RAT to see if the resource is listed.

The print server relies on the RAT; if it is incorrect, the print server cannot find resources in the resource library. As a result, you must always use AFP Resource Installer to manage your resource libraries, including to:

- Add CMRs and data objects to a resource library.
Do not copy CMRs or data objects directly into the resource libraries that AFP Resource Installer uses. If you copy CMRs or data objects into these resource libraries, the RAT is not updated so the print server cannot use it to find the CMRs or data objects.
- Modify properties of data objects and CMRs listed in the RAT.
Do not directly edit the RAT or any of the files in a resource library. Do not replace an existing version of a CMR or data object with a new version by copying the new version directly into the resource library; use AFP Resource Installer to update the resource.
- Install CMRs or data objects in a different resource library or replicate a resource library in a different location.
Do not copy CMRs or data objects from a resource library and store them in another location.

For more information about completing these tasks, see the AFP Resource Installer online help.

Tips and best practices

These general guidelines about creating and managing images and other color resources can improve the performance of your AFP color printing system.

Tips for images

To optimize the performance of your AFP color printing system, IBM recommends that you follow some guidelines for creating and including images in print jobs.

When you want to use color images in your print jobs:

- Get the original electronic versions of images instead of scanning existing documents.
Almost unnoticeable specks of color in the background of images that have been scanned can greatly increase the size of the image. If you must scan an image, use an image editing tool to clean up the background as much as possible.
- Save all images in the same standard color space so you only need one input profile for all of them.
Adobe RGB (1998) is the recommended color space for images that are to be printed.
- Flatten multi-layer images (such as the ones you can create in graphics tools like Adobe Illustrator and Corel Paint Shop Pro) before including them in print jobs.
Unflattened images are extremely large and more difficult to work with. Save a copy of the original image for future editing, but flatten the version that you include in your print job.

Tips for resources

To optimize the performance of your AFP color printing system, IBM recommends that you follow some guidelines for managing color resources.

You can use AFP Resource Installer to:

- Install all the CMRs for your printer in a resource library.
- Install the data objects that you use frequently in a resource library.
- Mark the CMRs and data objects that are reused regularly as non-private, capturable resources so they can be saved on the printer and used for other print jobs without being downloaded every time.

Note: This option is not advisable for secure resources, such as signature files.

- Install CMRs and data objects in resource libraries that the print server can access, so they only need to be stored in one place and can be used by all print servers.
- Associate audit color conversion CMRs with data objects that require color management, so the embedded profiles can be removed from the image files.

InfoPrint AFP Resource Installer

InfoPrint AFP Resource Installer is a key element of an AFP color management system when resources are stored in central libraries. You can use it to create, install, and manage color management resources (CMRs) and data objects for use in your system.

AFP Resource Installer is a Java™ application that you install on a Windows™ workstation. You can use it to install and work with fonts in addition to CMRs and data objects.

You can use AFP Resource Installer to:

- Create CMRs from existing data, including ICC profiles.
You can use a wizard to guide you through the process.
- Install CMRs, fonts, and data objects in resource libraries on the local system or on any system that you can access with FTP.
- Associate CMRs with data objects, so data objects can be reproduced accurately on different printers.

In some cases, you can reduce the file size of your images by removing the embedded color profile from the file and using an associated CMR.

- Mark resources as capturable.

Capturable resources can be captured and saved in the printer for use with other print jobs, which can help improve system performance. The print server queries the printer before it sends any resources; if the printer already has the resource, the print server does not have to send it.

- Mark resources as private.

Private resources cannot be captured in the printer and must be downloaded with every print job that uses them. For example, you can mark signature files used for company checks as private for security reasons.

When you use AFP Resource Installer to install a color conversion CMR, the software automatically creates link (LK) CMRs between the new color conversion CMR and the existing color conversion CMRs. When a print file references the new CMR, the print server automatically downloads the link CMRs that match the target device type and model and sends them to the printer with the print job. If one of those link CMRs is appropriate, the printer can use it instead of having to spend extra time creating a link CMR.

To let a print server use resources installed by AFP Resource Installer, you must add the path to the resource libraries to the AFP resource path in the server.

Appendix G. Accessibility

Publications for this product are offered in Adobe Portable Document Format (PDF) and should be compliant with accessibility standards. If you experience difficulties when using PDF files, you can view the publications on the z/OS Internet Library website. If you continue to experience problems, send comments by email to printpub@infoprint.com or by mail to:

IBM Corporation
6300 Diagonal Hwy 002J
Boulder, CO 80301-9270
U.S.A.

Accessibility features help a user who has a physical disability, such as restricted mobility or limited vision, use software products successfully. The major accessibility features in z/OS let users:

- Use assistive technologies such as screen readers and screen magnifier software.
- Operate specific or equivalent features by using only the keyboard.
- Customize display attributes such as color, contrast, and font size.

Using Assistive Technologies

Assistive technology products, such as screen readers, function with the user interfaces found in z/OS. Consult the assistive technology documentation for specific information when using such products to access z/OS interfaces.

Keyboard Navigation of the User Interface

Users can access z/OS user interfaces by using TSO/E or ISPF. For more information, see *z/OS TSO/E Primer*, SA22-7787, *z/OS TSO/E User's Guide*, SA22-7794, and *z/OS ISPF User's Guide Vol I*, SC34-4822. These guides describe how to use TSO/E and ISPF, including the use of keyboard shortcuts or function keys (PF keys). Each guide includes the default settings for the PF keys and explains how to modify their functions.

z/OS Information

z/OS information is accessible by using screen readers with the BookServer or Library Server versions of z/OS publications in the Internet library at:

<http://www.ibm.com/systems/z/os/zos/bkserv/>

Notices

This information was developed for products and services offered in the U.S.A.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that *only* that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property rights may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing
IBM Corporation
North Castle Drive
Armonk, NY 10594-1785
U.S.A.

For license inquiries regarding double-byte (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

Intellectual Property Licensing
Legal and Intellectual Property Law
IBM Japan, Ltd.
3-2-12, Roppongi, Minato-ku, Tokyo 106-8711
Japan

The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law: IBM PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) described in this publication at any time without notice.

Any references in this information to non-IBM Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this IBM product and use of those Web sites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

IBM Corporation
Department 11PA Building 002S
PO Box 1900
Boulder, CO 80301-9270
U.S.A.

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this document and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement or any equivalent agreement between us.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

COPYRIGHT LICENSE:

This information contains sample application programs in source language, which illustrates programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to IBM, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. IBM, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs.

Trademarks

IBM, the IBM logo, and ibm.com are trademarks or registered trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. Other product and service names might be trademarks of IBM or other companies. A current list of IBM trademarks is available on the web at "Copyright and trademark information":

<http://www.ibm.com/legal/copytrade.shtml>

These terms are trademarks or registered trademarks of Ricoh Co., Ltd., in the United States, other countries, or both:

- Advanced Function Presentation
- AFCCU
- AFP
- Bar Code Object Content Architecture
- BCOCA
- CMOCA
- Color Management Object Content Architecture
- InfoPrint
- Infoprint

- Intelligent Printer Data Stream
- IPDS
- Mixed Object Document Content Architecture
- MO:DCA
- Ricoh

Adobe and PostScript are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries.

|
|

Java and all Java-based trademarks and logos are trademarks or registered trademarks of Oracle and/or its affiliates.

Linux is a registered trademark of Linus Torvalds in the United States, other countries, or both.

Microsoft and Windows are trademarks of Microsoft Corporation in the United States, other countries, or both.

UNIX is a registered trademark of The Open Group in the United States and other countries.

Glossary

This glossary defines technical terms and abbreviations used in PSF for z/OS documentation. If you do not find the term you are looking for, view the IBM terminology website:

<http://www.ibm.com/software/globalization/terminology/>

These cross-references are used in this glossary:

- **See.** Refers to preferred synonyms or to defined terms for acronyms and abbreviations.
- **See also.** Refers to related terms that have similar, but not synonymous, meanings, or to contrasted terms that have opposite or substantively different meanings.

A

abend. See abnormal end of task.

abnormal end of task (abend). The termination of a task, job, or subsystem because of an error condition that recovery facilities cannot resolve during processing

access method. A technique for moving data between main storage and input/output devices.

active environment group. A collection of mapping structured fields, positioning controls, and data descriptors that define the environment for a page. These structured fields form an internal object in a composed text page, page definition, or overlay.

addressable point. For page printers, any defined position or picture element in a presentation surface or physical medium that can be referenced. See also picture element and print position.

Advanced Function Presentation (AFP). A set of licensed programs, together with user applications, that use the all-points-addressable concept to print data on a wide variety of printers or to display data on a variety of display devices. AFP includes creating, formatting, archiving, retrieving, viewing, distributing, and printing information.

AFP. See Advanced Function Presentation.

| **AFP Font Collection.** An IBM licensed product that
| includes a set of utilities, and a single font source for
| all AFP operating systems.

AFP Statistics (AFPSTATS) report. Contains summary data about the resources used to print a document. The AFPSTATS report is used to indicate in which libraries PSF found a resource, diagnose some resource selection

problems, obtain statistical data about how a print file is printed, and diagnose some print file printing performance problems.

AFPSTATS report. See AFP Statistics report.

AFPSTATS repository. A data set where AFP Statistics (AFPSTATS) reports are written.

AFP Toolbox. A product that assists application programmers in formatting printed output. Without requiring knowledge of the AFP data stream, AFP Toolbox provides access to sophisticated AFP functions through a callable C, C++, or COBOL interface.

all-points addressability (APA). The capability to address, reference, and position text, overlays, and images at any defined position or picture element on the printable area of the paper. This capability depends on the ability of the hardware to address and to display each picture element.

| **all-points addressable (APA).** Pertaining to
| addressing, referencing, and positioning text, overlays,
| and images at any defined position or picture element
| on the printable area of the paper.

American Standard Code for Information Interchange (ASCII). A standard code used for information exchange among data processing systems, data communication systems, and associated equipment. ASCII uses a coded character set consisting of 7-bit coded characters. See also Extended Binary Coded Decimal Interchange Code.

APA. See all-points addressability or all-points addressable.

APAR. See authorized program analysis report.

application program. A program used to communicate with stations in a network, enabling users to perform application-oriented activities.

ASCII. See American Standard Code for Information Interchange.

authorized program analysis report (APAR). A request for correction of a defect in a supported release of an IBM-supplied program.

auxiliary data set. In AFP printing, a data set that contains job header, data set header, job trailer, or message data. See also print data set.

auxiliary resource. Fonts, page segments, overlays, page definitions, or form definitions associated with auxiliary data sets.

B

bar code. An array of elements, such as bars, spaces, and two-dimensional modules, that encode data in a particular symbology. The elements are arranged in a predetermined pattern following unambiguous rules defined by the symbology.

Bar Code Object Content Architecture (BCOCA). An architected collection of constructs used to interchange and present bar code data.

baseline. A conceptual line with respect to which successive characters are aligned.

BCOCA. See Bar Code Object Content Architecture.

big endian. Pertaining to the order in which binary data is stored or transmitted with the most significant byte placed first. See also little endian.

bin. An enclosure on a printer that contains source or destination media, including paper, foils, labels, card stock, or microfilm. See also cassette and stacker.

bounded-box font. A font in bounded-box format. See also unbounded-box font.

bounded-character box. A character box that does not contain blank space on any sides of the character. See also unbounded-character box.

BTS. See burster-trimmer-stacker.

burst. To separate continuous-forms paper into separate sheets.

burster-trimmer-stacker (BTS). An optional printer feature that separates continuous forms into separate sheets, trims the carrier strip from both edges of the paper, and stacks the sheets. The BTS also identifies jobs by offsetting the stacking.

C

carriage control character. A character that is used to specify a write, space, or skip operation. See also control character.

cassette. In cut-sheet printers, a removable container for a supply of paper. See also bin.

CFS. See continuous-forms stacker.

channel-attached. Pertaining to the attachment of devices directly by input/output channels to a host processor. See also SNA-attached and TCP/IP-attached.

channel code. A number from 1 to 12 that identifies a position in the forms control buffer or a page definition.

character. (1) Any symbol that can be entered on a keyboard, printed, or displayed. For example, letters, numbers, and punctuation marks are all characters. (2) In a computer system, a member of a set of elements that is used for the representation, organization, or control of data. See also control character, glyph, and graphic character. (3) In bar codes, a single group of bars and spaces that represent an individual number, letter, punctuation mark, or other symbol.

character box. The area that completely contains the character pattern.

character data. Data in the form of letters and special characters, such as punctuation marks. See also numeric data.

character identifier. The standard identifier for a character, regardless of its style. For example, all uppercase A's have the same character identifier. See also graphic character identifier.

character rotation. The alignment of a character with respect to its character baseline, measured in degrees in a clockwise direction. See also rotation and orientation.

character set. A defined set of characters that can be recognized by a configured hardware or software system. A character set can be defined by alphabet, language, script, or any combination of these items. See also font character set.

checkpoint. A place in a program at which a check is made, or at which a recording of data is made to allow the program to be restarted in case of interruption.

client. A software program or computer that requests access to data, services, programs, and resources from a server. See also server and host.

CMR. See color management resource.

coded font. A font file that associates a code page and a font character set. For double-byte fonts, a coded font associates multiple pairs of code pages and font character sets.

coded font section. A font character set and code page pair. A single-byte coded font consists of only one coded font section; a double-byte coded font can consist of more than one.

code page. A particular assignment of code points to graphic characters. Within a given code page, a code point can only represent one character. A code page also identifies how undefined code points are handled. See also coded font and extended code page.

code point. A unique bit pattern that represents a character in a code page.

color management resource (CMR). An object that provides color management in presentation environments.

color mapping table. A MO:DCA object that is used to map color values specified in a source color space to color values specified in a target color space. This object is loaded into printers that support the color mapping table.

color selection. The ability to specify a color other than black to print data in more than one color. Some printers support selection of several colors, depending upon the color of the ribbon installed in the printer. Other printers support the selection of black or “color of media”, which can cause white lettering on a background that has been shaded black.

command. A request from a terminal or automated operator for the performance of an operation or service, or a request in a batch-processing job or print file for the operation or execution of a particular program.

communication. See data communication.

compatibility font. An AFP font designed to emulate the uniformly spaced and fixed-pitch fonts used with line printers.

| **complex text.** Unicode-encoded text that cannot be
| rendered in the traditional one-code-point to one-glyph
| fashion, such as bidirectional Arabic text or combined
| Hindi characters.

composed text. Text that has been formatted and that contains text-control information to direct the presentation of the text.

computing system RPQ. A customer request for a price quotation on alterations or additions to the functional capabilities of a computing system, hardware product, or device. The RPQ can be used in conjunction with programming RPQs to solve unique data processing problems. See also programming request for price quotation.

concatenate. (1) To link together. (2) To join two character strings.

concatenated data set. A group of logically connected data sets that are treated as one data set for the duration of a job step. See also data set, partitioned data set, and library.

conditional processing. A page definition function that allows input data records to partially control their own formatting.

console. A display station from which an operator can control and observe the system operation.

continuous forms. A series of connected forms that feed continuously through a printing device. The

connection between the forms is perforated so that the user can tear them apart. Before printing, the forms are folded in a stack, with the folds along the perforations. See also cut-sheet paper.

continuous-forms stacker (CFS). In continuous-forms printers, an output assembly that refolds and stacks continuous forms after printing.

control character. (1) A character that represents a command that is sent to an output device, such as a printer or monitor. Examples are line-feed, shift-in, shift-out, carriage return, font change, and end of transmission. See also carriage control character. (2) A character whose occurrence in a particular context initiates, modifies, or stops a control function.

copy group. An internal object in a form definition or a print data set that controls such items as modifications to a form, page placement, and overlays. See also internal copy group.

core interchange font. A uniformly spaced typographic font with specialized characters for different languages.

current print position. The picture element that defines the character reference point or the upper-left corner of an image.

cut-sheet paper. Paper that is cut into uniform-size sheets before it is loaded into the printer. See also continuous forms.

D

data check. A synchronous or asynchronous indication of a condition caused by erroneous data or incorrect positioning of data. Some data checks can be suppressed.

data communication. Transfer of data among functional units by means of data transmission protocols.

data control block (DCB). A control block used by access method routines in storing and retrieving data.

Data Facility Storage Management Subsystem (DFSMS). An operating environment that helps automate and centralize the management of storage. To manage storage, the storage management subsystem (SMS) provides the storage administrator with control over data class, storage class, management class, storage group, and automatic class selection (ACS) routine definitions.

data map. An internal object in a page definition that specifies fonts, page segments, fixed text, page size, and the placement and orientation of text.

| **data object.** An object that is either specified within a
| page or overlay or is identified as a resource by using

| the Map Data Resource (MDR) structured field and
| later included in a page or overlay. Examples include:
| PDF single-page and multiple-page objects,
| Encapsulated PostScript (EPS) objects, and IOCA
| images. See also data object resource and resource.

data object resource. An object container resource or IOCA image resource that is either printer resident or downloaded. Data object resources can be:

- Used to prepare for the presentation of a data object, such as with a resident color profile resource object
- | • Included in a page or overlay through the Include Object (IOB) structured field; for example, PDF single-page and multiple-page objects, Encapsulated PostScript (EPS) objects, and IOCA images
- | • Called from within a data object; for example, PDF resource objects

data set. The major unit of data storage and retrieval, consisting of a collection of data in one of several prescribed arrangements and described by control information to which the system has access. See also file, concatenated data set, partitioned data set, and sequential data set.

data set header. A page in printed output that separates multiple data sets or multiple copies of a data set within a print job. See also job header.

DCB. See data control block.

DCF. See Document Composition Facility.

default. Pertaining to an attribute, value, or option that is assumed when none is explicitly specified.

deferred-printing mode. A printing mode that spools output through JES to a data set instead of printing it immediately. Output is controlled by using JCL statements. See also direct-printing mode.

DFSMS. See Data Facility Storage Management Subsystem

direct-printing mode. A printing mode that gives PSF exclusive use of a channel-attached printer. Output is printed immediately and is not spooled through JES. See also deferred-printing mode.

disabled mechanism. A function of a printer that is temporarily out of operation or is not supported. In such a case, the device manager, such as PSF, might allow jobs to print with alternative options. See also enabled.

| **Distributed File Service z/OS File System (zFS).** A file system that can be used by z/OS UNIX System Services to provide data access over IP networks.

Distributed Print Function (DPF). A component of InfoPrint Manager for Windows that can be installed and used to print jobs from PSF.

document. (1) A machine-readable collection of one or more objects that represent a composition, a work, or a collection of data. (2) Data that has already been composed into pages and that contains a Begin Document and an End Document structured field.

Document Composition Facility (DCF). An IBM licensed program used to format input to a printer.

double-byte coded font. A font in which the characters are defined by 2 bytes. The first byte defines the coded font section; the second byte defines the code point in the code page specified for that section. See also single-byte coded font.

download. To transfer data from a computer to a connected device, such as a workstation or a printer. Typically, users download from a large computer to a diskette or fixed disk on a smaller computer or from a system unit to an adapter.

DPF. See Distributed Print Function.

duplex. Pertaining to printing on both sides of a sheet of paper. See also normal duplex, simplex, and tumble duplex.

E

EBCDIC. See Extended Binary Coded Decimal Interchange Code.

electronic form. A collection of constant data that is electronically composed in the host processor and can be merged with variable data on a page during printing.

enabled. (1) Pertaining to a state of the processing unit that allows the occurrence of certain types of interruptions. (2) A condition of the printer (physically selected) in which the printer is available to the host processor for typical work. The printer is online when in an enabled condition. See also disabled mechanism.

ERP. See error-recovery procedure.

error-recovery procedure (ERP). A procedure designed to help isolate and, where possible, to recover from errors in equipment. The procedure is often used in conjunction with programs that record information on machine malfunctions.

exception. A condition or event that cannot be handled by a normal process.

exception highlighting. The markings placed on the printed page to indicate the location of a data-stream error.

Extended Binary Coded Decimal Interchange Code (EBCDIC). A coded character set of 256 eight-bit characters developed for the representation of textual

data. EBCDIC is not compatible with ASCII character coding. See also American Standard Code for Information Interchange.

| **extended code page.** A code page that is stored in a
| partitioned data set (PDS or PDSE) in a font resource
| library or in a UNIX file in a font path library.
| Extended code pages might contain Unicode values
| that a printer uses to print EBCDIC or ASCII encoded
| text strings with TrueType and OpenType fonts.

F

FCB. See forms control buffer.

file. (1) A collection of related data that is stored and retrieved by an assigned name. A file can include information that starts a program (program-file object), contains text or graphics (data-file object), or processes a series of commands (batch file). (2) See also data set, partitioned data set, sequential data set, and library.

FOCA. See Font Object Content Architecture.

font. (1) A family or assortment of characters of a given size and style, for example, 9-point Bodoni modern. A font has a unique name and might have a registry number. (2) A particular type style (for example, Bodoni or Times Roman) that contains definitions of character sets, marker sets, and pattern sets. See also coded font and double-byte coded font.

font character set. (1) Part of an AFP font that contains the raster patterns, identifiers, and descriptions of characters. See also character set. (2) A Font Object Content Architecture (FOCA) resource containing descriptive information, font metrics, and the digital representation of character shapes for a specified graphic character set.

Font Object Content Architecture (FOCA). An architecture that defines the content of digital font resources by means of a set of parameter definitions.

font section. A subdivision of a double-byte font character set. The section consists of a maximum of 256 characters. See also coded font section.

form. (1) A physical piece of paper or other medium on which data is printed. See also medium, page, and sheet. (2) A display screen, printed document, or file with defined spaces for information to be inserted.

format. The shape, size, printing requirements, and general makeup of a printed document or presentation display.

formatted print records. Traditional line data made up of records that are formatted for printing on line printers. PSF uses a page definition to print formatted records on page printers.

form definition. An AFP resource object used by PSF that defines the characteristics of the form or printed media, including: overlays to be used, duplex printing, text suppression, the position of composed-text data on the form, and the number and modifications of a page.

forms control buffer (FCB). A buffer for controlling the vertical format of printed output. The FCB is a line-printer control that is similar to the punched-paper, carriage-control tape used on IBM 1403 printers. For AFP page printers, the forms control buffer is replaced by the page definition. See also page definition.

forms flash. In AFP support on the 3800 Printing Subsystem, a means of printing an overlay by using a negative plate projected on a form.

G

global resource identifier (GRID). An 8-byte identifier that identifies a coded font resource. A GRID contains these fields, in the order listed:

1. GCSGID of a minimum set of graphic characters required for presentation. It can be a character set that is associated with the code page, with the font character set, or with both.
2. CPGID of the associated code page.
3. FGID of the associated font character set.
4. Font width (FW), in 1440ths of an inch.

| **glyph.** (1) A graphic symbol whose appearance
| conveys information, for example, the vertical and
| horizontal arrows on cursor keys that indicate the
| directions in which they control cursor movement. (2)
| An image, typically of a character, in a font. See also
| character and graphic character.

GOCA. See Graphics Object Content Architecture.

graphical user interface (GUI). A type of computer interface that presents a visual metaphor of a real-world scene, often of a desktop, by combining high-resolution graphics, pointing devices, menu bars and other menus, overlapping windows, icons and the object-action relationship. See also programming interface for customers.

graphic character. (1) A visual representation of a character, other than a control character, that is typically produced by writing, printing, or displaying. See also glyph. (2) A member of a set of symbols that represent data. Graphic characters can be letters, digits, punctuation marks, or other symbols.

graphic character identifier. The unique name for a graphic character in a font or in a graphic character set. See also character identifier.

Graphics Object Content Architecture (GOCA). An architecture that provides a collection of graphics values and control structures used to interchange and present graphics data.

GRID. See global resource identifier.

GUI. See graphical user interface.

H

hardcopy. A printed copy of machine output in a visually readable form, such as printed reports, documents, and summaries. See also softcopy.

hard resource. A resource declared in the appropriate Map structured field and loaded in the printer the first time it is referenced. It can be reused during the job without being reloaded to the printer. See also soft resource.

hardware default font. The font used by the printer if no other font is specified.

hexadecimal. Pertaining to a numbering system that has a base of 16.

HFS. See hierarchical file system.

hierarchical file system (HFS). A system for organizing files in a hierarchy, as in a UNIX system.

host. (1) A computer that is connected to a network and provides an access point to that network. The host can be a client, a server, or both a client and server simultaneously. See also client and server. (2) In TCP/IP, any system that has at least one Internet address associated with it.

host font. See host resource.

host resource. A resource found either in a system library, in a user library, or inline in the print data set.

host system. See host.

I

image. (1) A pattern of toned and untoned pels that form a picture. See also impression. (2) An electronic representation of an original document or picture produced by a scanning device or created from software.

image data. (1) A pattern of bits with 0 and 1 values that define the pels in an image. A 1-bit is a toned pel. (2) Digital data derived from electrical signals that represent a visual image. (3) Rectangular arrays of raster information that define an image.

Image Object Content Architecture (IOCA). An architecture that provides a collection of constructs used to interchange and present images, such as printing image data on a page, page segment, or overlay.

impact printer. A printer in which printing is the result of mechanically striking the printing medium. See also nonimpact printer.

impression. The transfer of an image to a sheet of paper. Multiple impressions can be printed on each side of a sheet. Printer speed is often measured in impressions per minute (ipm).

InfoPrint AFP Resource Installer. An application that runs on a Windows workstation. InfoPrint AFP Resource Installer installs and manages fonts, data objects, and color management resources (CMRs) in resource libraries. It also creates CMRs and associates CMRs with data objects.

inline. Pertaining to spooled input data that is read into a job by a reader. See also inline resource.

inline direction. The direction in which successive characters are added to a line of text.

inline resource. A resource contained in a print file or a print data set.

input/output (I/O). Pertaining to a device, process, channel, or communication path involved in data input, data output, or both.

installation exit. The means specifically described in an IBM software product's documentation by which an IBM software product can be modified by a customer's system programmers to change or extend the functions of the IBM software product. Such modifications consist of exit routines written to replace one or more existing modules of an IBM software product, or to add one or more modules or subroutines to an IBM software product.

Intelligent Printer Data Stream (IPDS). An all-points-addressable data stream that lets users position text, images, graphics, and bar codes at any defined point on a printed page. IPDS is the strategic AFP printer data stream generated by PSF.

interface. A shared boundary between independent systems. An interface can be a hardware component used to link two devices, a convention that supports communication between software systems, or a method for a user to communicate with the operating system, such as a keyboard.

intermediate device. A device that operates on the data stream and is situated between a printer and a presentation services program in the host. Examples include devices that capture and store resources and devices that spool the data stream.

internal copy group. A copy group in a print data set instead of in a form definition. See also copy group.

internal medium map. See internal copy group.

internal object. A structured field that can be included as part of a resource or a print job (data set or file), but that cannot be accessed separately.

I/O. See input/output.

IOCA. See Image Object Content Architecture.

IPDS. See Intelligent Printer Data Stream.

J

JCL. See job control language.

JES. See Job Entry Subsystem.

JES2. An MVS subsystem that receives jobs into the system, converts them to internal format, selects them for processing, processes their output, and purges them from the system. In an installation with more than one processor, each JES2 processor independently controls its job input, scheduling, and output processing. See also Job Entry Subsystem and JES3.

JES3. An MVS subsystem that receives jobs into the system, converts them to internal format, selects them for processing, processes their output, and purges them from the system. In complexes that have several loosely coupled processing units, the JES3 program manages processors so that the global processor exercises centralized control over the local processors and distributes jobs to them by using a common job queue. See also Job Entry Subsystem and JES2.

job control language (JCL). A command language that identifies a job to an operating system and describes the job's requirements.

Job Entry Subsystem (JES). An IBM licensed program that receives jobs into the system and processes all output data that is produced by jobs. See also JES2 and JES3.

job header. A page in printed output that indicates the beginning of a user job. A user job can contain one or more data sets, or one or more copies of a print job. See also data set header.

job trailer. A page in the printed output that indicates the end of a user job.

K

Kanji. A graphic character set consisting of symbols used in Japanese ideographic alphabets. Each character is represented by 2 bytes.

L

landscape page presentation. The position of a printed sheet that has its long edges as the top and bottom and its short edges as the sides. See also portrait page presentation.

library. (1) A system object that serves as a directory to other objects. A library groups related objects, and allows the user to find objects by name. (2) A data file that contains copies of a number of individual files and control information that allows them to be accessed individually. (3) A partitioned data set or a series of concatenated partitioned data sets.

library member. A named collection of records or statements in a library. See also resource object.

line data. Data prepared for printing on a line printer without any data placement or presentation information. Line data can contain carriage-control characters and table-reference characters (TRC) for spacing and font selections. See also record format line data and traditional line data.

line descriptor. Specifications that describe how traditional line data records are formatted into individual print lines. Line descriptors are interpreted by PSF when formatting printed output.

line merging. The process of printing two or more records of traditional line data at the same location on the page. Line merging is used with traditional line data to mix different fonts on the same line, to underscore or overstrike, and, on impact printers, to create darker print.

line printer. A device that prints a line of characters as a unit. See also page printer.

lines per inch (lpi). (1) The number of characters that can be printed vertically within an inch. (2) A unit of measurement for specifying the placement of the baseline.

little endian. Pertaining to the order in which binary data is stored or transmitted with the least significant byte placed first. See also big endian.

logical page. The defined presentation space on the physical form. All the text and images in the print data must fit within the boundaries of the logical page, which has specified characteristics, such as size, shape, orientation, and offset. See also form and physical page.

logical page origin. The point on the logical page from which positions of images, graphics, page overlays, and text with 0-degree inline direction are measured.

logical unit (LU, L-unit). (1) A unit of linear measurement. For example, in Mixed Object Document

Content Architecture (MO:DCA) and AFP data streams, these measurements are used:

1 L-unit = 1/1440 inch

1 L-unit = 1/240 inch

(2) An access point through which a user or application program accesses the SNA network to communicate with another user or application program. An LU can support at least two sessions, one with an SSCP and one with another LU, and might be capable of supporting many sessions with other LUs.

lpi. See lines per inch.

LU. See logical unit.

L-unit. See logical unit.

M

magnetic ink character recognition (MICR). The identification of characters through the use of magnetic ink.

mandatory print labeling (MPL). A class, defined to RACF, that causes PSF to automatically label separator pages and data pages and to enforce the user printable area.

marking. A method of updating certain structured fields to identify a resource as printer-resident.

media origin. The reference point from which the logical page origin is positioned by the medium map. This point is represented by $X_m=0$, $Y_m=0$ in the X_m , Y_m coordinate system. The media origin is defined relative to the upper-left corner of the form. See also logical page origin. See also logical page origin.

medium. (1) The material on which computer information is stored. Examples of media are diskettes, CDs, DVDs, and tape. (2) The physical material, such as paper, on which data is printed. See also form, page, and sheet.

medium map. See copy group.

medium overlay. An electronic overlay that is called by the medium map of a form definition for printing at a fixed position on the form. See also page overlay.

member name. The name under which a file is stored in a library. For example, X1BITR is the member name of a font in the font library.

message data set. (1) In PSF, a virtual data set built by the library access system interface (LASI) subcomponent in memory to store error messages for printing at the end of the document. (2) A data set on disk storage that contains queues of messages awaiting transmission to particular terminal operators or to the host system.

MICR. See magnetic ink character recognition.

microfilm device. An output device that presents a hardcopy on microfilm.

microfilm setup resource. A setup file that contains information used to present AFP data on microfilm. See also object container.

| **migration.** The movement of data when software is
| upgraded or the data is transferred to a different
| hardware server or model.

Mixed Object Document Content Architecture (MO:DCA). An architected, device-independent data stream for interchanging documents.

| **Mixed Object Document Content Architecture for
| Presentation (MO:DCA-P).** The subset of MO:DCA
| that defines presentation documents. PSF supports
| MO:DCA-P Interchange Set data streams.

mixed-pitch font. A font that simulates a proportionally spaced or typographic font. The characters are in a limited set of pitches (for example, 10 pitch, 12 pitch, and 15 pitch).

MO:DCA. See Mixed Object Document Content Architecture.

MO:DCA data. Print data that has been composed into pages. Text-formatting programs (such as DCF) can produce composed text data consisting entirely of structured fields. ACIF or AFP Download Plus can transform line data or XML data to MO:DCA data.

MO:DCA-P. See Mixed Object Document Content Architecture for Presentation.

monospaced font. A font in which the spacing of the characters does not vary. See uniformly spaced font. See also proportionally spaced font.

MPL. See mandatory print labeling.

multiple up. The printing of more than one page on a single surface of a sheet of paper.

Multiple Virtual Storage (MVS). An IBM operating system that accesses multiple address spaces in virtual storage.

MVS. See Multiple Virtual Storage.

N

nonimpact printer. A printer in which printing is not the result of mechanical impacts, for example, a thermal printer, an electrostatic printer, and a photographic printer. See also impact printer.

normal duplex. Pertaining to printing on both sides of the paper such that the top of one side is at the same

end as the top of the other side. Normal duplex printing is used for forms that are bound on the long edge of the paper, regardless of whether the printing is portrait or landscape. See also duplex and tumble duplex.

numeric data. Data represented by numerals. See also character data.

N_UP. The partitioning of a side of a sheet into a fixed number of equal size partitions. For example, N_UP 4 divides each side of the sheet into four equal partitions. In enhanced N_UP printing, the sheet can be divided into 8 partitions, each of which can be anywhere on a single side of the sheet.

O

object. In AFP architecture, a collection of structured fields, bounded by a begin-object function and an end-object function. The object can contain other structured fields containing data elements of a particular type. Examples of objects are text, fonts, graphics, images, and bar codes.

object container. A MO:DCA structure that carries object data, which might or might not be defined by a presentation architecture.

offset stacking. A function that allows the printed output pages to be offset for easy separation of the print jobs.

OGL. See Overlay Generation Language.

OpenType font. An extension of the TrueType font format that adds support for PostScript outlines and more support for international character sets and advanced typographic control.

option. A specification in a statement that can influence the running of the statement.

orientation. In printing, the number of degrees an object is rotated relative to a reference; for example, the orientation of an overlay relative to the logical page origin, or the orientation of printing on a page relative to the page coordinates. Orientation typically applies to blocks of information, whereas character rotation applies to individual characters. See also character rotation.

origin. (1) A position from which the placement and orientation of an element is specified. (2) The point in a coordinate system where the axes intersect. Examples of origins are the addressable position in an X m ,Ym coordinate system where both coordinate values are zero and the character reference point in a character coordinate system.

outline font. A font whose graphic character shapes are defined by mathematical equations rather than by raster patterns. See also raster font.

overlay. (1) A resource object that contains predefined presentation data, such as text, image, graphics, and bar code data, that can be merged with variable data on a page or form while printing. See also page overlay and medium overlay. (2) The final representation of a collection of predefined presentation data on a physical medium.

Overlay Generation Language (OGL). An IBM licensed program used for designing objects (such as lines, boxes, shadings, and irregular shapes) for electronic overlays.

P

page. (1) A collection of data that can be printed on one side of a sheet of paper or a form. (2) A data stream object delimited by a Begin Page structured field and an End Page structured field. A page can contain presentation data such as text, image, graphics, and bar code data. See also logical page and physical page.

page definition. An AFP resource object used by PSF that defines the rules for transforming line data and XML data into MO:DCA data and text controls, such as width of margins and text orientation.

page format. See data map.

page mode. The mode of operation in which a page printer can accept an entire page of data from a host processor to be printed on an all-points-addressable output medium. A page of data can consist of text, images, overlays, and page segments.

page origin. See logical page origin.

page overlay. An electronic overlay that can be called for printing and positioned at any point on the page by an Invoke Page Overlay structured field in the print data. See also medium overlay.

page position. A control in the copy group to assign the upper-left boundary point of the logical page on a sheet for a data set. The page position is determined from the media origin.

page printer. (1) In AFP support, any of a class of printers that accepts composed pages, constructed of composed text and images, among other things. See also line printer. (2) A device that prints one page at a time.

Page Printer Formatting Aid (PPFA). An IBM licensed program with which to create and store form definitions and page definitions, which are resource

objects used for print-job management. These stored objects are used to format printed output.

page segment. An AFP resource object containing text, image, graphics, or bar code data that can be positioned on any addressable point on a page or an electronic overlay.

parameter. A value or reference passed to a function, command, or program that serves as input or controls actions. The value is supplied by a user or by another program or process.

partition. In basic N_UP printing, the division of the medium presentation space into a specified number of equal-sized areas in a manner determined by the current physical medium.

partitioned data set (PDS). A data set in direct-access storage that is divided into partitions, called members, each of which can contain a program, part of a program, or data. See also sequential data set.

PDS. See partitioned data set.

pel. See picture element.

physical medium. A physical entity on which information is presented; for example, a sheet of paper, a roll of paper, microfilm, an envelope, label, or display screen.

physical page. A single surface (front or back) of a form. See also form, logical page, and page.

picture element (pel, pixel). (1) An element of a raster pattern about which a toned area on the photoconductor might appear. When used with a number, "pel" indicates resolution. Examples include 240-pel and 300-pel. (2) The smallest printable or displayable unit that can be displayed. A common measurement of device resolution is picture elements per inch. Typical monitors display between 72 and 96 pixels per inch. Characters and graphics are created by turning pixels on or off.

pitch. A unit of measurement for the width of type (or a printed character), based on the number of characters that can be set (or printed) in one linear inch; for example, 10-pitch has 10 characters per inch. Uniformly spaced fonts are measured in pitch. See also point.

pixel. See picture element.

point. A unit of measurement used mainly for describing type sizes. Each pica has 12 points, and an inch has approximately 72 points. See also pitch.

point size. The height of a font in points.

portrait page presentation. The position of a printed sheet that has its short edges as the top and bottom and its long edges as the sides. See also landscape page presentation.

PostScript. A page description language developed by Adobe Systems, Incorporated that describes how text and graphics are presented on printers and display devices.

PPFA. See Page Printer Formatting Aid.

preprinted form. A sheet of paper containing a preprinted design of constant data on which variable data can be printed.

presentation text. See composed text.

Presentation Text Object Content Architecture (PTOCA). An architecture that provides a collection of constructs used to interchange and present presentation text data, such as printing text data on a page, page segment, or overlay.

printable area. The area on a sheet of paper where print can be placed.

print data set. A data set created by an application program that contains the actual information to be printed and, optionally, some of the data that controls the format of the printing. The types of print data sets are composed text, line format, XML data, and mixed format. See also auxiliary data set and print file.

print direction. A combination of the inline direction and the baseline direction.

Printer Control Language (PCL). The Hewlett Packard page description language that is used in laser and ink-jet printers.

print file. A file that is created for the purpose of printing data. A print file includes information to be printed and, optionally, some of the data that controls the format of the printing. See also print data set.

print job. One or more documents submitted in the same job to be printed on the same printer.

print labeling. A controlled method of placing identification labels on each page of PSF printed output.

print position. Any location on a medium where a character can be printed.

print quality. The measure of the quality of printed output relative to existing standards and in comparison with jobs printed previously.

Print Services Facility (PSF). An IBM licensed program that manages and controls the input data stream and output data stream required by supported page printers.

processor. In a computer, the part that interprets and processes instructions. Two typical components of a processor are a control unit and an arithmetic logic unit.

programming interface for customers. Any product method that lets a customer-written program obtain the services of the product (for example, CSECT names, data areas or control blocks, data sets or files, exits, macros, parameter lists, and programming languages). Not all products have programming interfaces for customers; some products provide their services through graphical user interfaces, while others provide their services only to other products. See also graphical user interface.

programming request for price quotation (PRPQ). A customer request for a price quotation on alterations or additions to the functional capabilities of system control programming or licensed programs. The PRPQ can be used in conjunction with computing system RPQs to solve unique data processing problems. See also computing system RPQ.

program temporary fix (PTF). For System i[®], System p[®], and System z[®] products, a package containing individual or multiple fixes that is made available to all licensed customers. A PTF resolves defects and might provide enhancements.

proportionally spaced font. A font in which the character increment for each graphic character varies. Proportionally spaced fonts provide the appearance of even spacing between presented characters and eliminate excess blank space around narrow characters, such as the letter “i”. See mixed-pitch font and monospaced font.

protocol. A set of rules controlling the communication and transfer of data between two or more devices or systems in a communications network.

PRPQ. See programming request for price quotation.

PSF. See Print Services Facility.

| **PSF Direct.** A function of InfoPrint Manager for AIX
| 4.2 or earlier or InfoPrint Manager for Windows 2.2 or
| earlier that enables another PSF program to print
| remotely.

PTF. See program temporary fix.

PTOCA. See Presentation Test Object Content Architecture.

R

RACF. See Resource Access Control Facility.

raster font. A font in which the characters are defined directly by the raster bit map. See also outline font.

raster pattern. A series of picture elements (pels) arranged in scan lines to form an image. The toned or untoned status of each pel creates an image. A digitized

raster pattern is an array of bits. The on or off status of each bit determines the toned or untoned status of each pel.

RAT. See resource access table.

RDW. See record descriptor word.

record descriptor. Specifications that describe how record format line data records are formatted into individual print lines. Record descriptors are interpreted by PSF when formatting printed output.

record descriptor word (RDW). Data preceding a variable record or a structured field that specifies the length of the entire record including the RDW.

record format line data. A form of line data where each record is preceded by a 10-byte identifier. See also line data.

repositioning. A process in which PSF, following an indication from the printer of a potentially recoverable error, locates the proper spool record for recomposing one or more pages for printing.

request for price quotation (RPQ). A customer request for a price quotation on alterations or additions to the functional capabilities of a hardware product for a computing system or a device. See computing system RPQ and programming request for price quotation.

resident resource. A resource, such as a font, symbol set, page segment, or overlay, that resides in a printer or an intermediary device, such as a personal computer.

resolution. A measure of the sharpness of an image, expressed as the number of lines per unit of length or the number of points per unit of area discernible in that image.

resource. A collection of printing instructions used, in addition to the print data set, to produce the printed output. Resources include coded fonts, font character sets, code pages, page segments, overlays, form definitions, and page definitions.

Resource Access Control Facility (RACF). An IBM licensed program that provides for access control by identifying users to the system, verifying users of the system, authorizing access to protected resources, logging unauthorized attempts to enter the system, and logging accesses to protected resources.

resource access table (RAT). An array of data that is used to map a resource name specified in the MO:DCA data stream to information used to find and process the resource on a given system.

resource name. The name under which an AFP resource object is stored, the first 2 characters of which indicate the resource type.

resource object. In AFP, a collection of printing instructions, and sometimes data to be printed, that consists entirely of structured fields. A resource object is stored as a member (or file) of a library and can be called for by PSF when needed. The different resource objects include: coded font, font character set, code page, page segment, overlay, form definition, and page definition. See also library member.

rotation. The number of degrees a graphic character is turned relative to the page coordinates. See character rotation. See also orientation.

routine. (1) A set of statements in a program that causes the system to perform an operation or a series of related operations. (2) A program or sequence of instructions called by a program. Typically, a routine has a general purpose and is frequently used.

RPQ. See request for price quotation.

rule. A solid or patterned line of any weight (line width) that extends horizontally across a row or page, or vertically down a column or page.

S

segment. A collection of composed text and images, prepared before formatting and included in a document when it is printed. See also page segment.

sequence number. A 2-byte field in the structured field introducer that identifies the position of the structured field in the data set.

sequential data set. A data set whose records are organized on the basis of their successive physical positions, such as on magnetic tape. See also partitioned data set.

server. A software program or a computer that provides services to other software programs or other computers. The program or computer making the request of the server is typically called the client. See also client and host.

service program. See utility program.

sheet. A division of the physical medium; multiple sheets can exist on a physical medium. For example, a roll of paper might be divided by a printer into rectangular pieces of paper, each representing a sheet. Envelopes are an example of a physical medium that comprises only one sheet. The IPDS architecture defines four types of sheets: cut-sheets, continuous forms, envelopes, and computer output on microfilm. Each type of sheet has a top edge. A sheet has two sides, a front side and a back side. See also form.

shift-out, shift-in (SOSI). Special EBCDIC or ASCII characters that exist in the data stream to indicate the switches between double-byte fonts and single-byte fonts.

simplex. Pertaining to printing on only one side of the paper. See also duplex, normal duplex, and tumble duplex.

single-byte coded font. A font in which the characters are defined by a 1-byte code point. A single-byte coded font has only one coded font section. See also double-byte coded font.

skip. (1) A move of the current print position to another location. (2) To ignore one or more instructions in a sequence of instructions. (3) To pass over one or more positions on a data medium; for example, to perform one or more line feed operations.

SMF. See System Management Facilities.

SNA. See Systems Network Architecture.

SNA-attached. Pertaining to a device that is linked to the host system through VTAM[®] or ACF/VTAM and uses an SNA protocol to transfer data. It does not need to be physically connected to the host; some printers are attached to a control unit, a communication controller, or both, and they can transfer data over telecommunication lines. For example, an IBM 3825 Page Printer attached to a communication controller that uses the LU 6.2 communication protocol to transfer data to a communication controller is considered an SNA-attached printer. See also channel-attached and TCP/IP-attached.

softcopy. One or more files that can be electronically distributed, manipulated, and printed by a user. See also hardcopy.

soft resource. A resource that is not declared in a Map structured field but is sent to the printer inline with data. It cannot be reused during the job without being reloaded to the printer. See also hard resource.

SOSI. See shift-out, shift-in.

stacker. An enclosure in a printer in which printed media is stacked.

startup procedure. A program used to start an application and to specify initialization parameters, libraries that contain system resources, and routing-control information.

storage. (1) A functional unit in which data can be placed and retained, and from which it can be retrieved. See also virtual storage. (2) The location of saved information.

structured field. (1) A self-identifying string of bytes and its data or parameters. (2) A mechanism that

permits variable length data to be encoded for transmission in the data stream.

subgroup. A set of modifications in a copy group that applies to a certain number of copies of a form. A copy group can contain more than one subgroup.

subpage. A part of a logical page on which traditional line data can be placed. In the page definition, multiple subpages can be placed on a physical page as specified in the print data.

suppression. A method used to prevent presentation of specified data. In AFP support, a page- and form-definition function that is used to identify fields in a print record that are not printed on selected pages of a document. See also text suppression.

symbol set. A type of font that resides in a printer but has fewer attributes than can be specified for resident coded fonts. See also character set.

SYSIN. See system input stream.

SYSOUT. See system output stream.

system input stream (SYSIN). A data definition (DD) statement used to begin an in-stream data set. See also system output stream.

| **system library.** A collection of data sets or files in
| which one or more system resources are stored. See
| also user library.

System Management Facilities (SMF). A component of z/OS that collects and records a variety of system and job-related information. Examples of information collected by SMF are statistics, accounting information, and performance data.

system output stream (SYSOUT). A data definition (DD) statement used to identify a data set as a system output data set. See also system input stream.

system path library. A path or set of paths for system UNIX files that contain font objects. See also user path library.

Systems Network Architecture (SNA). The description of the logical structure, formats, protocols, and operational sequences for transmitting information units through the networks and controlling the configuration and operation of networks. The layered structure of SNA allows the ultimate origins and destinations of information (the users) to be independent of and unaffected by the specific SNA network services and facilities that are used for information exchange.

T

table reference character (TRC). A numeric character corresponding to the order in which font character sets

have been specified. The TRC is used to select a font character set during printing.

TCP/IP-attached. Pertaining to a device that is linked to an operating system through an Internet Protocol network and receives data from the system by using an application-layer protocol for IPDS printers. Some TCP/IP-attached printers require the i-data 7913 IPDS Printer LAN Attachment. See also channel-attached and SNA-attached.

text. A sequence of characters that can be read by a person and encoded into formats such as ASCII that can be interpreted by a computer.

text control. Structured field data that control the format, placement, and appearance of text.

text control sequence. A text control and its associated data.

text orientation. A description of the appearance of text as a combination of print direction and character rotation.

text suppression. The intentional omission of portions of text in copy groups specified in the form definition.

throughput. (1) The measure of the amount of work performed by a device, such as a computer or printer, over a period of time, for example, the number of jobs per day. (2) In data communications, the total traffic between stations over a period of time.

trace. (1) A record of the processing of a computer program or transaction. The information collected from a trace can be used to assess problems and performance. (2) A DB2[®] for z/OS facility that provides the ability to collect monitoring, auditing, performance, accounting, statistics, and serviceability (global) data.

traditional line data. A form of line data that is prepared for printing on a line printer. See also line data.

transmission. The sending of data from one place for reception elsewhere.

tray. See bin.

TRC. See table reference character.

TrueType font. A font format based on scalable outline technology in which the graphic character shapes are based on quadratic curves. The font is described with a set of tables contained in a TrueType font file.

tumble duplex. Pertaining to printing on both sides of the paper such that the top of one side is at the same end as the bottom of the other side. Tumble duplex printing is used for forms that are bound on the short

edge of the paper, regardless of whether the printing is portrait or landscape. See also duplex, normal duplex, and simplex.

typeface. All characters of a single type family or style, weight class, width class, and posture, regardless of size. An example is Helvetica bold condensed italic, in any point size. See also font.

type size. A measurement in pitch or points of the height and width of a graphic character in a font. For example, the vertical height (point size) of a given typeface, such as 10 point.

typographic font. See proportionally spaced font.

U

UCS. See universal character set.

unbounded-box font. A font designed to use unbounded-character boxes. See also bounded-box font.

unbounded-character box. A character box that can have blank space on any sides of the character shape. See also bounded-character box.

unformatted print records. Traditional line data made up of fields of data that have not been formatted into print lines. PSF uses a page definition to format these records for printing on page printers.

Unicode. A character encoding standard that supports the interchange, processing, and display of text that is written in the common languages around the world, plus some classical and historical texts. For example, the text name for \$ is "dollar sign" and its numeric value is X'0024'. The Unicode standard has a 16-bit character set defined by ISO 10646.

uniformly spaced font. A font in which the character increment for each graphic character is the same. See also monospaced font and proportionally spaced font.

universal character set (UCS). A printer feature that permits the use of a variety of character arrays. See font.

UNIX file. An object that exists in a hierarchical file system. Examples of UNIX files are a DFSMS Hierarchical File System (HFS), a Network File System (NFS), a temporary file system (TFS), and the zOS File System (zFS).

UPA. See user printable area.

user library. A private print-resource library owned by an individual user, accessed only when the name is specified by the owner in a JCL statement.

user path library. A private font library owned by an individual user, accessed only when the path name is specified by the owner in a JCL statement.

user printable area (UPA). The area within the valid printable area (VPA) where user-generated data can print without causing an exception condition. See also valid printable area.

utility program. A computer program in general support of computer processes; for example, a diagnostic program, a trace program, or a sort program.

V

valid printable area (VPA). The intersection of the current logical page or current overlay with the physical page in which printing is allowed. See also user printable area.

value. In programming, the alphabetic or numeric contents of a variable, parameter, special register, field, or storage location.

virtual storage. The storage space that can be regarded as addressable main storage by the user of a computer system in which virtual addresses are mapped into real addresses. The size of virtual storage is limited by the addressing scheme of the computer system and by the amount of auxiliary storage available, not by the actual number of main storage locations. See also storage.

Virtual Telecommunications Access Method (VTAM). An IBM licensed program that controls communication and the flow of data in an SNA network. It provides single-domain, multiple-domain, and interconnected network capability.

VPA. See valid printable area.

VTAM. See Virtual Telecommunications Access Method.

X

XML data. Data identified with the Extensible Markup Language (XML), which is a standard metalanguage for defining markup languages that is based on Standard Generalized Markup Language (SGML). For printing on page printers, a page definition is required to provide the data placement and presentation information. The XML data processed by PSF can be encoded in EBCDIC, ASCII, UTF-8 or UTF-16.

Z

zFS. See z/OS file system.

z/OS. An IBM mainframe operating system that uses 64-bit real storage.

z/OS file system (zFS). A type of file system that resides in a Virtual Storage Access Method (VSAM) linear data set (LDS). zFS contains files and directories

- | that can be accessed with z/OS UNIX application
- | programming interfaces (APIs). See also Distributed
- | File Service z/OS File System.

Bibliography

This bibliography lists the titles of publications containing additional information about PSF, AFP, the z/OS operating system, and related products.

The titles and order numbers might change from time to time. To verify the current title or order number, consult your IBM marketing representative.

You can obtain many of the publications listed in this bibliography from the AFP Consortium, <http://www.afpcinc.org>, and the z/OS printing software web page: http://www.ibm.com/systems/z/zos/printsoftware/supportmanuals_ww.html

You can obtain InfoPrint Manager and InfoPrint ProcessDirector publications from the InfoPrint Information Center: <http://www.infoprint.com/infocenter>

Print Services Facility (PSF) for z/OS

Publication	Order Number
<i>AFP Conversion and Indexing Facility User's Guide</i>	S550-0436
<i>PSF for z/OS: AFP Download Plus</i>	S550-0433
<i>PSF for z/OS: Customization</i>	S550-0427
<i>PSF for z/OS: Diagnosis</i>	G550-0428
<i>PSF for z/OS: Download for z/OS</i>	S550-0429
<i>PSF for z/OS: Introduction</i>	G550-0430
<i>PSF for z/OS: Licensed Program Specifications</i>	G550-0431
<i>PSF for z/OS: Messages and Codes</i>	G550-0432
<i>PSF for z/OS: Security Guide</i>	S550-0434
<i>PSF for z/OS: User's Guide</i>	S550-0435
<i>PSF for z/OS Library Collection CD-ROM</i>	SK5T-8814

Infoprint Server

Publication	Order Number
<i>z/OS Infoprint Server Customization</i>	S544-5744
<i>z/OS Infoprint Server Introduction</i>	S544-5742
<i>z/OS Infoprint Server Messages and Diagnosis</i>	G544-5747
<i>z/OS Infoprint Server Operation and Administration</i>	S544-5745
<i>z/OS Infoprint Server Printer Inventory for PSF</i>	S510-7703
<i>z/OS Infoprint Server User's Guide</i>	S544-5746

Advanced Function Presentation (AFP)

Publication	Order Number
<i>Advanced Function Printing: Host Font Data Stream Reference</i>	S544-3289
<i>AFP Conversion and Indexing Facility User's Guide</i>	S550-0436
<i>AFP Toolbox User's Guide</i>	S544-5292
<i>AFP Workbench for Windows: Using the Viewer Application</i>	G544-3813
<i>Guide to Advanced Function Presentation</i>	G544-3876
<i>Overlay Generation Language User's Guide and Reference</i>	S544-3702
<i>Page Printer Formatting Aid: User's Guide</i>	S544-5284
Architecture	
<i>Advanced Function Presentation: Programming Guide and Line Data Reference</i>	S544-3884
<i>AFP Consortium: AFP Color Management Architecture (ACMA)</i>	G550-1046
<i>Bar Code Object Content Architecture Reference</i>	S544-3766
<i>Color Management Object Content Architecture Reference</i>	S550-0511
<i>Font Object Content Architecture Reference</i>	S544-3285
<i>Graphics Object Content Architecture for Advanced Function Presentation Reference</i>	S544-5498
<i>Using OpenType Fonts in an AFP System</i>	G544-5876
<i>Image Object Content Architecture Reference</i>	S550-1142
<i>Intelligent Printer Data Stream Reference</i>	S544-3417
<i>Mixed Object Document Content Architecture Reference</i>	SC31-6802
<i>Presentation Text Object Content Architecture Reference</i>	SC31-6803
Fonts	
<i>IBM AFP Fonts: Font Samples</i>	S544-3792
<i>IBM AFP Fonts: Font Summary for AFP Font Collection</i>	S544-5633
<i>IBM AFP Fonts: Type Transformer User's Guide</i>	G544-3796
<i>IBM Infoprint Fonts: Font Summary</i>	G544-5846
<i>IBM Infoprint Fonts: Introduction to Type Transformer and Utilities for Windows</i>	G544-5853

Data Transforms

Publication	Order number
<i>IBM Infoprint Transforms to AFP for z/OS</i>	G550-0443
<i>IBM Print Transforms from AFP for Infoprint Server for z/OS</i>	G325-2634
<i>Infoprint XT Extender for z/OS: Customization and Usage</i>	S544-5879
<i>Infoprint XT Extender for z/OS: Messages and Diagnosis</i>	G544-5878

Text Processing

Publication	Order number
<i>DCF/DLF General Information</i>	GH20-9158

Publication	Order number
<i>Document Composition Facility: Introduction to Generalized Markup Language</i>	G544-3192
<i>Document Composition Facility SCRIPT/VS Language Reference</i>	SH35-0070
<i>Document Composition Facility: SCRIPT/VS Text Programmer's Guide</i>	SH35-0069
<i>Document Composition Facility: SCRIPT/VS User's Guide</i>	S544-3191
<i>Publishing Systems BookMaster General Information</i>	GC34-5006
<i>Publishing Systems BookMaster User's Guide</i>	SC34-5009

Print Management

Publication	Order Number
<i>InfoPrint Manager for AIX: Getting Started</i>	G550-1061
<i>InfoPrint Manager for AIX: Introduction and Planning Guide</i>	G550-1060
<i>InfoPrint Manager for AIX: Procedures</i>	G550-1066
<i>InfoPrint Manager for Windows: Getting Started</i>	G550-1072
<i>InfoPrint Manager for Windows: Introduction and Planning Guide</i>	G550-1071
<i>InfoPrint Manager for Windows: Procedures</i>	G550-1073
<i>InfoPrint Manager: Reference</i>	S550-1052
<i>InfoPrint Manager: Publications</i>	SK4T-4017
<i>InfoPrint ProcessDirector for AIX: Planning and Installing</i>	G550-1045
<i>InfoPrint ProcessDirector for AIX: Publications</i>	GK4T-4011
<i>InfoPrint ProcessDirector for Linux: Planning and Installing</i>	G550-1042
<i>InfoPrint ProcessDirector for Linux: Publications</i>	GK4T-4007
<i>InfoPrint ProcessDirector for Windows: Planning and Installing</i>	G550-1365
<i>InfoPrint ProcessDirector for Windows: Publications</i>	GK4T-4107

Content Manager OnDemand

Publication	Order Number
<i>IBM DB2 Content Manager OnDemand for Multiplatforms: Administration Guide</i>	SC18-9237
<i>IBM DB2 Content Manager OnDemand for Multiplatforms: Indexing Reference</i>	SC18-9235
<i>IBM DB2 Content Manager OnDemand for Multiplatforms: Installation and Configuration Guide</i>	SC18-9232
<i>IBM DB2 Content Manager OnDemand for Multiplatforms: Introduction and Planning Guide</i>	GC18-9236
<i>IBM DB2 Content Manager OnDemand: Messages and Codes</i>	SC27-1379
<i>IBM DB2 Content Manager OnDemand: Report Distribution Installation, Use, Reference</i>	SC18-9233
<i>IBM DB2 Content Manager OnDemand: User's Guide</i>	SC27-0836
<i>IBM DB2 Content Manager OnDemand for Multiplatforms: Web Enablement Kit Implementation Guide</i>	SC18-9231
<i>IBM DB2 Content Manager OnDemand: Windows Client Customization Guide</i>	SC27-0837

i-data

Publication	Order Number
<i>i-data 7913 IPDS Printer LAN Attachment for Ethernet Installation Guide</i>	none
<i>i-data 7913 IPDS Printer LAN Attachment for Token Ring Installation Guide</i>	none

z/OS Version 1 Release 13

Publication	Order Number
<i>SMP/E User's Guide</i>	SA22-7773
<i>z/OS and Software Products DVD Collection</i>	SK3T-4271
<i>z/OS Communications Server: IP Sockets Application Programming Interface Guide and Reference</i>	SC31-8788
<i>z/OS Communications Server: IP Configuration Reference</i>	SC31-8776
<i>z/OS Communications Server: IP and SNA Codes</i>	SC31-8791
<i>z/OS Communications Server: SNA Diagnosis Vol 1, Techniques and Procedures</i>	GC31-6850
<i>z/OS Communications Server: SNA Diagnosis Vol 2, FFST Dumps and the VIT</i>	GC31-6851
<i>z/OS Communications Server: SNA Messages</i>	SC31-8790
<i>z/OS Communications Server: SNA Network Implementation Guide</i>	SC31-8777
<i>z/OS Communications Server: SNA Operation</i>	SC31-8779
<i>z/OS Communications Server: SNA Programming</i>	SC31-8829
<i>z/OS Communications Server: SNA Resource Definition Reference</i>	SC31-8778
<i>z/OS DFSMS Macro Instructions for Data Sets</i>	SC26-7408
<i>z/OS DFSMS Using Data Sets</i>	SC26-7410
<i>z/OS Distributed File Service zSeries File System Administration</i>	SC24-5989
<i>z/OS DFSMSdfp Utilities</i>	SC26-7414
<i>z/OS HCD Planning</i>	GA22-7525
<i>z/OS HCD User's Guide</i>	SC33-7988
<i>z/OS HCD Scenarios</i>	SC33-7987
<i>z/OS JES2 Commands</i>	SA22-7526
<i>z/OS JES2 Initialization and Tuning Guide</i>	SA22-7532
<i>z/OS JES2 Initialization and Tuning Reference</i>	SA22-7533
<i>z/OS JES2 Messages</i>	SA22-7537
<i>z/OS JES3 Commands</i>	SA22-7540
<i>z/OS JES3 Initialization and Tuning Guide</i>	SA22-7549
<i>z/OS JES3 Initialization and Tuning Reference</i>	SA22-7550
<i>z/OS JES3 Messages</i>	SA22-7552
<i>z/OS Language Environment Programming Guide</i>	SA22-7561
<i>z/OS MVS Diagnosis: Tools and Service Aids</i>	GA22-7589
<i>z/OS MVS Initialization and Tuning Guide</i>	SA22-7591
<i>z/OS MVS Initialization and Tuning Reference</i>	SA22-7592
<i>z/OS MVS IPCS User's Guide</i>	SA22-7596

Publication	Order Number
<i>z/OS MVS IPCS Commands</i>	SA22-7594
<i>z/OS MVS JCL Reference</i>	SA22-7597
<i>z/OS MVS JCL User's Guide</i>	SA22-7598
<i>z/OS MVS Programming: Authorized Assembler Services Guide</i>	SA22-7608
<i>z/OS MVS Programming: Authorized Assembler Services Reference ALE-DYN</i>	SA22-7609
<i>z/OS MVS Programming: Authorized Assembler Services Reference EDT-IXG</i>	SA22-7610
<i>z/OS MVS Programming: Authorized Assembler Services Reference LLA-SDU</i>	SA22-7611
<i>z/OS MVS Programming: Authorized Assembler Services Reference SET-WTO</i>	SA22-7612
<i>z/OS MVS Programming: Workload Management Services</i>	SA22-7619
<i>z/OS MVS System Codes</i>	SA22-7626
<i>z/OS MVS System Commands</i>	SA22-7627
<i>z/OS MVS System Management Facilities (SMF)</i>	SA22-7630
<i>z/OS MVS Using the Functional Subsystem Interface</i>	SA22-7641
<i>z/OS Planning for Multilevel Security and the Common Criteria</i>	GA22-7509
<i>z/OS Problem Management</i>	G325-2564
<i>z/OS SDSF Operation and Customization</i>	SA22-7670
<i>z/OS Security Server RACF General User's Guide</i>	SA22-7685
<i>z/OS Security Server RACF Security Administrator's Guide</i>	SA22-7683
<i>z/OS Security Server RACF System Programmer's Guide</i>	SA22-7681
<i>z/OS Unicode Services User's Guide and Reference</i>	SA22-7649
<i>z/OS UNIX System Services Command Reference</i>	SA22-7802
<i>z/OS UNIX System Services Planning</i>	GA22-7800
<i>z/OS UNIX System Services Programming: Assembler Callable Services Reference</i>	SA22-7803

Index

Numerics

- 2-up printing, page definitions for 205, 210
- 240- and 300-pel raster fonts 19

A

- absolute colorimetric 250
- access method, PSF as 10
- accessibility 265
- ACIF, using 86
- ADDRESS parameter 122
- Advanced Function Presentation
 - See AFP
- AFP
 - architecture 1
 - color management 251
 - files, uploading to z/OS 184
 - fonts 18
 - introducing 1
 - parameters in JCL, specifying 92
 - printer driver for Windows 85
 - printer, selecting 126
 - printing
 - direction and character rotation 4
 - how PSF manages 7
 - overview of 2
 - Resource Installer 262
 - resource management 260
 - sending data to microfilm devices 91
 - statistics about a print file, obtaining 187
 - structured fields in line data 79
 - using JCL for 89
- AFP Conversion and Indexing Facility, using 86
- AFP Reblocking Program 181
- AFP Toolbox, using 85
- AFPPARMS parameter 94
- AFPSTATS
 - parameter 94
 - report 187
 - hardcopy sample 230
 - hardcopy, sections and generating 191
 - requesting 187
 - samples 228
 - softcopy record details 215
 - softcopy sample 228
 - softcopy, format and records 188
 - repository 187
- AFRREBLK
 - command 184
 - profile, setting up 183
- all-points addressability 5
- alternative paper source, selecting 56
- APSRCF30 19
- APSRMARK utility 49
- architecture, AFP 1
- audit processing mode, CMR 256

B

- Bar Code Object Content Architecture
 - definition of 1
 - resources 40
- bar codes
 - description of 40
 - prefix for 42
 - printing 42
 - producing with
 - BCOCA 41
 - DCF 42
 - fonts 25
 - QR Code, using with SOSI data 171
 - resources, using 42
 - symbolologies for 41
- baseline direction for text 4
- basic N_UP printing 59
- BCOCA
 - definition of 1
 - resources 40
- bin selection 107
- BIN subcommand, specifying 65
- bins
 - selecting different output 65
 - specifying 131
- blocking data-check errors 101
- BookMaster, creating MO:DCA-P data with 85
- bounded-box fonts 19
- box formatting errors 169
- BTS feature
 - example of using 156
 - parameter for 95
- BUILDING parameter 123
- BURST parameter 95
- burst-trimmer-stacker feature
 - example of using 156
 - parameter for 95
- bursting output 156

C

- calibration, color 246
- capturing fonts 26
- carriage control characters, parameter for 99
- carriage control characters, specifying 148
- character rotation for text 4, 68
- CHARS
 - parameter 96
 - using with SOSI process 153
- checkpoints
 - pages between 96
 - seconds between 97
 - specifying 172
- CKPTPAGE parameter 96
- CKPTSEC parameter 97
- CLASS parameter 97
- CMOCA 1

CMRs

- See color management resources
- CMTs
 - See color mapping tables
- CMYK color space 244
- code pages, description of 20
- coded fonts, description of 20
- color conversion CMRs 252
- Color Management Object Content Architecture 1
- color management resources
 - audit processing mode 256
 - color conversion 252
 - comparison to other AFP resources 251
 - creating 257
 - description of 29
 - device link (DL) 253
 - generic halftone 254
 - generic tone transfer curve 255
 - halftone 254
 - indexed 255
 - installing 257
 - instruction processing mode 256
 - link (LK) 253
 - link color conversion 253
 - link processing mode 257
 - passthrough 252
 - processing modes 256
 - specifying in object container libraries 168
 - tone transfer curve 255
 - types 252
- color mapping tables
 - creating 175
 - description of 173
 - inline 167
 - parameter for 98
 - resources
 - examples for using 166
 - from user libraries 167
 - in object containers 29
 - included inline 167
 - sample source file 179
 - source groups in 173
 - target groups in 174
 - using 173
- Color Mapping Tool 175
- color printing
 - concepts 244
 - file size 247
 - solutions 243
- color spaces
 - color mapping tables 173
 - color printing 244
 - grayscale printing 248
- COLORMAP parameter 98
- column formatting errors 169
- command, AFRREBLK 184
- communication between PSF and printers 9

- components of PSF printing 8
- composite characters 5
- COMSETUP parameter 98
- conditional processing 71
- constant forms, specifying 60
- CONTROL parameter 99
- controls
 - for printing with PSF 89
 - in copy groups 54
 - in page formats 67
 - subgroups containing 64
- conversion program, font 19
- conversion, measurement unit 6
- copies
 - defining the number of 130
 - defining the number of transmissions for 129
 - large number for each page 100
 - printing multiple 153
 - small number for each page 99
 - specified in copy group subgroups 64
- COPIES parameter
 - group values 100
 - syntax for 99
 - with FORMDEF parameter 129
 - without FORMDEF parameter 130
- copy groups
 - description of 53
 - multiple, using 144
 - printing controls specified in 54
 - selecting in form definitions 54
 - using internal 53
- COPYCNT parameter 100
- creating FOCA fonts 24

D

- data
 - formatting with PSF 10
 - line 75
 - MO:DCA-P 85
 - printing different types of 75
 - XML 83
- data maps 66
- data object resources
 - search order for 14
 - using 28
- data objects
 - creating 260
 - in color printing 258
 - installing 260
- data page labeling, parameter for 103
- data sets
 - reblocking with AFRREBLK 184
 - specifying error disposition for 115
 - transmissions, defining number of 129
 - transmitting to IBM i systems 164
- data streams
 - definition of 3
 - types of PSF 8
- data suppression, specified in
 - copy group subgroups 65
 - page definitions 141
- data-check errors, blocking 101
- DATAACK parameter 101

- DBCS simulation fonts 20
- DCF, creating MO:DCA-P data with 85
- DD statement
 - assigning OUTPUT statements to 91
 - parameters used on OUTPUT statement 92
- defaults
 - determining printer 89
 - form, blank 237
 - form, example 90
- deferred-printing mode 9
- DEPT parameter 123
- DEST parameter 102
- device link (DL) CMRs 253
- diagnosing problems 187
- direct-printing mode
 - creating JCL for 91
 - PSF as access method 10
- direction specified in page definitions, print 68
- direction-rotation combinations of text 4
- disability 265
- disabled mechanisms, printers that support 56
- distributing output, parameters for 122
- Document Composition Facility, creating MO:DCA-P data with 85
- dot gain 247
- double-byte fonts
 - description of 20
 - with single-byte fonts in data 152
- DPAGELBL parameter 103
- DPF, storing resources with 49
- DUMMY value in
 - FORMDEF 128
 - PAGEDEF 137
- DUPLEX parameter 103
- duplex printing
 - example of specifying 131
 - specifying in copy groups 56
- duplex-page offsets
 - example of specifying 164
 - specifying in copy groups 59

E

- electronic forms, using overlays for 32
- encapsulated PostScript resources
 - description of 29
 - using 28
- encoding schemes for line data 78
- enhanced N_UP printing 60
- EPS resources
 - description of 29
 - using 28
- errors
 - blocking data-check 101
 - fidelity resolution 169
 - inhibiting recovery of 164
 - printing messages for 156
 - specifying data set disposition for 115
 - viewing messages for xiii
- examples, printing 125
- extended code pages, description of 20

F

- FCB parameter
 - See* forms control buffers
- fidelity resolution problems 169
- fields, page format options for formatting 70
- file size, color printing 247
- files, uploading AFP 184
- finishing output
 - examples of 168
 - form definition for 201
 - specifying in copy groups 63
- FLASH parameter
 - syntax 104
 - used with default form definition 130
- FOCA 2
- FOCA fonts 19
- font character sets, description of 20
- font conversion program 19
- Font Object Content Architecture 2
- font path library objects 22
- fonts
 - 240-pel raster 19
 - 300-pel raster 19
 - AFP 18
 - bar codes produced with 25
 - bounded-box format 19
 - capturing 26
 - character rotation 4
 - conversion program for 19
 - creating FOCA 24
 - DBCS simulation 20
 - description of 18
 - direction 4
 - double-byte 20
 - examples of specifying 141
 - FOCA 19
 - inline 96
 - library-member types 20
 - line spacing for PSF monospaced 214
 - mapping tables for 24
 - microfilm device 240
 - monospaced, line spacing for 214
 - OpenType 21
 - outline 19
 - parameter for specifying 96
 - printer-resident 25
 - printing at different resolutions 169
 - process mode, specifying for 152
 - raster 19
 - resident in the printer 25
 - rotation 4
 - selected in page formats 70
 - selecting for MO:DCA-P data 86
 - selecting with table reference characters 149
 - single-byte 20
 - SOSI codes, using to change 78
 - specifying in page formats 70
 - TrueType 21
 - unbounded-box format 19
 - using
 - to produce bar codes 25
 - with different printer resolutions 24
- form controls in copy groups 54

- form definitions
 - copy group printing controls specified in 54
 - creating with PPFA 53
 - description of 26
 - DUMMY, specifying 128
 - inline 128
 - microfilm device 239
 - modified-default 130
 - names for
 - 3-hole punched paper 196
 - 3800 printers 194
 - compatibility with
 - continuous-forms printers 198
 - compatibility with cut-sheet printers 199
 - finishing output 201
 - N_UP 2 printing 195
 - N_UP compatibility with
 - continuous-forms printers 198
 - non-3800 printers 195
 - PCL4 and PPDS printers 197
 - print quality on 64xx and 65xx printers 197
 - printers other than 3800, PCL4, and PPDS 194
 - printing envelopes on 4028 printers 195
 - printing PSF reports 202
 - rotating pages on paper 196
 - special purpose jobs 200
 - use with OGL 200
 - naming convention 193
 - overview of 54
 - page overlay rotation in 37
 - parameter for 105
 - prefix for 27
 - resources
 - from user libraries 127
 - included inline 128
 - selecting copy groups in 54
 - specifying 126
 - supplied with PSF 193
- form, defaults
 - blank 237
 - example 90
- format resolution
 - order of PSF search 170
 - specification errors 170
- formatted print records, page format options for 69
- formatting
 - changing within documents 144
 - data with PSF 10
 - fields with page format options 70
 - line data 66
 - MO:DCA-P data 85
 - options for formatted print records 69
- FORMDEF parameter 105
- FORMLEN parameter 106
- forms control buffers
 - converted to page definitions
 - supplied with PSF 73
 - using 138
 - parameter 104

- forms flash
 - parameter for 104
 - specified without FORMDEF parameter 130
 - subgroup modification 65
 - using 132
- FORMS parameter 107
- forms source, selecting 56
- forms, specifying 107

G

- gamut
 - colors in 246
 - definition of 246
- generic halftone CMRs 254
- GOCA
 - definition of 2
 - pattern fill source group 174
 - resources 43
- graphics
 - description of 43
 - prefix for 43
 - printing 44
 - resources, using 43
- Graphics Object Content Architecture
 - definition of 2
 - pattern fill source group 174
 - resources 43
- grayscale printing
 - concepts 248
 - solutions 243
- group values in COPIES parameter 100

H

- halftones
 - CMR 254
 - grayscale printing 248
 - overview 247
- hard page segment 39
- hard resources 15
- hardcopy report, AFPSTATS 191
- header page, sample 122
- highlight color source group 173
- horizontal adjustment value, specifying 64
- horizontal page offsets 55
- host resources 13

I

- IBM i system, transmitting data sets to 164
- ICC 249
- ICC profiles
 - color printing 244
 - grayscale printing 248
 - overview 249
- IM image data object, printing with 47
- Image Object Content Architecture
 - definition of 2
 - resources 44
- image resources
 - description of 44

- image resources (*continued*)
 - printing
 - color tips 261
 - with IOCA 46
 - without IOCA 47
 - using 28, 45
- incorrect-character errors, blocking 101
- indexed CMRs 255
- inhibiting print job recovery 164
- inline direction for text 4
- inline resources
 - color mapping table 167
 - fonts 96
 - form definitions 128
 - microfilm setup 166
 - page definitions 137
 - printing with 162
 - storing 13
 - using 50
- input paper source, selecting 56
- instruction processing mode, CMR 256
- internal copy groups 53
- International Color Consortium 249
- INTRAY parameter 107
- IOCA
 - definition of 2
 - resources 44
- IOCA tile resource objects
 - description of 30
 - using 28

J

JCL

- default printer values 89
- defaults form
 - blank 237
 - example 90
- for Color Mapping Tool, sample 176
- for direct-printing mode 91
- for microfilm devices 91
- OUTPUT statement assigned to DD statement 91
- parameters
 - See also* JCL parameters
 - for microfilm jobs 240
 - for printing MO:DCA-P data 86
 - ignored with XML data 84
 - specifying for microfilm jobs 165
- PRINTDEV statement 91
- using for AFP 89

JCL parameters 92

- ADDRESS 122
- AFPPARMS 94
- AFPSTATS 94
- BUILDING 123
- BURST 95
- CHARS 96
- CKPTPAGE 96
- CKPTSEC 97
- CLASS 97
- COLORMAP 98
- COMSETUP 98
- CONTROL 99
- COPIES 99
- COPYCNT 100
- DATAACK 101

JCL parameters (continued)

- DEPT 123
- DEST 102
- DPAGELBL 103
- DUPLEX 103
- FCB 104
- FLASH 104
- FORMDEF 105
- FORMLEN 106
- FORMS 107
- INTRAY 107
- LINECT 108
- NAME 123
- NOTIFY 108
- OFFSETXB 109
- OFFSETXF 110
- OFFSETYB 110
- OFFSETYF 111
- on OUTPUT or DD statement 92
- OUTBIN 111
- OVERLAYB 112
- OVERLAYF 112
- PAGEDEF 112
- PIMSG 113
- PRMODE 114
- PRTERORR 115
- PRTQUEUE 115
- RESFMT 116
- ROOM 123
- SEGMENT 116
- SUBSYS 117
- SYSAREA 118
- SYSOUT 118
- TITLE 124
- TRC 119
- UCS 119
- USERLIB 120
- USERPATH 121

Job Control Language

See JCL

job segments, specifying 116

K

keyboard 265

L

landscape page presentation 4

libraries

multiple system page segment 39

storing resource 13

types of resource 15

library objects, font path 22

library-member types for FOCA fonts 20

line data

definition of 75

encoding schemes for 78

examples of printing 135

formatting with page definitions 66

line spacing for 139

merging lines 151

printing 75

record format 77

selecting fonts 141

SOSI codes in 78

line data (continued)

structured fields in 79

traditional 76

using carriage control characters
in 148

using table reference characters
in 148, 149

line merging applications, creating 151

line printer, description of 3

line screen frequency, halftone 247

line spacing for

line and XML data, specifying 139

monospaced fonts 214

pages 69

PSF-supplied page definitions 211

line spacing parameter 99

line-printer data

See line data

LINECT parameter 108

link (LK) CMRs 253

link color conversion CMRs 253

link processing mode, CMR 257

logical page

definition of 67

origin 34, 55

LookAt message retrieval tool xiii

M

mainframe

education xiv

mapping tables

color 29

font 24

margin errors 169

marking resources 49

measurement unit conversion 6

media-relative colorimetric 250

medium maps

See copy groups

medium origin 55

medium overlays

positioning 33

printing 133

using 34

merging

data with overlay 35

lines 151

message retrieval tool, LookAt xiii

messages, printing

example of specifying 156

parameter for 113

messages, sending notification 163

microfilm devices

considerations for 239

creating JCL for 91

microfilm setup resources

examples for specifying 165

from user libraries 165

in object containers 30

included inline 166

parameter for 98

Mixed Object Document Content

Architecture-Presentation

See MO:DCA-P data

mixing structured fields with line
data 79

mixing, color 246

MO:DCA-P data

creating with programs 85

definition of 1

formatting 85

JCL parameters for printing 86

object containers 2

OCA in 1

printing

example of 147

overview 85

selecting fonts for 86

monospaced fonts, line spacing for 214

multiple

copies

parameter for large 100

parameter for small 99

printing 153

specified in copy group

subgroups 64

specified in JCL 130

copy groups, using 144

page formats, using 144

pages on a sheet, printing 140

resolution printers, printing on 169

system page segment libraries 39

multiple-image and multiple-page
resources 30

multiple-up printing

conditional processing for 72

example of 139

page definitions for 205, 210

N

N_UP printing

enhanced 60

example of 140

specifying in copy groups 59

NAME parameter 123

naming convention for form

definitions 193

normal duplex printing, specifying 56

notification messages, sending 163

NOTIFY parameter 108

number of copies

parameter for large 100

parameter for small 99

specified in copy group

subgroups 64

specified in JCL 130

transmitted 129

O

object container resources

color management resources 29

color mapping table resources 29

description of 27

encapsulated PostScript (EPS)

resources 29

IOCA tile resource objects 30

microfilm setup resources 30

multiple-image and multiple-page

resources 30

PDF resource objects 31

- object container resources (*continued*)
 - PDF single-page object resources 31
 - resident color profile resource
 - objects 31
 - specifying in libraries 168
 - using 28
- object containers, definition of 2
- Object Content Architecture
 - See* OCA
- objects, TrueType and OpenType 22
- obtaining AFP statistics 187
- OCA
 - BCOCA resources 40
 - description of 1
 - GOCA resources 43
 - IOCA resources 44
 - PTOCA resources 47
 - source group, standard 173
- offset stacking
 - continuous forms 156
 - specified in copy groups 63
- offsets
 - duplex-page 59, 164
 - horizontal and vertical page 55
- OFFSETXB parameter 109
- OFFSETXF parameter 110
- OFFSETYB parameter 110
- OFFSETYF parameter 111
- OGL
 - creating overlays with 32
 - form definition for 200
 - using with marked resources 49
- OpenType fonts 21
- origin, medium or page 55
- OUTBIN
 - parameter 111
 - subcommand or keyword 65
- outline fonts 19
- output
 - bins 65
 - bursting 156
 - finishing 63
 - offset stacking of 63
 - parameters for distributing 122
 - stacking 156
 - writer, PSF as 9
- OUTPUT statement
 - assigned to DD statement 91
 - parameters used on DD statement 92
- overlapping characters 5
- Overlay Generation Language
 - See* OGL
- OVERLAYB parameter 112
- OVERLAYF parameter 112
- overlays
 - description of 32
 - identified in copy group
 - subgroups 64
 - medium
 - example of printing 133
 - positioning 33
 - using 34
 - merging data with 35
 - page
 - example of printing 134
 - positioning 33, 135
 - rotation of 37

- overlays (*continued*)
 - page (*continued*)
 - using 35
 - prefix for 34
 - printing medium and page on same
 - page 36
 - printing with 132
 - rotation of page 37
 - specifying 34
 - testing 36
 - using with different printer
 - resolutions 36

P

- page definitions
 - converted from FCBs 138
 - data suppression in 141
 - description of 37
 - DUMMY, specifying 137
 - fonts, specifying in 142
 - formatting data with 66
 - inline, using 137
 - names for
 - 10.12 x 14.33 B4 cut-sheet
 - paper 207, 208
 - 12 x 8.5 continuous-forms
 - paper 206
 - 12 x 8.5 cut-sheet paper 203
 - 12 x 8.5 or 9.5 x 11 letter and
 - continuous-forms paper 209
 - 14.88 x 11 continuous-forms
 - paper 206
 - 14.88 x 11 cut-sheet paper 204
 - 14.88 x 11 legal and
 - continuous-forms paper 209
 - 14.88 x 11 paper and FCBs 203
 - 3-hole punched paper 210
 - 3800 printers 203
 - 4224, 4230, 4234, 4247, and 6400
 - printers 205
 - 8.27 x 11.69 A4 cut-sheet
 - paper 207, 208
 - 8.5 x 11 cut-sheet letter paper 207
 - 8.5 x 14 cut-sheet legal paper 207
 - 9.5 x 11 continuous-forms
 - paper 206
 - 9.5 x 11 cut-sheet paper 204
 - HP-CL4 and PPDS printers 206
 - line spacing 211
 - multiple-up printing 205, 210
 - other printers 208
 - printing PSF reports 211
 - overview of 66
 - page formats in 67
 - page overlay rotation in 37
 - parameter for 112
 - prefix for 37
 - relative print line positioning 69
 - resources
 - converted from FCBs 138
 - from user libraries 137
 - included inline 137
 - specifying 135
 - supplied with PSF 203
 - using PPFA to create 53

- page formats
 - controls for
 - conditional processing 71
 - fonts 70
 - formatted print records 69
 - formatting fields 70
 - line spacing for a page 69
 - page size 67
 - print direction 68
 - relative print line positioning 69
 - description of 66
 - multiple, using 144
 - required information in 67
 - type of data specified in 67
- page offsets 55, 59
- page origin 55
- page overlays
 - positioning 33, 135
 - printing 134
 - rotation in page and form
 - definitions 37
 - using 35
- page position 55
- page presentation
 - controls for 62
 - direction 4
- page printer
 - description of 3
 - selecting 126
- Page Printer Formatting Aid, using 53
- page segments
 - description of 38
 - hard 39
 - libraries, using multiple system 39
 - prefix for 39
 - printing 146
 - soft 39
 - testing 40
 - using 38
- page size specified in page
 - definitions 67
- page-printer defaults form 89, 237
- PAGEDEF parameter 112
- paper characteristics for color 250
- paper destination, selecting 65
- paper source
 - changing in a document 132
 - example of specifying 131
 - specifying in copy groups 56
 - specifying in subgroups 65
- paper tray, selecting 107
- parameters, JCL
 - See* JCL parameters
- passthrough CMRs 252
- pattern fill, GOCA 174
- pattern, halftone 247
- PCS 249
- PDF resource objects
 - description of 31
 - using 28
- PDF single-page object resources
 - description of 31
 - using 28
- pels
 - density and placement 6
 - printing at different resolutions 169
 - perceptual 250

- PIMSG parameter 113
- portrait page presentation 4
- PPFA, using 53
- predesigned forms, using
 - forms-flash unit 132
 - OGL 32
- prefixes for resources 15
- Presentation Text Object Content
 - Architecture
 - definition of 2
 - resources 47
- print direction
 - for text 4, 68
 - specifying 138
- print line positioning, relative 69
- print quality, selecting levels 64
- Print Services Facility
 - See PSF
- print-complete messages, sending 163
- print-positioning errors, blocking 101
- PRINTDEV statement 91
- printer
 - calibration for color 246
 - checkpoints, specifying 172
 - defaults form, page 89, 237
 - defaults, determining 89
 - driver
 - for Windows, AFP 85
 - PSF 3
 - resident fonts 25
 - resolutions, using FOCA fonts with
 - different 24
 - selection
 - example of 126
 - parameter for 97
 - support for disabled mechanisms 56
- printers
 - communication with PSF 9
 - line, description of 3
 - page
 - description of 3
 - selecting 126
- printing
 - AFP 2
 - bar codes 42
 - color concepts 244
 - components of PSF 8
 - controls specified in copy groups 54
 - data 75
 - deferred mode 9
 - direct mode
 - creating JCL for 91
 - PSF in 10
 - duplex 56
 - error messages 113, 156
 - examples 125
 - graphics 44
 - grayscale concepts 248
 - how PSF manages AFP 7
 - images 46, 47
 - inhibiting recovery of 164
 - job segments 116
 - line data 75, 135
 - messages 113, 156
 - mixed data 79
 - MO:DCA-P data
 - example of 147

- printing (*continued*)
 - MO:DCA-P data (*continued*)
 - overview 85
 - multiple copies 153
 - multiple pages on a sheet 140
 - multiple-up 139
 - N_UP
 - example of 140
 - specifying in copy groups 59
 - notification sent when finished 163
 - on microfilm devices 239
 - on multiple-resolution printers 169
 - overlays 32, 36, 132
 - page segments 146
 - performance problems,
 - diagnosing 187
 - record format line data 77
 - resources 13
 - simplex 56
 - solutions, color and grayscale 243
 - tasks 125
 - text 48
 - with inline resources 162
 - with user library resources 160
 - XML data 83, 135
- PRMODE parameter 114
- process mode
 - parameter 114
 - specifying SOSI codes with 152
- processing modes, CMR
 - audit 256
 - instruction 256
 - link 257
- profile connection space 249
- profile, AFRREBLK 183
- PRTEROR parameter 115
- PRTQUEUE parameter 115
- PSF
 - access method 10
 - APSRMARK utility 49
 - combining different types of data 48
 - communication with printers 9
 - data streams 8
 - deferred-printing mode 9
 - direct-printing mode 10
 - Distributed Print Function (DPF) 49
 - form definitions provided with 193
 - formatting data with 10
 - introduction to 7
 - libraries 15
 - managing AFP printing 7
 - messages, printing 113
 - output writer 9
 - page definitions provided with 203
 - printer defaults for 89
 - printing components 8
 - products 7
 - resources
 - overview of 13
 - supplied with 51
- PTOCA
 - definition of 2
 - resources 47
- publications, related 287

Q

- QR Code bar codes, using with SOSI data 171
- Qualified Tag 83
- quality levels, selecting print 64

R

- raster fonts 19
- RATs 260
- reblocking
 - data sets 184
 - program for AFP files 181
- record format line data
 - definition of 77
 - encoding schemes for 78
- recovery of print jobs, inhibiting 164
- related publications 287
- relative print line positioning 69
- rendering intent 250
- rendering intents
 - definition of 246
- report, AFPSTATS 187
- repository, AFPSTATS 187
- reprocessing 73
- RESFMT parameter 116
- resident
 - fonts, printer 25
 - resources 13
- resident color profile resource objects
 - description of 31
 - using 28
- resolutions 24
 - parameter for specifying output 116
 - printing at different 169
 - using FOCA fonts with different 24
 - using overlays on printers with
 - different 36
- resource access tables 260
- Resource Installer, AFP 262
- resource management, color 260
- resources
 - AFP fonts 18
 - bar codes 40
 - color mapping table, using 166
 - color printing tips 262
 - definition of 13
 - FOCA fonts 19
 - fonts 18
 - form definitions 26
 - graphics (GOCA) 43
 - hard 15
 - host 13
 - image (IOCA) 44
 - inline
 - printing with 162
 - using 50
 - installing 260
 - libraries 15
 - marking 49
 - object containers 27
 - OpenType fonts 21
 - overlays 32
 - page definitions 37
 - page segments 38
 - prefixes for 15

resources (*continued*)
 printing at different resolutions 169
 problems, diagnosing 187
 resident 13
 searching for in print jobs 14
 soft 15
 statistics about 187
 storing 13
 storing with DPF 49
 supplied with PSF 51
 text (PTOCA) 47
 TrueType fonts 21
 types of PSF 8
 user library, printing 160
RGB color space 244
ROOM parameter 123
rotation of page overlays 37
rotation, halftone 247
rotations, character 4, 68

S

saturation 250
search for specified resources 14
security labeling, parameter for 103
SEGMENT parameter 116
selecting
 fonts 141
 output bins 65
 paper destination 65
 paper source 56
 paper tray 107
 print quality level 64
 printers 126
separator pages
 parameters for 122
 sample 122
shift-out, shift-in codes
 See SOSI codes
shortcut keys 265
simplex printing, specifying 56
single-byte fonts
 description of 20
 with double-byte fonts in data 152
size specified in page definitions,
 page 67
soft page segment 39
soft resources 15
softcopy report, AFPSTATS 188
SOSI codes
 in line data 78
 parameter for specifying 114
 QR Code bar codes, using with 171
 specifying 152
 using CHARS parameter with 153
source file, sample of color mapping
 table 179
source groups in color mapping
 tables 173
spacing, parameter for line 99
stacking output 156
stacking, offset
 continuous forms 156
 specified in copy groups 63
standard OCA source group 173
stapling, example of 168
statistics, obtaining AFP 187

storing PSF resources 13
structured fields for
 changing copy groups or page
 formats 144
 identifying image resources 44
 including page segments 39
 line data 79
 producing bar codes 42
 rotating page overlays 37
 specifying offset stacking 64
subgroup modifications
 data suppression 65
 forms flash 65
 number of page copies 64
 output bins 65
 overlays 64
 paper source 65
subgroups in copy groups 64
subpages, placement of 205, 210
SUBSYS parameter 117
suppression, data
 specified in copy group
 subgroups 65
 specified in page definitions 141
symbologies for bar codes 41
syntax for JCL parameters 92
SYSAREA parameter 118
SYSOUT parameter 118

T

table reference characters
 parameter for 119
 rules for coding 150
 selecting fonts with 143, 149
 specifying 119, 148
 using in line data 149
target groups in color mapping
 tables 174
tasks, printing 125
testing
 overlays 36
 page segments 40
text
 description of 47
 printing 48
 resources, using 48
text direction and rotation 4, 68
TITLE parameter 124
tone transfer curves
 CMR 255
 grayscale printing 249
 overview 247
tools, application development
 ACIF 86
 AFP Toolbox 85
traditional line data
 definition of 76
 encoding schemes for 78
 multiple-up printing 139
 using table reference characters
 in 148, 149
transmissions, data set
 defining number of 129
 to IBM i systems 164
tray selection 107

TRC parameter
 See table reference characters
TrueType fonts 21
tumble duplex printing, specifying 57
Type Transformer 24

U

UCS parameter 119
unblocking data-check errors 101
unbounded-box fonts 19
unformatted print records, field
 formatting options for 70
unit conversion 6
uploading AFP files to z/OS 184
user library resources
 color mapping table 167
 form definitions 127
 microfilm setup 165
 page definitions 137
 printing with 160
USERLIB parameter 120
USERPATH parameter 121

V

vertical page offsets 55

W

Windows AFP printer driver 85

X

XML data
 element content 83
 encoding schemes and
 conversions 84
 examples of printing 135
 external entities 84
 formatting with page definitions 66
 JCL parameters ignored 84
 line spacing for 139
 printing 83

Z

z/OS Basic Skills information center xiv



Program Number: 5655-M32

Printed in USA

S550-0435-03

