

IBM Workload Scheduler



Troubleshooting Guide

Version 9 Release 5

IBM Workload Scheduler



Troubleshooting Guide

Version 9 Release 5

Note

Before using this information and the product it supports, read the information in “Notices”.

Contents

Note	iii
.....	v
List of Figures	xv
List of Tables	xvii
Preface: About this guide	xix
What is new in this release.....	xix
Accessibility.....	xix
Technical training.....	xix
Support information.....	xix
Chapter 1: Getting started	21
Where products and components are installed.....	21
Finding out what is installed.....	25
Built-in troubleshooting features.....	27
Keeping up to date.....	27
Upgrading your whole environment.....	27
Chapter 2: Logs and traces	29
Modifying log and trace levels: quick reference.....	29
Logs and traces: the difference.....	31
IBM Workload Scheduler logging and tracing.....	33
Locations.....	33
File switching.....	34
Customization.....	34
Performance.....	37
Dynamic Workload Console log and trace files.....	38
Activating traces.....	38
IBM Workload Scheduler agent trace files.....	39
Retrieving IBM Workload Scheduler agent traces from the Dynamic Workload Console.....	39
Self-Service mobile applications log file.....	39
Dynamic workload scheduling log and trace files.....	40
Dynamic agent log and trace files.....	40
Trace configuration for the agent.....	42
Application server: log and trace files.....	45
Setting application server traces.....	45
Chapter 3: Capturing product data	49
Data capture utility.....	49
When to run.....	49

Prerequisites.....	50
Command and parameters.....	51
Tasks.....	51
Data collection.....	52
First failure data capture (ffdc).....	54
Creating application server dumps.....	55
Chapter 4: In-Flight Trace facility.....	57
In-Flight Trace configuration file.....	59
Changing the configuration.....	60
Configuration file syntax.....	60
xcli command.....	62
Selecting programs, segments, and products.....	62
xcli command syntax.....	63
xcli messages.....	69
Chapter 5: Troubleshooting performance.....	73
Chapter 6: Troubleshooting networks.....	75
Network recovery.....	75
Initialization problems.....	75
Network link problems.....	76
Replacement of a domain manager.....	77
Replacement of a master domain manager.....	77
Other common network problems.....	77
Using SSL, no connection between fault-tolerant agent and its domain manager.....	77
Timeout during Symphony download.....	78
After changing SSL mode, a workstation cannot link.....	78
Start and stop remote commands not working with firewall.....	79
Remote command job fails to connect to remote computer.....	79
The domain manager cannot link to a fault-tolerant agent.....	79
Agents not linking after first JnextPlan on HP-UX.....	80
Fault-tolerant agents not linking to master domain manager.....	80
dynamic agent not found from console.....	81
Submitted job not running on a dynamic agent.....	81
Job status of submitted job continually running on dynamic agent.....	82
Network performance.....	82
AWSITA245E or AWSITA104E- Agent is down but jobmanager is running.....	82
Chapter 7: Troubleshooting engine problems.....	85
Composer problems.....	85
Composer dependency error with interdependent object definitions.....	85
The <code>display cpu=@</code> command fails on UNIX.....	86
Composer not authorized to access server error.....	86
Composer deletion of a workstation fails with the AWSJOM179E error.....	86
Job stream synchronicity problems.....	87
Exit from command line takes a long amount of time.....	87
JnextPlan problems.....	87
JnextPlan fails to start.....	88
JnextPlan fails because transaction log for the database is full.....	88
JnextPlan fails: Java out-of-memory error.....	88
JnextPlan fails with DB2 error: nullDSRA0010E.....	88

JnextPlan fails - AWSJPL017E message.....	89
On windows operating systems JnextPlan fails with cscript error.....	89
JnextPlan is slow.....	89
Remote workstation not initializing after JnextPlan.....	90
Workstation not linking after JnextPlan.....	90
Job remains in "exec" status after JnextPlan but not running.....	90
Resource quantity change not implemented in the plan after JnextPlan.....	92
CreatePostReports.cmd, or Makeplan.cmd, or Updatestats.cmd, or rep8.cmd hang on Windows operating systems.....	92
Conman problems.....	92
AWSDEQ024E message is received on Windows.....	93
Duplicate ad-hoc prompt number.....	94
During Jnextplan fault-tolerant agents cannot be linked.....	95
Submitting job streams with a wildcard loses dependencies.....	95
Exit from command line takes a long amount of time.....	96
Job log not displayed.....	96
Cannot retrieve objects defined in folders on a workstation set to ignore.....	96
Fault-tolerant agent problems.....	97
Job fails in heavy workload conditions.....	97
Batchman fails on a fault-tolerant agent AWSDEC002E message.....	97
Fault-tolerant agents unlink from mailman.....	98
Symphony file on the master domain manager not updated with fault-tolerant agent job status.....	98
Dynamic agent problems.....	98
Connection problems for the dynamic agent.....	98
JBDC driver problem with MSSQL database.....	99
Error AWSITA104E Unable to perform the system resources scan.....	99
Event condition on dynamic agent does not generate any action.....	99
Job manager encounters a core dump.....	100
Problems on Windows.....	100
Interactive jobs not interactive using Terminal Services.....	100
Services fail to start after workstation restart.....	100
Batchup service fails to start.....	100
Error relating to impersonation level.....	102
Corrupted characters appear in the command shell when executing cli commands.....	102
Extended agent problems.....	102
The extended agent for MVS returns an error.....	102
Planner problems.....	103
Mismatch between Job Scheduler instances and preproduction plan.....	103
Planman deploy error when deploying a plug-in.....	103
Insufficient space error while deploying rules.....	103
AWSJCO084E UpdateStats fails if job run time exceeds two hours.....	103
Planman showinfo command displays inconsistent times.....	104
Job stream duration might be calculated incorrectly as well as other time-related calculations.....	105
Bound z/OS shadow job carried forward indefinitely.....	105
Problems with DB2.....	105
Timeout occurs with DB2.....	105
JnextPlan fails because DB2 transaction log is full.....	106
DB2 might lock while making schedule changes.....	106
Problems with Oracle.....	106
JnextPlan fails because the database transaction log is full.....	107
Oracle maintenance on UNIX not possible after installation.....	107
Dynamic workload broker fails to start after switching DB2 to Oracle.....	107
Problems with MSSQL.....	107
An error is returned when deleting records with cascade option in MSSQL.....	108
Problems with Informix.....	108
Solving deadlocks when using composer in Informix.....	108

Application server problems.....	108
Application server not starting after changes to SSL keystore password.....	108
Timeout occurs with the application server.....	109
Master Domain Manager may stop when trying to retrieve a big job log.....	110
AWKTSA050E error issued during submission.....	110
Event management problems.....	110
Troubleshooting an event rule that does not trigger the required action.....	110
After replying to a prompt, the triggered action is not performed.....	119
Actions involving automatic sending of email fail.....	119
An event is lost.....	120
Action not triggered.....	120
Event rules not deployed after switching event processor.....	121
Event LogMessageWritten is not triggered.....	121
Deploy (D) flag not set after ResetPlan.....	121
Missing or empty event monitoring configuration file.....	122
Events not processed in correct order.....	122
Stopeventprocessor or switcheventprocessor commands not working.....	122
Event rules not deployed with large numbers of rules.....	123
Problem prevention in IBM Workload Scheduler environment.....	123
On AIX operating systems the SSM agent crashes if you have a very large number of files to be managed using event-driven workload automation.....	123
File creation and deletion actions not triggered.....	123
File monitoring events unsupported on Solaris AMD Opteron configured in FIPS mode.....	124
Time zones not resolving with enLegacyStartOfDayEvaluation set.....	124
Managing concurrent accesses to Symphony.....	124
Scenario 1: Access to Symphony file locked by other processes.....	124
Scenario 2: Access to Symphony file locked by stageman.....	124
StartApp Server problems.....	124
MakePlan problems.....	125
MakePlan fails to start.....	125
Unable to establish communication with the server on host - AWSBEH023E.....	125
The user "twuser" is not authorized to access the server on host - AWSBEH021E.....	125
Database is already locked - AWSJPL018E.....	126
An internal error has occurred - AWSJPL006E.....	126
The production plan cannot be created - AWSJPL017E.....	126
An internal error has occurred - AWSJPL704E.....	126
SwitchPlan problems.....	126
When SwitchPlan fails to start.....	127
Previous Symphony file and Symnew file have the same run number - AWSBHV082E.....	127
Create Post Reports.....	127
Update Stats.....	128
Miscellaneous problems.....	128
Error message for a locked database table or object in a table.....	128
Command line programs error "user not authorized to access server".....	129
Rmstdlist command gives different results.....	129
Rmstdlist command fails on AIX with exit code of 126.....	129
Question marks found in the stdlist.....	130
Deleting stdlist or one of its files while processes are still running.....	130
Job with "rerun" recovery job remains in "running" state.....	130
Job statistics are not updated daily.....	131
A Job Scheduler dependency is not added.....	131
Incorrect time-related status when time zone not enabled.....	131
Completed job or job stream not found.....	131
Variables not resolved after upgrade.....	131
Default variable table not accessible after upgrade.....	132
Local parameters not being resolved correctly.....	132

Inconsistent time and date in job streams and jobs.....	132
Deleting leftover files after uninstallation is too slow.....	132
Special characters are corrupted in script job output.....	133
Failover Cluster Command Interface deprecated.....	133
Job stream creation failure due to missing rights on calendars.....	133
StartUp shows an error after upgrade.....	133

Chapter 8: Troubleshooting dynamic workload scheduling..... 135

How to tune the rate of job processing.....	135
Remote command job fails.....	137
Monitoring and canceling jobs.....	138
On Windows 2012 the user interfaces for the interactive jobs are not visible on dynamic agents.....	140
MASTERAGENTS workstation not updated in optman.....	141
Troubleshooting common problems.....	141
On AIX operating systems the concurrent submission of one hundred or more jobs on the same agent can result in a core dump or in a resource temporarily unavailable message.....	141
Dynamic workload broker cannot run after the database is stopped.....	142
OutOfMemory exception when submitting a job.....	142
Jobsubmiterror exception when submitting a job.....	142

Chapter 9: Troubleshooting when automatically adding dynamic agent workstations to the plan.....143

The dynamic agent workstation automatically added to the plan is not initialized.....	143
---	-----

Chapter 10: Troubleshooting Dynamic Workload Console..... 145

Troubleshooting connection problems.....	145
The engine connection does not work.....	145
Test connection takes several minutes before returning failure.....	147
Engine version and connection status not displayed.....	147
Failure in testing connection or running reports if Oracle database in use.....	147
Connection problem with the engine.....	148
Engine connection failure when connecting to z/OS connector (v8.3x and v8.5x).....	148
Engine connection failure when connecting to z/OS connector v8.3x or distributed engine v8.3x.....	149
Engine connection settings not checked for validity.....	150
LDAP account locked after one wrong authentication attempt.....	150
Troubleshooting performance problems.....	151
With a distributed engine responsiveness decreases overtime.....	151
Running production details reports overloading distributed engine.....	151
Troubleshooting user access problems.....	152
Wrong user logged in when using multiple accesses.....	152
Unexpected user login request when using Single Sign-On.....	152
Authentication problem when opening the Workload Designer.....	153
Troubleshooting problems with reports.....	153
Validate command on a custom SQL query returns AWSWUI0331E error.....	153
Reports not displayed in a browser with a toolbar installed.....	153
WSWUI0331E error when running reports.....	154
CSV report looks corrupted on Microsoft Excel not supporting UTF8.....	154
Insufficient space when running production details reports.....	154
Report fields show default values after upgrade from v8.3 to v8.5.....	154
the specified run period exceeds the historical data time frame.....	155
Troubleshooting problems with browsers.....	156
Default tasks not converted into the browser language.....	156

"Access Error" when launching a task.....	156
Processing threads continue in the background.....	156
Unresponsive script warning with Firefox.....	157
Plan View panel seems to freeze with Internet Explorer v7.....	157
Blank page displayed (in High availability disaster recovery configuration).....	157
Workload Designer not showing on foreground with Firefox.....	157
Panels not displayed in Internet Explorer.....	158
Web page error with Internet Explorer.....	158
Panels frozen with Internet Explorer developer tools.....	158
Simplified Chinese characters missing or corrupted when using Google Chrome or Apple Safari.....	158
Troubleshooting problems with graphical views.....	159
Language-specific characters not correctly displayed in graphical views.....	159
Plan View limit.....	159
JAWSITA122E or AWKRAA209E error in the Workload Designer.....	159
Troubleshooting problems with database.....	160
Import settings to DB2 repository fails.....	160
Troubleshooting other problems.....	160
Jobs in READY status do not start.....	160
Composer deletion of a workstation fails with the AWSJOM179E error.....	161
Data not updated after running actions.....	161
"Session has become invalid" message received.....	161
Actions against scheduling objects return empty tables.....	162
Default tasks not converted into the browser language.....	162
"Access Error" when launching a task.....	162
Processing threads continue in the background.....	163
List of Available Groups is empty in Enter Task Information window.....	163
Blank page displayed (in High availability disaster recovery configuration).....	163
Some exceptions might not be displayed in Language-specific in the Dynamic Workload Console.....	163
Extraneous exception logged in SystemOut.....	164
Filtering task results might not work as expected.....	164
Sorting task results might not work as expected.....	165
Monitoring job streams on multiple engines does not respect scheduled time range on z/OS.....	166
Dynamic Workload Console 9.x login or graphical view pages do not display.....	166
Java exception when performing a query on job streams in plan.....	166
Import a property file bigger than 100MB.....	167
Query results not displayed.....	167

Chapter 11: Troubleshooting workload service assurance..... 169

Components involved in workload service assurance.....	169
Exchange of information.....	170
Common problems with workload service assurance.....	170
Critical start times not aligned.....	170
Critical start times inconsistent.....	170
Critical network timings change unexpectedly.....	171
A critical job is consistently late.....	171
A high risk critical job has an empty hot list.....	171

Chapter 12: Troubleshooting switch manager..... 173

Event counter.....	173
Ftbox.....	174
Troubleshooting link problems.....	174
Common problems with the backup domain manager.....	180
The Symphony file on the backup domain manager is corrupted.....	180

Processes not killed on previous UNIX domain manager after running switchmgr.....	180
Agent cannot relink.....	181

Chapter 13: Synchronizing the database with the Symphony file..... 183

Chapter 14: Corrupt Symphony recovery.....185

Recovery procedure on a master domain manager.....	185
Recovering using the backup master domain manager.....	185
Recover using the logman and ResetPlan commands.....	186
Recovering the plan from the archived plan.....	188
Recovery procedure on a fault-tolerant agent or lower domain manager.....	189
Recovery procedure on a fault-tolerant agent with resetFTA.....	190

Appendix A: Support information..... 193

Searching knowledge bases.....	193
Search the online product documentation.....	193
Search the Internet.....	193
Obtaining fixes.....	194
Receiving support updates.....	194

Appendix B: Date and time format reference - strftime..... 197

Notices..... 199

Trademarks.....	200
Terms and conditions for product documentation.....	201

Index.....203

List of Figures

Figure 1: ACCT_FS has not linked.....	174
Figure 2: Example output for conman sc @!@ run on the master domain manager.....	176
Figure 3: Example output for conman sc run on the domain manager.....	177
Figure 4: Example output for conman sc run on the unlinked workstation.....	178
Figure 5: Example output for conman sc @!@ run on the unlinked workstation.....	179
Figure 6: Example output for ps -ef grep writer run on the unlinked workstation.....	180

List of Tables

Table 1: Where to find other troubleshooting material.....	21
Table 2: Difference between logs and traces.....	32
Table 3: Locations of log files and trace files.....	38
Table 4: Locations of log and trace files.....	40
Table 5: Job processing status to queue jobs for dispatching.....	136
Table 6: Status mapping between Dynamic workload broker and IBM Workload Scheduler.....	138
Table 7: Default settings for new job run statistic reports.....	155
Table 8: Default settings for new job run history reports.....	155
Table 9: strftime date and time format parameters.....	197

Preface

About this guide

Gives useful information about the guide, such as what it contains, who should read it, what has changed since the last release, and how to obtain training and support.

Troubleshooting Guide provides information about troubleshooting IBM Workload Scheduler and its components.

What is new in this release

Learn what is new in this release.

For information about the new or changed functions in this release, see *IBM Workload Automation: Overview*, section *Summary of enhancements*.

For information about the APARs that this release addresses, see the IBM Workload Scheduler Release Notes at [IBM Workload Scheduler Release Notes](#) and the Dynamic Workload Console Release Notes at [Dynamic Workload Console Release Notes](#). For information about the APARs addressed in a fix pack, refer to the readme file for the fix pack.

New or changed content is marked with revision bars.

Accessibility

Accessibility features help users with a physical disability, such as restricted mobility or limited vision, to use software products successfully.

With this product, you can use assistive technologies to hear and navigate the interface. You can also use the keyboard instead of the mouse to operate all features of the graphical user interface.

For full information, see the Accessibility Appendix in the *IBM Workload Scheduler User's Guide and Reference*.

Technical training

Cloud & Smarter Infrastructure provides technical training.

For Cloud & Smarter Infrastructure technical training information, see: <http://www.ibm.com/software/tivoli/education>

Support information

IBM provides several ways for you to obtain support when you encounter a problem.

If you have a problem with your IBM software, you want to resolve it quickly. IBM provides the following ways for you to obtain the support you need:

- Searching knowledge bases: You can search across a large collection of known problems and workarounds, Technotes, and other information.
- Obtaining fixes: You can locate the latest fixes that are already available for your product.
- Contacting IBM Software Support: If you still cannot solve your problem, and you need to work with someone from IBM, you can use a variety of ways to contact IBM Software Support.

For more information about these three ways of resolving problems, see the appendix about support information in *IBM Workload Scheduler: Troubleshooting Guide*.

Chapter 1

Getting started with troubleshooting

Gives an overview of what troubleshooting information is contained in this publication, and where to find troubleshooting information which is *not* included.

This publication gives troubleshooting information about the IBM Workload Scheduler *engine*. The engine comprises the components of IBM Workload Scheduler that perform the workload scheduling activities, together with the command line by which they can be controlled.

Troubleshooting for other IBM Workload Scheduler activities, products, and components can be found in their relevant publications, as follows:

Table 1: Where to find other troubleshooting material

Activity, Product, or Component	Publication
Installation, upgrade, and uninstallation of IBM Workload Scheduler components and the Dynamic Workload Console	<i>Planning and Installation Guide</i>
Limited fault-tolerant agents for IBM i	<i>Limited Fault-tolerant Agent for IBM i</i>
IBM® Z Workload Scheduler	<i>Diagnosis Guide and Reference</i> <i>Messages and Codes</i>
IBM Workload Scheduler methods and plug-ins	<i>IBM Workload Automation: Scheduling Applications with IBM Workload Automation</i>

Many of the procedures described in this publication require you to identify a file in the installation path of the product and its components. However, they can have more than one installation path, as described in [Where products and components are installed](#) on page 21.

Where products and components are installed

Describes where the IBM Workload Scheduler products and components are installed.

This section commences by briefly introducing IBM Workload Automation and explaining how this concept impacts the installed structure of IBM Workload Scheduler.

IBM Workload Automation

IBM Workload Automation is the name of a family of products and components, which includes the following components:

- IBM Workload Scheduler
- IBM® Z Workload Scheduler

- IBM Workload Scheduler for Applications
- Dynamic Workload Console

Many IBM Workload Scheduler components are installed in what is called a *IBM Workload Automation instance*.

Installation paths

TWA_home installation path

Many of the components are installed in an IBM Workload Automation instance. Although this is a notional structure it is represented on the computer where you install IBM Workload Automation components by a common directory referred to in the documentation as *TWA_home*. The path of this directory is determined when you install an IBM Workload Scheduler component for the first time on a computer. You have the opportunity to choose the path when you make that first-time installation, but if you accept the default path, it is as follows:

On UNIX™ operating systems

```
/opt/wa/server_<wauser><n>
```

On Windows™ operating systems

```
%Program Files%\wa\server<n>
```

where *<n>* is an integer value ranging from 0 for the first instance installed, 1 for the second, and so on.

This path is called, in the publications, *TWA_home*. For details about the directories created outside of *TWA_home*, see the section about directories created outside of *TWA_home* in *Planning and Installation Guide*.

TWA_DATA_DIR and *DWC_DATA_dir* configuration directories

To simplify administration, configuration, and backup and recovery on UNIX systems, a new default behavior has been implemented with regard to the storage of product data and data generated by IBM® Workload Scheduler, such as logs and configuration information. These files are now stored by default in the *<data_dir>* directory, which you can optionally customize at installation time.

By default, this directory is *TWA_home/TWSDATA* for the server and agent components, and *DWC_home/DWC_DATA* for the Dynamic Workload Console. The product binaries are stored instead, in the installation directory.

You can optionally customize the *<data_dir>* directory at installation time by setting the *--data_dir* argument when you install using the command-line installation. If you want to maintain the previous behavior, you can set the *--data_dir* argument to the IBM® Workload Scheduler installation directory.

If you deploy the product components using Docker containers, the *<data_dir>* is set to the default directory name and location, and it cannot be modified.

To retrieve the *TWA_DATA_DIR* and *DWC_DATA_dir* location in case you have modified the default path, check the values for the *TWS_datadir* and *DWC_datadir* properties stored in the *twainstance<instance_number>.TWA.properties* file. The file is located in */etc/TWA*.

Alternatively, you can also proceed as follows:

1. Browse to *<TWA_home>/TWS* path.
2. Source the *./twc_env.sh* shell script.
3. Type `echo $UNISONWORK`. As a result, the path to the *TWA_DATA_DIR* is returned.

IBM Workload Scheduler installation path

You can install more than one IBM Workload Scheduler component (master domain manager, backup master domain manager, domain manager, or backup domain manager) on a system, but each is installed in a separate instance of IBM Workload Automation, as described above.

The installation path of IBM Workload Scheduler is:

```
<TWA_home>/TWS
```

DWC_home installation path

The Dynamic Workload Console can be installed in the path of your choice, but the default installation path is as follows:

On Windows™ operating systems

```
%ProgramFiles%\wa\DWC
```

On UNIX™ operating systems

```
/opt/wa/DWC
```

On z/OS operating system

```
/opt/wa/DWC
```

IBM Workload Scheduler agent installation path

The agent also uses the same default path structure, but has its own separate installation directory:

```
<TWA_home>/TWS/ITA/cpa
```



Note: The agent also installs some files outside this path. If you have to share, map, or copy the agent files (for example when configuring support for clustering) share, map, or copy these files, as well:

On UNIX™ operating systems

```
/etc/teb/teb_tws_cpa_agent_<tws_user>.ini
/opt/IBM/CAP/EMICPA_default.xml
/etc/init.d/tebctl-
tws_cpa_agent_<tws_user>
(on Linux and Solaris)
/etc/rc.d/init.d/tebctl-
tws_cpa_agent_<tws_user>
(on AIX)
/sbin/init.d/tebctl-
tws_cpa_agent_<tws_user>
(on HP-UX)
```

On Windows™ operating systems

```
%windir%\teb\teb_tws_cpa_agent_<tws_user>.ini
%ALLUSERSPROFILE%\IBM\CAP\EMICPA_default.xml
```

The agent uses the following configuration files which you might need to modify:

JobManager.ini

This file contains the parameters that tell the agent how to run jobs. You should only change the parameters if advised to do so in the IBM Workload Scheduler documentation or requested to do so by IBM Software Support. Its path is:

On UNIX™ operating systems

TWA_DATA_DIR/ITA/cpa/config/
JobManager.ini

On Windows™ operating systems

TWA_home\TWS\ITA\cpa\config
\JobManager.ini

JobManagerGW.ini

When a dynamic agent is installed and `-gateway local|remote` is specified, then this file contains the same parameters as the `JobManager.ini` file except for the following differences:

- The `ResourceAdvisorUrl` parameter points to the dynamic workload broker, and not the master domain manager.

The `JobManagerGW.ini` file is installed in the following location:

On UNIX™ operating systems

TWA_DATA_DIR/ITA/cpa/config/
JobManagerGW.ini

On Windows™ operating systems

TWA_home\TWS\ITA\cpa\config
\JobManagerGW.ini

ita.ini

This file contains parameters which determine how the agent behaves. Changing these parameters may compromise the agent functionality and require it to be reinstalled. You should only change the parameters if advised to do so in the IBM Workload Scheduler documentation or requested to do so by IBM Software Support. Its path is:

On UNIX™ operating systems

TWA_DATA_DIR/ITA/cpa/ita/ita.ini

On Windows™ operating systems

TWA_home\TWS\ITA\cpa\config\ita.ini

Installation path for files giving the dynamic scheduling capability

The files that give the dynamic scheduling capability are installed in the following path:

<*TWA_home*>/TDWB

The command line client installation path

The command line client is installed outside all *IBM Workload Automation instances*. Its default path is:

TWA_home/TWS/CLI

However, the information above supplies only the **default** paths. To determine the actual paths of products and components installed in your IBM Workload Automation instances, see [Finding out what has been installed in which IBM Workload Automation instances](#) on page 25

Finding out what has been installed in which IBM Workload Automation instances

How to identify which IBM Workload Scheduler components are installed on a computer.

If you are not the installer of IBM Workload Scheduler and its components, you might not know what components have been installed, and in which instances of IBM Workload Automation. Follow this procedure to find out:

1. Access the following directory:


UNIX™ and Linux™ operating systems

```
/etc/TWA
```

Windows™ operating systems

```
%windir%\TWA
```

2. List the contents of the directory. Each IBM Workload Automation instance is represented by a file called: `twainstance<instance_number>.TWA.properties`. These files are deleted when all the products or components in an instance are uninstalled, so the number of files present indicates the number of valid instances currently in use.
3. Open a file in a text viewer.

 **Attention:** Do not edit the contents of this file, unless directed to do so by IBM Software Support. Doing so might invalidate your IBM Workload Scheduler environment.

The contents are similar to this on a master domain manager :

```
#TWAInstance registry
#Tue Feb 26 09:28:08 EST 2019
TWA_path=/opt/wa/server_twsuser
TWA_componentList=TWS
TWS_version=9.5.0.00
TWS_counter=1
TWS_instance_type=MDM
TWS_basePath=/opt/wa/server_twsuser/TWS
TWS_user_name=twsuser
TWS_wlpdir=/opt/wa/wlpEngine/wlp
TWS_datadir=/opt/wa/server_twsuser/TWSDATA
TWS_jdbcdir=/opt/wa/server_twsuser/TWS/jdbcdrivers/db2
```

The contents are similar to this on the Dynamic Workload Console:

```
#TWAInstance registry
#Tue Feb 26 09:42:10 EST 2019
TWA_path=/opt/wa/DWC
TWA_componentList=DWC
DWC_version=9.5.0.00
DWC_counter=1
DWC_instance_type=DWC
DWC_basePath=/opt/wa/DWC
DWC_user_name=dwadmin
DWC_wlpdir=/opt/wa/wlpDWC/wlp
DWC_datadir=/opt/wa/DWC/DWC_DATA
DWC_jdbcdir=/opt/wa/DWC/jdbcdrivers/derby
```

The important keys to interpret in this file are:

TWA_path

This is the base path, to which the installation added one or more of the following directories, depending on what was installed:

TWS

	Where the IBM Workload Scheduler component is installed
DWC	
	Where the Dynamic Workload Console is installed
ssm	
	Where the Netcool® SSM monitoring agent is installed (used in event management)
TWA_componentList	
	Lists the components installed in the instance of IBM Workload Automation.
TWS_counter	
	Indicates if an IBM Workload Scheduler component is installed in this instance of IBM Workload Automation (when the value=1).
TWS_instance_type	
	Indicates which component of IBM Workload Scheduler is installed in this instance:
MDM	Master domain manager
BKM	Backup master domain manager
DDM	dynamic domain manager
FTA	Fault-tolerant agent or domain manager
TWS_user_name	
	The ID of the <<TWS_user>> of the IBM Workload Scheduler component.
TWS_wlplibdir	
	The installation directory of the WebSphere Application Server Liberty Base instance used by IBM Workload Scheduler.
TWS_datadir	
	The directory containing product data and data generated by IBM Workload Scheduler, such as logs and configuration information.
DWC_counter	
	Indicates if an instance of Dynamic Workload Console is installed in this instance of IBM Workload Automation (when the value=1)
DWC_user_name	
	The ID of the Dynamic Workload Console user.
DWC_wlplibdir	
	The installation directory of the WebSphere Application Server Liberty Base instance used by Dynamic Workload Console.
DWC_datadir	

The directory containing product data and data generated by Dynamic Workload Console, such as logs and configuration information.

Built-in troubleshooting features

A list, brief description and links to more information on the tools and facilities which are built in to the product to facilitate troubleshooting.

IBM Workload Scheduler is supplied with the following features that assist you with troubleshooting:

- Informational messages that inform you of expected events.
- Error and warning messages that inform you of unexpected events.
- Message helps for the most commonly-occurring messages. See *IBM® Workload Automation: Messages and Codes*.
- A logging facility that writes all types of messages to log files, which you use to monitor the progress of IBM Workload Scheduler activities. See [IBM Workload Scheduler logging and tracing using CCLog](#) on page 33.
- Various tracing facilities which record at varying levels of details the IBM Workload Scheduler processes for troubleshooting by IBM® Software Support. See [Difference between logs and traces](#) on page 31 for more details.
- A facility to save a configurable level of log and tracing information in memory and then save all or part of this information to a single fully integrated file for troubleshooting by IBM® Software Support. See [In-Flight Trace facility for engine](#) on page 57 for more details.
- An auditing facility that provides an audit trail of changes to the IBM Workload Scheduler database and plan for use in both monitoring and troubleshooting. For more details, see the section about Auditing in the Administration Guide.
- A configuration snapshot facility that you can use for backup, and also which provides IBM® Software Support with configuration information when unexpected events occur. See [Data capture utility](#) on page 49.
- A facility that automatically creates a First Failure Data Capture (ffdc) configuration snapshot if the failure of any of the key components can be detected by its parent component. See [First failure data capture \(ffdc\)](#) on page 54.
- An automatic backup mechanism of the *Symphony* file whereby each fault-tolerant agent and domain manager that receives a new *Symphony* file, automatically archives the previous *Symphony* to *Symphony.last* in the path `<TWA_home/TWS/>`, so that a backup copy is always maintained. This permits viewing of the previous *Symphony* data in case there were any message updates on the job and job stream states that were lost between the agent and its master domain manager.
- A problem determination capability available from the Dynamic Workload Console to determine why jobs that are ready to start, do not start and the solution. See [Jobs in READY status do not start](#) on page 160.

Keeping up-to-date with the latest fix packs

Reminds you that the best way to avoid problems is to apply fix packs

IBM Workload Scheduler fix packs contain fixes to problems that IBM®, you, or other customers have identified. Install the latest fix pack when it becomes available, to keep the product up to date.

Upgrading your whole environment

When upgrading, although compatibility with previous version components is a feature of IBM Workload Scheduler, potential problems can be avoided by upgrading all components to the new level as quickly as possible.

To avoid problems, ensure that when you upgrade to a new version of IBM Workload Scheduler you do so across your whole environment.

The components of this version of IBM Workload Scheduler are compatible with components of many previous versions (see *IBM® Workload Automation: Overview* for full details). However, running IBM Workload Scheduler in a mixed network increases the possibility of problems arising, because each new release of IBM Workload Scheduler not only adds functions, but also improves the stability and reliability of the various components. Try not to run in a mixed network for extended periods.

Chapter

2

Logging and tracing

Provides detailed information about logs and traces, and how to customize them and set the logging and tracing levels.

Information on the logging and tracing facilities of IBM Workload Scheduler, Dynamic Workload Console, and the WebSphere® Application Server is described in these topics:

- [Quick reference: how to modify log and trace levels](#) on page 29
- [Difference between logs and traces](#) on page 31
- [IBM Workload Scheduler logging and tracing using CCLog](#) on page 33
- [Dynamic Workload Console log and trace files](#) on page 38
- [Log file for the Self-Service mobile applications](#) on page 39
- [Dynamic workload scheduling log and trace files](#) on page 40
- [Dynamic agent log and trace files](#) on page 40
- [Log and trace files for the application server](#) on page 45
- [Collect trace information](#) on page 44
- [Retrieving IBM Workload Scheduler agent traces from the Dynamic Workload Console](#) on page 39

Quick reference: how to modify log and trace levels

Quick reference information about how to modify log and tracing levels for all components.

Modifying IBM Workload Scheduler logging level

1. Edit the `TWSCCLog.properties` file, located in the following path:

On Windows operating systems

`<TWA_home>\TWS\`

On UNIX operating systems

`<TWA_DATA_DIR>/TWS/`

2. Modify the `twsc.loggers.msgLogger.level` property.

This determines the type of messages that are logged. Change this value to log more or fewer messages, as appropriate, or on request from IBM® Software Support. Valid values are:

INFO

All log messages are displayed in the log. The default value.

WARNING

All messages except *informational* messages are displayed.

ERROR

Only *error* and *fatal* messages are displayed.

FATAL

Only messages which cause IBM Workload Scheduler to stop are displayed.

3. Save the file. The change is immediately effective.

See [Engine log and trace customization](#) on page 34 for more details.

Modifying IBM Workload Scheduler tracing level

1. Edit the `TWSCCLog.properties` file, located in the following path:

On Windows operating systems

`<TWA_home>\TWS\`

On UNIX operating systems

`<TWA_DATA_DIR>`

2. Modify `twsc.loggers.trc<component>.level`.

This determines the type of trace messages that are logged. Change this value to trace more or fewer events, as appropriate, or on request from IBM® Software Support. Valid values are:

DEBUG_MAX

Maximum tracing. Every trace message in the code is written to the trace logs.

DEBUG_MID

Medium tracing. A medium number of trace messages in the code is written to the trace logs.

DEBUG_MIN

Minimum tracing. A minimum number of trace messages in the code is written to the trace logs.

INFO

All *informational*, *warning*, *error* and *critical* trace messages are written to the trace. The default value.

WARNING

All *warning*, *error* and *critical* trace messages are written to the trace.

ERROR

Only *error* and *critical* messages are written to the trace.

CRITICAL

Only messages which cause IBM Workload Scheduler to stop are written to the trace.

3. Save the file. The change is immediately effective.

See [Engine log and trace customization](#) on page 34 for more details.

Modifying Dynamic Workload Console tracing level

To activate the Dynamic Workload Console traces at run time, locate and edit the `trace.xml` template.

To modify the `trace.xml` template, follow this procedure:

1. Copy the template file from the `templates` folder to a working folder.
2. Edit the template file in the working folder with the desired configuration.
3. Optionally, create a backup copy of the relevant configuration file present in the `overrides` directory in a different directory. Ensure you do not copy the backup file in the path where the template files are located.

4. Copy the updated template file to the `overrides` folder. Maintaining the original folder structure is not required.
5. Changes are effective immediately.

See: [Activating and deactivating traces in Dynamic Workload Console](#) on page 38 for more details.

Modifying WebSphere Application Server Liberty Base tracing level

To modify the trace level on the WebSphere Application Server Liberty Base, edit the `trace.xml` file as necessary.

1. Copy the template file from the `templates` folder to a working folder.
2. Edit the template file in the working folder with the desired configuration.
3. Optionally, create a backup copy of the relevant configuration file present in the `overrides` directory in a different directory. Ensure you do not copy the backup file in the path where the template files are located.
4. Copy the updated template file to the `overrides` folder. Maintaining the original folder structure is not required.
5. Changes are effective immediately.

See [Setting the traces on the application server for the major IBM Workload Scheduler processes](#) on page 45 for more details.

Managing dynamic agent tracing level

To manage traces for the dynamic agent, refer to the following sections:

- [See command usage and verify version](#) on page 42
- [Enable or disable trace](#) on page 43
- [Set trace information](#) on page 43
- [Show trace information](#) on page 43
- [Collect trace information](#) on page 44

You can also configure the traces when the agent is not running by editing the `[JobManager.Logging]` section in the `JobManager.ini` file as described in [Configuring the agent](#) section. This procedure requires that you stop and restart the agent.

Managing Application Lab tracing level

To modify the trace level on the Application Lab, edit the `trace.xml` file as necessary.

Application Lab is identified by the `simpleui` string, for example:

```
com.ibm.tws.simpleui.*=all
com.ibm.twa.simpleui.*=all.
com.ibm.tws.simpleui.*=info
com.ibm.twa.simpleui.*=info
```

Difference between logs and traces

Describes the difference between log and trace messages, and indicates in which languages they are available.

IBM Workload Scheduler and the Dynamic Workload Console create both log and trace messages:

Log messages

These are messages that provide you with information, give you warning of potential problems, and inform you of errors. Most log messages are described in *Messages and Codes*. Log messages are translated into the following languages:

- Chinese - simplified
- Chinese - traditional
- French

- German
- Italian
- Japanese
- Korean
- Portuguese - Brazilian
- Spanish

Messages are written to the log file in the language of the locale set on the computer where they were generated, at the moment when they were generated.

Trace messages

These are messages for IBM® Software Support that provide in depth information about IBM Workload Scheduler processes. In most cases they are in English. Whereas log messages are written so that you can understand them in relation to the activity you were performing, trace messages might not be. There is no guarantee that you can diagnose any error situations from the information they contain.

The traces are provided at several different levels and in several different forms:

Messages for IBM® Software Support

These are similar to log messages, and while not intended for customer use, can be sometimes helpful to experienced customers who know the product well. The information they contain is used by IBM® Software Support to understand problems better.

Specific software traces

These are traces written directly by the program code normally indicating the values of variables being used in complex processes. They are not for use by the customer.

Automatic software traces

These are traces issued automatically by the code when it enters and exits code modules. They are not for use by the customer.

The following table gives more detailed information:

Table 2: Difference between logs and traces

Characteristics	Log Messages	Messages for IBM® Software Support	Specific software traces	Automatic software traces
Translated	√			
Documented in Knowledge Center	√	Some		
Written to	√			
Windows operating systems				
				<TWA_home>\TWS \stdlist\logs
UNIX operating systems				
				TWA_DATA_DIR/ stdlist/logs/

Characteristics	Log Messages	Messages for IBM® Software Support	Specific software traces	Automatic software traces
Written to	√	√	√	
Windows operating systems <code><TWA_home>\TWS \stdlist\traces</code>				
UNIX operating systems <code>TWA_DATA_DIR/ stdlist/traces/</code>				
Logging level, format etc. controlled by <code>TWSCCLog.properties</code>	√	√	√	
Logging level, format etc. controlled by TWSFullTrace				√
Optionally written to memory by TWSFullTrace and written to disc by that utility when requested.	√	√	√	√

If you want to merge the logs and traces controlled by `TWSCCLog.properties` into one file, set the **localopts** option `merge stdlist` to `yes`.

IBM Workload Scheduler logging and tracing using CCLog

Describes the log and trace files created by the CCLog logging engine, and how they are configured.

CCLog is a logging engine that creates log files in a defined structure. It can be used to monitor many products from a variety of software suppliers. The configuration supplied with IBM Workload Scheduler uses it uniquely for the processes of IBM Workload Scheduler.

The CCLog engine is used wherever any of the following components are installed:

- Master domain manager
- Backup master domain manager
- Fault-tolerant agent

The contents of this section are as follows:

- [Engine log and trace file locations](#) on page 33
- [Engine log and trace file switching](#) on page 34
- [Engine log and trace customization](#) on page 34
- [Engine log and trace performance](#) on page 37

Engine log and trace file locations

Describes where to find the engine log and trace files produced by CCLog.

All log and trace files produced by IBM Workload Scheduler are stored in:

On Windows operating systems

`TWA_home\TWS\stdlist`

On UNIX operating systems

`TWA_DATA_DIR/stdlist`

The files have different names, depending on the settings in the `localopts` file:

merge stdlists = yes

- `<yyyymmdd>_NETMAN.log`
This is the log file for netman.
- `<yyyymmdd>_TWSMERGE.log`
This is the log file for all other processes.

merge stdlists = no

`<yyyymmdd>_<process_name>.log`

where `<process_name>` can be one of the following values:

```
APPSRVMAN
BATCHMAN
CONNECTR
JOBMAN
JOBMON
MAILMAN
NETMAN
WRITER
```

Low-level traces, and open source library messages that do not conform to the current standard IBM Workload Scheduler message format (for instance, some SSL stdout and stderr messages), are found in the following files: `<yyyy.mm.dd>/<process_name>`, where `<process_name>` is as above. For more information, see *User's Guide and Reference*.



Note: You can add a local option `restricted stdlists` to your `localopts` file to limit access to the `stdlist` directory on your UNIX™ workstation. For details, see *Administration Guide*.

Engine log and trace file switching

Describes when new log and trace files with the next day's datestamp are created.

The IBM Workload Scheduler log files are switched every day, creating new log files with the new datestamp, at the time set in the `startOfDay` global options (`optman`).

Engine log and trace customization

Describes how you can customize the CCLog logging and tracing facility. You can modify the appearance of the log and the logging and tracing levels.

You can customize the information written to the log files by modifying selected parameters in its properties file. The changes you can make affect the format of the log or trace file and the logging level or trace level.



Attention: Do not change any parameters in this file other than those detailed here, otherwise you might compromise the logging facility.

The CCLog properties file is located in the following path:

On Windows operating systems

`<TWA_home>/TWS`

On UNIX operating systems

`TWA_DATA_DIR`

Parameters

The parameters that can be modified are as follows:

Logging level

twsl.loggers.msgLogger.level

This determines the type of messages that are logged. Change this value to log more or fewer messages, as appropriate, or on request from IBM® Software Support. Valid values are:

INFO

All log messages are displayed in the log. The default value.

WARNING

All messages except *informational* messages are displayed.

ERROR

Only *error* and *fatal* messages are displayed.

FATAL

Only messages which cause IBM Workload Scheduler to stop are displayed.

Tracing level

twsl.loggers.trc<component>.level

This determines the type of trace messages that are logged. Change this value to trace more or fewer events, as appropriate, or on request from IBM® Software Support. Valid values are:

DEBUG_MAX

Maximum tracing. Every trace message in the code is written to the trace logs.

DEBUG_MID

Medium tracing. A medium number of trace messages in the code is written to the trace logs.

DEBUG_MIN

Minimum tracing. A minimum number of trace messages in the code is written to the trace logs.

INFO

All *informational*, *warning*, *error* and *critical* trace messages are written to the trace. The default value.

WARNING

All *warning*, *error* and *critical* trace messages are written to the trace.

ERROR

Only *error* and *critical* messages are written to the trace.

CRITICAL

Only messages which cause IBM Workload Scheduler to stop are written to the trace.

Component names used in the `tw.s.loggers.trc` property names are for the most part self-explanatory, but the following short explanations might help:

Logger

The main internal component of IBM Workload Scheduler that performs the scheduling activities.

Sendevnt

The event processor.

Connectr

The connector.

Log format parameters

fomatters.basicFmt.dateTimeFormat

This contains a specification of the date and time format used by CCLog when adding the date and time stamp to the message header. The format uses the standard *strftime* format convention, used by many programming libraries. The full format details can be found by searching the Internet, but a synthesis of the commonly used definitions is included in [Date and time format reference - strftime](#) on page 197.

fomatters.basicFmt.separator

This defaults to the pipe symbol "|", and is used to separate the header of each log message, which contains information such as the date and time stamp and the process that issued the error, from the body, which contains the process-specific information such as the issuing process, the message number and the message text. You can change the separator to another character or characters, or set it to null.

tw.sHnd.logFile.className

This indicates if CCLog uses semaphore memory to write to the log file. The default setting (`ccg_filehandler`) tells CCLog to write each line of a multiline message separately. Each process interleaves each line of its multiline messages with messages from other processes, if necessary, improving performance. While this approach could potentially make the log files more difficult to read, this interleaving only occurs in extreme situations of very high use, for example when many jobs are running concurrently.

The setting `ccg_multiproc_filehandler`, defines that each process completes writing any log message, including multiline messages, before freeing the log file for another process to use. This can have an impact on performance when many processes are running concurrently.

tw.s.loggers.className

This indicates the type of log layout you want to use, determining the number of fields in the log record header. The default setting (`ccg_basiclogger`) tells CCLog to put just the date/time stamp and the process name in the header.

The alternative setting is `ccg_pdlogger`, which contains more information in the header, thus reducing the length of the log records available for the message text.

`twsl.loggers.organization`

This defaults to *IBM*[®] and is used to differentiate between log entries from applications from different suppliers when the same instance of CCLog is being used by more than one software supplier. IBM Workload Scheduler is supplied with a unique instance, and thus unique log files, so if this value is prefixed to your log messages, you can set the value of this parameter to null to avoid it being displayed.

`twsl.loggers.product`

This defaults to *TWS* and is used to differentiate when the same log files are used by more than one product. IBM Workload Scheduler is supplied with unique log files, so if this value is prefixed to your log messages, you can set the value of this parameter to null to avoid it being displayed.

Other parameters

No other parameters must be modified. To do so risks compromising the logging or tracing facility, or both.

Making changes effective

Making your changes effective depends on the type of change:

Changes to log or trace levels

If you change the `twsl.loggers.msgLogger.level` or the `twsl.loggers.trc<component>.level`, the change is immediately effective after the file has been saved.

All other changes

Restart IBM Workload Scheduler to make overall changes effective; restart a process to make process-specific changes effective.

Engine log and trace performance

Describes what impact logging and tracing has on the product's performance.

If you use the default configuration, CCLog does not normally have a significant impact on performance.

If you believe that it is impacting performance, check that the default values for the parameters `twslHnd.logFile.className` and `twslloggers.className` are as described in [Engine log and trace customization](#) on page 34, and have not been set to other values.

However, even if the default parameters are in use, you might find that in situations of very heavy workload, such as when you have many jobs running simultaneously on the same workstation, multiline log messages become interleaved with messages from other processes. The length of log messages has been increased to offset this risk, but if you find it becoming a problem, contact IBM[®] Software Support for advice on how to reset the previous settings, which avoided the interleaved messages, but had an impact on performance at busy times.

Dynamic Workload Console log and trace files

This section describes the Dynamic Workload Console log and trace files, where to find them, and how to modify log and tracing levels.

[Table 3: Locations of log files and trace files](#) on page 38 lists the log and trace files created by the Dynamic Workload Console:

Table 3: Locations of log files and trace files

Path	Files	Content
Dynamic Workload Console:		
On Windows	console.log, messages.log trace.log	The Dynamic Workload Console run time logs and traces.
<code><DWC_home>\stdlist \appserver\dwcServer \logs</code>		
On UNIX:		
<code><DWC_DATA_dir>/stdlist/ appserver/dwcServer/ logs</code>		
On Windows	dwcinst_<version_number>	The Dynamic Workload Console installation log.
<code><DWC_home>\logs</code>		
On UNIX		
<code><DWC_DATA_dir>/ installation/logs</code>		

Activating and deactivating traces in Dynamic Workload Console

Describes how to activate or deactivate the Dynamic Workload Console traces.

Traces activation and deactivation

This task activates Dynamic Workload Console traces.

To activate the Dynamic Workload Console traces at run time, locate and edit the `trace.xml` template as described below.

Templates for the Dynamic Workload Console are stored in the following paths:

On UNIX operating systems

`DWC_home/usr/servers/dwcServer/configDropins/templates`

On Windows operating systems

`DWC_home\usr\servers\dwcServer\configDropins\templates`

When you edit the file with your customized settings for the Dynamic Workload Console, move it to the following paths:

On UNIX operating systems

`DWC_DATA_dir/usr/servers/dwcServer/configDropins/overrides`

On Windows operating systems

`DWC_home\usr\servers\dwcServer\configDropins\overrides`

To modify the `trace.xml` template, follow this procedure:

1. Copy the template file from the `templates` folder to a working folder.
2. Edit the template file in the working folder with the desired configuration.
3. Optionally, create a backup copy of the relevant configuration file present in the `overrides` directory in a different directory. Ensure you do not copy the backup file in the path where the template files are located.
4. Copy the updated template file to the `overrides` folder. Maintaining the original folder structure is not required.
5. Changes are effective immediately.

IBM Workload Scheduler agent trace files

Describes how to collect trace files for the IBM Workload Scheduler agent.

You can collect log and trace files for the IBM Workload Scheduler agent, by performing the following actions:

When the agent is running:

By using the `twstrace` command as described in [twstrace command](#) on page 42.

When the agent is stopped:

By configuring the `[JobManager.Logging]` section in the `JobManager.ini` file.

For more information, see the section about Configuring log message properties `[JobManager.Logging.clog]` in *IBM Workload Scheduler: Administration Guide*.

This procedure requires that you stop and restart the dynamic agent.

Using the Dynamic Workload Console

Log in to the Dynamic Workload Console and proceed as described in [Retrieving IBM Workload Scheduler agent traces from the Dynamic Workload Console](#) on page 39.

Retrieving IBM Workload Scheduler agent traces from the Dynamic Workload Console

Describes how to collect trace files for the IBM Workload Scheduler agent from the Dynamic Workload Console.

You can collect trace files for the IBM Workload Scheduler agent, by performing the following actions:

1. Log in to the Dynamic Workload Console.
2. In the navigation bar at the top, click **Monitoring and Reporting > Workload Monitoring > Monitor Workload**.
3. In the **Engine** field, select one or more engines.
4. In the **Object Type** field, Select **Workstation**.
5. in the **More Actions** menu, select **Collect Agent Logs**.

A `.zip` file is created containing all agent traces.



Note:

An error message might be displayed if the size of the `.zip` file is very large. In this case, try and reduce the size of the log files on the agent workstation.

Log file for the Self-Service mobile applications

The log file for the Self-Service Catalog and Self-Service Dashboards mobile applications can be configured in the Dynamic Workload Console global settings file. The log file is enabled by default.

For more information, see the section about auditing mobile app activity in *Dynamic Workload Console User's Guide*

The log file is written to the following path:

On UNIX operating systems

`<DWC_DATA_dir>/stdlist/appserver/dwcServer/audit_SSC_SSD.log`

On Windows operating systems

`<TWA_home>\stdlist\appserver\dwcServer\audit_SSC_SSD.log`

Dynamic workload scheduling log and trace files

The logs and traces produced by the dynamic workload scheduling processes are in most part included in the log and trace files of the IBM Workload Scheduler master domain manager. In addition, the files listed in [Table 4: Locations of log and trace files](#) on page 40 also contain log and trace material from these processes.

Table 4: Locations of log and trace files

Component	Path	Trace files	Log files	Content
IBM Workload Scheduler master domain manager	On Windows systems	native_stderr.log native_stdout.log serverStatus.log startServer.log stopServer.log SystemErr.log trace.log	SystemOut.log	Additional log files used by dynamic workload scheduling
	On UNIX systems	<code><TWA_DATA_DIR>/stdlist/appserver/engineServer/logs</code>		
IBM Workload Scheduler agent	<code>TWA_home /TWS/stdlist/JM</code>	JobManager_trace.log ita_trace.log	JobManager_message.log ita_message.log	Log and trace files
	<code>TWA_home /TWS/stdlist/JM/JOBMANAGER-FFDC/yy-mm-dd/</code>		JobManager_message.log	Processing error log file

Dynamic agent log and trace files

Describes how to collect log and trace files for the agent.

You can collect log and trace files for the agent, by performing the following actions:

When the agent is running:

By using the `twstrace` command as described in [twstrace command](#) on page 42.

When the agent is stopped:

By configuring the [JobManager.Logging] section in the `JobManager.ini` file.

For more information, see the section about Configuring log message properties [JobManager.Logging.clog] in *IBM Workload Scheduler: Administration Guide*.

This procedure requires that you stop and restart the dynamic agent.

The log messages are written in the following file:

On Windows operating systems:

<TWA_home>\TWS\stdlist\JM\JobManager_message.log

On UNIX and Linux operating systems:

<TWA_DATA_DIR>/stdlist/JM/JobManager_message.log

The trace messages are written in the following file:

On Windows operating systems:

- <TWA_home>\TWS\stdlist\JM\ITA_trace.log
- <TWA_home>\TWS\stdlist\JM\JobManager_trace.log
- <TWA_home>\TWS\JavaExt\logs\javaExecutor0.log

On UNIX and Linux operating systems:

- <TWA_DATA_DIR>/stdlist/JM/ITA_trace.log
- <TWA_DATA_DIR>/stdlist/JM/JobManager_trace.log
- <TWA_DATA_DIR>/JavaExt/logs/javaExecutor0.log

Logging information about job types with advanced options

You can use the logging.properties file to configure the logging process for job types with advanced options, with the exception of the Executable and Access Method job types.

The logging.properties file is located on the IBM® Z Workload Scheduler Agent, located in the following path:

On Windows operating systems:

<TWA_home>/TWS/JavaExt/cfg/logging.properties

On UNIX and Linux operating systems:

<TWA_DATA_DIR>/JavaExt/cfg/logging.properties

After installation, this file is as follows:

```
# Specify the handlers to create in the root logger
# (all loggers are children of the root logger)
# The following creates two handlers
handlers = java.util.logging.ConsoleHandler,
           java.util.logging.FileHandler

# Set the default logging level for the root logger
.level = INFO

# Set the default logging level for new ConsoleHandler
instances
java.util.logging.ConsoleHandler.level = INFO

# Set the default logging level for new FileHandler instances
java.util.logging.FileHandler.level
= ALL
java.util.logging.FileHandler.pattern
= C:\TWA_home\TWS\JavaExt\logs\javaExecutor%g.log
java.util.logging.FileHandler.limit
= 1000000
java.util.logging.FileHandler.count
= 10

# Set the default formatter for new ConsoleHandler instances
```

```
java.util.logging.ConsoleHandler.formatter =
    java.util.logging.SimpleFormatter
java.util.logging.FileHandler.formatter =
    java.util.logging.SimpleFormatter

# Set the default logging level for the logger named
  com.mycompany
com.ibm.scheduling = INFO
```

You can customize:

- The logging level (from INFO to WARNING, ERROR, or ALL) in the following keywords:

.level

Defines the logging level for the internal logger.

com.ibm.scheduling

Defines the logging level for the job types with advanced options. To log information about job types with advanced options, set this keyword to ALL.

- The path where the logs are written, specified by the following keyword:

```
java.util.logging.FileHandler.pattern
```

Configuring trace properties when the agent is running

Use the **twstrace** command to set the trace on the agent when it is running.

Using the **twstrace** command, you can perform the following actions on the agent when it is running:

- [See command usage and verify version](#) on page 42.
- [Enable or disable trace](#) on page 43.
- Set the traces to a specific level, specify the number of trace files you want to create, and the maximum size of each trace file. See [Set trace information](#) on page 43.
- [Show trace information](#) on page 43.
- Collect trace files, message files, and configuration files in a compressed file using the command line. See [Collect trace information](#) on page 44.
- Collect trace files, message files, and configuration files in a compressed file using the Dynamic Workload Console. See [Retrieving IBM Workload Scheduler agent traces from the Dynamic Workload Console](#) on page 39.

You can also configure the traces when the agent is not running by editing the [JobManager.Logging] section in the `JobManager.ini` file as described in [Configuring the agent](#) section. This procedure requires that you stop and restart the agent.

twstrace command

Use the **twstrace** command to configure traces, and collect logs, traces, and configuration files (`ita.ini` and `jobManager.ini`) for agents. You collect all the information in a compressed file when it is running without stopping and restarting it.

See command usage and verify version

To see the command usage and options, use the following syntax.

Syntax

```
twstrace -u | -v
```


Parameters

-u

Shows the command usage.

-v

Shows the command version.

Enable or disable trace

To set the trace to the maximum or minimum level, use the following syntax.

Syntax

```
twstrace -enable | -disable
```

Parameters

-enable

Sets the trace to the maximum level. The maximum level is **1000**.

-disable

Sets the trace to the minimum level. The minimum level is **3000**.

Set trace information

To set the trace to a specific level, specify the number of trace files you want to create, and the maximum size the trace files can reach, use the following syntax.

Syntax

```
twstrace [ -level <level_number> ] [ -maxFiles <files_number> ] [ -maxFileBytes <bytes_number> ]
```

Parameters

-level <level_number>

Sets the trace level. Specify a value in the range from 1000 to 3000, which is also the default value. Note that if you set this parameter to 3000, you have the lowest verbosity level and the fewest trace messages. To have a better trace level, with the most verbose trace messages and the maximum trace level, set it to **1000**.

-maxFiles <files_number>

Specify the number of trace files you want to create.

-maxFileBytes <bytes_number>

Set the maximum size in bytes that the trace files can reach. The default is **1024000** bytes.

Show trace information

To display the current trace level, the number of trace files, and the maximum size the trace files can reach, use the following syntax.

Syntax

```
twstrace -level | -maxFiles | -maxFileBytes
```

Parameters

-level

See the trace level you set.

-maxFiles

See the number of trace files you create.

-maxFileBytes

See the maximum size you set for each trace file

Sample

The example shows the information you receive when you run the following command:

```
twstrace -level -maxFiles -maxFileBytes
```

```
AWSITA176I The trace properties are: level="1000",
max files="3", file size="1024000".
```

Collect trace information

To collect the trace files, the message files, and the configuration files in a compressed file, use the following syntax.

Syntax

```
twstrace -getLogs [ -zipFile <compressed_file_name> ] [ -host <host_name> ] [ -protocol {http |
https } ] [ -port <port_number> ] [ -iniFile <ini_file_name> ]
```

Parameters

-zipFile <compressed_file_name>

Specify the name of the compressed file that contains all the information, that is logs, traces, and configuration files (ita.ini and jobManager.ini) for the agent. The default is **logs.zip**.

-host <host_name>

Specify the host name or the IP address of the agent for which you want to collect the trace. The default is **localhost**.

-protocol http|https

Specify the protocol of the agent for which you are collecting the trace. The default is the protocol specified in the **.ini** file of the agent.

-port <port_number>

Specify the port of the agent. The default is the port number of the agent where you are running the command line.

-iniFile <ini_file_name>

Specify the name of the **.ini** file that contains the SSL configuration of the agent for which you want to collect the traces. If you are collecting the traces for a remote agent for which you customized the security certificates, you must import the certificate on the local agent and specify the name of the **.ini** file that contains this configuration. To do this, perform the following actions:

1. Extract the certificate from the keystore of the remote agent.
2. Import the certificate in a local agent keystore. You can create an ad hoc keystore whose name must be **TWSClientKeyStore.kdb**.

3. Create an **.ini** file in which you specify:

- **0** in the **tcp_port** property as follows:

```
tcp_port=0
```

- The port of the remote agent in the **ssl_port** property as follows:

```
ssl_port=<ssl_port>
```

- The path to the keystore you created in Step 2 on page 44 in the **key_repository_path** property as follows:

```
key_repository_path=<local_agent_keystore_path>
```

Log and trace files for the application server

The log and trace files for WebSphere Application Server Liberty Base can be found in:

Application server run time log and trace files

On UNIX:

- `<TWA_DATA_DIR>/stdlist/appserver/engineServer/logs/messages.log`
- `<TWA_DATA_DIR>/stdlist/appserver/engineServer/logs/trace.log`

On Windows:

- `<TWA_home>\TWS\stdlist\appserver\engineServer\logs\messages.log`
- `<TWA_home>\TWS\stdlist\appserver\engineServer\logs\trace.log`

Trace files containing messages related to the plan replication in the database

On UNIX:

- `<TWA_DATA_DIR>/stdlist/appserver/engineServer/logs/PlanEventMonitor.log.0`
- `<TWA_DATA_DIR>/stdlist/appserver/engineServer/logs/PlanEventMonitor.log.1`

On Windows:

- `<TWA_home>\TWS\stdlist\appserver\engineServer\logs\PlanEventMonitor.log.0`
- `<TWA_home>\TWS\stdlist\appserver\engineServer\logs\PlanEventMonitor.log.1`

Setting the traces on the application server for the major IBM Workload Scheduler processes

The application server handles all communications between the IBM Workload Scheduler processes. The trace for these communications is set to `tws_info` by default (information messages only). The application server can be set to trace all communications, either for the whole product or for these specific groups of processes:

- Command line
- Connector
- Database
- Planner
- Utilities
- Dynamic workload broker

Significant impact on performance: Activating traces for the WebSphere Application Server Liberty Base leads to a significant impact on performance, especially if you set the tracing to `all`. Thus you are strongly advised to identify the process group where the problem that you want to trace is occurring, and only set the trace to that group.

To modify the trace level on the WebSphere Application Server Liberty Base, edit the `trace.xml` file as necessary.

Templates for the master domain manager are stored in the following paths:

On UNIX operating systems

`TWA_home/usr/servers/engineServer/configDropins/templates`

On Windows operating systems

`TWA_home\usr\servers\engineServer\configDropins\templates`

Templates for the Dynamic Workload Console are stored in the following paths:

On UNIX operating systems

`DWC_home/usr/servers/dwcServer/configDropins/templates`

On Windows operating systems

`DWC_home\usr\servers\dwcServer\configDropins\templates`

When you edit the file with your customized settings for the master domain manager, move it to the following paths:

On UNIX operating systems

`TWA_DATA_DIR/usr/servers/engineServer/configDropins/overrides`

On Windows operating systems

`TWA_home\usr\servers\engineServer\configDropins\overrides`

When you edit the file with your customized settings for the Dynamic Workload Console, move it to the following paths:

On UNIX operating systems

`DWC_DATA_dir/usr/servers/dwcServer/configDropins/overrides`

On Windows operating systems

`DWC_home\usr\servers\dwcServer\configDropins\overrides`

1. Copy the template file from the `templates` folder to a working folder.
2. Edit the template file in the working folder with the desired configuration.
3. Optionally, create a backup copy of the relevant configuration file present in the `overrides` directory in a different directory. Ensure you do not copy the backup file in the path where the template files are located.
4. Copy the updated template file to the `overrides` folder. Maintaining the original folder structure is not required.
5. Changes are effective immediately.

`[-user <<TWS_user>> -password <<TWS_user>_password>]`

The user and password are optional. By default, the script looks for the credentials in the `soap.client.props` file located in the `properties` directory of the WebSphere Application Server Liberty Base profile.

`<trace_mode>` is one of the following values:

active_correlation

All communications involving the event correlator are traced.

tws_all_jni

All communications involving the jni code are traced. The jni code refers to code in shared C libraries invoked from Java™. This option is used by, or under the guidance of, IBM Software Support.

tws_all

All IBM Workload Scheduler communications are traced.

tws_alldefault

Resets the trace level to the default level imposed at installation.

tws_bridge

Only the messages issued by the workload broker workstation are traced.

tws_broker_all

All dynamic workload broker communications are traced.

tws_broker_rest

Only the communication between dynamic workload broker and the agents is traced.

tws_cli

All IBM Workload Scheduler command line communications are traced.

tws_conn

All IBM Workload Scheduler connector communications are traced.

tws_db

All IBM Workload Scheduler database communications are traced.

tws_info

Only information messages are traced. The default value.

tws_planner

All IBM Workload Scheduler planner communications are traced.

tws_secjni

All IBM Workload Scheduler jni code auditing and security communications are traced. The jni code refers to code in shared C libraries invoked from Java™. Only use this option under the guidance of, IBM Software Support.

tws_smseadapter

All the activities of the Solution Manager Scheduling Enabler (SMSE) adapter on the master domain manager are logged in the `trace.log` file. The only exceptions apply to errors due to missing libraries or errors incurred during the startup process, which are recorded in the `SystemOut.log` file

tws_utils

All IBM Workload Scheduler utility communications are traced.

Chapter

3

Capturing data in the event of problems

Describes the facilities available for data capture in the event of problems occurring. It provides full details of the Data capture utility and the provisions for first failure data capture.

In the event of any problems occurring while you are using IBM Workload Scheduler, you might be asked by the IBM® Customer Support to supply information about your system that might throw a light on why the problem occurred. The following utilities are available:

- A general data capture utility command that extracts information about IBM Workload Scheduler and related workstations, system-specific information, and data related to WebSphere Application Server Liberty Base; see [Data capture utility](#) on page 49.
- A first failure data capture (ffdc) facility built into **batchman** and **mailman** that automatically runs the data capture utility when failures occur in **jobman**, **mailman**, or **batchman**; see [First failure data capture \(ffdc\)](#) on page 54.
- WebSphere Application Server Liberty Base `javadump` command to create the heap dump for WebSphere Application Server Liberty Base that runs on the Dynamic Workload Console and the master domain manager; see [Creating application server dumps](#) on page 55.

Data capture utility

The data capture utility is a script named `wa_pull_info` which extracts information about a product instance of IBM Workload Scheduler.

The data capture utility script is located in the following path:

On Windows operating systems

`%windir%`

On UNIX operating systems

`TWA_home/TWS/bin`

and can be run from the UNIX™ or DOS prompt on the master domain manager, the backup master domain manager, or a standard or fault-tolerant agent.

When to run the utility

Describes the circumstances in which you would use the data capture utility.

Use the data capture utility in these circumstances:

- An IBM Workload Scheduler process has failed, but the automatic ffdc facility has not detected the failure and run the script for you (see [First failure data capture \(ffdc\)](#) on page 54)
- IBM Workload Scheduler is very slow or is behaving in any other abnormal way
- You are requested to do so by IBM® Software Support

Using the utility when you need to switch to the backup master domain manager

If the master domain manager fails you might decide that you want to switch to the backup master domain manager to keep your scheduling activities running. If you also want to run the data capture utility you have two choices:

Data capture first

Run the data capture utility first to ensure that the information extracted is as fresh as possible. Then run **switchmgr**.

Switchmgr first

In an emergency situation, where you must continue scheduling activities, run **switchmgr** immediately and then run the data capture utility on both the new master domain manager and the new backup master domain manager as soon as **switchmgr** has completed.

Prerequisites

Describes the prerequisites for running the `wa_pull_info` data capture utility.

Where the utility can be run

The utility can be run on the master domain manager, the backup master domain manager or a standard or fault-tolerant agent.

Who can run it

The utility must be run by one of the following users:

- Any IBM Workload Scheduler user
- Root (recommended on UNIX™ or Linux™ systems)
- Administrator (on Windows™ systems)

To determine the best user to run the script, make the following considerations:

Troubleshooting any type of problem

- On UNIX™ operating systems, the user running the script must have read access to the `/etc` and `/etc/TWS` directories and read access to the `/etc/TWS/TWSRegistry.dat` file

Troubleshooting installation problems

- On UNIX™ operating systems, run the script as root to ensure to gather all installation information.

Troubleshooting problems when the product is running

- The script will only extract database object descriptions to which the user running it has EXTRACT permission in the Security file. The `<TWS_User>` (the user who performed the installation) normally has full access to all database objects, so this is the best user to run the script.
- The IBM Workload Scheduler instance must have a Symphony file otherwise some information will not be extracted.

Command and parameters

Describes the command syntax and parameters of the data capture utility.

Command syntax

Run the data capture utility with the following command:

```
wa_pull_info.sh -?
```

```
wa_pull_info.sh  
-component DWC|TWS  
[-date yyyy-mm-dd]  
-output output_path  
-user userid
```

This is the syntax for UNIX[®] operating systems; on Windows[™] use **wa_pull_info.cmd**

Parameters

-component

The component whose data you want to capture. Supported values are DWC and TWS. This parameter is mandatory.

-date

Used as the base date for collected data logs. If not specified, the script uses the current date by default and the day before the current date. Run the data capture utility as soon as a problem occurs, to collect the data specific to the date and time of the problem. Thus, if the problem occurs on the current date, this option is not required. If the problem occurred earlier, then the date on which the problem occurred must be specified in the yyyy-mm-dd format. Either the current date or the specified date is used to identify which files and logs are extracted. This parameter is optional.

-output

The base directory location where the collected data is stored. The user must have write access to the specified directory. This parameter is mandatory.

-user

The IBM Workload Scheduler user that you specify when you install the IBM Workload Scheduler. This user must exist in the `TWSregistry.dat` file if the IBM Workload Scheduler instance already exists. This parameter is mandatory.

-?

Displays the usage of the command.

Tasks

Describes the tasks performed by the data capture utility.

Check that the user exists

The script verifies if the specified user exists in the `TWSRegistry.dat` file. If it does, the `<TWS_HOME>` directory used for data collection is extracted from the `TWSRegistry.dat` file. (UNIX[™] only) If the specified user does not exist, the script verifies if the user exists in the `/etc/passwd` file. If no user exists, the script terminates.

Check the user permissions

The commands that are used during the data collection try to retain the original ownership of the files; when the script is run on Solaris platforms, the ownership of the files might change. If the

script is run by a IBM Workload Scheduler user (for example, not the root user) the script collects the available instance data.



Note:

Some Windows™ security policies can affect which data is extracted.

Create the directories in which to store the collected data

The script first creates the `<log_dir_base>` directory, where `<log_dir_base>` is the value provided for the `-log_dir_base` option. Within the `<log_dir_base>` directory, the script creates the `tws_info` directory and its subdirectories `TWS_yyyymmdd_hhmmss`, where `yyyy`=year, `mm`=month, `dd`=day, `hh`=hour, `mm`=minute and `ss`=seconds.

Collect data

The script collects system and product-specific data, as described in [Data collection](#) on page 52.

Create the TAR file

UNIX™

The script creates the TAR file `TWS_yyyymmdd_hhmmss.tar` and compresses it to `TWS_yyyymmdd_hhmmss.tar.Z`, or if the operating system is Linux_i386, `TWS_yyyymmdd_hhmmss.tar.gz`.

Windows™

On Windows™ operating systems there is no built-in compression program, so the script does not create a compressed file. If you intend to send the data to IBM® Software Support you should use your own compression utility to create the compressed archive.

Data collection

Describes the data collected by the data capture utility.

System-specific data

For system-specific data, the script performs the following operations:

- Extracts local CPU node information
- Extracts the environment for the current IBM Workload Scheduler instance
- Extracts `nslookup` information for local CPU
- Extracts `netstat` information for local CPU
- Extracts Services information
- Extracts the current running processes
- (UNIX® only) Extracts a list of the files and directories under `/usr/Tivoli/TWS`
- Extracts the current available disk space for `%TWA_HOME%`
- Extracts the current available disk space for the `tmp` directory
- (UNIX® only) Extracts the current system disk space
- (UNIX® only) Extracts the current disk space of root `filesystem`
- (Solaris 10.x or above) Extracts `zonecfg` information
- (AIX® only) Copies `netshvc.conf`
- (UNIX® only, except AIX®) Copies the `nsswitch.*` files
- Copies the host and services files

IBM Workload Scheduler-specific data

For IBM Workload Scheduler-specific data, the script performs the following operations:

Collects IBM Workload Scheduler messages, as follows:

- Generates a list of the .msg files
- Extracts a list of the files in the following path:

On Windows™ operating systems

`<TWA_home>\TWS\ftbox`

On UNIX® operating systems

`<TWA_DATA_DIR>/ftbox`

Collects IBM Workload Scheduler information, as follows:

- Extracts information about the IBM Workload Scheduler instance installation
- Extracts the IBM Workload Scheduler Security file
- Extracts a list of all files under the %TWA_HOME% directory
- Extracts the database definitions to flatfiles
- (UNIX® only) Extracts the optman output
- (UNIX® only) Extracts planman "showinfo" output
- Copies jobmanrc.cmd and jobmanrc (if it exists)
- Copies the schedlog files of the previous day (the option -date is not used)
- Copies the schedlog files of the day on which the problem occurred, day - 1 and day + 1 (the option -date is used)
- Copies files located in the following path:

On Windows™ operating systems

`<TWA_home>TWS\audit\database\plan\${today} & ${yesterday}`

On UNIX® operating systems

`<TWA_DATA_DIR>\audit\database\plan\${today} & ${yesterday}`

- Copies the BmEvents.conf file and the event log (if %TWA_HOME%\BmEvents.conf exists)
- Copies the content of the BmEvents log file (if %TWA_HOME%\BmEvents.conf exists)
- Copies the TWSRegistry.dat file
- (UNIX® only) Copies all files from /etc/TWA, /tmp/TWA*, /tmp/twsinst*, /tmp/tws9*, and TWA_DATA_DIR/stdlist/logs.
- Copies the content of the %TWA_HOME%\version directory
- Copies the files of the local workstation (the master domain manager and the backup master domain manager are also workstations on which jobs can be scheduled)
- (Windows™ only) If the z/OS® connector is installed locally, copies the TWSZOSConnRegistry.dat file

Collects IBM Workload Scheduler logs, as follows:

- Copies the TWSUser, BATCHUP, NETMAN, TWSMERGE, and joblog stdlist files for current and previous date
- Copies the TWSMERGE and NETMAN log files from the stdlist\logs directory for current and previous date
- Copies the TWSMERGE BATCHUP and NETMAN stdlist files from the stdlist\traces directory for current and previous date
- Collects output of various conman commands: sc, sj, ss



Note: The NETMAN log files also contain information about the mailman process.

Collects IBM Workload Scheduler files, as follows:

- Extracts a list of the files in the %TWA_HOME%\ITA directory
- Extracts a list of the files in the %TWA_HOME%\stdlist\JM directory
- Extracts a list of the files in the %TWA_HOME%\jmJobTableDir directory
- Copies all the files in the %TWA_HOME%\stdlist\JM directory
- Copies all the files in %TWA_HOME%\jmJobTableDir

Collect xtrace information from IBM Workload Scheduler processes as follows:

- Generates snapshot files for IBM Workload Scheduler processes in raw format
- Generates snapshot files in XML format from the raw format

If IBM Workload Scheduler for Applications is installed on the workstation, collects data on the methods, as follows:

- Copies the content of the %TWA_HOME%\methods directory (if it exists)
- (Windows™ only) Collects information about the Peoplesoft method
- Collects information about the r3batch method
- (UNIX® only) Collects the r3batch picklist results

WebSphere Application Server Liberty Base-specific data

For WebSphere Application Server Liberty Base-specific data, the script performs the following operations:

- Extracts a list of the IBM Workload Scheduler server files specific to WebSphere Application Server Liberty Base
- Collects the IBM Workload Scheduler server Liberty profile ()
- Copies select IBM Workload Scheduler application files specific to WebSphere®
- Collects all configuration files:
 - datasource.xml
 - ssl_variables.xml
 - wauser_variables.xml
 - ports_variables.xml
 - host_variables.xml
 - jvm.options
 - authentication_config.xml
- Collects the javacore*.txt files from the path <PROFILE_HOME>
- Collects the data source properties
- Collects the host properties
- Collects the security properties

First failure data capture (ffdc)

Describes how the data capture tool is used automatically by components of the product to create a *first failure data capture* of the products logs, traces and configuration files.

To assist in troubleshooting, several modules of the product have been enabled to create a *first failure data capture* in the event of failure. This facility uses the data capture tool `wa_pull_info` (see [Data capture utility](#) on page 49) to copy logs, traces, configuration files and the database contents (if the database is on DB2®) and create a compressed file that you can send to IBM® Software Support.

This tool is run in the following circumstances:

Jobman fails

If batchman detects that jobman has failed, it runs the script, placing the output in <TWA_home>/stdlist/yyyy.mm.dd/collector/JOBMAN

Batchman fails

If mailman detects that batchman has failed, it runs the script, placing the output in `<TWA_home>/stdlist/yyyy.mm.dd/collector/BATCHMAN`

Mailman fails

If mailman detects that it itself has failed with a terminal error, it runs the script, placing the output in `<TWA_home>/stdlist/yyyy.mm.dd/collector/MAILMAN`. Note that process hard stops, for example, segmentation violations, are not tracked by mailman itself.

Netman child process fails

If netman detects that one of its child processes has failed, it runs the script, placing the output in `<TWA_home>/stdlist/yyyy.mm.dd/collector/NETMAN`

Only one data collection is kept for each day. Each day a new data collection overwrites the previous day's collection.

Within each of the target output directories, the output file is stored in the `/tw_info/TWS_yyyymmdd_hhmmss` directory.

To perform `ffdc`, the `wa_pull_info` script is run by a script called `collector.sh (.cmd)`. You can customize this script (located in `<TWA_home>/TWS/bin`) to apply different parameters to the `wa_pull_info` script for any of the enabled modules (jobman, mailman, batchman and netman)

Creating application server dumps

See the related WebSphere Application Server Liberty Base documentation at [How to generate javacores/thread dumps, heapdumps and system cores for the WebSphere Application Server Liberty profile](#).

The following is an example of how to create the heap dump for both the Dynamic Workload Console and the master domain manager:

1. Set the environment by running the `setEnv.sh` script located in the path:

Dynamic Workload Console

On Windows™ operating systems:

```
DWC_INST_DIR\DWC\appservertools\setEnv.bat
```

On UNIX™ operating systems:

```
DWC_DATA_dir/DWC/appservertools/setEnv.sh
```

master domain manager

On Windows™ operating systems:

```
TWA_home\server_<wauser>\appservertools\setEnv.bat
```

On UNIX™ operating systems:

```
TWA_DATA_DIR/server_<wauser>/appservertools/
setEnv.sh
```

2. Submit the following command to create the heap dump:

Dynamic Workload Console and master domain manager

On Windows™ operating systems:

```
WLP_INST_DIR\bin\server javadump <dwc_Server_Name>
--include=heap
```

On UNIX™ operating systems:

```
WLP_INST_DIR//bin/server javadump <dwc_Server_Name>  
--include=heap
```

You can locate the dump file in the following path:

Dynamic Workload Console

On Windows™ operating systems:

```
DWC_INST_DIR\stdlist\appserver\dwcServer
```

On UNIX™ operating systems:

```
DWC_DATA_dir/stdlist/appserver/dwcServer
```

master domain manager

On Windows™ operating systems:

```
TWA_home\stdlist\appserver\engineServer
```

On UNIX™ operating systems:

```
TWA_DATA_DIR/stdlist/appserver/engineServer
```

Chapter 4

In-Flight Trace facility for engine

Describes the tracing facility for troubleshooting the IBM Workload Scheduler engine. This facility is called In-Flight Trace.

This document describes the IBM Workload Scheduler server tracing facility that replaced Autotrace from version 8.6. The facility is designed to be used by IBM® Software Support, but is fully described here so that you understand how to use it if requested to do so by IBM® Software Support.

The IBM Workload Scheduler server tracing facility (hereafter called In-Flight Trace) is a facility used by IBM® Software Support to help solve problems in IBM Workload Scheduler. At maximum capacity it can trace the entry into and exit from every IBM Workload Scheduler function, plus many other events, and includes all log and trace messages currently issued by the CCLog facility.

In-Flight Trace has been conceived as a multi-product tool, although this description concentrates on its use for IBM Workload Scheduler.

It works as follows:

Existing trace calls

In-Flight Trace uses the logging and tracing facilities still used by the CCLog logging and tracing mechanism, and which were used by the Autotrace facility in releases before 8.6.

Function entry and exit

In addition, the IBM Workload Scheduler engine product build now inserts trace calls in the code to record the entry to and exit from every function and assigns a sequential numeric function ID to each function. The trace calls use these IDs to identify the functions.

Building the xdb.dat symbols database

During the same process, the build creates the **xdb.data** symbols database associating the name of each function with the function ID. In this way, the trace writes the minimum information possible to the trace record (the function ID), which can then be expanded to give the function name later for viewing.

The build also stores in the database the source file and line number of each function.

Further, it stores the name of the component which "owns" the function. One program contains many components, each of which contains many functions.

The symbols database is the key to managing the activation/deactivation and filtering of the traces. The information it contains is encrypted.

Tracing in shared memory

The traces are written to shared memory. This is divided into segments, and the traces chosen to be written to each segment are written in an endless loop. At maximum capacity (tracing all events on all functions) the traces might loop every few seconds, while at minimum capacity (tracing just one little-used function), the trace might not loop for months.

Segments

You can choose to use any number of segments (each is identified by a unique number) and for each segment can determine how much shared memory the segment is to use. More and bigger segments consume more memory, with all the normal consequences that entails.

Programs

Any number of IBM Workload Scheduler programs can be configured to be saved to the same segment. You decide which programs are to be traced to which segments, and whether those segments are to be enabled for tracing, by modifying the basic configuration. Any of the IBM Workload Scheduler programs and utilities can be configured for tracing.

Basic configuration

The basic configuration determines which segments are enabled for tracing, and makes an initial determination of whether the tracing for a specific program is activated. It is achieved by editing a configuration file with a text editor. The IBM Workload Scheduler engine (the product) must be restarted to make the changes take effect. The configuration is divided into the following sections:

Global

This section not only includes general information like the product code and the segment size, but also acts as a "catch-all", where traces from programs not specifically configured are configured.

<program>

If a program is not to be traced under the "global" section, a specific program section must be configured, defining which segment the program is to be traced in, and other basic information. The information in a program section overrides that in the global section, but just for that program.

Activating and deactivating traces

For segments which are enabled, traces for specific programs can be activated and deactivated on-the-fly, from the command line, as these flags are held in memory.

Trace levels

Events in the code have been assigned trace levels. The lower the level, the more drastic the event. The levels range from reporting only unrecoverable errors, through recoverable errors, warnings, and informational messages and three debug levels to the maximum reporting level, where even function entry and exit events are recorded.

Trace levels can also be changed on-the-fly, from the command line, without restarting the engine.

Snapshots

In-Flight Trace lets you take a snapshot of the current contents of the traces for a program or segment and save it to a file. You can optionally clear the memory in the segment after taking the snapshot. The snapshot file is in the internal format, containing function IDs, etc., and is not easily readable. It must be formatted to make it readable.

Formatting the snapshot

A command-line option lets you format a snapshot file for the standard output. The output can be in CSV or XML format, and information about the source data (file name and line number) is automatically included. Or you can select the standard trace format (one line per trace record) and choose whether to include the source information. And finally you can choose whether to include the header information (ideal for a printed output) or not (ideal for the creation of a file you are going to analyze programmatically).

Filtering

The tooling-up of the code is a fully automatic process and you might find that your traces include frequently used components or functions that are not causing any problems. You would like to exclude them from the trace and you do this by using the command line to create a filter file, in which you can specify to include all and then exclude any combinations of specific components, functions, and source files. Alternatively, you can exclude all and then include any combinations of specific components, functions, and source files. Functions can also be included or excluded by specifying a range of function IDs.

Once created, a filter file is declared either in the global section of the configuration file or one of the program sections. You can have more than one filter file which you use with different programs, however, note that the filter is applied at segment level. This means that if you have two programs writing to the same segment, the filter is applied to both even if it is only specified for one of them.

Existing filter files can be modified from the command line.

Products

In-Flight Trace is conceived as a multi-product facility. Each product has its own separate configuration file. Multiple instances of the facility can be run on the same system, completely independently of each other. However, you can also control one product from the tracing facility of another, by identifying the product to which to apply the commands. For example, if you had two versions of IBM Workload Scheduler running on the same system, you could control the In-Flight Trace facility for both of them from one place, inserting the appropriate product code when required by the command syntax.

In-Flight Trace configuration file

Describes the In-Flight Trace configuration file, `xtrace.ini`.

The In-Flight Trace configuration file is used to initialize the shared memory at product startup. The information in shared memory determines which traces are saved at which level. All function trace calls are parsed by the trace facility to determine if they should be saved.

The In-Flight Trace configuration file is found in the following path:

```
<TWA_home>/TWS/xtrace/xtrace.ini
```

An example of the file is as follows:

```
[ _GLOBAL_ ]
  Product      = <PRODUCT>
  Enabled      = y
  Active       = y
  SegNum       = 1
  FilterFile    = $(install_dir)/bin/xfull.xtrace
  SegSize      = 10240
  Level        = 80
  SegPerUser   = n

[netman]
  Enabled      = y
  Active       = y
  SegNum       = 2
  Level        = 80
```

Changing the configuration

Describes how to modify the configuration file.

To permanently change the configuration in shared memory that controls the tracing, edit the file, save it, and restart the product. On UNIX™ platforms you must also clean up the memory by running the tracing command with the **-clean** parameter between stopping and restarting the product. Thus, the procedure to change the configuration file is as follows:

UNIX™

1. Modify the configuration file
2. Save the configuration file
3. Stop the product
4. Run `xcli -clean`
5. Restart the product

Windows™

1. Modify the configuration file
2. Save the configuration file
3. Stop the product
4. Restart the product

You can change much of the configuration in shared memory that controls the tracing by using the `xcli` command (see [xcli command syntax](#) on page 63). However, any changes made in this way are not updated in the configuration file, so at the next initialization, unless you have specifically edited the file, the parameters used are those that were in the file last time you restarted the product.

Configuration file syntax

The configuration file is divided into sections.

Each section begins with a header in one of the two following formats (the square brackets are required, they are not command syntax indicators):

```
[ _GLOBAL_ ]
[ <program> ]
```

[_GLOBAL_]

There must be only one [_GLOBAL_] section containing general information about the product and the tracing configuration for all programs that do not have a specific section.

[<program>]

You can define a separate section for each of the IBM Workload Scheduler programs ([<program>]). The following programs are most likely to require tracing:


```
APPSRVMAN
BATCHMAN
JOBMAN
JOBMON
MAILMAN
NETMAN
WRITER
JAVA (the connector)
```

However, you can trace any executable program such as COMPOSER, CONMAN and all the utilities stored in the IBM Workload Scheduler `/bin` directory.

You cannot have more than one instance of a section for the same program.

If a program has no specific section, its trace configuration uses the defaults in the [`_GLOBAL_`] section. Details defined in the program sections in almost all cases override the corresponding values in the [`_GLOBAL_`] section (the exception is Product).

The program name is not case-sensitive. For example, you can write Netman, NetMan, netman or NETMAN.

 **Note:** On UNIX™ operating systems, JOBMAN and jobman are two separate programs performing different functions. This means that on UNIX™ operating systems, because of the case-insensitivity, if you set a trace configuration section for either JOBMAN or jobman, both programs will be traced using that section and therefore to the same segment. This is a limitation that cannot be avoided at present.

Available keys (each key can be defined only once in each section):

Product

[`_GLOBAL_`] only. Product identification string. Required.

Enabled

Specifies if the segment is enabled. If you change the enablement of a segment by changing this value and saving the configuration file, you must restart the product to make the change effective. If the segment in the [`_GLOBAL_`] section is not enabled, the entire tracing facility is disabled. Enter "y" or "n".

Active

Specifies whether tracing for the specific program is active. If the [`_GLOBAL_`] section is not activated, the tracing for all programs without a specific section is not activated. This value can be changed without restarting the product by using the tracing command. Enter "y" or "n".

SegNum

Determines the segment number to use for tracing for a specific section. More than one program can be defined for the same segment in different sections. The SegNum specified in the [`_GLOBAL_`] section is used by any program that does not have a specific section defined. If you change the segment number of a program by changing this value and saving the configuration file, you must restart the product to make the change effective. Enter any numeric value.

FilterFile

Specifies the file that contains the criteria for filtering components, functions, or source files. The file is applied at segment level, so you cannot specify different filter files for different programs that use the same segment. This value can be changed without restarting the product by using the tracing command. Enter the fully qualified file path.

The default filter file supplied with the product does not trace the top 5% most-used routines (by being most-used they are less likely to exhibit problems).

SegSize

Specifies the segment size (Kb). If this value is supplied more than once in different sections for the same segment, the trace facility uses the highest of the supplied values. If you change the size of a segment by changing this value and saving the configuration file, you must restart the product. Enter a numeric value.

The full shared memory usage is the sum of all enabled segments, plus several Kbytes for the control data.

On UNIX™, ensure that you do not exceed the configurable kernel parameter which determines the maximum size of shared memory.

Level

Specifies the maximum level to be traced for the program. Enter one of the following numeric values:

Level	Description
10	Unrecoverable
20	Error
30	Warning
40	Informational
50	Debug minimum
60	Debug medium
70	Debug maximum
80	Function entry and exit

If this value is supplied more than once in different sections for different programs that trace in the same segment, the trace facility uses the appropriate values for each program. Thus, the segment might contain traces for one program at level 10 and for another at level 80.

This value can be changed without restarting the product by using the tracing command.

SegPerUser

Specifies if the segment provides access to the owner of the segment only (y) or all users (n). Enter "y" or "n"

In-Flight Trace command: xcli

This topic describes the command used to control all aspects of the run time behavior of In-Flight Trace.

The **xcli** command modifies the information in shared memory. Shared memory is initialized from the information in the configuration file, but any changes to shared memory that are made using the options of this command are *not* saved in the configuration file.

Selecting programs, segments, and products

Describes how to select programs, segments, and products in the xcli command.

In many of the parameters of the **xcli** command, you are required to select a program or a segment, and optionally a product. To avoid repeating the same information, details of how to do this are supplied here:

Program

Select a program for a specific action by identifying the global section ([`_GLOBAL_`]) or any of the configuration file sections containing IBM Workload Scheduler programs ([`<program>`]).

Segment

Select one of the segment numbers that were defined in the configuration file when the shared memory was initialized. If you need to use extra segments or redistribute the programs within the segments, you must edit and save the configuration file and then stop and restart the IBM Workload Scheduler engine.

Product

The tracing facility is multi-product. However, if you run the `xcli` command from the same directory as a configuration file, you automatically run it on the product defined in that configuration file, without having to define the product in the command.

But if you are using In-Flight Trace to trace more than one product, and you want to use the command supplied with product A to modify the tracing of product B, you must supply the product code for product B as a parameter to the command, by adding the `-P <product>` parameter to the command string. This parameter is only applicable to the `-snap`, `-query`, `-active`, `-level`, and `-filter` subcommands.

xcli command syntax

Gives the full syntax of the `xcli` command.

Controls all of the runtime aspects of the In-Flight Trace facility. It modifies the information in shared memory. Shared memory is initialized from the information in the configuration file, but any changes to shared memory made using the options of this command are *not* saved in the configuration file.

You must be the `TWS_user` to run the command.

Syntax

xcli

`-snap <snap_file>`

{ `-p <program>` | `-s <segment>` }

[`-descr <description>`]

[`-clean`]

[`-P <product>`]

`-format <snap_file>`

`-d <symbols_database>`

[`-full`]

[`-noHeader`]

[`-standard` [`-source`] | `-xml` | `-csv`]

`-query` [`-p <program>` | `-s <segment>`] [`-P <product>`]

`-active` { `y` | `n` }

{ `-p <program>` | `-s <segment>` | `-all` }

[`-P <product>`]

`-level <level>`

{ `-p <program>` | `-s <segment>` | `-all` }

[`-P <product>`]

`-filter <filter_file>`

{ `-p <program>` | `-s <segment>` }

[`-P <product>`]

`-createFilter <filter_file>` `-d <symbols_database>`

[`-add_all` |

`-add_comp <component>` | `-remove_comp <component>` |

`-add_func <function_name>` | `-remove_func <function_name>` |

`-add_func_id <function_ID>` | `-remove_func_id <function_ID>` |

`-add_func_id_range <from>` `<to>` | `-remove_func_id_range <from>` `<to>` |

`-add_filter <filter_file>` | `-remove_filter <filter_file>`] ...

```

-modifyFilter<filter_file> -d<symbols_database>
[ -add_all | -remove_all
-add_comp <component> | -remove_comp <component> |
-add_func <function_name> | -remove_func <function_name> |
-add_func_id <function_ID> | -remove_func_id <function_ID> |
-add_func_id_range <from> <to> | -remove_func_id_range <from> <to> |
-add_filter <filter_file> | -remove_filter <filter_file> ] ...

```

-clean

-config [<config_file>]

Arguments

-snap <snap_file>

Saves a snapshot of part of the shared memory to the indicated file. For the snapshot, you can use the following parameters:

{ **-p** <program> | **-s** <segment> }

Define if the snapshot is for either a program or a segment. If it is made for a program which shares a segment with other programs, the whole segment is snapped, but the header information shows which program it was snapped for. See also [Selecting programs, segments, and products](#) on page 62.

[**-descr** <description>]

Supply a description for the snapshot. Surround it with double quotation marks if it contains spaces.

[**-clean**]

Optionally clear the entire segment memory after taking the snapshot. If any process is still using the memory, the clean operation cannot be performed and a warning message is given.



Note: If your snapshot is of a program, this option clears the memory for all traces in the segment for which the program is configured, including those of any other programs that have been configured to write to it.

[**-P** <product>]

See [Selecting programs, segments, and products](#) on page 62.

The snap file header information is as follows:

```

Snap information:
" Product:          <product>
" Description:      <description>
" Snap platform:    <platform>
" Snap time (GMT):  <time>
" Snap program:     <program>
" Snap segment:     <segment>
"   Segment size:  <size> (Kb)
"   Segment use:   <percent_used>

```

-format <snap_file>

Formats the supplied snapshot file for the standard output. The formatting options are:

-d <symbols_database>

Supply the name of the symbols database to use for the formatting. The database must be either the same version as the instance of IBM Workload Scheduler from which the snap was captured (ideally), or a later version. The default symbols database is **xdb.dat**.

[-full]

If the snap was taken of a single program in a multi-program segment, use this option to send the full set of traces (all programs) to the standard output, rather than that of the single program as determined by the header information in the snap file.

[-noHeader]

Use this to suppress the output of the header information. The standard output then just consists of trace messages, which is more acceptable as input to an analysis program.

[-standard [-source] | -xml | -csv]

Define the formatting of the traces. If you have selected **-standard**, use the optional parameter **-source** to add information about the source file and line number. This source information is automatically included in the **-xml** and **-csv** options. If you supply none of these, the format defaults to **-standard**.

-query

Outputs the enablement or activation state of a program or segment. Without parameters, this option displays information about the entire configuration to the standard output. The parameters are:

[-p <program> | -s <segment>]

Optionally define whether the query is for a specific program or a specific segment. See also [Selecting programs, segments, and products](#) on page 62.

[-P <product>]

See [Selecting programs, segments, and products](#) on page 62.

-active { y | n }

Activates (y) or deactivates (n) a program or segment in memory, or all programs and segments. The parameters are as follows:

{ -p <program> | -s <segment> | -all }

Activate either a specific program or a specific segment, or all programs and segments. See also [Selecting programs, segments, and products](#) on page 62.

[-P <product>]

See [Selecting programs, segments, and products](#) on page 62.

-level <level>

Sets the tracing level for a program or segment in memory. Specify one of the following level codes:

Level	Description
10	Unrecoverable

Level	Description
20	Error
30	Warning
40	Informational
50	Debug minimum
60	Debug medium
70	Debug maximum
80	Function entry and exit

For example, to trace only unrecoverable failures and errors, supply "20".

The parameters are as follows:

{ -p<program> | -s<segment> | -all }

Set the level for either a specific program or a specific segment, or all programs and segments. See also [Selecting programs, segments, and products](#) on page 62.

[-P<product>]

See [Selecting programs, segments, and products](#) on page 62.

-filter <filter_file>

Applies a new filter file for a program or segment in shared memory. The parameters are as follows:

{ -p <program> | -s <segment> }

Determine the filter file to be used for either a program or a segment. See also [Selecting programs, segments, and products](#) on page 62.

[-P <product>]

See [Selecting programs, segments, and products](#) on page 62.

default

The filter file is created using the **-createFilter** option. In this option (and the associated **-modifyFilter** option) you specify any components and functions you want to include or exclude from the tracing (see below for more details). This information is written in the filter file as a list of all functions in the symbols database (by ID) with a bit set to indicate whether they are to be included or excluded. The default symbols database is **xdb.dat**.

Any filter files defined in the configuration file are loaded into shared memory at initialization. If you use this option, the shared memory area is overwritten with the new contents. If the new filter file has been created using a different symbols database than the original file, a warning is given, because it is advisable to use the same symbols database when creating the new filter file.

The default filter file supplied with the product is set to not trace the 5% most-used routines, on the basis that the most-used routines are less likely to create problems because they are well tried and tested.

-createFilter <filter_file>

Creates the filter file named in the parameter. The file must not already exist. There is no facility to view a filter file, so use meaningful names and maintain your own documentation of the contents of each filter file.

To populate the file supply one or more of the following parameters. If you *add* an item, its traces will be saved; if you *remove* an item, its traces will *not* be saved. By default, all components and functions are removed.

-d *<symbols_database>*

Identify the symbols database to use to verify the component names, and the function names and IDs.

-add_all

Add all components and functions to the filter file. Use this with one of the **-remove** options to create an exclusive "all except ..." filter.

-add_comp *<component>* | **-remove_comp** *<component>*

Add a component to the file or remove one that has already been added. For example, you could add all components using **-add_all** and then remove just one, which would be easier than adding all of the required components individually. Discover component names by viewing a formatted snapshot.

-add_func *<function_name>* | **-remove_func** *<function_name>*

Add a function to the file or remove one that has already been added. For example, you could add a component using **-add_comp** and then remove one of its functions, which would be easier than adding all of the required functions individually. Discover function names by viewing a formatted snapshot.

-add_func_id *<function_ID>* | **-remove_func_id** *<function_ID>*

Adds a function to the file by ID, or removes one that has already been added. For example, you could add a component using **-add_comp** and then remove one of its functions, which would be easier than adding all of the required functions individually. A function ID is a sequential number allocated to a function when the product was built, and stored in the symbols database. Discover function IDs by viewing a formatted snapshot.

-add_func_id_range *<from>* *<to>* | **-remove_func_id_range** *<from>* *<to>* |

Adds a range of functions to the file by ID or removes a range of functions that have been already added. Discover function IDs by viewing a formatted snapshot.

-add_filter *<filter_file>* | **-remove_filter** *<filter_file>*

Adds or removes the contents of an existing (different) filter file, as follows:

Adding a filter file

If you add a filter file, the items in that filter file which are set to be filtered (traced) are added to whatever other filter criteria you might have set.

Removing a filter file

If you remove a filter file, the items in the filter file which are set to be filtered (traced) are removed from whatever other filter criteria you might have set.

For example, you might create a filter file that configures the tracing of the communications functions. You could then add this set of functions to your filter set in one command, or remove them, depending on whether you think the communications are part of the problem you are trying to solve.

The add and remove actions are processed in the order you submit them. Thus if you add a function ID, and then remove a range that includes that ID it is removed from the criteria. But if you remove the range, and then add the ID, it is added to the criteria.

-modifyFilter <filter_file>

Modifies the existing filter file named in the parameter.

This subcommand takes all of the parameters used in the **-addFilter** subcommand in the same way, with the addition of the following action:

-remove_all

Removes all components and functions from the filter file. Use this with one of the **-add** options to create an inclusive "all of the following" filter.

-clean

On UNIX™ operating systems only, use this to delete the shared memory segments after you have modified and saved the configuration file, and stopped the product. If a segment is in use, it is marked for deletion and will be automatically deleted when no longer in use.

-config [<config_file>]

This initializes the memory. It is run automatically when the IBM Workload Scheduler engine is restarted, using the default configuration file `./xtrace.ini`. In normal circumstances, you never need to run this manually. If you believe that the shared memory is corrupted, it is better to restart the product, which automatically re-initializes the memory.

Examples

The following examples are a scenario for using the trace to troubleshoot an instance of IBM Workload Scheduler which is hanging for 5 minutes when you run a particular utility command, without giving any log messages to indicate why.

The presupposition is that you have the following configuration file:

```
[ _GLOBAL_ ]
Product      = 9.3.0-IBM-IWS-00
Enabled      = y
Active       = n
SegNum       = 1
FilterFile   = $(install_dir)/bin/xfull.xtrace
SegSize      = 10240
Level        = 80
SegPerUser   = n

[netman]
Enabled      = y
Active       = n
SegNum       = 2
Level        = 80

[batchman]
Enabled      = y
Active       = n
SegNum       = 3
Level        = 80
```

1. Start the tracing

Tracing is enabled but inactive for three segments. You think the problem is not network related, so netman is not involved. To activate the other two segments run the following commands:

```
xcli -active y -s 1
xcli -active y -s 3
```

2. Adjust the levels for minimum debug

You want to trace as much activity as possible so that you understand what is happening. So you adjust the tracing levels to minimum debug:

```
xcli -level 50 -s 1
xcli -level 50 -s 3
```

3. Take a snapshot when the product hangs

Restart IBM Workload Scheduler and run the utility again. When the product hangs immediately take a snapshot of each segment. You include the option to clean the memory after the snapshot:

```
xcli -snap main_snap -s 1
      -descr "Snap of segment 1 when TWS hangs after using utility" -
clean
xcli -snap batchman_snap -s 3
      -descr "Snap of batchman when TWS hangs after using utility" -
clean
```

4. Format the trace to view it

Run the following command for a standard format for each file, and save it to a text file:

```
xcli -format main_snap -d xdb.dat > main_snap.txt
xcli -format batchman_snap -d xdb.dat > batchman_snap.txt
```

5. The problem seems to be with batchman, but you need more detail

After examining the two snap files it seems as though the problem is occurring in batchman, but you need more detail:

```
xcli -level 80 -s 3
```

6. Take another snapshot of batchman when the product hangs

Restart IBM Workload Scheduler and run the utility again. When the product hangs immediately take another snapshot of batchman's segment:

```
xcli -snap batchman2_snap -s 3 -descr "Second snap of batchman (level
80) "
```

7. Format the trace again to view it

Run the following command to save the snap file in XML format to a file:

```
xcli -format batchman2_snap -d TWS86SymDB -xml > batchman2_snap.xml
```

You now have a well-formatted XML file of the traces to examine in details and determine where the problem is occurring.

xcli messages

Lists all the messages that might be issued by the xcli command.

This section details the messages that might be produced by xcli and explains what they mean.

Incorrect syntax in configuration file.

In-Flight Trace has found syntax that it cannot parse in the configuration file. Check the syntax carefully with the information in this manual. Correct the error and rerun the command.

Cannot create the semaphore '%d', error %ld.

The error message is from the operating system. There might be a memory usage problem which requires an operating system reboot.

Cannot lock the semaphore, error %ld.

The error message is from the operating system. There might be a memory usage problem which requires an operating system reboot.

Cannot create the shared memory, error %ld.

The error message is from the operating system. There might be a memory usage problem which requires an operating system reboot.

Cannot map the shared memory, error %ld.

The error message is from the operating system. There might be a memory usage problem which requires an operating system reboot.

Incorrect value for key %s in section '%s'.

The syntax of the configuration file is correct but the indicated key in the indicated section has an incorrect value.

The tracing facility is not active.

If the "Enable" key in the [_GLOBAL_] section is set to "n", the tracing facility is disabled. To enable it, edit the configuration file, set the "Enable" key in the [_GLOBAL_] section to "y", save the file and restart IBM Workload Scheduler.

Unable to open file '%s', error %d.

The error message is from the operating system. Check the error code. The file might be open in another process, or the user running the command might not have rights to open the file. Correct the problem and try the command again.

Not enough free memory to allocate %d bytes.

The message indicates the memory required by your configuration. Either reduce the amount of memory used by the configuration by editing the configuration file, changing the values, saving the file and restarting IBM Workload Scheduler, or free some memory by closing other applications. You might also be able to enlarge the memory paging file. Use the **-config** option to reinitialize the memory.

Unable to write to file '%s', error %d.

The error message is from the operating system. Check the error code. The file might have been deleted by another process, or the user running the command might not have rights to write to the file. Correct the problem and try the command again.

Unable to read from file '%s', error %d.

The error message is from the operating system. Check the error code. The file might have been deleted by another process, or the user running the command might not have rights to read from the file. Correct the problem and try the command again.

The selected file does not contain a valid snapshot.

You have identified a snapshot file to format, but either it is not a snapshot file or the snapshot file was not written correctly. Check the name you supplied. If it was not correct, reissue the command with the correct file name. If the file name is correct, rerun the snap to regenerate the file.

Memory not correctly initialized.

The shared memory has not been correctly created. Check that there is sufficient free memory to create the shared memory you have defined in the configuration file.

The tracing facility is not active for program %s.

You have requested to change tracing information for the indicated program which is not active. Activate the program first, using the **-active** option.

The tracing facility is not active for segment %s.

You have requested to change tracing information for the indicated segment which is not active. Activate the segment first, using the **-active** option.

Operation successful.

No-brainer! Whatever you were doing has worked!

Unable to remove the semaphore %x, error %d.

The error message is from the operating system. There might be a memory usage problem which requires an operating system reboot.

Unable to remove the shared memory %x, error %d.

The error message is from the operating system. There might be a memory usage problem which requires an operating system reboot.

The tracing facility is not active for product %s.

You have identified a product for which the "Enable" key in the [_GLOBAL_] section is set to "n", and so the tracing facility is disabled. To enable it, edit the appropriate configuration file, setting the "Enable" key in the [_GLOBAL_] section to "y", save the file and restart the product.

The maximum number of products (%d) has already been reached.

In-Flight Trace can only trace a limited number of products at one time, regardless of the amount of memory available. You have reached that limit!

The sections '%s' and '%s' have the same segment number but different %s.

Some of the keys in a section are "segment-based", in that if more than one section traces to the same segment, they must have the same values. For example, the filter file for programs that trace to the same segment must be the same. Either change the programs to trace to different segments or supply the same filter file for all programs that trace to the same segment.

Segment %d is too small for the filter file '%s'.

The space you allocate to a segment is used to store the filter file for more than 12,000 functions, in addition to the traces. In this case, you have not created sufficient space to store the filter file. You cannot change the size of the filter file, because it uses one entry for every function in the product, regardless of whether that function is or is not filtered for tracing. So you must increase the segment size by editing the configuration file, saving it and restarting IBM Workload Scheduler.

Cannot open the symbols database '%s'.

Either the symbols database does not exist with the name you supplied, the user running the command does not have the rights to open the file, or the file is corrupted. Check that the name is correct and ensure that you are the *TWS_user*.

Too many input parameters.

The syntax of the command you supplied is not correct. Check the syntax with what is documented in this publication and try the command again.

An error occurred while opening the symbols database '%s'.

The database file might be corrupted.

Warning: the function ID %d is not in the symbols database.

You have tried to add or remove a function which is not in the symbols database. Check the source from which you obtained the function name or ID. Check that you are using the correct symbols database. The default symbols database is **xdb.dat**. Correct the error and try the command again.

Duplicated section '%s' in the configuration file.

Each program section can only be present once in the configuration file. Perhaps you copied a section intending to change the name but did not. Edit the configuration file, save it and restart IBM Workload Scheduler.

Warning: There is a mismatch between the size of the new filter file and the previous one (new size = %d, previous size = %d).

You have used the **-filter** option to supply a new filter file, but the new filter file was generated using a symbols database different from that used when the filter file currently in use was created. Put a different way, you seem to have used different symbols databases to create two different filter files, and the two different databases have different numbers of functions. In-Flight Trace can continue tracing but the filtering might not be applied correctly. You are advised always to use only the symbols database generated when the version of the product you are tracing was built.

Cannot clean up the shared memory because some process is currently using it.

You have used the **-clean** option to clean the shared memory, but one or more processes is still using the shared memory, so it cannot be cleaned. Use your system resources to determine which process is using the shared memory, stop it, and retry the **-clean** option.

Chapter 5

Troubleshooting performance issues

This refers you to the *Administration Guide* for the resolution of performance problems.

The performance of IBM Workload Scheduler can depend on many factors. Preventing performance problems is at least as important as resolving problems that occur. For this reason, all discussion of performance issues has been placed together in the chapter on performance in the *IBM® Workload Scheduler: Administration Guide*.

Chapter

6

Troubleshooting networks

Describes how to recover from short-term and long-term network outages and offers solutions to a series of network problems.

This section describes how to resolve problems in the IBM Workload Scheduler network. It covers the following topics:

- [Network recovery](#) on page 75
- [Other common network problems](#) on page 77

Network recovery

Several types of problems might make it necessary to follow network recovery procedures. These include:

- Initialization problems that prevent agents and domain managers from starting properly at the start of a new production period. See [Initialization problems](#) on page 75.
- Network link problems that prevent agents from communicating with their domain managers. See [Network link problems](#) on page 76.
- Loss of a domain manager, which requires switching to a backup. See [Replacement of a domain manager](#) on page 77.
- Loss of a master domain manager, which is more serious, and requires switching to a backup or other more involved recovery steps. See [Replacement of a master domain manager](#) on page 77.



Note: In all cases, a problem with a domain manager affects all of its agents and subordinate domain managers.

Initialization problems

Initialization problems can occur when IBM Workload Scheduler is started for a new production period. This can be caused by having IBM Workload Scheduler processes running on an agent or domain manager from the previous production period or a previous IBM Workload Scheduler run. To initialize the agent or domain manager in this situation, perform the following steps:

1. For a domain manager, log into the parent domain manager or the master domain manager. For an agent, log into the agent domain manager, the parent domain manager, or the master domain manager.
2. Run the Console Manager and issue a `stop` command for the affected agent.
3. Run a `link` command for the affected agent. This initializes and starts the agent.

If these actions fail to work, check to see if `netman` is running on the affected agent. If not, issue the `StartUp` command locally and then issue a `link` command from its domain manager.

If there are severe network problems preventing the normal distribution of the new Symphony file, a fault-tolerant agent or subordinate domain manager can be run as a standalone system, provided the following conditions are met:

- The Sinfonia file was generated on the master domain manager after the network problem occurred, and so has never been transferred to the agent or domain manager

- You have some other method, such as a physical file transfer or FTP to transfer the new Sinfonia file from the master domain manager to the agent or subordinate domain manager.
- The master domain manager and the agent or subordinate domain manager have the same processor architecture.

If these conditions are met, perform the following steps:

1. Stop the agent or domain manager.
2. Delete the `<TWA_home>/TWS/Symphony` file on the agent or domain manager.
3. Copy the file `<TWA_home>/TWS/Sinfonia` from the master domain manager to the `<TWA_home>/TWS` directory on the agent or domain manager.
4. Rename the copied file `<TWA_home>/TWS/Symphony`
5. Run `StartUp` to start the agent or domain manager.

Any inter-workstation dependencies must be resolved locally using appropriate console manager commands, such as **Delete Dependency** and **Release**.

Network link problems

IBM Workload Scheduler has a high degree of fault tolerance in the event of a communications problem. Each fault-tolerant agent has its own copy of the `Symphony` file, containing the production period's processing. When link failures occur, they continue processing using their own copies of the `Symphony` file. Any inter-workstation dependencies, however, must be resolved locally using appropriate console manager commands: `deldep` and `release`, for example.

While a link is down, any messages destined for a non-communicating workstations are stored by the sending workstations in the `<TWA_home>/TWS/pobox` directory, in files named `<workstation>.msg`. When the links are restored, the workstations begin sending their stored messages. If the links to a domain manager are down for an extended period of time, it might be necessary to switch to a backup (see *IBM® Workload Scheduler: Administration Guide*).



Note:

1. The **conman submit job** and **submit schedule** commands can be issued on an agent that cannot communicate with its domain manager, provided that you configure (and they can make) a direct HTTP connection to the master domain manager. This is configured using the *conman connection* options in the `localopts` file, or the corresponding options in the `useropts` file for the user (see the *IBM® Workload Scheduler: Administration Guide* for details).

However, all events have to pass through the domain manager, so although jobs and job streams can be submitted, their progress can only be monitored locally, not at the master domain manager. It is thus always important to attempt to correct the link problem as soon as possible.

2. If the link to a standard agent workstation is lost, there is no temporary recovery option available, because standard agents are hosted by their domain managers. In networks with a large number of standard agents, you can choose to switch to a backup domain manager.

Troubleshooting a network link problem

When an agent link fails it is important to know if the problem is caused by your network or by IBM Workload Scheduler. The following procedure is run from the master domain manager to help you to determine which:

1. Try using `telnet` to access the agent: `telnet <node>:<port>`
2. Try using `ping` to access the agent: `ping <node>:<port>`
3. Run `nslookup` for the agent and the master domain manager from both, and check that the information on each system is the same from each system
4. Run `netstat -a |grep <port>` and check if any `FIN_WAIT_2` states exist
5. Verify that the port number of the master domain manager matches the entry for "nm port" in the `localopts` file of the master domain manager
6. Verify that the port number of the agent matches the entry for "nm port" in the `localopts` file of the agent
7. Check the `netman` and `TWSMerge` logs on both the master domain manager and the agent, for errors.

**Note:**

1. Any issues found in steps 1 on page 76 to 4 on page 76 suggest that there are problems with the network
2. Any issues found in steps 5 on page 76 to 7 on page 76 suggest that there are problems with the IBM Workload Scheduler configuration or installation

If this information does not provide the answer to the linking issue, call IBM® Software Support for further assistance.

The commands used in steps 1 on page 76 to 4 on page 76 are IP network management commands, information about which can be obtained in the Internet. The following technical note also provides useful information about their use: <http://www.ibm.com/support/docview.wss?rs=0&uid=swg21156106>

Replacement of a domain manager

A domain manager might need to be changed as the result of network linking problems or the failure of the domain manager workstation itself. It can be temporarily replaced by switching any full status agent in its domain to become the new domain manager, while the failed domain manager is repaired or replaced.

The steps for performing this activity are as described for the planned replacement of a domain manager; see *IBM® Workload Scheduler: Administration Guide*.

Replacement of a master domain manager

If you lose a master domain manager, you have to perform all of the steps described in *IBM® Workload Scheduler: Administration Guide* for the planned replacement of a master domain manager.

Other common network problems

The following problems could be encountered:

- [Using SSL, no connection between a fault-tolerant agent and its domain manager](#) on page 77
- [After changing SSL mode, a workstation cannot link](#) on page 78
- [In a configuration with a firewall, the start and stop remote commands do not work](#) on page 79
- [The domain manager cannot link to a fault-tolerant agent](#) on page 79
- [Agents not linking to master domain manager after first JnextPlan on HP-UX](#) on page 80
- [Fault-tolerant agents not linking to master domain manager](#) on page 80
- [The dynamic agent cannot be found from Dynamic Workload Console](#) on page 81
- [Submitted job is not running on a dynamic agent](#) on page 81
- [Job status of a submitted job is continually shown as running on dynamic agent](#) on page 82
- [Network performance](#) on page 82
- [AWSITA245E or AWSITA104E - Agent is down but jobmanager is running](#) on page 82

Using SSL, no connection between a fault-tolerant agent and its domain manager

In a network using SSL authentication, no connection can be established between a fault-tolerant agent and its domain manager. The standard lists of the two workstations display messages like in the following examples.

- On the domain manager, mailman messages:

```
+ ++++++
+ AWSBCV082I Workstation FTAHP, Message: AWSDEB009E Data
+ transmission is not possible because the connection is broken.
+ The following gives more details of the error: Error 0.
+ ++++++
+ AWSBCV035W Mailman was unable to link to workstation: rsmith297;
+ the messages are written to the PO box.
+ ++++++
```

- On the fault-tolerant agent, writer messages:

```
/* *****
/* AWSBCW003E Writer cannot connect to the remote mailman. The
/* following gives more details of the error: "
/* AWSDEB046E An error has occurred during the SSL handshaking. The
/* following gives more details of the error: error:140890B2:SSL
/* routines:SSL3_GET_CLIENT_CERTIFICATE:no certificate returned
/* *****
/* AWSDEZ003E **ERROR**(cpu secs 0)
```

Cause and solution:

In the localopts file of either the domain manager or the fault-tolerant agent , the SSL port statement is set to 0.

Correct the problem by setting the SSL port number to the correct value in the localopts file. You then need to stop and restart netman on the workstation so that it can now listen on the correct port number.

Timeout during Symphony download - AWSDEB003I Writing socket Resource temporarily unavailable

A dynamic domain manager is installed. The installation completes successfully. The dynamic domain manager is not linked to the master domain manager.

In the TWSMERGE.log of the master domain manager, the following mailman message is displayed:

```
+ ++++++
+ AWSBCV082I Workstation DDM, Message: AWSDEB003I Writing socket:
+ Resource temporarily unavailable.
+ ++++++
```

The same problem occurs when installing a backup domain manager or a fault-tolerant agent.

Cause and solution:

In the localopts file of the master domain manager, the mm symphony download timeout is set to 0 minutes.

Correct the problem by setting the mm symphony download timeout to 1 minute.

After changing SSL mode, a workstation cannot link

You have changed the SSL mode between a workstation and its domain manager. However, you are unable to relink to the workstation from the domain manager.

Cause and solution:

The following Symphony file and message files at the workstation must be deleted after a change of SSL mode, otherwise the data does not match:

```
Symphony
Sinfonia
$HOME/* .msg
$HOME/pobox/* .msg
```

In a configuration with a firewall, the start and stop remote commands do not work

In a configuration with a firewall between the master domain manager and one or more domain managers, the `start` and `stop` commands from the master domain manager to the fault-tolerant agents in the domains do not work. This is often the case when an "rs final" ends and the impacted fault-tolerant agents are not linked.

Cause and solution:

The fault-tolerant agents belonging to these domains do not have the *behind firewall* attribute set to *on* in the IBM Workload Scheduler database. When there is a firewall between the master domain manager and other domains, `start` and `stop` commands must go through the IBM Workload Scheduler hierarchy. This parameter tells the master domain manager that the `stop` request must be sent to the domain manager which then sends it to the fault-tolerant agents in its domain.

Use either the Dynamic Workload Console or the composer `cpuname` command to set to the *behind firewall* attribute *on* in the workstation definitions of these fault-tolerant agents.

Remote command job fails to connect to remote computer

After submitting a remote command job, error message AWKRCE012E indicates that an error has occurred establishing a connection to the remote computer.

Cause and solution:

There are several possible causes to this problem:

- The host name specified for the computer where the remote command instance is running does not exist.
- The port number is incorrect, for example, a port number which is different from the port number configured for a specific protocol.
- The protocol type specified is unable to establish a connection because the remote computer is not open to using that particular protocol.

See the topic about the remote command job definition in the *IBM Workload Scheduler: User's Guide and Reference* for information about the connection settings for the remote computer.

The domain manager cannot link to a fault-tolerant agent

The domain manager cannot link to a fault-tolerant agent. The `stdlist` records the following messages:

```
+ ++++++
+ AWSEDW020E: Error opening IPC
+ AWSEDW001I: Getting a new socket: 9
+ ++++++
```

Cause and solution:

The fault-tolerant agent has two netman processes listening on the same port number. This is the case if you installed more than one IBM Workload Scheduler instance on the same workstation and failed to specify different netman port numbers.

Stop one of the two netman services and specify a unique port number using the `nm port local option (localopts file)`.

Ensure that the workstation definition on the master domain manager is defined with the unique port number or it will not be able to connect.

Agents not linking to master domain manager after first JnextPlan on HP-UX

You have successfully installed the components of your network with the master domain manager on HP-UX. You perform all the necessary steps to create a plan and run your first `JnextPlan`, which appears to work correctly. The Symphony file is distributed to the agents but they cannot link to the master domain manager, even if you issue a specific `link` command for them. The `conman` error log shows that the agents cannot communicate with the master domain manager.

Cause and solution:

One possible cause for this problem is that while on HP-UX host names are normally limited to eight bytes, on some versions of this platform you can define larger host names. The problem occurs if you define the master domain manager's host name as more than eight bytes. When you install the master domain manager on this host a standard operating system routine obtains the host name from the operating system, but either truncates it to eight bytes before storing it in the database, or stores it as "unknown". When you install the agents, you supply the longer master domain manager host name. However, when the agents try to link to the master domain manager they cannot match the host name.

To resolve this problem, perform the following steps:

1. Change the workstation definition of the master domain manager to the correct host name.
2. Run `ResetPlan -scratch`.
3. Run `JnextPlan`.

The agents now link.

Fault-tolerant agents not linking to master domain manager

A fault-tolerant agent does not link to its master domain manager and any other link problem scenarios documented here do not apply.

Cause and solution:

The cause of this problem might not be easy to discover, but is almost certainly involved with a mismatch between the levels of the various files used on the fault-tolerant agent.

To resolve the problem, if all other attempts have failed, perform the following cleanup procedure. However, note that this procedure loses data (unless the fault-tolerant agent is not linking after a fresh installation), so should not be undertaken lightly.

Perform the following steps:

1. Using `conman "unlink @;noask"` or the Dynamic Workload Console, unlink the agent from the master domain manager
2. Stop IBM Workload Scheduler, in particular netman, as follows:
 - a. `conman "stop;wait"`
 - b. `conman "shut;wait"`
 - c. On Windows™ only; shutdown
 - d. Stop the SSM agent, as follows:
 - On Windows™, stop the Windows™ service: IBM Workload Scheduler SSM Agent (for `<<TWS_user>>`).
 - On UNIX™, run **stopmon**.



Note: If the `conman` commands do not work, enter the following command:

UNIX™

```
ps -ef |grep <<TWS_user>> & kill -9
```

Windows™

```
<TWA_home>\TWS\unsupported\listproc & killproc
```

- 3. Risk of data loss:** Removing the following indicated files can cause significant loss of data. Further, if jobs have run on the fault-tolerant agent for the current plan, without additional interaction, the fault-tolerant agent will rerun those jobs.

Remove or rename the following files:

```
<TWS_home>\TWS\*.msg
    \Symphony
    \Sinfonia
    \Jobtable
    \pobox\*.msg
```



Note: See [Corrupt Symphony file recovery](#) on page 185 for additional options.

- 4.** Start `netman` with `StartUp` run as the `<TWS_user>`
- 5.** Issue a "link" command from the master domain manager to the fault-tolerant agent
- 6.** Issue a `conman start` command on the fault-tolerant agent.

The IBM® technical note describing this procedure also contains some advice about starting with a lossless version of this procedure (by omitting step 3 on page 81) and then looping through the procedure in increasingly more-aggressive ways, with the intention of minimizing data loss. See <http://www.ibm.com/support/docview.wss?uid=swg21296908>

The dynamic agent cannot be found from Dynamic Workload Console

You correctly installed a dynamic agent but cannot see it from the Dynamic Workload Console.

Cause and solution:

A possible cause for this problem might be that either the dynamic workload broker hostname, **-tdwbhostname**, or the dynamic workload broker port, or both, and which are both registered on the agent, are not known in the network of the master domain manager because the broker host is in a different DNS domain.

Edit the `JobManager.ini` configuration file (for its path, see [Where products and components are installed](#) on page 21). Edit the following parameter:

```
ResourceAdvisorUrl = https://<servername>:
                    31116/JobManagerRESTWeb/JobScheduler/resource
```

Submitted job is not running on a dynamic agent

From Dynamic Workload Console, you can see a dynamic agent, but the submitted job appears as "No resources available" or is dispatched to other agents.

Cause and solution:

A possible cause might be that the local hostname of a registered dynamic workload broker server on the agent is not known in the network of the master domain manager because it is in a different DNS domain.

Edit the `JobManager.ini` configuration file (for its path, see [Where products and components are installed](#) on page 21). Edit the following parameter:

```
FullyQualifiedHostname = <servername>
```

Job status of a submitted job is continually shown as running on dynamic agent

From Dynamic Workload Console, you can see a dynamic agent, but the job status of a submitted job is continually in the running state.

Cause and solution:

A possible cause might be that the master domain manager local hostname is not known in the network of the agent because it is in a different DNS domain.

Open the `JobDispatcherConfig.properties` file and edit the parameter `JDURL=https://<localhostname>`

See the *Administration Guide* for more details about editing this file.

Network performance

If your network shows performance problems, you can use the environment variable `TWS_TRUSTED_ADDRESS` to resolve these problems. You can set `TWS_TRUSTED_ADDRESS` to an IP address or leave it blank. If you set it to an IP address, all the processes use this address for their connections. If you leave it blank, the processes use the address returned by the operating system. If you do not create this variable, the processes use the IP address returned by the Symphony file.

AWSITA245E or AWSITA104E - Agent is down but jobmanager is running

If while using **conman** or the Dynamic Workload Console you receive one of the following error messages stating that the agent is down, while jobmanager process is up and running, causes and solutions might be as follows:

Cause and solution

AWSITA245E

An error occurred getting the response of the HTTP request.

- If the detailed error reports problems about `CURL Error ##`, check the following link: <http://curl.haxx.se/libcurl/c/libcurl-errors.html> .
- If the error is 35, perform the following steps:
 1. Enable **gskit** traces, as described in the following section: <http://www-01.ibm.com/support/docview.wss?uid=swg21283690>.
 2. Edit the `JobManager.ini` file and add a the following line
`GSK_TRACE_FILE = /tmp/gskit.log` in the `ITA Envsection`.
 3. Reproduce the problem.
 4. Collect the `/tmp/gskit.log` file.

AWSITA104E

Unable to perform the system resources scan. The problem is that the *Common Inventory Technology* (CIT) is unable to perform correctly the resources scan because the hostname of the machine is not recognized. The CIT return codes are documented at the following site: <http://pic.dhe.ibm.com/infocenter/tivihelp/v3r1/index.jsp?topic=%2Fcom.ibm.tivoli.item.doc%2Finvug265.htm>

To solve the problem, perform the following steps:

1. Run the `/opt/tivoli/bin/cit/wscanhw` command and check if you obtain the same result.

2. Enable the traces of the JobManager process, wait for the error to occur and check the JobManager_trace.log file.

- If the error is executed with error(s)! exit why is <1>, exit code is <1>, check the command line used by running the following and parameters:

```
/home/twsuser/TWS/bin/citLauncher --cit -task  
WSCANHW -c  
/home/twsuser/TWS/ITA/cpa/ita/fullScan.xml
```

- Run the /opt/tivoli/bin/cit/wscanhw command again, as twsuser.
3. If it still fails, check that the permissions of the /home/twsuser/TWS/bin/citLauncher file are: -r-s--s--x 1 root tws86.

Chapter 7

Troubleshooting common engine problems

Gives solutions to problems that might occur with the modules and programs that comprise the basic scheduling "engine" on the master domain manager.

This section details commonly occurring problems and their solutions in components and activities not already discussed in previous chapters.

Other common problems are dealt with in other guides, or other chapters of this guide:

- For installation problems see the *IBM® Workload Scheduler: Planning and Installation Guide*.
- For network problems see [Troubleshooting networks](#) on page 75
- For problems with the fault-tolerant switch manager see [Troubleshooting the fault-tolerant switch manager](#) on page 173.
- For problems with the Symphony file see [Corrupt Symphony file recovery](#) on page 185.

The problems are grouped according to their typology:

Composer problems

The following problems could be encountered with composer:

- [Composer gives a dependency error with interdependent object definitions](#) on page 85
- [The display `cpu=@` command does not work on UNIX](#) on page 86
- [Composer gives the error "user is not authorized to access server"](#) on page 86
- [The deletion of a workstation fails with the "AWSJOM179E error](#) on page 86
- [When using the composer add and replace commands, a Job Scheduler has synchronicity problems](#) on page 87
- [Exiting the composer or conman command line takes an abnormally long amount of time](#) on page 87

Composer gives a dependency error with interdependent object definitions

You are running composer to add or modify a set of object definitions where one object is dependent on another in the same definition. An error is given for the dependency, even though the syntax of the definition is correct.

Cause and solution:

Composer validates objects in the order that they are presented in the command or the definition file. For example, you define two jobs, and the first-defined (*job_tom*) has a `follows` dependency on the second-defined (*job_harry*). The object validation tries to validate the `follows` dependency in *job_tom* but cannot find *job_harry* so gives an error and does not add the job to the database. However, it then reads the definition of *job_harry*, which is perfectly valid, and adds that to the database.

Similarly, this problem could arise if you define that a job needs a given resource or a Job Scheduler needs a given calendar, but you define the resource or calendar *after* defining the job or Job Scheduler that references them.

This problem applies to all composer commands that create or modify object definitions.


To resolve the problem, you can just simply repeat the operation. In the above example the following happens:

- The first job defined (*job_tom*) now finds the second job (*job_harry*) which was added to the database initially.

- You receive a "duplicate job" error for the second.

Alternatively, you can edit the object definition and retry the operation with just the object definition that gave the error initially.

To ensure that the problem does not reoccur, always remember to define objects in the order they are to be used. Define depending jobs and job streams before dependent ones. Define referred objects before referring objects.

 **Note:** There is a special case of this error which impacts the use of the `validate` operation. Because `validate` does not add *any* job definitions to the database, correct or otherwise, *all* interdependent job definitions give an error.

In the example above, the problem would not have occurred when using `add`, `new`, `create`, or `modify` if the job definition of `job_harry` preceded that of `job_tom`. `job_harry` would have been added to the database, so the validation of `job_tom` would have been able to verify the existence of `job_harry`. Because the `validate` command does not add `job_harry` to the database, the validation of the `follows` dependency in `job_tom` fails.

There is no workaround for this problem when using `validate`. All you can do is to ensure that there are no interdependencies between objects in the object definition file.

The `display cpu=@` command does not work on UNIX™

In UNIX™, nothing happens when typing `display cpu=@` at the composer prompt.

Cause and solution:

The `@` (atsign) key is set up as the "kill" character.

Type `stty -a` at the UNIX™ prompt to determine the setting of the `@` key. If it is set as the "kill" character, then use the following command to change the setting to be "control/U" or something else:

```
stty kill ^U
```

where `^U` is "control/U", not caret U.

Composer gives the error "user is not authorized to access server"

Troubleshooting for a user authorization error in composer.

You successfully launch composer but when you try to run a command, the following error is given:

```
user is not authorized to access server
```

Cause and solution:

This is a problem that is common to several CLI programs; see [Command line programs \(like composer\) give the error "user is not authorized to access server"](#) on page 129.

The deletion of a workstation fails with the "AWSJOM179E error

You want to delete a workstation either using `Composer` or the Dynamic Workload Console and the following error occurs:

```
AWSJOM179E An error occurred deleting definition of the workstation {0}.
The workload broker server is currently unreachable.
```

Cause and solution:

This problem occurs if you removed a dynamic domain manager without following the procedure that describes how to uninstall a dynamic domain manager in the *IBM Workload Scheduler: Planning and Installation*.

To remove workstations connected to the dynamic domain manager, perform the following steps:

1. Verify that the dynamic domain manager was deleted, not just unavailable, otherwise when the dynamic domain manager restarts, you must wait until the workstations register again on the master domain manager before using them.
2. Delete the workstations using the following command:

```
composer del ws <workstation_name>;force
```

When using the composer add and replace commands, a Job Scheduler has synchronicity problems

The `composer add` and `replace` commands do not correctly validate the time zone used in the Job Scheduler definition at daylight savings; as a consequence, the following unexpected warning message is displayed:

```
AWSBIA148W WARNING: UNTIL time occurs before AT time for
<workstation>#<schedule>.
AWSBIA019E For <workstation>#<schedule> Errors 0, warnings 1.
AWSBIA106W The schedule definition has warnings.
AWSBIA015I Schedule <workstation>#<schedule> added.
```

The same might happen for the `deadline` keyword.

Cause and solution:

The problem is related to the C-Runtime Library `date` and `time` functions that fail to calculate the correct time during the first week of daylight savings time.

To ensure the accuracy of scheduling times, for the `at`, `until`, or `deadline` scheduling keywords, specify a different value than that of the start time for the IBM Workload Scheduler production period defined in the global options file. These values must differ from one another by plus or minus one hour.

Exiting the composer or conman command line takes an abnormally long amount of time

Troubleshooting for a problem in `composer` or `conman` command line in a Windows environment

Cause and solution:

In a Windows environment, if there is a large number of files in the `Conman-FFDC` and `Composer-FFDC` folder, exit from `composer` or `conman` command line may take an abnormally long amount of time.

If you encounter this problem, you need to clean up the folders `Conman-FFDC` e `Composer-FFDC` to the trace files located in `stdlist/JM`

JnextPlan problems

The following problems could be encountered with `JnextPlan`:

- [JnextPlan fails to start](#) on page 88
- [JnextPlan fails with the database message "The transaction log for the database is full."](#) on page 88
- [JnextPlan fails with a Java out-of-memory error](#) on page 88
- [JnextPlan fails with the DB2 error like: nullDSRA0010E](#) on page 88
- [JnextPlan fails with message AWSJPL017E](#) on page 89
- [JnextPlan is slow](#) on page 89
- [A remote workstation does not initialize after JnextPlan](#) on page 90
- [A job remains in "exec" status after JnextPlan but is not running](#) on page 90
- [A change in a resource quantity in the database is not also implemented in the plan after JnextPlan](#) on page 92

- [CreatePostReports.cmd](#), or [Makeplan.cmd](#), or [Updatestats.cmd](#), or [rep8.cmd](#) hang on Windows operating systems on page 92

JnextPlan fails to start

JnextPlan fails to start.

Cause and solution:

This error might be a symptom that your IBM Workload Scheduler network requires additional tuning because of a problem with the sizing of the `pobox` files. The default size of the `pobox` files is 10MB. You might want to increase the size according to the following criteria:

- The role (master domain manager, domain manager, or fault-tolerant agent) of the workstation in the network. Higher hierarchical roles need larger `pobox` files due to the larger number of events they must handle (since the total number of events that a workstation receives is proportional to the number of its connections). For a domain manager, also the number of sub domains under its control make a difference.
- The average number of jobs in the plan.
- The I/O speed of the workstation (IBM Workload Scheduler is IO- dependent).

JnextPlan fails with the database message "The transaction log for the database is full."

You receive a message from JnextPlan which includes the following database message (the example is from DB2®, but the Oracle message is very similar):

```
The transaction log for the database is full.
```

The JnextPlan message is probably the general database access error message AWSJDB801E.

Cause and solution:

The problem is probably caused by the number of Job Scheduler instances that JnextPlan needs to handle. The default database transaction log files cannot handle more than the transactions generated by a certain number of Job Scheduler instances. In the case of DB2® this number is 180 000; in the case of Oracle it depends on how you configured the database. If JnextPlan is generating this many instances, you need to change the log file creation parameters to ensure more log space is created. You might also need to increase the Java™ heap size on the application server. See "Scalability" in the *IBM® Workload Scheduler: Administration Guide* for a full description of how to perform these activities.

JnextPlan fails with a Java™ out-of-memory error

You receive the following message from JnextPlan:

```
AWSJCS011E An internal error has occurred.
The error is the following: "java.lang.OutOfMemoryError".
```

Cause and solution:

This error is a symptom that the processes running in WebSphere Application Server Liberty Base during JnextPlan phase need more Java virtual memory to run. To increase the Java virtual memory for the WebSphere Application Server Liberty Base, you must increase the default Java heap size values.

See the section about increasing application server heap size in *Administration Guide*

JnextPlan fails with the DB2® error like: nullDSRA0010E

JnextPlan has failed with the following messages:

```
AWSJPL705E An internal error has occurred. The planner is unable to create the
preproduction plan.
```

AWSBIS348E An internal error has occurred. MakePlan failed while running: planman.

AWSBIS335E JnextPlan failed while running: tclsh84 The SystemOut.log has an error like this:

AWSJDB801E An internal error has been found while accessing the database. The internal error message is: "nullDSRA0010E: SQL State = 57011, Error Code = -912".

Cause and solution:

This indicates that the memory that DB2® allocates for its "lock list" is insufficient. To understand why the problem has occurred and resolve it, see the section in the *IBM® Workload Scheduler: Administration Guide* about monitoring the "lock list" value among the DB2® administrative tasks.

JnextPlan fails with message AWSJPL017E

You receive the following message from JnextPlan:

```
AWSJPL017E The production plan cannot be created because a
previous action on the production plan did not complete successfully.
See the message help for more details.
```

Cause and solution:

The problem might be caused by a JnextPlan being launched before the previous JnextPlan has run the SwitchPlan command.

The situation might not resolve itself. To resolve it yourself, perform the following steps:

1. Reset the plan by issuing the command `ResetPlan -scratch`
2. If the reset of the plan shows that the database is locked, run a `planman unlock` command.

On Windows operating systems JnextPlan fails with cscript error

On Windows operating systems, you receive the following message from JnextPlan or ResetPlan:

```
'cscript' is not recognized as an internal or external command,
operable program or batch file
```

Cause and solution:

JnextPlan or ResetPlan fails because the `cscript` utility that runs files with `.vbs` extension is not installed.

Install the `cscript` utility on your Windows operating system and rerun JnextPlan or ResetPlan.

JnextPlan is slow

You find that JnextPlan is unacceptably slow.

Cause and solution:

There are three possible causes for this problem:

Tracing too much

One possible cause is the tracing facility. It could be that it is providing too much trace information. There are three possible solutions:

- Reduce the number of processes that the tracing facility is monitoring. See [Quick reference: how to modify log and trace levels](#) on page 29 for full details.

- Stop the tracing facility while JnextPlan is running. See [xcli command syntax](#) on page 63 to find out how to activate or deactivate a program or segment in memory, or all programs and segments.

Application server tracing too much

Another possible cause is that the application server tracing is set to high. See [Log and trace files for the application server](#) on page 45 for more details about the trace and how to reset it.

Database needs reorganizing

Another possible cause is that the database needs reorganizing. See "Reorganizing the database" in *IBM® Workload Scheduler: Administration Guide* for a description of how and why you reorganize the database, logically and physically.

A remote workstation does not initialize after JnextPlan

After running JnextPlan you notice that a remote workstation does not immediately initialize. The following message is seen:

```

+++++
+ AWSBCW037E Writer cannot initialize this workstation because mailman
+ is still active.
+ +++++
+ AWSBCW039E Writer encountered an error opening the Mailbox.msg file.
+ The total cpu time used is as follows: 0
+++++

```

Cause and solution:

If mailman is still running a process on the remote workstation, JnextPlan cannot download the Symphony file and initialize the next production period's activities. Instead, the domain manager issues a `stop` command to the workstation. The workstation reacts in the normal way to the `stop` command, completing those activities it must complete and stopping those activities it can stop.

After the interval determined in the `localopts` parameter `mm retrylink`, the domain manager tries again to initialize the workstation. When it finds that the `stop` command has been implemented, it starts to initialize the workstation, downloading the Symphony file and starting the workstation's activities.

A workstation does not link after JnextPlan

On UNIX and Windows operating systems, after running JnextPlan a workstation does not link to the domain manager.

Cause and solution:

The workstation does not recognize its own IP address and host name. To resolve this problem, add the workstation IP address and hostname to the `hosts` file located in `C:\Windows\System32\Drivers\etc\hosts` (Windows) or `/etc/hosts` (UNIX) file in the following format:

```
IPaddress hostname hostname.domain
```

For example, `9.168.60.9 nc060009 nc060009.romelab.it.ibm.com`

A job remains in "exec" status after JnextPlan but is not running

After running JnextPlan you notice that a job has remained in "exec" status, but is not being processed.

Cause and solution:

This error scenario is possible if a job completes its processing at a fault-tolerant agent just before `JnextPlan` is run. The detail of the circumstances in which the error occurs is as follows:

1. A job completes processing
2. The fault-tolerant agent marks the job as "succ" in its current Symphony file
3. The fault-tolerant agent prepares and sends a job status changed event (JS) and a job termination event (JT), informing the master domain manager of the successful end of job
4. At this point `JnextPlan` is started on the master domain manager
5. `JnextPlan` starts by unlinking its workstations, including the one that has just sent the JS and JT events. The message is thus not received, and waits in a message queue at an intermediate node in the network.
6. `JnextPlan` carries the job forward into the next Symphony file, and marks it as "exec", because the last information it had received from the workstation was the Launch Job Event (BL).
7. `JnextPlan` relinks the workstation
8. The fault-tolerant agent receives the new Symphony file and checks for jobs in the "exec" status.
9. It then correlates these jobs with running processes but does not make a match, so does not update the job status
10. The master domain manager receives the Completed Job Event that was waiting in the network and marks the carried forward job as "succ" and so does not send any further messages in respect of the job
11. Next time `JnextPlan` is run, the job will be treated as completed and will not figure in any further Symphony files, so the situation will be resolved. However, in the meantime, any dependent jobs will not have been run. If you are running `JnextPlan` with an extended frequency (for example once per month), this might be a serious problem.

There are two possible solutions:

Leave `JnextPlan` to resolve the problem

If there are no jobs dependent on this one, leave the situation to be resolved by the next `JnextPlan`.

Change the job status locally to "succ"

Change the job status as follows:

1. Check the job's stdlist file on the fault-tolerant agent to confirm that it did complete successfully.
2. Issue the following command on the fault-tolerant agent:

```
conman "confirm <job>;succ"
```

To prevent the reoccurrence of this problem, take the following steps:

1. Edit the `JnextPlan` script
2. Locate the following command:

```
conman "stop @!@;wait ;noask"
```

3. Replace this command with individual stop commands for each workstation (`conman "stop <workstation> ;wait ;noask"`) starting with the farthest distant nodes in the workstation and following with their parents, and so on, ending up with the master domain manager last. Thus, in a workstation at any level, a message placed in its forwarding queue either by its own job monitoring processes or by a communication from a lower level should have time to be forwarded at least to the level above before the workstation itself is closed down.
4. Save the modified `JnextPlan`.

A change in a resource quantity in the database is not also implemented in the plan after JnextPlan

You make changes to the number of available resources in the database, but the number of available resources in the plan does not change. The global option `enCFResourceQuantity` is set to `no`.

Cause and solution:

If the global option `enCFResourceQuantity` is set to `yes`, you would expect that any changes to the available quantity of a given resource in the database would not be implemented in the plan, provided there is at least one job or Job Scheduler instance using that resource in the extended plan.

Similarly, if the global option `enCFResourceQuantity` is set to `no` you might expect that the available resource quantity would change after `JnextPlan`. However, this is not always true, depending on the quantity of that resource being used by jobs and Job Scheduler instances currently in the plan:

- If the usage of the resource by jobs and Job Scheduler instances is *less than or equal to* the new total of available resources in the database, the available quantity of the resource is changed in the plan.
- If the usage of the resource by jobs and Job Scheduler instances is *greater than* the new total of available resources in the database, the available quantity of the resource is *not* changed in the plan.

To be sure to update the quantity of resources in the plan, make available at least as many instances of the resource as are required by the jobs and Job Scheduler instances in the plan.

See also the description of the `enCFResourceQuantity` option in the *IBM® Workload Scheduler: User's Guide and Reference*.

CreatePostReports.cmd, or Makeplan.cmd, or Updatestats.cmd, or rep8.cmd hang on Windows operating systems

`CreatePostReports.cmd`, or `Makeplan.cmd`, or `Updatestats.cmd`, or `rep8.cmd` hang on Windows operating systems

Cause and solution:

On Windows operating systems it might happen that, when running `CreatePostReports.cmd`, or `Makeplan.cmd`, or `Updatestats.cmd`, or `rep8.cmd` jobs, the Tool Command Language interpreter hangs not returning an answer to the caller and the jobs do not complete. These jobs use by default the Tool Command Language interpreter but can be configured to not use it. To avoid that `CreatePostReports.cmd`, or `Makeplan.cmd`, or `Updatestats.cmd`, or `rep8.cmd` jobs use the Tool Command Language interpreter, open each of them with a text editor, find the following line:

```
set USETCL=yes
```

and change it either commenting it:

```
REM set USETCL=yes
```

or setting the variable to `no`:

```
set USETCL=no
```

In this way, when `CreatePostReports.cmd`, or `Makeplan.cmd` or `Updatestats.cmd`, or `rep8.cmd` jobs run, the Tool Command Language interpreter is not invoked.

Conman problems

The following problems could be encountered when running `conman`:

- [On Windows, the message AWSDEQ024E is received](#) on page 93
- [Duplicate ad-hoc prompt number](#) on page 94

- [Submitting job streams with a wildcard loses dependencies](#) on page 95
- [Exiting the composer or conman command line takes an abnormally long amount of time](#) on page 87
- [Job log not displayed](#) on page 96
- [Cannot retrieve objects defined in folders on a workstation set to ignore](#) on page 96

On Windows™, the message AWSDEQ024E is received

When attempting to log in to conman on a Windows™ operating system, the following error is received:

```

+++++
+ AWSDEQ024E Error owner is not of type user in TOKENUTILS.C;1178
+++++

```

Cause and solution:

This problem can have a variety of causes related to users and permissions. On the server, perform the following checks:

<<TWS_user>> password

Make sure that the password that you supplied for the <<TWS_user>> user is correct, that the account is not locked out, and that the password has not expired.

TokenSRV service

Ensure that the Tivoli® Token Service (tokensrv) is started by the IBM Workload Scheduler administrative user (not the local system account). This must be verified in the properties of that service in the Services panel; see *IBM® Workload Scheduler: Administration Guide* for details of how to access that panel and view the details of the user that "owns" the service.

If the password to this user has changed on the workstation, check also that the password has been changed in the entry on the Services panel.

File ownerships

Check that the following ownerships are correct:

- All .exe and .dll files in the <TWA_home>\TWS\bin directory are owned by the <<TWS_user>>
- All .cmd files are owned by "Administrator"

If necessary, alter the ownership of these files as follows:

1. Stop any active IBM Workload Scheduler processes.
2. Change to the <TWA_home>\TWS directory.
3. Issue the following commands:

```

setown -u <TWS_user> .\bin\*.exe
setown -u <TWS_user> .\bin\*.dll c:\win32app\maestro>
setown -u administrator .\bin\*.cmd

```

4. Issue a StartUp command on the affected server.
5. On the IBM Workload Scheduler master domain manager, launch conman.
6. Once conman is started, issue the following command sequence: **link @!@;noask**
7. Keep issuing the sc command to ensure that all the servers relink. A server is considered linked if the State shows "LTI JW"

Advanced user rights

Make sure that the <<TWS_user>> has the correct advanced user rights, as documented in the *IBM® Workload Scheduler: Planning and Installation Guide*. These are as follows:

- Act as part of the operating system
- Adjust memory quotas for a process
- Log on as a batch job
- Log on as a service
- Log on locally
- Replace a process level token
- Impersonate a client after authentication right

Resolving the problem by reinstalling

If none of the above suggestions resolve the problem, you might need to reinstall IBM Workload Scheduler. However, it might happen that the uninstallation fails to completely remove all of the Registry keys from the previous installation. In this case, remove the registry keys following the procedure in the *IBM® Workload Scheduler: Planning and Installation Guide*. Then make a fresh installation from the product DVD, subsequently reapplying the most recent fix pack, if there is any.

Duplicate ad-hoc prompt number

You issue a job or Job Scheduler that is dependent on an ad-hoc prompt, but `conman` cannot submit the job because the prompt number is duplicated.

Cause and solution:

On the master domain manager, prompts are created in the plan using a unique prompt number. This number is maintained in the file of the master domain manager. `JnextPlan` initially sets the prompt number to "1", and then increments it for each prompt that is to be included in the plan.

If you want to submit a job or Job Scheduler using an ad-hoc prompt on another IBM Workload Scheduler agent during the currency of a plan, the local `conman` looks in its own `runmsgno` file in its own `<TWA_home>/TWS/mozart/` directory, and uses the number it finds there. The value in the local file does not necessarily reflect the current value used in the `Symphony` file. For example, when the file is first created on an agent the run number is created as the highest run number used in the `Symphony` file at that time, plus `1000`. It is then incremented every time `conman` needs to assign a number to a prompt. Despite this interval of `1000`, it is still possible for duplicates to occur.

To resolve the problem, edit the file and change the number. An example of the file contents is as follows:

```
0          1236
```

The format is as follows:

- The 10-digit last Symphony run number, right-justified, blank filled. This should not be edited.
- A single blank.
- The 10-digit last prompt number, right-justified, blank filled.

For example:

```
123456789012345678901
0          98
```

When modifying the last prompt number, remember that the least significant digit must always be in character position 21. This means that if the current number is "98" and you want to modify it to display "2098" then you must replace two spaces with the "20", and not just insert the two characters. For example:

```
123456789012345678901
0          2098
```

Save the file and rerun the submit. No error should be given by `conman`.

During Jnextplan fault-tolerant agents cannot be linked

When you run the `conman` command `stop`, the command might take time to stop all the IBM Workload Scheduler processes on local fault-tolerant agents. If, in the meantime, the Symphony file was downloaded, it cannot be received by the IBM Workload Scheduler agent because some processes are still running and the following message is displayed:

```
AWSBCW037E Writer cannot initialize this workstation because
WRITER:+ mailman is still active.
```

Solution:

Insert `sleep 60` after `conman stop` in the Jnextplan script.

Submitting job streams with a wildcard loses dependencies

You issue a submit of interdependent job streams using a wildcard. In certain circumstances you lose the dependencies in an anomalous way.

Cause and solution:

To understand the cause, follow this example, in which the job streams are represented by A, B, C, and their instances are represented by 1, 2:

1. You have the following job streams and jobs in the Symphony file:

```
A1
B1 (A1, C1)
C1
```

where B1 depends on A1 and C1.

2. You submit all the jobs, using:

```
sbs @
```

The planner creates the following Job Scheduler instances:

```
A2
B2 (A2, C1)
C2
```

B2 now depends on A2 and C1. This is correct, because at the moment of submitting the B2 Job Scheduler C2 did not exist, so the highest instance available was C1.

3. The planner then asks you to confirm that you want to submit the instances:

```
Do you want to submit A2?
Do you want to submit B2?
Do you want to submit C2?
```

4. Assume that you do not want to submit the job streams A2 and C2, yet, so you reply "No" to the first and last questions. In these circumstances you lose the dependency on A2, but not on C1. This behavior is correct and logical but could be seen by some as anomalous.

To correct the situation, stop the agent on the workstation where the Job Scheduler is running and cancel the Job Scheduler. Then determine the correct sequence of actions to achieve the objective you want, and submit the appropriate jobs.

Exiting the composer or conman command line takes an abnormally long amount of time

Troubleshooting for a problem in composer or conman command line in a Windows environment

Cause and solution:

In a Windows environment, if there is a large number of files in the Conman-FFDC and Composer-FFDC folder, exit from composer or conman command line may take an abnormally long amount of time.

If you encounter this problem, you need to clean up the folders Conman-FFDC e Composer-FFDC to the trace files located in stdlist/JM

Job log not displayed

The job log does not display when submitting `conman sj;stdlist` and a wildcard is used in place of the workstation name if a previous operation canceled the job stream related to that job. For example, consider the following scenario:

1. Schedule a job stream named "jobstreamA" to run on workstation "workstationA". The job stream contains a job named "jobA".
2. Cancel the job stream:

```
%cancel workstationA#jobsteramA
```

3. Display the job stream specifying a wild card, @, in place of the actual workstation name:

```
%sj @#jobstreamA.jobA;stdlist
```

The job log is not displayed.

Cause and solution:

In a scenario where a job stream has been canceled and a request is made to display the job log related to a job defined in that job stream, and a wild card is used in place of the workstation name, the job log cannot be displayed. To work around this problem, avoid using a wild card in place of the workstation name when requesting to display the job log and use instead the CPU name. For example, in the scenario described, the following is the correct way to successfully display the job log:

```
%sj workstationA#jobstreamA.jobA;stdlist
```

Cannot retrieve objects defined in folders on a workstation set to ignore

You search for scheduling objects, such as jobs or resources, defined on a workstation which is defined on a folder and set to ignore, but no objects are retrieved in the search.

Cause and solution:

This is a known problem related to the folders feature. To work around this problem, search for the workstation with the filter set to `/@/@`, or specify the workstation unique identifier, as described in the following example:

```
conman ss 0ASEA234AAE432#/FOLDER_1/JS1
```

where 0ASEA234AAE432 is the ID of the workstation.

You can retrieve the workstation unique identifier using the following `composer` command:

```
composer li ws=<workstation_name>;showid
```

Fault-tolerant agent problems

The following problems could be encountered with fault-tolerant agents.

- [A job fails in heavy workload conditions](#) on page 97
- [Batchman, and other processes fail on a fault-tolerant agent with the message AWSDEC002E](#) on page 97
- [Fault-tolerant agents unlink from mailman on a domain manager](#) on page 98

A job fails in heavy workload conditions

A job fails on a fault-tolerant agent where a large number of jobs are running concurrently and one of the following messages is logged:

- “TOS error: No space left on device.”
- “TOS error: Interrupted system call.”

Cause and solution:

This problem could indicate that one or more of the CCLog properties has been inadvertently set back to the default values applied in a prior version (which used to occasionally impact performance).

See [IBM Workload Scheduler logging and tracing using CCLog](#) on page 33 and check that the `TWSCCLog.properties` file contains the indicated default values for the properties `twshnd.logfile.className` and `twslloggers.className`.

If the correct default values are being used, contact IBM® Software Support to address this problem.

Batchman, and other processes fail on a fault-tolerant agent with the message AWSDEC002E

The batchman process fails together with all other processes that are running on the fault-tolerant agent, typically mailman and jobman (and JOBMON on Windows™ 2000). The following errors are recorded in the `stdlist` log of the fault-tolerant agent:

```
+ ++++++
+ AWSBCV012E Mailman cannot read a message in a message file.
+ The following gives more details of the error:
+ AWSDEC002E An internal error has occurred. The following UNIX
+ system error occurred on an events file: "9" at line = 2212
+ ++++++
```

Cause and solution:

The cause is a corruption of the file `Mailbox.msg`, probably because the file is not large enough for the number of messages that needed to be written to it.

Consider if it seems likely that the problem is caused by the file overflowing:

- If you are sure that this is the cause, you can delete the corrupted message file.

All events lost: Following this procedure means that all events in the corrupted message file are lost.

Perform the following steps:

1. Use the `evtsize` command to increase the `Mailbox.msg` file. Ensure that the file system has sufficient space to accommodate the larger file.
 2. Delete the corrupt message file.
 3. Restart IBM Workload Scheduler by issuing the `conman start` command on the fault-tolerant agent.
- If you do not think that this is the answer, or are not sure, contact IBM® Software Support for assistance.

Fault-tolerant agents unlink from mailman on a domain manager

A message is received in the maestro log on the domain manager from mailman for each of the fault-tolerant agents to which it is connected. The messages are as follows:

```
MAILMAN:06:15/ + ++++++
MAILMAN:06:15/ + WARNING: No incoming from <<workstation>>
                  - disconnecting. [2073.25]
MAILMAN:06:15/ + ++++++
```

These messages usually occur in the 30 - 60 minutes immediately following JnextPlan.

Cause and solution:

This problem is normally caused by a false timeout in one of the mailman processes on the domain manager. During the initialization period immediately following JnextPlan, the "*.msg" files on the domain manager might become filled with a backlog of messages coming from fault-tolerant agents. While mailman is processing the messages for one fault-tolerant agent, messages from other fault-tolerant agents are kept waiting until the configured time interval for communications from a fault-tolerant agent is exceeded, at which point mailman unlinks them.

To correct the problem, increase the value of the *mm response* and *mm unlink* variables in the configuration file `~maestro/localopts`. These values must be increased together in small increments (60-300 seconds) until the timeouts no longer occur.

Symphony file on the master domain manager not updated with fault-tolerant agent job status

Jobs are running on a fault-tolerant agent and the local *Symphony* file has been updated, but due to a line failure with the master domain manager and the removal of `<TWS_home>\TWS*.msg` files, the *Symphony* file on the master domain manager has not been updated.

Solution:

Look at the latest *Symphony* file that was processed on the fault-tolerant agent, by using the `conman listsym` command. When used from a fault-tolerant agent command line, this command shows the latest *Symphony* file, saved as `MSymOldBackup`.

Dynamic agent problems

The following problems could be encountered with dynamic agent.

- [The dynamic agent cannot contact the server](#) on page 98
- [Error message AWKDBE009E is received](#) on page 99

The dynamic agent cannot contact the server

The dynamic agent cannot communicate with the server.

The dynamic agent cannot contact the IBM Workload Scheduler master domain manager or dynamic domain manager.

Cause and solution:

This problem might indicate that the list of URLs for connecting to the master domain manager or dynamic domain manager stored on the dynamic agent is incorrect. Perform the following steps:

1. Stop the dynamic agent
2. Delete the `BackupResourceAdvisorUrls` property from the `JobManager.ini` file
3. Edit the `ResourceAdvisorUrl` property in the `JobManager.ini` file and set the URL of the master domain manager or dynamic domain manager.

4. Start the dynamic agent.

Error message AWKDBE009E is received

Submission of an MSSQL job or of a Database job on an MSSQL database fails.

When you try to submit an MSSQL job or a Database job running on an MSSQL database, an error message similar to the following is returned, despite the required JDBC driver being installed in the correct directory:

```
AWKDBE009E Unable to create the connection - "
java.lang.UnsupportedOperationException:
Java Runtime Environment (JRE) version 1.6 is not supported by this driver.
Use the sqljdbc4.jar class library, which provides support for JDBC 4.0."
```

Cause and solution:

Verify that only the required **sqljdbc4.jar** driver is present in the JDBC driver directory. If unsupported JDBC drivers are also present in this directory, the dynamic agent might load them and cause the error message.

To solve the problem, perform the following steps:

1. Remove the unsupported JDBC drivers.
2. Stop the dynamic agent with command **ShutDownLwa**.
3. Restart the dynamic agent with command **StartUpLwa**.

For more information, see the section about configuring to schedule job types with advanced options in *IBM Workload Scheduler: Administration Guide*.

Error message AWSITA104E is received

System resources scan fails.

From the **dynamic workload broker > Tracking > Computers** entry of the Dynamic Workload Console, if you see the *status* of the agent *online*, but the *availability* is *unavailable*, you can see in the `JobManager_trace.log` file the following error:

```
AWSITA104E Unable to perform the system resources scan.
The error is "Unable to parse hardware scan output".
AWSITA105E Unable to notify scan results to the server
because of a resources scanner error.
```

Cause and solution:

The problem is that the *Common Inventory Technology* (CIT) is unable to perform correctly the resources scan because the hostname of the machine is not recognized.

To solve the problem, perform the following steps:

on UNIX operating systems

- verify that the hostname is listed in the `/etc/hosts` file.
- verify that the `ping hostname` command is performed successfully.

on Windows operating systems

- verify that the `ping hostname` command is performed successfully.

Event condition on dynamic agent does not generate any action

After the event rules are deployed on the dynamic agent, the dynamic agent is stopped and restarted automatically. The restarting process takes place only after some minutes, therefore an event condition issued shortly after the deployment of the event rule does not generate any action.

Job manager encounters a core dump

Job manager encounter a core dump when processing a high number of concurrent jobs on a UNIX workstation.

Cause and solution:

If you encounter this problem, you should adjust the supported number of concurrent jobs as needed, based on the requirements of your environment. To perform this operation, use the **ulimit** native UNIX command.

Problems on Windows™

You could encounter the following problems running IBM Workload Scheduler on Windows™.

- [Interactive jobs are not interactive using Terminal Services](#) on page 100
- [The IBM Workload Scheduler services fail to start after a restart of the workstation](#) on page 100
- [The IBM Workload Scheduler for user service \(batchup\) fails to start](#) on page 100
- [An error relating to impersonation level is received](#) on page 102

Interactive jobs are not interactive using Terminal Services

You want to run a job at a Windows™ fault-tolerant agent, launching the job remotely from another workstation. You want to use Windows™ Terminal Services to launch the job on the fault-tolerant agent, either with the Dynamic Workload Console or from the command line. You set the "is interactive" flag to supply some run time data to the job, and indicate the application program that is to be run (for example, `notepad.exe`). However, when the job starts running, although everything seems correct, the application program window does not open on the Terminal Services screen. An investigation at the fault-tolerant agent shows that the application program is running on the fault-tolerant agent, but Terminal Services is not showing you the window.

Cause and solution:

The problem is a limitation of Terminal Services, and there is no known workaround. All "interactive jobs" must be run by a user at the fault-tolerant agent, and cannot be run remotely, using Terminal Services. Jobs that do not require user interaction are not impacted, and can be run from Terminal Services without any problems.

The IBM Workload Scheduler services fail to start after a restart of the workstation

On Windows™, both the Tivoli® Token service and the IBM Workload Scheduler for user service (batchup) fail to start after a restart of the workstation on which they are running.

Cause and solution:

The user under which these services start might have changed password.

If you believe this to be the case, follow the procedure described in *IBM® Workload Scheduler: Administration Guide*.

The IBM Workload Scheduler for user service (batchup) fails to start

The IBM Workload Scheduler for <<TWS_user>> service (sometimes also called *batchup*) does not start when the other IBM Workload Scheduler processes (for example, mailman and batchman) start on workstations running Windows™ 2000 and 2003 Server. This problem occurs on a fault-tolerant agent, either after a conman start command or after a domain manager switch. The Tivoli® Token service and netman services are unaffected.

This problem does not impact scheduling, but can result in misleading status data.

Cause and solution:

The problem is probably caused either because the <<TWS_user>> has changed password, or because the name of the service does not match that expected by IBM Workload Scheduler. This could be because a change in the configuration of the workstation has impacted the name of the service.

To resolve the problem temporarily, start the service manually using the Windows™ Services panel (under **Administrative Tools**). The service starts and runs correctly. However, the problem could reoccur unless you correct the root cause.

To resolve the problem permanently, follow these steps:

1. If the <<TWS_user>> has changed password, ensure that the service has been changed to reflect the new password, as described in *IBM® Workload Scheduler: Administration Guide*.
2. Look at the Windows™ Event Viewer to see if the information there explains why the service did not start. Resolve any problem that you find.
3. If the failure of the service to start is referred to the following reason, there is a mismatch between the name of the installed service and the name of the service that the mailman process calls when it starts:

```
System error code 1060:
    The specified service does not exist as an installed service
```

The normal reason for this is that the user ID of the <<TWS_user>> has changed. The <<TWS_user>> cannot normally be changed by you, so this implies some change that has been imposed externally. A typical example of this is if you have promoted the workstation from *member server* to *domain controller*. When this happens, the local <<TWS_user>> is converted automatically to a domain user, which means that the domain name is prefixed to the user ID, as follows: <domain_name>\<TWS_user>.

The problem occurs because of the way IBM Workload Scheduler installs the service. If the workstation is *not* a domain controller the installation names the service: `tw_s_maestro_<TWS_user>`. If the workstation *is* a domain controller the installation names the service: `tw_s_maestro_<domain_name>_<TWS_user>`.

When batchman starts up it discovers that the <<TWS_user>> is a domain user. Batchman tries to use the domain user service name to start the batchup service. The action fails because the service on the workstation has the local user service name.

To resolve this problem you must change the name of this service, and to do this you are recommended to uninstall the IBM Workload Scheduler instance and install it again.

An alternative, but deprecated, method is to change the name of the service in the Windows™ registry.

⚠ Attention: Making changes to the Windows™ Registry can make the operating system unusable. You are strongly advised to back up the Registry before you start.

If you decide to use this method you must edit the following keys:

```
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\tw_s_maestro_<<TWS_user>>
    HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Services\tw_s_maestro_<<TWS_user>>
    HKEY_LOCAL_MACHINE\SYSTEM\ControlSet002\Services\tw_s_maestro_<<TWS_user>>
```

and change them as follows:

```
HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services
\tw_s_maestro_<domain_name>_<<TWS_user>>
    HKEY_LOCAL_MACHINE\SYSTEM\ControlSet001\Services
\tw_s_maestro_<domain_name>_<<TWS_user>>
    HKEY_LOCAL_MACHINE\SYSTEM\ControlSet002\Services
\tw_s_maestro_<domain_name>_<<TWS_user>>
```

If you have changed the name of the service in the registry, you must ensure that the logon is correct. Open the **Log On** tab of the service in the Windows™ Services panel and change the account name, if necessary, to <domain_name>\<<TWS_user>>. You must also enter the password and confirm it.

An error relating to impersonation level is received

On Windows™, an error is received when you try to use any of the IBM Workload Scheduler commands (for example, conman, composer, datecalc). The error message is similar to the following example:

```
AWSDEQ008E Error opening thread token ../../src/libs/tokenutils.c:1380
message = Either a required impersonation level was not provided, or the
provided impersonation level is invalid
```

Cause and solution:

This issue occurs when the user account that is used to run the IBM Workload Scheduler command line does not have the user right: "Impersonate a client after authentication". This is a security setting that applies to a subset of Windows versions. For more information, see the related Microsoft documentation. The upgrade does not grant this right to existing users.

To resolve this problem, grant the user right "Impersonate a client after authentication" to all users that need to run IBM Workload Scheduler commands on the workstation. To do this, follow these steps:

1. Select **Start** → **Programs** → **Administrative Tools** → **Local Security Policy**
2. Expand **Local Policies**, and then click **User Rights Assignment**.
3. In the right pane, double-click **Impersonate a client after authentication**.
4. In the Local Security Policy Setting dialog box, click **Add**.
5. In the Select Users or Group dialog box, click the user account that you want to add, click **Add**, and then click **OK**.
6. Click **OK**.

Corrupted characters appear in the command shell when executing cli commands

On Windows™, corrupted characters appear in the command shell when you try to execute any of the IBM Workload Scheduler command line interface commands (for example, conman, composer, wappman). The error message is similar to the following example:

Cause and solution:

This issue is caused by the default font used in the command prompt window (Raster fonts). To change the font, do the following:

- Click the icon in the upper left corner of the command prompt window
- Select Properties, then click the Font tab
- The default font is Raster fonts. Change this to Lucida Console and click OK

Extended agent problems

The following problem could be encountered with extended agents:

The extended agent for MVS returns an error

The extended agent for MVS returns an unsatisfied link error.

Cause and solution:

Required libraries are missing. To find an updated list of required libraries, see [IBM Workload Scheduler Detailed System Requirements](#).

Planner problems

The following problems could be encountered with the planner:

There is a mismatch between Job Scheduler instances in the Symphony file and the preproduction plan

You notice that there are Job Scheduler instances in the Symphony file that are not in the preproduction plan.

Cause and solution:

Job streams are automatically deleted from the preproduction plan when they are completed. However, it is possible to set the "carryStates" global option (using `optman`) so that job streams with jobs in the *SUCC* status are carried forward. In this case such job streams are carried forward to the new Symphony file when the plan is extended, but are deleted from the preproduction plan if the job streams have been successfully completed. This is not an error. These job streams can remain in the current plan (Symphony file) and can even be run again.

To resolve the situation for a given plan, use `conman` or the Dynamic Workload Console to delete the Job Scheduler instances from the plan.

To prevent the problem reoccurring, consider why the "carryStates" global option is set so that job streams with jobs in the *SUCC* status are carried forward. If it has been set in error, or is no longer required, change the settings of the option (using `optman`) so that this no longer happens.

Planman deploy error when deploying a plug-in

When using the `planman deploy` command to deploy a plug-in, the deploy fails with the following error:

```
AWSJCS011E An internal error has occurred. The error is the following:
"ACTEX0019E The following errors
from the Java compiler cannot be parsed:
error: error reading <file_name>; Error opening zip file
<file_name>
```

Cause and solution:

The .jar file identified in the message is corrupt. Check and correct the format of the file before retrying the deploy.

An insufficient space error occurs while deploying rules

When using the `planman deploy` command with the `-scratch` option to deploy all non-draft rules, the following error occurs:

```
AWSJCS011E An internal error has occurred. The error is the following:
"ACTEX0023E The Active Correlation Technology compiler cannot
communicate with the external Java compiler.
java.io.IOException: Not enough space".
```

Cause and solution:

This error occurs when there is insufficient swap space (virtual memory) to perform the operation.

Create more swap space or wait until there are fewer active processes before retrying the operation.

UpdateStats fails if it runs more than two hours (message AWSJCO084E given)

When running the `UpdateStats` command in a large plan, if the job run time exceeds two hours, the job fails with messages that include the following:

```
AWSJCO084E The user "UNAUTHENTICATED" is not authorized to work with the
```

```
"planner" process.
```

Cause and solution:

This error occurs because the large number of jobs in the plan has caused the job run time to exceed two hours, which is the default timeout for the user credentials of the WebSphere® Application Server.

To increase the timeout so that the UpdateStats command has more time to run, perform the following steps:

1. Browse to the following path:

On Windows systems

```
<TWA_home>\usr\servers\engineServer\configDropins\defaults
```

On UNIX systems

```
<TWA_home>/usr/servers/engineServer/configDropins/defaults
```

2. Edit the expiration attribute for LTPA as necessary. The attribute is expressed in minutes and the default value is 24 hours:

```
<ltpa keysPassword="{xor}Ozo5PiozKw==" keysFileName="{server.config.dir}/resources/security/ltpa.keys" expiration="1440"/>
```

3. Copy the file to the following path:

On Windows systems

```
<TWA_home>\usr\servers\engineServer\overrides\
```

On UNIX systems

```
<TWA_DATA_DIR>/usr/servers/engineServer/overrides/
```

The planman showinfo command displays inconsistent times

The plan time displayed by the `planman showinfo` command might be incongruent with the time set in the operating system of the workstation. For example, the time zone set for the workstation is GMT+2 but `planman showinfo` displays plan times according to the GMT+1 time zone.

Cause and solution:

This situation arises when the WebSphere Application Server Liberty Base Java™ virtual machine does not recognize the time zone set on the operating system.

As a workaround for this problem, set the time zone defined in the `server.xml` file equal to the time zone defined for the workstation in the IBM Workload Scheduler database. Proceed as follows:

1. Stop WebSphere Application Server Liberty Base.
2. Browse to the following path:

On Windows operating systems

```
<TWA_home>\usr\servers\engineServer\configDropins\overrides
```

On UNIX operating systems

```
<TWA_DATA_DIR>/usr/servers/engineServer/configDropins/overrides
```

3. In the `jvm.options` file, add the following line:

```
-Duser.timezone=time_zone
```

4. Restart WebSphere Application Server Liberty Base.

Job stream duration might be calculated incorrectly as well as other time-related calculations

The duration of a submitted job stream might be calculated incorrectly as well as other time-related calculations.

Cause and solution:

This situation arises when the time set on the workstations where the master and the engine are installed are not aligned.

As a workaround for this problem, align the time of all the workstations belonging to the IBM Workload Scheduler network, even if they are in different time zones.

A bound z/OS shadow job is carried forward indefinitely

A z/OS shadow job, defined for the distributed environment, is successfully bound to a remote z/OS® job, but the z/OS shadow job never completes and is carried forward indefinitely.

Cause and solution:

A Refresh Current Plan operation was performed on the remote IBM Z Workload Scheduler instance. Because this operation scratches the current plan, the remote z/OS® job instance binding was removed.

To prevent the z/OS shadow job from being indefinitely carried forward, manually cancel the z/OS shadow job instance in the distributed engine plan.

For instructions on how to do this, see the *cancel job* topic in the *Managing objects in the plan - conman* chapter of the *IBM Workload Scheduler: User's Guide and Reference*.

Problems with DB2®

The following problems could be encountered with DB2®:

- [Timeout occurs with DB2](#) on page 105
- [JnextPlan fails with the DB2 message "The transaction log for the database is full."](#) on page 106
- [UpdateStats fails if it runs more than two hours \(message AWSJCO084E given\)](#) on page 103
- [DB2 might lock while making schedule changes](#) on page 106

Timeout occurs with DB2®

You are trying to edit an object, but after a delay an error is issued by DB2® referring to a timeout:

```
AWSJDB803E
An internal deadlock or timeout error has occurred while processing a
database transaction. The internal error message is:
"The current transaction has been rolled back because of a deadlock or
timeout.
Reason code "68".
```

Cause and solution:

In this case the object you are trying to access is locked by another user, or by you in another session, but the lock has not been detected by the application. So the application waits to get access until it is interrupted by the DB2® timeout.

By default, both DB2® and WebSphere Application Server Liberty Base have the same length timeout, but as the WebSphere Application Server Liberty Base action starts before the DB2® action, it is normally the WebSphere Application Server Liberty Base timeout that is logged:

```
AWSJCO005E WebSphere Application Server Liberty
Base has given the following error:
CORBA NO_RESPONSE 0x4942fb01 Maybe; nested exception is:
org.omg.CORBA.NO_RESPONSE:
```

```
Request 1685 timed out vmcid:
IBM minor code: B01 completed: Maybe.
```

To resolve the problem, check if the object in question is locked. If it is, take the appropriate action to unlock it, working with the user who locked it. If it is not locked retry the operation. If the problem persists contact IBM® Software Support for assistance.

JnextPlan fails with the DB2® message "The transaction log for the database is full."

You receive a message from JnextPlan that includes the following DB2® message:

```
The transaction log for the database is full.
```

The JnextPlan message is probably the general database access error message AWSJDB801E.

Cause and solution:

This scenario is described in [JnextPlan fails with the database message "The transaction log for the database is full."](#) on page 88.

DB2® might lock while making schedule changes

Multiple concurrent changes (modify, delete or create) to job streams or domains might cause a logical deadlock between one or more database transactions. This is a remote but possible problem you might encounter.

This deadlock might take place even if the objects being worked on are different (for example, different job streams).

The problem affects database elements (rows or tables), not IBM Workload Scheduler objects, so it is unrelated with the `Locked By` property of IBM Workload Scheduler objects.

The same problem might arise when making concurrent changes for plan generation.

When the deadlock occurs, DB2® rollbacks one of the deadlocking threads and the following error is logged in the `SystemOut.log` of WebSphere Application Server Liberty Base:

```
AWSJDB803E An internal deadlock or timeout error has occurred
while processing a database transaction. The internal error
message is: "The current transaction has been rolled back
because of a deadlock or timeout. Reason code "2"."
```

In general, this type of error is timing-dependent, and the transactions involved must overlap in very specific conditions to generate a deadlock. However it might easily occur during plan generation (either forecast, trial, or current), when the plan includes many objects and DB2® must automatically escalate locks from row to table level, as the number of locked objects exceeds the current maximum limit.

You can mitigate the error by increasing the maximum number of locks that DB2® can hold. Refer to the DB2® Information Center to learn more about the DB2® lock escalation mechanism and to find how to increase the maximum number of concurrent locks.

In the above scenarios, if an interactive user session is rolled back, the user gets an error message but is allowed to repeat the task. Instead, if a script session is rolled back (for example, a script that generates a forecast plan or updates a job stream definition), the script ends in failure.

Problems with Oracle

The following problems could be encountered with Oracle:

- [JnextPlan fails with the database message "The transaction log for the database is full."](#) on page 107
- [You cannot do Oracle maintenance on UNIX after installation](#) on page 107
- [Dynamic workload broker fails to start after switching DB2 to Oracle](#) on page 107

JnextPlan fails with the database message "The transaction log for the database is full."

You receive a message from JnextPlan that includes the following database message:

```
The transaction log for the database is full.
```

The JnextPlan message is probably the general database access error message AWSJDB801E.

Cause and solution:

This scenario is described in [JnextPlan fails with the database message "The transaction log for the database is full."](#) on page 88.

You cannot do Oracle maintenance on UNIX™ after installation

You have installed IBM Workload Scheduler, creating the installation directory with the default root user permission. When you switch to the Oracle administration user and try and use the Oracle tools, you encounter access problems.

Cause and solution:

The problem could be that the Oracle administration user does not have "read" permission for the entire path of the IBM Workload Scheduler installation directory. For example, if you have created the IBM Workload Scheduler installation directory as /opt/myProducts/TWS, the Oracle administration user must have "read" permission for /opt and /myProducts, as well as /TWS.

Give the Oracle administration user read permission for the full path of the IBM Workload Scheduler installation directory.

Dynamic workload broker fails to start after switching DB2® to Oracle

After migrating the IBM Workload Scheduler database vendor from DB2® to Oracle, the Dynamic Workload Broker fails to start. Following the procedure to switch the database vendor from DB2® to Oracle results in missing Dynamic Workload Broker tables in Oracle. Also, the configuration file `DAOCommon.properties` is not updated with the Oracle specific information. The `DAOCommon.properties` file is located in the following path:

On Windows operating systems

```
<TWA_home>\broker\config
```

On UNIX operating systems

```
<TWA_DATA_DIR>/broker/config
```

Cause and solution:

To correct the set of database tables, follow the procedure *Planning and Installation Guide* about upgrading the database schema. Also, manually update the `DAOCommon.properties` so that the `rdbmsName=oracle`, and not `db2`, and ensure that all three of the values for the setting `*Schema=` are set to the Oracle schema name for the IBM Workload Scheduler database.

Problems with MSSQL

The following problem could be encountered with MSSQL:

- [An error is returned when deleting records with cascade option in MSSQL](#) on page 108

An error is returned when deleting records with cascade option in MSSQL

When performing a record deletion with cascade option in MSSQL, you receive a message similar to the following:

```
Maximum stored procedure, function, trigger, or view nesting level exceeded
(limit 32).
```

Cause and solution:

Deleting with cascade option a row which contains more than 30 references is not supported in MSSQL.

Problems with Informix

The following problem could be encountered with Informix:

- [Solving deadlocks when using composer with an Informix database](#) on page 108

Solving deadlocks when using composer with an Informix database

You encounter a database deadlock when two concurrent transactions cannot make progress because each one waits for the other to release a lock. If you encounter an Informix deadlock while using composer commands, perform the following steps:

1. Stop WebSphere Application Server Liberty Base, as described in the topic about starting and stopping the application server in *Administration Guide*.
2. Browse to the `TWSConfig.properties` file, located in the following paths:

On Windows operating systems

```
<TWA_home>\usr\servers\engineServer\resources\properties
```

On UNIX operating systems

```
<TWA_DATA_DIR>/usr/servers/engineServer/resources/properties
```

3. Add the following property to the file:

```
com.ibm.tws.dao.rdbms.ids.lockTimeout=0
```

4. Start WebSphere Application Server Liberty Base, as described in the topic about starting and stopping the application server in *Administration Guide*.

```
Maximum stored procedure, function, trigger, or view nesting level exceeded
(limit 32).
```

Application server problems

The following problems might occur:

- [Timeout occurs with the application server](#) on page 109
- [The application server does not start after changes to the SSL keystore password](#) on page 108
- [Master Domain Manager may stop when trying to retrieve a big job log](#) on page 110
- [AWKTSA050E error issued during submission](#) on page 110

The application server does not start after changes to the SSL keystore password

You change the password to the SSL keystore on WebSphere Application Server Liberty Base, or you change the security settings using WebSphere Application Server Liberty Base the `ssl_config.xml` or `authentication_config.xml` configuration files. The application server does not start. The following

message is found in the application server trace file `trace.log` (the message is shown here on three lines to make it more readable):

```
JSAS0011E: [SSLConfiguration.validateSSLConfig] Java. exception
Exception = java.io.IOException:
Keystore was tampered with, or password was incorrect
```

Cause and solution:

The certificate has not been reloaded or regenerated. Any change to the keystore password on the server or connector requires the SSL certificate to be reloaded or regenerated to work correctly.

Reload or regenerate the certificate and restart the application server.

To regenerate the certificate issue this command:

```
openssl genrsa -des3 -passout pass:<your_password> -out client.key 2048
```

If you do not want to supply the password openly in the command, omit it, and you will be prompted for it.

Timeout occurs with the application server

You are trying to edit an object, but after a delay an error is issued by WebSphere Application Server Liberty Base referring to a timeout:

```
AWSJCO005E WebSphere Application Server Liberty
Base has given the following error:
CORBA_NO_RESPONSE 0x4942fb01 Maybe; nested exception is:
  org.omg.CORBA.NO_RESPONSE:
  Request 1685 timed out vmcid:
  IBM minor code: B01 completed: Maybe.
```

Cause and solution:

In this case the object you are trying to access is locked from outside IBM Workload Scheduler, maybe by the database administrator or an automatic database function. So the application waits to get access until it is interrupted by the application server timeout.

DB2®

By default, both DB2® and WebSphere Application Server Liberty Base have the same length timeout, but as the WebSphere Application Server Liberty Base action starts before the DB2® action, it is normally the WebSphere Application Server Liberty Base timeout that is logged.

If one or both of the timeouts have been modified from the default values, and the DB2® timeout is now shorter, the following message is issued:

```
AWSJDB803E
An internal deadlock or timeout error has occurred while
processing a
database transaction. The internal error message is:
"The current transaction has been rolled back because of a
deadlock or timeout.
Reason code "68".
```

Oracle

There is no corresponding timeout on Oracle, so the Dynamic Workload Console hangs.

To resolve the problem, get the database administrator to check if the object in question is locked outside IBM Workload Scheduler. If it is, take the appropriate action to unlock it, if necessary asking the database administrator to force unlock the object.

If the object is not locked outside IBM Workload Scheduler, retry the operation. If the problem persists contact IBM® Software Support for assistance.

Master Domain Manager may stop when trying to retrieve a big job log

When trying to get a big job log (greater than 100 Mb) from the Dynamic Workload Console, the Master Domain Manager Liberty server could unexpectedly stop working due to a known issue affecting OpenJDK v8, which is related to a temporary issue with the /tmp filesystem.

After a short time, the WebSphere Application Server Liberty Base automatically restarts and, if the temporary issue with the /tmp filesystem is resolved, the operation can be performed again.

AWKTSA050E error issued during submission

The following error is written to the master domain manager `messages.log` file after submitting your workload to run:

```
[12/1/20 13:33:05:868 CET] 000000a2 TWSAgent E AWKTSA050E A problem with the
JCL content,
prevent Dynamic Workload Bridge from submitting the job "null"
(alias"DYNAGT7#S_STD_EXTRA_1.S_STD_J_24.SCHEDID-0AAAAAAAAAAAA353V2.JNUM-499584099".
The following error was returned:"java.lang.NullPointerException
```

Solution:

This error indicates that a restart of WebSphere Application Server Liberty Base is required. Restart WebSphere® Liberty.

Event management problems

This section describes problems that might occur with processing of events. The topics are as follows:

- [Troubleshooting an event rule that does not trigger the required action](#) on page 110
- [After replying to a prompt, the triggered action is not performed](#) on page 119
- [Actions involving the automatic sending of an email fail](#) on page 119
- [An event is lost](#) on page 120
- [Expected actions not triggered following an event](#) on page 120
- [Event rules not deployed after switching event processor](#) on page 121
- [Event LogMessageWritten is not triggered](#) on page 121
- [Deploy \(D\) flag not set after ResetPlan command used](#) on page 121
- [Missing or empty event monitoring configuration file](#) on page 122
- [Events not processed in correct order](#) on page 122
- [The stopeventprocessor or switcheventprocessor commands do not work](#) on page 122
- [Event rules not deployed with large numbers of rules](#) on page 123
- [Problem prevention with disk usage, process status, and mailbox usage](#) on page 123
- [On AIX operating systems the SSM agent crashes if you have a very large number of files to be managed using event-driven workload automation](#) on page 123
- [File creation and deletion actions not triggered](#) on page 123
- [Product limitation: no support for file monitoring events on Solaris AMD Opteron configured in FIPS mode.](#) on page 124

Troubleshooting an event rule that does not trigger the required action

You have created an event rule, but the required action is not triggered when the event condition is encountered.

Cause and solution:

The cause and subsequent solution might be any of a number of things. Use the following checklist and procedures to determine what has happened and resolve the problem. The checklist uses a test event which has the following characteristics:

```
<eventRule name="TEST1" ruleType="filter" isDraft="no">
  <description>A Rule that checks the sequence of events</description>
  <eventCondition name="fileCreated1" eventProvider="FileMonitor"
    eventType="FileCreated">
    <scope>
      C:\TEMP\FILE5.TXT ON CPU_MASTER
    </scope>
    <filteringPredicate>
      <attributeFilter name="FileName" operator="eq">
        <value>c:\temp\file5.txt</value>
      </attributeFilter>
      <attributeFilter name="Workstation" operator="eq">
        <value>CPU_MASTER</value>
      </attributeFilter>
      <attributeFilter name="SampleInterval" operator="eq">
        <value>60</value>
      </attributeFilter>
    </filteringPredicate>
  </eventCondition>
  <action actionProvider="TWSAction" actionType="sbj"
    responseType="onDetection">
    <scope>
      SBJ CPU_MASTER#JOB1 INTO CPU_MASTER#JOBS
    </scope>
    <parameter name="JobUseUniqueAlias">
      <value>true</value>
    </parameter>
    <parameter name="JobDefinitionWorkstationName">
      <value>CPU_MASTER</value>
    </parameter>
    <parameter name="JobDefinitionName">
      <value>JOB1</value>
    </parameter>
  </action>
</eventRule>
```

The checklist is as follows:

Step 1: Is event management enabled?

Check if the event management feature is enabled (at installation it is enabled by default):

1. Run the following command:

```
optman ls
```

and look for the following entry:

```
enEventDrivenWorkloadAutomation / ed = YES
```

If the value is "YES", go to [Step 2: Is the workstation enabled for event processing?](#)

2. Action: If the property is set to *NO*, run the command:

```
optman chg ed=YES
```

- To effect the change, run:

```
JnextPlan -for 0000
```

Check that the event rule is now being processed correctly. If not, go to [Step 2: Is the workstation enabled for event processing?](#)

Step 2: Is the workstation enabled for event processing?

Check that the workstation is enabled for event processing. By default the master domain manager and backup master domain manager are enabled for event processing, but the default value might have been changed. Perform the following steps:

- View the `localopts` file on the master domain manager with a text editor or viewer, and check for the following entry:

```
can be event processor = yes
```

If the value is "yes", go to [Step 3: Is the event processor installed, up and running, and correctly configured?](#)

- Action:** If the value is "no", set it to "yes". Save the `localopts` file and stop and start IBM Workload Scheduler. Check that the event rule is now being processed correctly. If not, go to [Step 3: Is the event processor installed, up and running, and correctly configured?](#)

Step 3: Is the event processor installed, up and running, and correctly configured?

- Start `conman`.
- Issue the `showcpus` command:

```
%sc @!@
```

You will see the following output:

CPUID	RUN	NODE	LIMIT	FENCE	DATE	TIME	STATE
METHOD	DOMAIN						
CPU_MASTER	11	*WNT MASTER	0	0	09/03/19	09:51	I
JW MDEA		MASTERDM					
F'TA1	11	WNT F'TA	0	0			LT
		MASTERDM					

- Check the STATE field for the presence of an M, a D, and an E (uppercase). In the example, the STATE field has a value of `I JW MDEA`, and the `MDE` is highlighted. If *all* are present, the event processor is installed, up and running, and correctly configured; go to [Step 9: Is the SSM agent running \(for rules with FileMonitor plug-in-related events only?\)](#).
- Actions:** If one or more of M, D, and E are not present, perform one or more of the following actions until they are all present:

The STATE field has neither an uppercase E nor a lowercase e

If there is neither an uppercase E nor a lowercase e, the event processor is not installed. The event processor is installed by default on the master domain manager and backup master domain manager. If you are working on either, then the installation did not complete correctly. Collect the log files in the following paths:

Windows operating systems

```
<TWA_home>\TWS\stdlist\logs
```

UNIX operating systems

TWA_DATA_DIR/stdlist/logs/

and contact customer support for assistance.

The STATE field has a lowercase e

If the STATE field has a lower case e, the event processor is installed but not running. Start the event processor using the `conman startevtproc` command, or the Dynamic Workload Console. If you use `conman`, for example, you will see the following output:

```
%startevtproc
AWSJCL528I The event processor has been started
successfully.
```

The STATE field has no M

If the STATE field has no M, `monman` is not running. Start `monman` using the `conman startmon` command. You will see the following output:

```
%startmon
AWSBHU470I A startmon command was issued for
CPU_MASTER.
```

The STATE field has no D

If the STATE field has no D, the current monitoring package configuration is not deployed. Go to [Step 5: Has the rule been added to the monitoring configuration on the workstation?](#).

5. Rerun the `showcpus` command.
6. When the M, D, and E are all present, check that the event rule is now being processed correctly. If not, go to [Step 9: Is the SSM agent running \(for rules with FileMonitor plugin-related events only?\)](#).

Step 4: Is the workstation definition present in the plan?

1. Start `conman`.
2. Issue the `showcpus` command:

```
%sc @!@
```

If the workstation definition is not included in the plan, add it by generating the production plan with the `JnextPlan - for 00` command. If the workstation definition is included, go to [Step 5: Has the rule been added to the monitoring configuration on the workstation?](#).

Step 5: Has the rule been added to the monitoring configuration on the workstation?

1. Check if the rule is present in the workstation monitoring configuration by running the `conman showcpus` command with the `;getmon` argument:

```
%sc ;getmon
Monitoring configuration for CPU_MASTER:
*****
*** Package date : 2019/09/03 07:48 GMT ***
*****
```

```
TEST1::FileMonitor#FileCreated:C:\TEMP\FILE5.TXT ON
CPU_MASTER;
TEST1::TWSObjectsMonitor#JobSubmit:* # * . TEST*;
```

If the rule is present, go to [Step 7: Has the new monitoring configuration been deployed to the workstation?](#)

2. **Action:** If the configuration does not contain the expected rule, go to [Step 6: Is the rule active.](#)

Step 6: Is the rule active

If the configuration does not contain the expected rule, check if it is active.

1. Check the rule status, using the `composer list` command or the Dynamic Workload Console. For example, if you use `composer` you will see the following output:

```
-list er=@

Event Rule Name          Type      Draft  Status
Updated On  Locked By
-----
TEST1
09/03/2019  -          filter      N      active
```

If the rule is in *active* status go to [Step 7: Has the new monitoring configuration been deployed to the workstation?](#)

2. **Action:** If the rule is in *error* status, activate the IBM Workload Scheduler trace, collect the log files located in

Windows operating systems

`<TWA_home>\TWS\stdlist\logs`

UNIX operating systems

`TWA_DATA_DIR/stdlist/logs/`

and contact customer support for assistance.

Step 7: Has the new monitoring configuration been deployed to the workstation?

If the rule is active, check if the new monitoring configuration has been deployed to the workstation.

1. The deployment of a new monitoring configuration can be checked in either of these ways:

- Check if the configuration is present in the following paths:

On Windows systems

`<TWA_home>/TWS/monconf`

On UNIX systems

`<TWA_DATA_DIR>/monconf`

- Check in the `SystemOut` file located in

On Windows systems

`<TWA_home>\stdlist\appserver\engineServer\logs`

On UNIX systems


```
<TWA_DATA_DIR>/stdlist/appserver/engineServer/
logs
```

Look for the message:

```
[9/3/19 9:50:00:796 CEST] 00000020
sendEventReadyConfiguration(wsInPlanIds, zipsToDeploy)
                                AWSDPM001I The workstation "CPU_MASTER"
has been notified about
                                a new available configuration.
```

If the message is present for the workstation in question after the time when the rule was made available for deployment, then the new configuration has been deployed.

If the configuration has been deployed, go to [Step 8: Has the deploy of the new monitoring configuration worked correctly?](#).

- 2. Action:** If the configuration has not been deployed, deploy it with the `conman deploy` command:

```
%deploy
AWSBHU470I A deployconf command was issued for MASTER_CPU.
```

Check that the event rule is now being processed correctly. If not, go to [Step 8: Has the deploy of the new monitoring configuration worked correctly?](#).

Step 8: Has the deploy of the new monitoring configuration worked correctly?

If the new monitoring configuration has been deployed, check that the deployment was successful:

1. Check in the `<date>_TWSMERGE.log` in the following paths:

Windows operating systems

```
<TWA_home>\TWS\stdlist\traces
```

UNIX operating systems

```
TWA_DATA_DIR/stdlist/traces/
```

and look for the most recent occurrence of these 2 messages:

```
09:51:57 03.09.2019|MONMAN:INFO:=== DEPLOY ===> CPU_MASTER has
been notified
                                of the availability of the new
monitoring configuration.
09:51:57 03.09.2019|MONMAN:INFO:=== DEPLOY ===> The zip file d:
\TWS\twsuser\monconf\deployconf.zip
                                has been successfully downloaded.
```

If you find these messages, referring to the workstation in question, and occurring after the time when the rule was deployed, then the rule has been successfully deployed to the workstation: go to [Step 9: Is the SSM agent running \(for rules with FileMonitor plug-in-related events only?\)](#).

- 2. Actions:** If you find messages that indicate an error, follow one of these actions:

Message indicates that the server could not be contacted or that the action has been resubmitted by monman

Message indicates a problem with decoding or extracting the compressed file

You find one of the following messages:

```
=== DEPLOY ===> ERROR decoding the zip file
temporarily downloaded in
<TWA_home>\TWS\monconf

=== DEPLOY ===> ERROR unzipping the zip file
<file_name>
```

Collect the log files and contact customer support for assistance.

Step 9: Is the SSM agent running (for rules with FileMonitor plug-in-related events only?)

1. If the rule has an event that uses the FileMonitor plug-in, check that the SSM Agent is running. Check in the log that when the `conman startmon` command was run (either when you ran it manually or when IBM Workload Scheduler started).
2. Search in the log for the following message:

```
11:13:56 03.09.2019|MONMAN:INFO:SSM Agent service
successfully started
```

If it is present, or the rule does not use the FileMonitor plug-in, go to [Step 6: Is the rule active](#).

3. **Action:** If the SSM Agent message is not present, collect the log files. Log files are located in

Windows operating systems

```
<TWA_home>\TWS\stdlist\logs
```

```
<TWA_home>/ssm
```

UNIX operating systems

```
TWA_DATA_DIR/stdlist/logs/
```

```
<TWA_DATA_DIR>/EDWA/ssm
```

and contact customer support for assistance.

Step 10: Have the events been received?

You know the rule has been deployed, but now you need to know if the event or events have been received.

1. Check in the `SystemOut` of the server to see if the event has been received. The output is different, depending on the type of event:

FileMonitorPlugIn event

- a. Following is the output of a FileMonitorPlugIn event:

```
[9/3/19 9:55:05:078 CEST] 00000035 EventProcessor A
com.ibm.tws.event.EventProcessorManager
    processEvent(IEvent)
        AWSEVP001I The following
event has been received:
    event type =
"FILECREATED"; event provider = "FileMonitor";
```

```

event scope = "c:\temp
\file5.txt on CPU_MASTER".
FILECREATED FileMonitor
c:\temp\file5.txt on CPU_MASTER

```

If the event has been received, go to [Step 11: Has the rule been performed?](#).

- b. If the event has not been received check if it has been created by looking in the `traps.log` for the message that indicates that the event has been created:

```

.1.3.6.1.4.1.1977.47.1.1.4.25 OCTET STRING
FileCreatedEvent event

```

- c. **Action:** Whether the event has or has not been created, collect the information in

Windows operating systems

```
<TWA_home>/ssm
```

UNIX operating systems

```
<TWA_DATA_DIR>/EDWA/ssm
```

and contact customer support for assistance.

TWSObjectMonitorPlugIn event

- a. Following is the output of a TWSObjectMonitorPlugIn event:

```

[9/3/19 12:28:38:843 CEST] 00000042 EventProcesso A
com.ibm.tws.event.EventProcessorManager
processEvent (IEvent)
AWSEVP001I The
following event has been received: event type =
"JOBSUBMIT";
event provider =
""TWSObjectsMonitor""; event scope = "CPU_MASTER #
JOBS .
(CPU_MASTER #) TEST".
JOBSUBMIT "TWSObjectsMonitor" CPU_MASTER # JOBS .
(CPU_MASTER #) TEST

```

- b. **Action:** If the event has not been received, collect the log data and contact customer support for assistance.
- c. If the TWSObjectMonitorPlugIn event has been received, check in the same log that the EIF event has been sent. Following is the output of an EIF event:

```

12:27:18 03.09.19|MONMAN:INFO:Sending EIF
Event:
"JobSubmit;

TimeStamp="2019-09-03T12:26:00Z/";

EventProvider="TWSObjectsMonitor";
HostName="CPU_MASTER";

```

```

IPAddress="9.71.147.38";
PlanNumber="11";
Workstation="CPU_MASTER";

JobStreamWorkstation="CPU_MASTER";
JobStreamId="JOBS";
JobStreamName="JOBS";

JobStreamSchedTime="2019-09-03T12:26:00";
JobName="TEST";
Priority="10";
Monitored="false";
EstimatedDuration="0";
ActualDuration="0";
Status="Waiting";
InternalStatus="ADD";
Login="twuser";END

```

- d. If the EIF event has been sent, it might be cached in the following path:

On Windows operating systems

<TWA_home>/EIF

On UNIX operating systems

<TWA_DATA_DIR>/EIF

- e. If the event is found there, check the communication with the agent and the server. If no communication problem is present wait until the event is sent.
- f. The event might also be cached in the machine where the event processor is located. Check this in the following paths:

On Windows operating systems

<TWA_home>TWS\stdlist\appserver
 \engineServer\temp\TWS\EIFListener/
 eif.templ

On UNIX operating systems

<TWA_DATA_DIR>/stdlist/appserver/
 engineServer/temp/TWS/EIFListener/
 eif.templ

If the event is found there, check the communication with the agent and the server. If no communication problem is present wait until the event is sent.

2. **Action:** If the problem persists, collect the log data and contact customer support for assistance.

Step 11: Has the rule been performed?

You now know that the event has been received, but that the action has apparently not been performed.

1. Check in the SystemOut of the server to see if the rules have been performed. Look for messages like these:

```

[9/3/19 9:55:05:578 CEST] 00000035 ActionHelper A
com.ibm.tws.event.plugin.action.ActionHelper

invokeAction(ActionContext,Map,EventRuleHeader)

```

```

trigged. TEST1
[9/3/19 9:55:05:625 CEST] 00000036 ActionHelper A
com.ibm.tws.event.plugin.action.ActionHelper
AsynchAction::run()
AWSAHL002I The action "sbj" for the
plug-in "TWSAction" has been started.
sbj TWSAction
[9/3/19 9:55:06:296 CEST] 00000036 ActionHelper A
com.ibm.tws.event.plugin.action.ActionHelper
AsynchAction::run()
AWSAHL003I The action "sbj" for the
plug-in "TWSAction" has completed.
sbj TWSAction

```

If the rule has been triggered and the action completed, go to [Step 12: Is the problem in the visualization of the event?](#).

- Action:** If the action has not been completed collect the log data and contact customer support for assistance.

Step 12: Is the problem in the visualization of the event?

Action: If the event has been received, but you cannot see it, there might be a problem with the console you are using to view the event. See [Troubleshooting Dynamic Workload Console problems](#) on page 145.

After replying to a prompt, the triggered action is not performed

An event rule of prompt status changed and recovery prompt is created and deployed, however, after a "yes" response to the prompt, the event rule action is not triggered. The following message is written to WebSphere Application Server Liberty Base traces:

```
AWSEVP008I The following event did not match any existing event condition
```

Cause and solution:

The event rule action is not triggered because no match is found for the event condition. The combination of conditions specified can never be met. To workaroud this problem, you need to modify the event rule and ensure that when specifying an event rule of prompt status changed, if you want to specify the recovery prompt, then you must obligatorily set the prompt status to "Asked".

Actions involving the automatic sending of an email fail

An event rule is created, including as the required action the sending of an email. When the event occurs, the action fails with the following message:

```

AWSMSP104E The mail "<mailID>" has not been successfully
delivered to "<recipient>".
Reason: "Sending failed;
nested exception is:
?????class javax.mail.MessagingException: 553 5.5.4 <TWS>...
Domain name required for sender address TWS

```

Cause and solution:

The mail send action failed because the domain name of the SMTP server was not defined in the mail sender name global option: mailSenderName (ms).

Use the `optman` command to specify the correct mail sender name including the domain. For example, if the mail sender name is `tws@alpha.ibm.com`, issue the following command:

```
optman chg ms=tws@alpha.ibm.com
```

An event is lost

You have sent a large number of events to the event processor. When you check the event queue you find that the most recent event or events are missing.

Cause and solution:

The event queue is not big enough. The event queue is circular, with events being added at the end and removed from the beginning. However, if there is no room to write an event at the end of the queue it is written at the beginning, overwriting the event at the beginning of the queue.

You cannot recover the event that has been overwritten, but you can increase the size of the queue to ensure the problem does not recur. Follow the instructions in "Managing the event queue" in *IBM® Workload Scheduler: Administration Guide*.

Expected actions not triggered following an event

In situations where a large number of events are generated and where an action or actions that are expected to be triggered on the master are not triggered, then most probably not all events arrived on the server. There are a number of steps you can perform to collect the necessary information customer support requires to assist you in solving the problem.

Collecting required information:

1. Set the keyword LogEvents = YES in the following files on the server and client. By default, the value assigned to this keyword is NO.

On the client

On Windows operating systems

```
<TWA_home>/EIF/monmaneif.templ
```

```
<TWA_home>/ssm/eif/tecad_snmp_eEIF.templ
```

On UNIX operating systems

```
<TWA_DATA_DIR>/EIF/monmaneif.templ
```

```
<TWA_DATA_DIR>/EDWA/ssm/eif/tecad_snmp_eEIF.templ
```

On the server

On Windows operating systems

```
<TWA_home>TWS\stdlist\appserver\engineServer\temp
\TWS\EIFListener/eif.templ
```

On UNIX operating systems

```
<TWA_DATA_DIR>/stdlist/appserver/engineServer/temp/
TWS/EIFListener/eif.templ
```

2. On the client, stop and start monman by submitting the respective command.

Stop

```
conman stopmon
```

Start

```
conman startmon
```

3. On the server, stop and start the event processor submitting the respective command.

Stop

```
conman stopevtproc
```

Start

```
conman startevtproc
```

4. All generated events are logged in a file. By default, this file is stored in the path /EIF. Collect these logs and send them to customer support. Because this log file can become quite large very quickly, there are ways to filter the events that get logged in the file.

On the server, set the LogEventsFilter keyword using a regular expression to filter events written on the server. By default, the value of this keyword is ".*" and therefore all events are logged. For example, if you are aware that problems originate from a specific client, then you can specify the CPU name of the client in the value of the LogEventsFilter keyword to limit the events logged to the file to this specific client as follows:

```
LogEventsFilter=.*<cpu_name>#MONMAN.*
```

Event rules not deployed after switching event processor

You have switched the event processor, but new or amended rules have not been deployed (the event states of the workstations that were affected by the new or amended rules do not show "D" indicating that the rules are not up-to-date, and the `getmon` command shows the old rules).

Cause and solution:

The probable cause is that you made some changes to the rules before running the `switcheventprocessor` command, and these rules were not deployed (for whatever reason) before the switch.

To remediate the situation, run the command `conman deployconf <workstation_name>`, for each affected workstation, and the rule changes will be deployed.

To avoid that this problem reoccurs, run `planman` with the `deploy` action before running `switcheventprocessor`.

Event *LogMessageWritten* is not triggered

You are monitoring a log file for a specific log message, using the *LogMessageWritten* event. The message is written to the file but the event is not triggered.

Cause and solution:

The SSM agent monitors the log file. It sends an event when a new message is written to the log file that matches the string in the event rule. However, there is a limitation. It cannot detect the very latest message to be written to the file, but only messages prior to the latest. Thus, when message line "n" is written containing the string that the event rule is configured to search for, the agent does not detect that a message has been written, because the message is the last one in the file. When any other message line is written, if or not it contains the monitored string, the agent is now able to read the message line containing the string it is monitoring, and sends an event for it.

There is no workaround to resolve this problem. However, it should be noted that in a typical log file, messages are being written by one or other processes frequently, perhaps every few seconds, and the writing of a subsequent message line will trigger the event in question. If you have log files where few messages are written, you might want to attempt to write a dummy blank message after every "real" message, in order to ensure that the "real" message is never the last in the file for any length of time.

Deploy (D) flag not set after ResetPlan command used

The deploy (D) flag is not set on workstations after the `ResetPlan` command is used.

Cause and solution:

This is not a problem that affects the processing of events but just the visualization of the flag which indicates that the event configuration file has been received at the workstation.

No action is required, because the situation will be normalized the next time that the event processor sends an event configuration file to the workstation.

However, if you want to take a positive action to resolve the problem, perform the following steps:

1. Create a dummy event rule that applies only to the affected workstations.
2. Perform a `planman deploy` to send the configuration file.
3. Monitor the receipt of the file on the agent.
4. When it is received, delete the dummy rule at the event processor.

Missing or empty event monitoring configuration file

You have received a MONMAN trace message on a workstation, similar to this:

```
MONMAN:INFO:=== DEPLOY ===> ERROR reading the .zip file
                /home/f_edwa3/monconf/deployconf.zip.
                It is empty or does not exist".
```

Cause and solution:

The IBM Workload Scheduler agent on a workstation monitors for events using a configuration file. This file is created on the event processor, compressed, and sent to the agent. If a `switcheventprocessor` action is performed between the creation of the file on the old event processor and the receipt on the new event processor of the request for download from the agent, the file is not found on the new event processor, and this message is issued.

To resolve the problem, perform the following steps:

1. Create a dummy event rule that applies only to the affected workstation.
2. Perform a `planman deploy` to send the configuration file.
3. Monitor the receipt of the file on the agent.
4. When it is received, delete the dummy rule at the event processor.

Events not processed in correct order

You have specified an event rule with two or more events that must arrive in the correct order, using the *sequence* event grouping attribute. However, although the events occurred in the required sequence the rule is not triggered, because the events arrived at the event processor in an order different from their creation order.

Cause and solution:

Events are processed in the order they arrive, not the order they are created. If they arrive in order different from the creation order, you will not get the expected result.

For example, consider a rule which is triggered if event A defined on workstation AA occurs before event B which is defined on workstation BB. If workstation AA loses its network connection before event A occurs, and does not regain it until after event B has arrived at the event processor, the event rule will not be satisfied, even though the events might have occurred in the correct order.

The solution to this problem is that if you need to define a rule involving more than one event, use the *set* event grouping attribute, unless you can be certain that the events will arrive at the event processor in the order they occur.

The `stopeventprocessor` or `switcheventprocessor` commands do not work

You have run `stopeventprocessor` or `switcheventprocessor` but the command has failed. The log indicates a communication problem.

Cause and solution:

If you issue the **stopeventprocessor** command from a workstation other than that where the event processor is configured, the command uses the command-line client, so the user credentials for the command-line client must be set correctly.

Similarly, if you use **switchevtprocessor**, it also uses the command-line client, so the user credentials for the command-line client must be set correctly also in this case.

Event rules not deployed with large numbers of rules

You have run **planman deploy** (or the equivalent action from the Dynamic Workload Console), with a very large number of event rules, but the command has failed. The log indicates a memory error.

Cause and solution:

A large number of event rules requires a Java™ heap size for the application server larger than the default. In this context, a large number would be 10 000 or more. Doubling the default size should be sufficient.

Full details of how to do this are described in the *IBM® Workload Scheduler: Administration Guide* in the section on *Increase application server heap size* in the *Performance* chapter.

Problem prevention with disk usage, process status, and mailbox usage

You can use event-driven workload automation (EDWA) to monitor the health of the IBM Workload Scheduler environment and to start a predefined set of actions when one or more specific events take place. You can prevent problems in the IBM Workload Scheduler environment by monitoring the filling percentage of the mailboxes, the status of IBM Workload Scheduler processes, and the disk usage of the IBM Workload Scheduler file system.

Full details of how to do this are described in the *IBM® Workload Scheduler: Administration Guide*, as follows:

- section on *Monitoring the disk space used by IBM Workload Scheduler* in the *Data maintenance* chapter
- sections on *Monitoring the IBM Workload Scheduler message queues* and *Monitoring the IBM Workload Scheduler processes* in chapter *Network administration*

See also [Configuring trace properties when the agent is running](#) on page 42.

On AIX operating systems the SSM agent crashes if you have a very large number of files to be managed using event-driven workload automation

On AIX operating systems the SSM agent crashes if you use the have a very large number of files to be managed using the FileCreated and FileDeleted event types of the FileMonitor events provided by even-driven workload automation (EDWA) feature.

Cause and solution:

This problem is due to a missing option setting in the EDWA configuration file. To solve this problem, add the following line in the files `<TWS_INST_DIR>/TWS/ssm/bin/preload_ssmagent_0.sh` and `<TWS_INST_DIR>/TWS/EDWA/ssm/bin/preload_ssmagent_0.sh`:

```
export LDR_CNTRL=MAXDATA=0x80000000
```

where `<TWS_INST_DIR>` is the IBM Workload Scheduler installation directory.

File creation and deletion actions not triggered

You are monitoring the creation or the deletion of a file on Windows using the FileCreated and FileDeleted events. The file is created or deleted, but the event action is not triggered.

Cause and solution:

The SSM agent monitors the file creation and deletion. An event is sent when a file that matches the string in the event rule is created or is deleted. However, on Windows platforms, if the file path contains forward slashes ("/"), the event action is not triggered. Replace forward slashes ("/") with backward slashes ("\") and redeploy the rule.

Product limitation: no support for file monitoring events on Solaris AMD Opteron configured in FIPS mode.

File monitoring events are not supported on Solaris AMD Opteron configured in FIPS mode. This limitation applies to fault-tolerant agents and to light-weight agents without a gateway. On light-weight agents with a gateway the event rules for the file monitoring are correctly triggered as expected.

Time zones do not resolve correctly with enLegacyStartOfDayEvaluation set

You are using IBM Workload Scheduler with the `enLegacyStartOfDayEvaluation` and `enTimeZone` options set to `yes` to convert the `startOfDay` time set on the master domain manager to the local time zone set on each workstation across the network. You submit a job or job stream with the `at` keyword, but the job or job stream does not start when expected.

Cause and solution:

Add the `absolute` keyword to make sure that the submission times are resolved correctly. The `absolute` keyword specifies that the start date is based on the calendar day rather than on the production day.

Managing concurrent accesses to the Symphony file

This section contains two sample scenarios describing how IBM Workload Scheduler manages possible concurrent accesses to the `Symphony` file when running `stageman`.

Scenario 1: Access to Symphony file locked by other IBM Workload Scheduler processes

If IBM Workload Scheduler processes are still active and accessing the `Symphony` file when `stageman` is run, the following message is displayed:

```
Unable to get exclusive access to Symphony.
Shutdown batchman and mailman.
```

To continue, stop IBM Workload Scheduler and rerun `stageman`. If `stageman` aborts for any reason, you must rerun both `planman` and `stageman`.

Scenario 2: Access to Symphony file locked by stageman

If you try to access the plan using the command-line interface while the `Symphony` is being switched, you get the following message:

```
Current Symphony file is old. Switching to new Symphony.
Schedule mm/dd/yyyy (nnnn) on cpu, Symphony switched.
```

StartApp Server problems

The `StartApp Server` command checks if WebSphere Application Server Liberty Base is running, if the WebSphere Application Server Liberty Base is not running `startApp Server` starts it.

In case of failure:

- Rerun the job.

MakePlan problems

MakePlan performs the following actions:

- Replans or extends the preproduction plan.
- Produces the Symnew file.
- Generates preproduction reports in the joblog

The following problems could be encountered when running MakePlan:

- [MakePlan fails to start](#) on page 125
- [Unable to establish communication with the server on host - AWSBEH023E](#) on page 125
- [The user "twuser" is not authorized to access the server on host - AWSBEH021E](#) on page 125
- [The database is already locked - AWSJPL018E](#) on page 126
- [An internal error has occurred - AWSJPL006E](#) on page 126
- [The production plan cannot be created - AWSJPL017E](#) on page 126
- [An internal error has occurred - AWSJPL704E](#) on page 126

MakePlan fails to start

If MakePlan fails to start:

- Global lock might be left to 'set'. Use `planman unlock` to 'reset' it
- Rerun the job to recover:
 - Preproduction plan is automatically reverified and updated.
 - Symnew is created again.

How to stop it:

- Stopping the job might not stop the processing that is still running on WebSphere Application Server Liberty Base or in the database.
- Force the Database statement to close if a database statement runs for too long and causes MakePlan to abend.
- Restart the WebSphere Application Server Liberty Base if processing is still running on WebSphere Application Server Liberty Base and MakePlan does not finish.



Note: Check if the database statistics are enabled. If not, it is recommended to schedule the `runstatistics` script stored in the `dbtools` IBM Workload Scheduler directory.

Unable to establish communication with the server on host - AWSBEH023E

If you receive the following error message from MakePlan stdlist:

```
AWSBEH023E Unable to establish communication with the server on host
"127.0.0.1" using port "31116"
```

Cause and solution: This error means that the application server is down and MakePlan cannot continue. If this happens, start the WebSphere Application Server Liberty Base and check the WebSphere Application Server Liberty Base logs to identify the reason why the WebSphere Application Server Liberty Base has stopped.

The user "twuser" is not authorized to access the server on host - AWSBEH021E

```
AWSBEH021E The user "twuser" is not authorized to access the server on
host "127.0.0.1" using port "31116"
```

Cause and solution: This is an authorization error. Check your IBM Workload Scheduler user name and password in the useropts file.

The database is already locked - AWSJPL018E

```
AWSJPL018E The database is already locked
```

Cause and solution: The previous operation of MakePlan is stopped and the global lock is not reset. To recover the situation run `planman unlock`.

An internal error has occurred - AWSJPL006E

```
AWSJPL006E An internal error has occurred. A database object "xxxx"
cannot be loaded from the database.
```

Cause and solution: Usually "xxxx" is an object like a workstation, job, or job stream. This error means that a connection with the database is broken. In this case, check the error in the SystemOut.log and the ffdc directory as additional information related to the error is logged there.

The production plan cannot be created - AWSJPL017E

```
AWSJPL017E The production plan cannot be created because a previous
action on the production plan did not complete successfully. Refer to
the message help for more details.
```

Cause and solution: This error might mean that a previous operation on the preproduction plan is performed but ended with an error. Generally it is present when "ResetPlan - scratch" is performed but does not end successfully.

An internal error has occurred - AWSJPL704E

```
AWSJPL704E An internal error has occurred. The planner is unable to
extend the preproduction plan.
```

Cause and solution: This error might mean that MakePlan cannot extend the preproduction plan. Different root causes are associated with this issue, typically always related to the database, for example, no space for the tablespace or full transaction logs. Check for more information in the SystemOut.log directory or in the directories where ffdc (*first failure data capture*) utility saves the extracted information.

SwitchPlan problems

SwitchPlan performs the following actions:

- Stops all the workstations
- Runs Stageman to:
 - Merge the old Symphony file with SymNew
 - Archive the old Symphony file in the schedlog directory
- Runs the `planman confirm` command to update the database plan status information . For example, the plan end date and the current run number.
- Restarts the master to distribute the Symphony file and restart scheduling.

The following problems could be encountered when running `SwitchPlan`:

- [When SwitchPlan fails to start](#) on page 127
- [The previous Symphony file and Symnew file have the same run number - AWSBHV082E](#) on page 127

When SwitchPlan fails to start

If `SwitchPlan` fails to start:

1. `planman confirm` is not running. Perform the following actions:
 - a. Check the logs
 - b. Run `"planman showinfo"`
 - c. Rerun `SwitchPlan`
2. `planman confirm` failed. Perform the following action:
 - Manually run `planman confirm` and `conman confirm`.
3. `planman confirm` was already run and the plan end date has been updated. Perform the following action:
 - Run `conman start`

If `conman stop` hangs, kill the `conman` command. This might impact the plan distribution because it stops the agents left running before distributing the new Symphony.

The previous Symphony file and Symnew file have the same run number - AWSBHV082E

If `SwitchPlan` `stdlist` shows the following messages:

```
STAGEMAN: AWSBHV082E: The previous Symphony file and Symnew file have
the same run number. They cannot be merged to form the new symphony file.
```

Cause and solution: There are several possible causes because the Symphony and Symnew run numbers have the same values, common causes for this are:

1. `MakePlan` did not extend the run number in the Symnew file.
2. `SwitchPlan` ran before `MakePlan`.
3. The Stageman process ran twice on the same Symnew file without resetting the plan or deleting the Symphony file.

```
AWSJCL054E: The command "CONFIRM" has failed.
```

```
AWSJPL016E: An internal error has occurred. A global option "confirm
run member" cannot be set.
```

Cause and solution: These error messages are present when the last step of the `SwitchPlan`, that is `planman confirm` fails. Analyze the `SystemOut.log` for more information and rerun `planman confirm`.

Create Post Reports

`Create Post Reports` has the following function:

- General post production reports in the job output.

In case of failure:

- Rerun the job if reports are needed.

Update Stats problems

Update Stats has the following functions:

- Runs logman to update job statistics and history.
- Extends the Preproduction plan if its length is shorter than minLen.

In case of failure:

- Rerun the job or manually run "logman <file> " on the latest schedlog file.
- If it does not run, the statistics and history will be partial. Preproduction plan is updated at the beginning of MakePlan .

How to stop it:

- Kill the job or logman process, the statistics and history will be partial until the job or logman is rerun.

Miscellaneous problems

The following problems might occur:

- [An error message indicates that a database table, or an object in a table, is locked](#) on page 128
- [Command line programs \(like composer\) give the error "user is not authorized to access server"](#) on page 129
- [The rmstdlist command gives different results on different platforms](#) on page 129
- [Question marks are found in the stdlist](#) on page 130
- [Deleting stdlist or one of its files when processes are still running](#) on page 130
- [A job with a "rerun" recovery job remains in the "running" state](#) on page 130
- [Job statistics are not updated daily](#) on page 131
- [A Job Scheduler dependency is not added](#) on page 131
- [Incorrect time-related status displayed when time zone not enabled](#) on page 131
- [Completed job or job stream not found](#) on page 131
- [Variables not resolved after upgrade](#) on page 131
- [Default variable table not accessible after upgrade](#) on page 132
- [Local parameters not being resolved correctly](#) on page 132
- [Deleting leftover files after uninstallation is too slow](#) on page 132
- [Corrupted special characters in the job log from scripts running on Windows](#) on page 133
- [Failover Cluster Command Interface deprecated](#) on page 133
- [Job stream creation failure due to missing rights on calendars](#) on page 133

An error message indicates that a database table, or an object in a table, is locked

An error message indicates that a function cannot be performed because a table, or an object in a table, is locked. However, the table or object does not appear to be locked by another IBM Workload Scheduler process.

Cause and solution:

The probable cause is that a user has locked the table by using the database command-line or GUI:


DB2®

Just opening the DB2® GUI is sufficient to lock the database tables, denying access to all IBM Workload Scheduler processes.

Oracle

If the Oracle command-line is opened without the auto-commit option, or the GUI is opened, Oracle locks all tables, denying access to all IBM Workload Scheduler processes.

To unlock the table close the command-line or GUI, as appropriate.

 **Note:** IBM Workload Scheduler provides all of the database views and reports you need to manage the product. You are strongly recommended to not use the facilities of the database to perform any operations, including viewing, on the database tables.

Command line programs (like composer) give the error "user is not authorized to access server"

You launch CLI programs (like composer) but when you try and run a command, the following error is given:

```
user is not authorized to access server
```

Cause and solution:

This problem occurs when the user running the command has a null password. Composer, and many of the other IBM Workload Scheduler CLI programs cannot run if the password is null.

Change the password of the user and retry the operation.

The rmstdlist command gives different results on different platforms

The `rmstdlist` command on a given UNIX™ platform gives results that differ from when it is used on other platforms with the same parameters and scenario.

Cause and solution:

This is because on UNIX™ platforms the command uses the `-mtime` option of the `find` command, which is interpreted differently on different UNIX™ platforms.

To help you determine how the `-mtime` option of the `find` command is interpreted on your workstation, consider that the following command:

```
<TWA_home>/TWS/bin/stdlist/rmstdlist -p 6
```

gives the same results as these commands:

```
find <TWA_home>/TWS/stdlist/ -type d ! -name logs ! -name traces -mtime +6 -print
  find <TWA_home>/TWS/stdlist/logs/ -type f -mtime +6 -print
  find <TWA_home>/TWS/stdlist/traces/ -type f -mtime +6 -print
```

Look at your operating system documentation and determine how the option works.

The rmstdlist command fails on AIX® with an exit code of 126

The `rmstdlist` command on AIX® fails with an exit code of 126 and no other error message.

Cause and solution:

This could be because there are too many log files in the `stdlist` directory.

On AIX®, you should regularly remove standard list files every 10-20 days. See the usage instructions in the *IBM® Workload Scheduler: User's Guide and Reference* for full details.

Question marks are found in the stdlist

You discover messages in the log or trace files that contain question marks, as in the following example (the message has been split over several lines to make it more readable and the question marks are highlighted to make them more obvious):

```
10:20:02 03.02.2008|BATCHMAN:+ AWSBHT057W
Batchman has found a non-valid run number in the Symphony
file for the following record type: "Jt" and object:
"F235011S3_01#???[ ( ), (0AAAAAAAAAAAAAZD)].A_7_13 (#J18214)".
```

Cause and solution:

This problem occurs when the process that needs to write the log message cannot obtain the Job Scheduler name. For example, when a Job Scheduler is dependent on a Job Scheduler that is not in the current plan (Symphony file). The process writes "???" in place of the missing Job Scheduler name.

The message contains the Job Scheduler ID (in the above example it is the string in the second set of parentheses: (0AAAAAAAAAAAAAZD)). Use the Job Scheduler ID to identify the instance of the Job Scheduler, and take any action suggested by the message that contained the question marks.

Deleting stdlist or one of its files when processes are still running

Erroneously deleted the `stdlist` directory or one of its files while processes are running.

You erroneously deleted the `stdlist` directory or one of its files while processes are running and you receive the following error when performing an operation:

```
Permission denied
Bad file descriptor
```

Cause and solution:

This problem occurs because the directories or files with root ownership are not re-created during the initialization phase.

According to your operating system, perform one of the following actions:

UNIX

- Create the directory or file that you deleted with **twuser** and **group** ownership.
- Modify the ownership of the directory or file created with **root** ownership to **twuser** and **group** ownership.

Windows

- Ensure that you are running the command line with the **Run as Administrator** privilege level.

A job with a "rerun" recovery job remains in the "running" state

You have run a job specifying a recovery job using the "rerun" recovery method. The original job fails, but when the recovery job starts the original job shows that the recovery action has been completed successfully, but remains in the "running" state.

Cause and solution:

This problem would occur if the recovery job was specified to run on a different workstation and domain from the original job. The original job is then unable to detect the state of the recovery job, so it cannot determine if the recovery job has finished or what state it finished in.

To resolve the problem for the specific job that is still in "running" state, you must manually stop the job.

To avoid the recurrence of the problem specify the "rerun" recovery action on the same workstation in the same domain.

Job statistics are not updated daily

Job statistics are not updated daily, as they were with versions prior to version 8.3.

Cause and solution:

Job statistics are updated by `JnextPlan`. If you are running `JnextPlan` less frequently than daily, the statistics are only updated when `JnextPlan` is run.

A Job Scheduler dependency is not added

A dependency is added to a Job Scheduler instance and the Job Scheduler is saved. When the list of dependencies is reopened, the new dependency is not present.

Cause and solution:

This occurs when a Job Scheduler instance already has the maximum number (40) of dependencies defined. Normally, an error message would alert you to the limit, but the message might not be displayed if there is a delay propagating the Symphony updates across the network or if your update coincided with updates by other users.

Incorrect time-related status displayed when time zone not enabled

You are using IBM Workload Scheduler in an environment where nodes are in different time zones, but the time zone feature is not enabled. The time-related status of a job (for example, "Late") is not reported correctly on workstations other than that where the job is being run.

Cause and solution:

Enable the time zone feature to resolve this problem. See *IBM® Workload Scheduler: User's Guide and Reference* to learn more about the time zone feature. See *IBM® Workload Scheduler: Administration Guide* for instructions on how to enable it in the global options.

Completed job or job stream not found

A job or job stream that uses an alias has completed but when you define a query or report to include it, the job or job stream is not included.

Cause and solution:

Jobs and job streams in *final* status are stored in the archive with their *original* names, not their aliases, so any search or reporting of completed jobs must ignore the aliases.

Variables not resolved after upgrade

After performing an upgrade, global variables are not resolved.

Cause and solution:

During the upgrade, all the security file statements relating to your global variables were copied by the installation wizard into a default variable table in the new security file. Global variables are disabled and can only be used through the variable tables. If you subsequently rebuilt the security file using the output from your *previous* `dumpsec` as input to the new `makesec`, you will have overwritten the security statements relating to your default variable table, so no user has access to the default variable table.

If you have a backup of your security file from prior to when you ran `makesec`, run `dumpsec` from that, and merge your old `dumpsec` output file with your new one, as described in the upgrade procedure in the *IBM Workload Scheduler: Planning and Installation*.

If you do not have a backup, create the default variable table security statement, following the instructions about configuring the security file in the *IBM Workload Scheduler: Administration Guide*.

Default variable table not accessible after upgrade

After upgrading, your default variable table is not accessible by any user.

Cause and solution:

This problem has exactly the same Cause and solution: as the preceding - see [Variables not resolved after upgrade](#) on page 131.

Local parameters not being resolved correctly

You have scheduled a job or job stream that uses local parameters, but the parameters are not resolved correctly.

Cause and solution:

One reason for this could be that one or both of the files where the parameters are stored have been deleted or renamed.

Check that the following files can be found in the `TWA_home/TWS` directory:

```
parameters
parameters.KEY
```

These files are required by IBM Workload Scheduler to resolve local parameters, so they must not be deleted or renamed. Fix the problem as follows:

1. If the files have been renamed, rename them to the original names.
2. If the files have been deleted, re-create them, using the `parms` utility.
3. To make the changes effective, restart the application server, using the `stopappserver` and `startappserver` commands.

Inconsistent time and date in conman and planman output

If you notice inconsistent times and dates in jobs and job streams on an AIX® master domain manager, ensure that the system time zone is set correctly. For example, you might notice this problem in the job schedtime or start time, or in other properties related to date and time.

Cause and solution:

The problem might be due to an incorrect setting of the time zone. To set the correct time zone, perform the following steps on the AIX® master domain manager:

1. Start `smit` (System Management Interface Tool).
2. Select System Environments > Change / Show Date, Time, and Time Zone > Change Time Zone Using User Entered Values.
3. Set the relevant time zone. For example, to set the Central European Time (CET) time zone, enter the following values:

```
* Standard Time ID(only alphabets)           [CET]
* Standard Time Offset from CUT([+|-]HH:MM:SS) [-1]
  Day Light Savings Time ID(only alphabets)  [CEST]
```

4. Restart the system to make the change effective.

For information about how to set the time zone, see *IBM Workload Scheduler: Administration Guide*. For a description of how the time zone works, see *IBM Workload Scheduler: User's Guide and Reference*.

Deleting leftover files after uninstallation is too slow

Deleting leftover `Onnnn.hhmm` files `TWA_installation_directory\TWS\stdlist\yyyy.mm.dd\` after uninstalling IBM Workload Scheduler is too slow.

Cause and solution:

This problem is caused by a known Microsoft™ issue on Windows™ operating systems. It occurs when you try to delete the `Onnnn.hhmm` files in `TWA_installation_directory\TWS\stdlist\yyyymm.dd\` on the Windows™ system after having uninstalled the master domain manager.

To prevent the problem, remove the `Onnnn.hhmm` files permanently using the Shift-Canc keys instead of using the Delete key or sending the files to the Recycle Bin.

Corrupted special characters in the job log from scripts running on Windows™

When you run scripts on Windows™ systems, any special characters resulting from the commands in the script might not be displayed correctly in the job log. This is a display problem that does not affect the correct run of the job. No workaround is currently available for this problem.

Failover Cluster Command Interface deprecated

The `cluster.exe` command-line tool for Failover Clustering was deprecated for Windows Server 2012 platforms. The commands `Startup_clu.cmd`, `Shutdown_clu.cmd`, and `clusterupg` do not work.

Cause and solution:

This occurs because of the deprecation of the `cluster.exe` command-line tool for Failover Clustering on Windows Server 2012 platforms. To avoid this problem, you must reinstall the deprecated Failover Clustering feature `cluster.exe`.

Job stream creation failure due to missing rights on calendars

When creating a job stream, if no calendar is specified in the job stream definition, an error occurs and a message similar to the following is displayed:

```
AWSJCO026E User <user_name>" is not authorized to perform the action
"<action_name>" on an object "<object_name>" and key "<key_name>".
```

In this case, modify the security file providing the ACCESS USE on CALENDAR HOLIDAYS to the user. For more information about configuring security, see the *Configuring user authorization (Security file)* chapter in the *Administration Guide*.

StartUp shows an error after upgrade

Problem:

After upgrading to version 8.6, StartUp script shows the following error:

```
TWS for UNIX/STARTUP 8.5.1
Licensed Materials - Property of IBM*
5698-WSH
(C) Copyright IBM Corp. 1998, 2012 All rights reserved.
* Trademark of International Business Machines
Program code level: 20120510
Killed
ld.so.1: /export/home/svtUser/TWS/trace/atctl: fatal:
libatrc.so: open failed: No such file or directory
Killed
AWSBHU507I A start command was issued for NC121016.
```

Cause and solution:

During the upgrade to version 8.6, the following configuration files:

- `twc_env.sh`
- `twc_env.csh`

- jobmanrc
- TWSCCLog.properties
- StartUp
- MakePlan
- SwitchPlan
- SwitchPlan
- CreatePostReports
- UpdateStats
- ResetPlan
- Sfinal

are not overwritten but the 8.6 version of above files are installed under `twc_home/config` directory, and therefore to remove the above error message you must merge manually the two version of the files modifying the file under `twc_home` directory.

Chapter

8

Troubleshooting dynamic workload scheduling

This section provides information that is useful in identifying and resolving problems with dynamic workload scheduling, including how to tune the job processing rate and how to solve common dynamic scheduling problems.

It includes the following sections:

- [How to tune the rate of job processing](#) on page 135
- [Troubleshooting common problems](#) on page 141
- [Remote command job fails](#) on page 137
- [Monitoring and canceling jobs](#) on page 138

See also the section about auditing in the *Administration Guide*.

How to tune the rate of job processing

The processing of jobs submitted for dynamic scheduling is handled by the two subcomponents of dynamic workload broker, job dispatcher and resource advisor, through a mechanism of queues and a cache memory. Job dispatcher uses a system of queues into which jobs are placed according to their processing status and thus transmitted to the resource advisor. Resource advisor uses a system of time slots during which it takes a number of jobs from the job dispatcher and allocates them to the resources that will run them.

The `JobDispatcherConfig.properties` and `ResourceAdvisorConfig.properties` configuration files are tuned to suit most environments. However, if your environment requires a high job throughput or if jobs are processed too slowly, you can add the parameters listed below to the specified configuration files and provide customized values. The configuration files are created for dynamic workload broker at installation time and are documented in *IBM® Workload Scheduler: Administration Guide*.

By default, the parameters listed below are not listed in the configuration files to prevent unwanted modifications. Only expert administrators should set these parameters.

After modifying these parameters, stop and restart dynamic workload broker, as explained in the section about `startbrokerapp` in the *IBM® Workload Scheduler: Administration Guide*.

JobDispatcherConfig.properties

MaxProcessingWorkers

Job dispatcher queues the submitted jobs according to their processing status. By default the following 3 queues are already specified:

```
Queue.actions.0 = cancel,
                  cancelAllocation,
                  completed,
                  cancelOrphanAllocation
Queue.actions.1 = execute,
                  reallocateAllocation
Queue.size.1    = 20
Queue.actions.2 = submitted,
                  notification,
```

```
updateFailed
```

Each queue is determined by the keywords:

Queue.actions.queue_number

Specifies the jobs added in this queue based on their processing status. The *queue_number* identifies the queue and ranges from 0 to 9. You can specify a maximum of 10 queues. The following table shows the entire list of process statuses you can specify in the queues.

Table 5: Job processing status to queue jobs for dispatching

Job processing statuses:		
activated	cancel	cancelAllocation
cancelJobCommand	cancelOrphanAllocation	childActivated
childCompleted	childDeactivated	childStarted
completed	deleteJobCommand	execute
getJobLogCommand	getJobPropertiesCommand	holdJobCommand
notification	reallocateAllocation	reconnect
resumeJobCommand	submitJobCommand	submitted
updateFailed	-	-

Unspecified job processing statuses are automatically placed in queue 0.

Queue.size.queue_number

Specifies the number of threads available to the queue identified by *queue_number*. You can specify 1 to 100 threads for each queue you define. The default is the number specified for `MaxProcessingWorkers`.

`MaxProcessingWorkers` specifies the default number of concurrent threads available to each queue. Each job dispatcher queue uses `MaxProcessingWorkers` threads, unless otherwise specified in `Queue.size.queue_number`. The `MaxProcessingWorkers` default is 10. Of the three default queues shown above, only queue 1 has its size specified to 20 threads (or workers). Queues 0 and 2 use the default defined in `MaxProcessingWorkers` (10 threads).

For example, in a test scenario with 250K jobs submitted through the workload broker workstation, the job allocation queues are re-configured as follows:

```
# Override default settings
Queue.actions.0 = cancel,
                 cancelAllocation,
                 cancelOrphanAllocation
Queue.size.0    = 10
Queue.actions.1 = reallocateAllocation
Queue.size.1    = 10
Queue.actions.2 = updateFailed
Queue.size.2    = 10
```

```
# Relevant to jobs submitted from
# workload broker workstation, when successful
Queue.actions.3 = completed
Queue.size.3    = 50
Queue.actions.4 = execute
Queue.size.4    = 50
Queue.actions.5 = submitted
Queue.size.5    = 50
Queue.actions.6 = notification
Queue.size.6    = 50

# Default for every queue size
MaxProcessingWorkers = 10
```

Tune this parameter carefully to avoid impairing product performance.

HistoryDataChunk

Specifies the number of jobs to be processed at the same time when moving job data to the archive database. This is applicable only to a DB2® RDBMS. This parameter prevents an overload on the job dispatcher. The unit of measurement is jobs. The default value is 1000 jobs.

ResourceAdvisorConfig.properties

MaxAllocsPerTimeSlot

Specifies the number of requests for job allocation to be processed for each time slot. The default value is 100 requests per time slot. By default, each time slot lasts 15 seconds. Increasing this number causes the resource advisor to process a higher number of resource allocation requests per time slot with consequent processor time usage. This also allows the processing of a higher number of jobs per time slot. Decreasing this number causes the resource advisor to process a lower number of resource allocation requests per time slot resulting in a smoother processor usage and slower job submission processing. You can also modify the time slot duration using the `TimeSlotLength` parameter available in this file.

MaxAllocsInCache

Specifies the number of requests for job allocation submitted by job manager to the resource advisor and stored in its cache. This number should be substantially higher than the value specified in the `MaxAllocsPerTimeSlot` parameter. The default value is 5000 allocation requests. Increasing this number causes the resource advisor to process a potentially higher number of resource reservations per time slot with consequent processor time usage. This also allows the processing of a higher number of jobs. Decreasing this number causes the resource advisor to process a lower number of resource reservations per time slot resulting in lower processor usage and slower job submission processing. For optimal performance, this value should be at least 10 times the value specified in the `MaxAllocsPerTimeSlot` parameter.

Remote command job fails

You define and run a remote command job that performs a task on a remote Windows system. If the remote command job goes into ABEND state, and the job log contains a message like: **AWKRCE012E Could not establish a connection to "nc112134.romelab.it.ibm.com" target machine.**, see the following cause and solution.

Cause and solution:

A necessary Windows service might be stopped. Start the Remote Registry Windows service on the remote system.



Note: A Remote Command job that runs on a Windows workstation that is configured to use the samba protocol version 2 or 3, without an active SSH server, fails.

Monitoring and canceling jobs

This section explains how you can monitor and cancel jobs using the Dynamic Workload Console or the **conman** command.

You can use the Dynamic Workload Console or the **conman** command line to monitor the status of submitted jobs, retrieve the job output, and cancel jobs if necessary, as you normally do in IBM Workload Scheduler. You can also use the Dynamic Workload Console to view their status since it provides more detail on jobs processed through IBM® Workload Scheduler.

Job statuses in Dynamic workload broker correspond to the following statuses in IBM Workload Scheduler:

Table 6: Status mapping between Dynamic workload broker and IBM Workload Scheduler

Dynamic workload broker job status	IBM Workload Scheduler job status
1. Run failed	1. ABEND
2. Unable to start	2. FAILED
3. Resource allocation failed	3. FAILED
4. Unknown	4. ABEND
1. Submitted	1. INTRO
2. Submitted to Agent	2. WAIT
3. Resource Allocation Received	3. WAIT
4. Waiting for Reallocation	4. WAIT
5. Waiting for Resources	5. WAIT
1. Running	1. EXEC
1. Completed Successfully	1. SUCC
1. Canceled	1. ABEND
2. Cancel Pending	2. The status is updated when the job reaches the Canceled state in IBM® Workload Scheduler
3. Cancel Allocation	3. The status is updated when the job reaches the Canceled state in IBM® Workload Scheduler



Note: The + flag written beside the INTRO and EXEC statuses means that the job is managed by the local **batchman** process.

You can view the job output by using both the Dynamic Workload Console or the **conman** command-line.

Consider the following Job Submission Description Language (JSDL) example, called `BROKER_COMMAND_JOB`:

```
<?xml version="1.0" encoding="UTF-8"?>
  <jsdsl:jobDefinition xmlns:jsdl="http://www.abc.com/xmlns/prod/
scheduling/1.0/jsdl"
xmlns:jsdle="http://www.abc.com/xmlns/prod/scheduling/1.0/jsdle"
                        name="BROKER_COMMAND_JOB">
    <jsdsl:variables>
      <jsdsl:stringVariable
name="command">dir<jsdsl:stringVariable>
                        <jsdsl:stringVariable name="params">d</
jsdl:stringVariable>
    </jsdl:variables>
    <jsdsl:application name="executable">
      <jsdle:executable interactive="false">
        <jsdle:script>${command} ${params}</jsdle:script>
      </jsdle:executable>
    </jsdl:application>
  </jsdl:jobDefinition>
```

and the associated IBM Workload Scheduler job definition, called `TWS_COMMAND_JOB`:

```
TTANCREC_BRK#TWS_COMMAND_JOB
SCRIPTNAME "BROKER_COMMAND_JOB -var command=ping,
           params=ttancred.romelab.it.abc.com"
STREAMLOGON tws86master
TASKTYPE BROKER
RECOVERY STOP
```

The following example displays the output of the previous job, submitted from IBM Workload Scheduler to the workload broker workstation.

```
%sj TTANCREC_DWB#JOBS.TWS_COMMAND_JOB;std
```

```
=====
= JOB      : TTANCREC_DWB#JOBS[(0000 10/28/12),(JOBS)].TWS_COMMAND_JOB
= USER    : twa86master
= TASK     : <?xml version="1.0" encoding="UTF-8"?>
<jsdsl:jobDefinition xmlns:jsdl="http://www.abc.com/xmlns/prod/scheduling/1.0/
jsdl"
xmlns:jsdle="http://www.abc.com/xmlns/prod/scheduling/1.0/jsdle"
                        name="BROKER_COMMAND_JOB">
  <jsdsl:variables>
    <jsdsl:stringVariable name="command">dir<jsdsl:stringVariable>
    <jsdsl:stringVariable name="params">d</jsdl:stringVariable>
  </jsdl:variables>
  <jsdsl:application name="executable">
    <jsdle:executable interactive="false">
      <jsdle:script>${command} ${params}</jsdle:script>
    </jsdle:executable>
  </jsdl:application>
</jsdl:jobDefinition>
= AGENT    : TTAGENT
= Job Number: 318858480
= Wed Oct 24 15:58:24 CEST 2012
=====
Pinging ttancred.romelab.it.abc.com [9.168.101.100] with 32 bytes of data:

Reply from 9.168.101.100: bytes=32 time<1ms TTL=128
Reply from 9.168.101.100: bytes=32 time<1ms TTL=128
Reply from 9.168.101.100: bytes=32 time<1ms TTL=128
Reply from 9.168.101.100: bytes=32 time<1ms TTL=128
```

```

Ping statistics for 9.168.101.100:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

```

```

=====
= Exit Status : 0
= Elapsed Time (Minutes) : 1
= Job CPU usage (ms) : 1406
= Job Memory usage (kb) : 3940
= Wed Oct 24 15:58:27 CEST 2012
=====

```

The keywords in the job output are as follows:

JOB

Is the host name of the IBM Workload Scheduler agent to which the job has been submitted and the job name.

USER

Is the IBM Workload Scheduler user who submitted the job to the workload broker workstation. When a scheduled job is submitted, the user name is retrieved from the **STREAMLOGON** keyword specified in the job definition. When an ad-hoc job is submitted from conman and the logon is not specified, the user name corresponds to the user who submitted the job.

TASK

Is the full JSDL job submitted with all the variables substituted.

AGENT

Is the agent that run the job.

Job Number

Is the job number.

Exit Status

Is the status of the job when completed.

System Time

Is the time the kernel system spent for the job.

User Time

Is the time the system user spent for the job.



Note: The same job output format is used for JSDL template job types.

You can also kill the job after submitting it. Killing a job in IBM Workload Scheduler performs the same operations as issuing the **cancel** command in IBM® Workload Scheduler.

On Windows 2012 the user interfaces for the interactive jobs are not visible on dynamic agents

On dynamic agent installed on Windows 2012 operating system, if you are running an interactive job, no user interface required by the interactive job, is displayed.

Cause and solution:

Ensure that the Interactive Services Detection service is running on Windows 2012 workstation where the dynamic agent is installed, and rerun the interactive job.



Note: Before start the Interactive Services Detection service on your operating system, ensure to read carefully the Windows documentation for the Interactive Services Detection running.

MASTERAGENTS workstation not updated in optman

After moving the MASTERAGENTS workstation to a folder, the workstation name is not updated in the `resubmitJobName optman` property.

When you modify the MASTERAGENTS workstation by storing it in a folder using the `composer rename` command, the command completes successfully. However, the `resubmitJobName optman` property is not updated and you cannot update it using the `optman chg` command. When you try to update the property, a message similar to the following is displayed:

```
AWSJCS037E The value of the string "<folder_name>/MASTERAGENTS" in property "RJ" is not correct. The value must be alphanumeric.
```

Cause and solution:

The `pools.properties` file is not updated automatically.

To solve the problem, perform the following steps:

1. Stop the agent using the `ShutDownLwa` command. For more information, see the section about the `ShutDownLwa` in *User's Guide and Reference*.
2. Browse to the following paths:

On Windows operating systems

```
<TWS_home>\ITA\cpa\config
```

On UNIX operating systems

```
TWA_DATA_DIR/ITA/cpa/config
```

3. Edit the `pools.properties` file and update the name of the MASTERAGENTS workstation as necessary.
4. Start the agent using the `StartUpLwa` command. For more information, see the section about the `StartUpLwa` in *User's Guide and Reference*.

Troubleshooting common problems

The following problems could be encountered with dynamic workload broker:

- [Dynamic workload broker cannot run after the IBM Workload Scheduler database is stopped](#) on page 142
- [Getting an OutofMemory exception when submitting a job](#) on page 142
- [Getting an error exception when submitting a job on a fresh agent](#) on page 142

On AIX operating systems the concurrent submission of one hundred or more jobs on the same agent can result in a core dump or in a resource temporarily unavailable message

On AIX operating systems, the concurrent submission of one hundred or more jobs on the same agent can result in a memory dump or in a resource temporarily unavailable message

On AIX operating systems if you submit concurrently one hundred or more jobs on the same agent you can receive a core memory dump or the following message:

```
resource temporarily unavailable
```

Cause and solution:

This problem is due to insufficient memory and the process number per user allocated to run the jobs concurrently. To solve this problem, verify the value of the following configuration settings and change them as follows:

Ulimit settings

The submission of a significant number of Java jobs requires a large amount of memory. Change the value for data, stack, and memory limits according to the number of jobs you want to submit. The submission of a significant number of native jobs requires a high number of file descriptors and processes. Change the values for `nfiles` and `processes` according to the number of jobs you want to submit. The following example gives possible setting values to submit 100 jobs concurrently:

```
time(seconds)          unlimited
file(blocks)           2097151
data(kbytes)           131072
stack(kbytes)          32768
memory(kbytes)         32768
coredump(blocks)       2097151
nfiles(descriptors)    4000
threads(per process)   unlimited
processes(per user)    unlimited
```

Process number per user

To submit a high number of jobs concurrently you must have a high value for the `maxuproc` setting. Use the `lsattr -E -l sys0 -a maxuproc` command to verify the number of concurrent processes that a user can create. Use the `chdev -l sys0 -a maxuproc=<value>` command to change the value for the `maxuproc` setting. For example, to submit 100 jobs concurrently use the following command:

```
chdev -l sys0 -a maxuproc=500
```

Dynamic workload broker cannot run after the IBM Workload Scheduler database is stopped

Getting an OutOfMemory exception when submitting a job

If you get the following message after you submit a job for dynamic scheduling:

```
The job with ID job ID failed to start.
The error is "unable to create new native thread".
```

you must tune a property of the scheduling agent.

The property is named `ExecutorsMinThreads` and is located in the `JobManager.ini` file on the agent (for the path, see [Where products and components are installed](#) on page 21). Its default value is 38 but if this error occurs, you must decrease it to reduce the number of threads created when the job is launched.

The `JobManager.ini` file is described in the *IBM® Workload Scheduler: Administration Guide*.

Getting an error exception when submitting a job on a fresh agent

If you register a dynamic agent after the generation of a plan and you submit a job or a jobstream on a workstation class using this agent, you get an error message.

This behaviour is normal considering that the agent is not in the plan yet. To avoid getting this error message, do not use agents registered after the plan has been generated.

Chapter 9

Troubleshooting when automatically adding dynamic agent workstations to the plan

This section provides information that is useful in identifying and resolving problems in the IBM Workload Scheduler environment when you enable the automatic adding of dynamic agent workstations to the plan.

It includes the following section:

- [The dynamic agent workstation automatically added to the plan is not initialized](#) on page 143.

The dynamic agent workstation automatically added to the plan is not initialized

The global option `enAddWorkstation` is set to "yes". On the master domain manager, if the `Intercom.msg` file is full and you are stopping processes during the dynamic agent workstation addition to the plan, the dynamic agent workstation is added to the plan, but it might not be initialized, linked, or started. On the master domain manager, after the master domain manager processes restart, you cannot see the `LTI J` flags in the `conman` command-line output, if you perform the following command:

```
conman sc dynamic_agent_workstation_name
```

Where *dynamic_agent_workstation_name* is the dynamic agent workstation name that you inserted during the installation process.

Cause and solution:

The cause is that the master domain manager mailman stopping process is unable to manage the IBM Workload Scheduler event that communicates the workstation addition to the plan, also after the master domain manager processes restart.

To solve the problem, restart the master domain manager processes by performing in order the following commands:

```
conman stop mdm_workstation_name  
conman start mdm_workstation_name
```

Where *mdm_workstation_name* is the master domain manager workstation name.

Chapter 10

Troubleshooting Dynamic Workload Console problems

Describes how to troubleshoot problems with the Dynamic Workload Console related to connections, performance, user access, reports, and others.

This section describes the problems which could occur while using the Dynamic Workload Console:

The problems are described in these groups:

- [Troubleshooting connection problems](#) on page 145
- [Troubleshooting performance problems](#) on page 151
- [Troubleshooting user access problems](#) on page 152
- [Troubleshooting problems with reports](#) on page 153
- [Troubleshooting problems with graphical views](#) on page 159
- [Troubleshooting problems with database](#) on page 160
- [Troubleshooting other problems](#) on page 160

Troubleshooting connection problems

The following problems could occur with the connection to the engine or the database:

- [The engine connection does not work](#) on page 145
- [Test connection takes several minutes before returning failure](#) on page 147
- [Engine version and connection status not displayed](#) on page 147
- [Failure in testing a connection or running reports on an engine using an Oracle database](#) on page 147
- [Connection problem with the engine when performing any operation](#) on page 148
- [Engine connection does not work when connecting to the z/OS connector \(versions 8.3.x and 8.5.x\)](#) on page 148
- [Engine connection does not work when connecting to the z/OS connector V8.3.x or a distributed IBM Workload Scheduler engine V8.3.x](#) on page 149
- [Engine connection settings are not checked for validity when establishing the connection](#) on page 150
- [LDAP account locked after one wrong authentication attempt](#) on page 150

The engine connection does not work

You define an engine connection, you verify that the values entered for the engine connection are correct, and then you click **Test Connection**. The test fails and a connection error message is returned.

Cause and solution:

Assuming that `system_A` is where you installed the Dynamic Workload Console, and `system_B` is where you installed IBM Workload Scheduler, follow these verification steps to investigate and fix the problem:


1. Verify that there is no firewall between the two systems as follows:
 - a. Make sure the two systems can ping each other. If you are trying to connect to a z/OS® engine you must check that the system where the Dynamic Workload Console is installed and the system where the IBM Workload Scheduler z/OS® connector is installed can ping each other.
 - b. Make sure you can telnet from `system_A` to `system_B` using the port number specified in the engine connection settings (for example, 31117 is the default port number for distributed engine).
 - c. Make sure you can telnet from `system_A` to `system_B` using the CSIV2 authentication port numbers specified during installation (for example, 31120 is the default server port number and 31121 is the default client port number).

If either of these two steps fails then there might be a firewall preventing the two systems from communicating.

2. Check if you can connect using the **composer** command line interface, or the Dynamic Workload Console to the IBM Workload Scheduler engine on `system_B` using the same credentials specified in the engine connection. If you cannot, then check if the user definition on `system_B` and the user authorization specified in the IBM Workload Scheduler security file are correct.
3. If you are using LDAP or another User Registry on the Dynamic Workload Console make sure that:
 - a. The connection to the user registry works.
 - b. The User Registry settings specified on the Integrated Solutions Console in the **Security** menu under **Secure administration, applications, and infrastructure** are correct.

For more information about how to configure the Dynamic Workload Console to use LDAP or about how to test the connection to a User Registry, refer to the chapter on configuring user security in the *IBM Workload Scheduler: Administration Guide*.

4. If you set up to use Single Sign-On between the Dynamic Workload Console and the IBM Workload Scheduler engine, make sure you correctly shared the LTPA_keys as described in the chapter on configuring SSL in the *Administration Guide*.

 **Note:** Make sure that you correctly shared the LTPA_keys also if you get errors AWSUI0766E and AWSUI0833E. The problem occurs when the realm values are the same for more than one WebSphere Application Server (Dynamic Workload Console, IBM Workload Scheduler z/OS® connector, or IBM Workload Scheduler engine). These steps are usually described only when you configure the Single Sign On, but they are required also when you have the same realm. You have the same realm when you configure all WebSphere Application Server Liberty Base instances with the same LDAP user registry and when you install all WebSphere Application Server Liberty Base instances on the same machine.

If this checklist does not help you in identifying and fixing your problem then activate tracing on the Dynamic Workload Console (adding also the Java™ packages `com.ibm.ws.security.*=all:com.ibm.tws.*=all`), and on the IBM Workload Scheduler engine. See the procedure in [Quick reference: how to modify log and trace levels](#) on page 29.

After modifying the traces as necessary, connect to the Dynamic Workload Console again, test the connection to the IBM Workload Scheduler engine, and then check the information stored in the following trace logs:

- On the Dynamic Workload Console, browse to the following path:

On Windows operating systems

`DWC_home\stdlist\appserver\dwcServer\logs`

On UNIX operating systems

`DWC_DATA_dir/stdlist/appserver/dwcServer/logs`

- On the IBM Workload Scheduler engine, browse to the following path:

On Windows operating systems

`TWA_home\TWS\stdlist\appserver\engineServer\logs`

On UNIX operating systems

`TWA_DATA_DIR/stdlist/appserver/engineServer/logs`

In these files you see the information about the error that occurred. If useful, compare the connection information stored in the traces with the information set for WebSphere Application Server Liberty Base security on both sides. Refer to the *Administration Guide* to list the information about the security properties.

Test connection takes several minutes before returning failure

You select an engine connection and click **Test Connection** to check that the communication is working. The test takes several minutes to complete and then returns a failure.

Cause and solution:

When the **Test Connection** is run, the result is returned only after the timeout expires. The timeout for running the **Test Connection** operation cannot be customized. The connection failed because of one of the following reasons:

- The system where the IBM Workload Scheduler engine is installed is not active.
- The IP address or the hostname of the system where the IBM Workload Scheduler engine is installed was not correctly specified (in other words, the host name specified by the `showHostProperties` command must be capable of being contacted by the Dynamic Workload Console and vice versa)
- A network firewall prevents the system where the Dynamic Workload Console is installed and the system where the IBM Workload Scheduler engine is installed from communicating.

Check which of these reasons causes the communication failure, fix the problem, and then retry.

Engine version and connection status not displayed

The table listing your engine connections, in the Manage Engines panel of the Dynamic Workload Console does not display the engine version or the icon identifying the connection status.

Cause and solution:

Probably it happened because you tried to establish an engine connection using wrong credentials, then you entered the correct credentials and tested the connection again without checking the **Save** option. The correct credentials have not been saved and even though the connection is successful, data relating engine version and connection status is not loaded in the table.

Refresh the panel to make data displayed.

Failure in testing a connection or running reports on an engine using an Oracle database

You test the connection to an engine by specifying the user credentials for an Oracle database, or you run a report on that engine connection. The operation fails and the following error message is displayed:

```
AWSUI0360E The JDBC URL is not configured on the selected engine,
so the reporting capabilities cannot be used.
Contact the IBM Workload Scheduler administrator."
```

Cause and solution:

Make sure that the IBM Workload Scheduler administrator has updated the `TWSConfig.properties` file by adding the following key:

```
com.ibm.tws.webui.oracleJdbcURL
```

specifying the JDBC Oracle URL. For example:

```
com.ibm.tws.webui.oracleJdbcURL=jdbc:oracle:thin:@//9.132.235.7:1521/orcl
```

Rerun the operation after the `TWSConfig.properties` has been updated. For more information about showing and changing database security properties for IBM Workload Scheduler, see *Administration Guide*.

Connection problem with the engine when performing any operation

Whatever operation you try to run in the Dynamic Workload Console, you get an error message saying that there is a connection problem with the engine.

Cause and solution:

Do the following steps:

1. Exit the Dynamic Workload Console.
2. Restart the WebSphere Application Server Liberty Base.
3. Log in again to the Dynamic Workload Console.

Continue with your activities on Dynamic Workload Console.

Engine connection does not work when connecting to the z/OS® connector (versions 8.3.x and 8.5.x)

If one of the following errors occurs when running the test connection, follow the steps described in the cause and solution section:

1. AWSUI0766E Test connection to *myengine*: failed. AWSUI0833E The operation did not complete. There was a communication failure. The internal message is: AWSJZC093E The requested engine zserver is not defined.
2. AWSUI0766E Test connection to *myengine* : failed. AWSUI0833E The operation did not complete. There was a communication failure. The internal message is: A communication failure occurred while attempting to obtain an initial context with the provider URL: "corbaloc:iiop:ZOS_CONNECTOR_HOSTNAME:31127".
3. AWSUI0766E Test connection to *myengine* : failed. AWSUI0833E The operation did complete. There was a communication failure. The internal message is: EQQPH26E TME user ID missing in TME user to RACF userid mapping table: myuser@hostname1.test.com

Cause and solution:

The possible causes for the case above are:

1. The name of the server startup job on host side must be defined on the z/OS® connector before you perform the test connection from the TDWC.
2. The WebSphere Bootstrap port is incorrect. Make sure that any bootstrap address information in the URL is correct and that the target name server is running. A bootstrap address with no port specification defaults to port 2809. Possible causes other than an incorrect bootstrap address or unavailable name server include the network environment and workstation network configuration.
3. The RACF® user ID has not been defined in the mapping table on host side.

You can solve the problem as follows:

Environment description example

The environment is composed of a z/OS® connector installed on the `hostname1.test.com`, a TDWC installed on either the same or another system, and a z/OS® engine installed on the `hostname2.test.com` (port 445).

Steps on the z/OS® connector side

Define a connection from the z/OS[®] connector to the host side by running the following script located in the directory <ZCONN_INST_DIR>/wastools and then restart WebSphere[®]:

```
> createZosEngine -name zserver -hostName hostname2.test.com/
portNumber 445
> stopWas
> startWas
```

where *zserver* is a logical name and can be changed to any other name.

Check the Bootstrap port by running the script showHostProperties.bat (sh) located in the directory <ZCONN_INST_DIR>/wastools.

Steps on the TDWC side

On the TDWC web interface, define an engine connection from TDWC to the z/OS[®] connector, as follows:

Engine name

Choose any name.

Engine Type

z/OS[®].

Host Name

Either `hostname1.test.com` or `localhost` depending on if TDWC is installed on the same host of Z/CONN or not.

Port Number

The z/OS[®] connector Bootstrap port.

Remote Server Name

zserver (or the name you used in step 2 - createZosEngine).

User ID / Password

For example, the credentials you specified when installing z/OS[®] Connector (that is, the user that owns the z/OS[®] Connector instance). The user can be any user that is authenticated by the User Registry configured on the embedded WebSphere[®] installed with the products.



Note: Bootstrap Port Number in version 8.5.x depends on which product is installed first. If TDWC is installed first, the Bootstrap port is 22809 and subsequent products installed on top of TDWC inherit that. If z/OS[®] Connector is installed first, the Bootstrap port is 31217. If the z/OS[®] connector version is 8.3 FPx, the default Bootstrap port is 31127.

Steps on the z/OS[®] side

Make sure that user `myuser@hostname1.test.com` is defined in the RACF[®] user ID mapping table on host side (USERMAP parameter in the SERVOPTS initialization statement).

Engine connection does not work when connecting to the z/OS[®] connector V8.3.x or a distributed IBM Workload Scheduler engine V8.3.x

If one of the following errors occurs when running the test connection, follow the steps described in the cause and solution section:

1. AWSUI0766E Test connection to *myengine*: failed. AWSUI0833E The operation did not complete.

```
Reason: AWSJCO005E WebSphere Application Server gives the following
error:
CORBA NO_PERMISSION 0x0 No; nested exception is:
org.omg.CORBA.NO_PERMISSION: Trace from server: 1198777258 at host
myhostname.com >>
org.omg.CORBA.NO_PERMISSION: java.rmi.AccessException: ; nested exception
is:
com.ibm.websphere.csi.CSIAccessException:
SECJ0053E: Authorization failed for /UNAUTHENTICATED while invoking (Bean)
ejb/com/ibm/tws/zconn/engine/ZConnEngineHome
getEngineInfo(com.ibm.tws.conn.util.Context):
1 securityName: /UNAUTHENTICATED;accessID:
UNAUTHENTICATED is not granted any of the required roles:
TWSAdmin vmcid: 0x0 minor code: 0 completed: No . . .
```

2. AWSUI0778E There was an authentication failure: the user name or password is incorrect.

Cause and solution:

The symptoms above are caused because on the z/OS® connector, or on the distributed engine side, the script **webui.sh** (bat) must be run to enable communication with the TDWC. Under the `wastools` directory of the home directory of the installation directory, run these commands:

```
./webui.sh -operation enable -user wasuser
-password waspwd -port soap_port
-pwdLTPA anypassword -server server1

./stopWas.sh -user wasuser -password waspwd

./startWas.sh
```

where:

`user` and `password` are those specified at installation time.

`port` is the WebSphere® SOAP port (display it by running the command **showHostProperties.sh**).

`pwdLTPA` is any password used to export and encrypt the LTPA keys.

`server` is the WebSphere® server name. The default is `server1`.

Engine connection settings are not checked for validity when establishing the connection

You incorrectly defined an engine connection to a distributed engine specifying a value for **Remote Server Name**. The **Remote Server Name** is not a valid setting for a connection to a distributed engine.

The check runs when you save the engine connection definition or when you run a test connection to that engine, but no exception about the incorrect setting is returned.

Cause and solution:

Whenever the test connection is run, only the mandatory fields for that specific type of engine, distributed rather than z/OS®, are used to test the connection. Fields that are not mandatory, such as **Remote Server Name** for distributed engine connections are not taken into account.

LDAP account locked after one wrong authentication attempt

LDAP accounts might be blocked even after only one login attempt when connecting using the web user interface or Dynamic Workload Console through LDAP/AD authentication, if wrong credentials are provided because of

internal LDAP/AD security policy. This happens because one login attempt with wrong credentials using the web user interface or Dynamic Workload Console, is transformed into several authentication requests to LDAP.

Cause and solution:

When a single LDAP hostname is mapped to multiple IP addresses in a network configuration, if an invalid password is entered during the login, WebSphere makes as many login attempts as the number of associated IP addresses plus 1. If the resulting number exceeds the maximum number of failed logins allowed by local LDAP/AD security policy, the LDAP account is blocked. In the log file `SystemOut.log` the following error shows an authentication error because of wrong credentials:

```
ECJ0369E: Authentication failed when using LTPA. The exception is
javax.naming.AuthenticationException: [LDAP: error code 49 -
80090308: LdapErr: DSID-0C090334, comment:
AcceptSecurityContext error, data 52e, vece
```

The WebSphere APAR PK42672 addresses this problem in the following way:

Two new custom properties are available to prevent this issue; use the one suitable for your LDAP configuration:

1. If LDAP is configured using the `wsadmin` command to register backend LDAP server hostnames, in the administration console click **Security > User Registries > LDAP > Custom Properties** and set to `true` the property `com.ibm.websphere.security.ldap.retryBind`. If this property is set to `false`, the Application Server does not retry LDAP bind calls. The default value is `true`.
2. If LDAP is configured associating a hostname with multiple IP addresses using the network configuration, in the administration console click **Security > User Registries > LDAP > Custom Properties** and set to `false` the property `com.ibm.websphere.security.registry.ldap.singleLDAP`. If this property is set to `true`, the Application Server does not resolve an LDAP hostname to multiple IP addresses. The default value is `false`.

Troubleshooting performance problems

- [With a distributed engine the responsiveness decreases overtime](#) on page 151
- [Running production details reports might overload the distributed engine](#) on page 151

With a distributed engine the responsiveness decreases overtime

When working with a distributed engine the responsiveness decreases overtime.

Cause and solution:

The problem might be related to multiple production plan report request running on that IBM Workload Scheduler engine, since those operations are CPU consuming. Ensure to wait until the report completion before running again other requests of the same kind.

Running production details reports might overload the distributed engine

The WebSphere Application Server Liberty Base on the distributed engine where the production details reports run, is overloaded and the temporary directory is full.

Cause and solution:

The amount of memory used by the WebSphere Application Server Liberty Base to extract the data varies depending on the number of objects to be extracted. For example, to extract 70 000 objects required almost 1 GB of RAM. To change the WebSphere Application Server Liberty Base heap size, see the section about increasing application server heap size in *Administration Guide*.



Note: As a general recommendation, use filters to avoid extracting huge production report files.

Troubleshooting user access problems

- [Wrong user logged in when using multiple accesses from the same system](#) on page 152
- [Unexpected user login request after having configured to use Single Sign-On](#) on page 152
- [Authentication problem when opening the Workload Designer](#) on page 153

Wrong user logged in when using multiple accesses from the same system

You try to access the Dynamic Workload Console as *user2* using Firefox or Internet Explorer 7, where a connection as *user1* is already active in the same browser. In the case of Firefox the problem occurs if *user1* is active in *any* other Firefox window or tab. In Internet Explorer 7 the problem only occurs if the other user is active in a different tab of the same browser instance. But in both cases the result is the same: the browser logs you in to the Dynamic Workload Console as *user1* instead of *user2*.

Cause and solution:

This is a browser limitation. If you have an active connection through Internet Explorer 7 to the Dynamic Workload Console, and you want to open another session on the same system, you need only to open a different browser window. If the active connection is on Firefox, however, you must use a different browser. For a list of supported browsers, see the Dynamic Workload Console [System Requirements Document](#) at [Dynamic Workload Console Detailed System Requirements](#).

Unexpected user login request after having configured to use Single Sign-On

It might happen that, after running successfully all the steps required to configure the Single Sign-On between the Dynamic Workload Console and a IBM Workload Scheduler engine, when you try to test the connection or run a task on that engine, you are unexpectedly prompted to enter your user credentials to connect. This behavior means that the Single Sign-On method is not working properly on that engine and you receive the following exception:

Cause and solution:

Locate the `authentication_config.xml` configuration files on both the Dynamic Workload Console and the master domain manager.

The file is located in the following path for the master domain manager:

On UNIX operating systems

```
TWA_DATA_DIR/usr/servers/engineServer/configDropins/overrides
```

On Windows operating systems

```
TWA_home\usr\servers\engineServer\configDropins\overrides
```

The file is located in the following path for the Dynamic Workload Console:

On UNIX operating systems

```
DWC_DATA_dir/usr/servers/dwcServer/configDropins/overrides
```

On Windows operating systems

```
DWC_home\usr\servers\dwcServer\configDropins\overrides
```

Make sure that the files have identical values assigned to the *name* field of the *primaryRealm* section. This setting belongs to the WebSphere Application Server Liberty Base profile configuration.

For example, even though you ran all the required steps to configure the Single Sign-On, it might still not work if you set `name="myHost.myDomain:389"` on the Dynamic Workload Console and `name="myHost:389"` on the IBM Workload Scheduler engine. To make it work, you must enter: `name="myLDAPHost.myDomain:389"`.

Authentication problem when opening the Workload Designer

You try to open the Workload Designer but the action fails and you receive a message saying that the engine credentials are wrong, even though you entered the correct user name and password. This happens in a configuration with the Dynamic Workload Console connected to IBM Z Workload Scheduler connector on z/OS WebSphere Application Server Liberty Base.

The problem is due to the definition of the engine connection that contain the engine IP address instead of the hostname.

To solve the problem, open the Engine Connection Properties panel and replace the IP address with the hostname in the Connection Data section.

Troubleshooting problems with reports

- [The validate command running on a custom SQL query returns the error message AWSWUI0331E](#) on page 153
- [The output of report tasks is not displayed in a browser with a toolbar installed](#) on page 153
- [WSWUI0331E error when running reports on an Oracle database](#) on page 154
- [CSV report looks corrupted on Microsoft Excel not supporting UTF8](#) on page 154
- [Insufficient space when running production details reports](#) on page 154
- [After IBM Workload Scheduler upgrades from version 8.3 to version 8.5 some fields in the output of reports show default values \(-1, 0, unknown, regular\)](#) on page 154
- [Report error: the specified run period exceeds the historical data time frame](#) on page 155

The validate command running on a custom SQL query returns the error message AWSWUI0331E

You are creating a Custom SQL report, and you run the **Validate** command to check your query. The validate fails and the following error message is returned:

```
AWSWUI0331E The SQL query could not be validated. The database internal
message is:
[ibm][db2][jcc][10103][10941] Method executeQuery cannot be used for update.
```

Cause and solution:

The validate failure is caused by a syntax error in the query statement, for example, a typing error, such as:

```
sele Workstation_name, Job_name, Job_start_time from MDL.JOB_HISTORY_V
where Workstation_name like 'H%'
```

In this query, *sele* is written in place of *select*.

Verify the SQL query is correct and, optionally, try to run the same query from the DB2® command line to get additional details.

The output of report tasks is not displayed in a browser with a toolbar installed

You tested that the connection to the database set in the engine connection works properly but, after you run a report task, no window opens in your browser to display the task results. You have a third-party toolbar installed on your browser.

Cause and solution:

A third-party toolbar (such as Yahoo! or Google or similar) installed on top of the browser might conflict with the correct operation of the Dynamic Workload Console reporting feature. To make the reporting feature work correctly you must uninstall the toolbar and then rerun the report task.

WSWUI0331E error when running reports on an Oracle database

You try to run a report on an engine connection where an Oracle database has been referenced. The report task fails and the following error is displayed:

```
WSWUI0331E SQL validate failure.The database internal message is:ORA-00942:
table or view does not exist
```

If you try to run an SQL query statement in the Oracle database on the same table or view using the userid specified for the database connection in the engine connection properties, the query runs successfully.

Cause and solution:

On Oracle databases only, you must run these steps, as Oracle database administrator, to allow the database user specified in the engine connection properties to run reports from the Dynamic Workload Console:

1. Assign to the database user the "CREATE TABLE" Oracle System privilege.
2. Run the following script:

On Windows™

```
TWA_home\TWS\dbtools\oracle\script\dbgrant.bat
```

On UNIX™:

```
TWA_home/dbtools/oracle/script/dbgrant.sh
```

CSV report looks corrupted on Microsoft™ Excel not supporting UTF8

You run a report asking to save the result in a CSV file. When you open the CSV file using Microsoft™ Excel, the content of the file looks corrupted.

Cause and solution:

To bypass this problem, make sure that the version of Microsoft™ Excel you are using supports the UTF8 character set. If it does not, install a more recent version that supports UTF8. Then, follow these steps to correctly open CSV reports from Microsoft™ Excel:

1. Open Microsoft™ Excel.
2. In the **Data** menu entry, select **Import External Data** and then **Import Data**.
3. Select the CSV file saved and click **Open**.
4. In the field File Origin, select **UTF8**.

Insufficient space when running production details reports

When running production details reports the temporary directory on the IBM Workload Scheduler engine where the reports run, could be full.

Cause and solution:

You need to free some space in the temporary directory on the IBM Workload Scheduler engine before continuing to work on that engine.

After IBM Workload Scheduler upgrades from version 8.3 to version 8.5 some fields in the output of reports show default values (-1, 0, unknown, regular)

After migrating IBM Workload Scheduler from version 8.3 to version 8.5, the output on the Dynamic Workload Console of reports run on old migrated jobs show default values for the new fields introduced since version 8.3.

Cause and solution:

This is not a problem or a limitation but the result of migrating data from old tables to new tables containing newly created fields. After migration, it is necessary to assign a value to the new fields introduced since version 8.3 for job runs that occurred before migrating. The values assigned by default to these new fields are:

For job run statistic reports:

Table 7: Default settings for new job run statistic reports

Value	Field
0	Number of "Long Duration" job runs
0	Number of "Suppressed" job runs
0	Number of "Started Late" job runs
0	Number of "Ended late" job runs
0	Total Reruns
-1	Average CPU Time
-1	Average Duration

For job run history reports:

Table 8: Default settings for new job run history reports

Value	Field
unknown	Workstation Name (Job Stream)
-1	Started Late (delay hh:mm)
-1	Ended Late (delay hh:mm)
-1	Estimated Duration (hh:mm)
No	Long Duration
Regular	Run Type
-1	Iteration Number
0	Return Code
0	Job Number
unknown	Login

Report error: the specified run period exceeds the historical data time frame

You define a report specifying a valid date range as execution period in the filter criteria. When you run the report, you receive the following warning message:

```
AWSUI2003IThe specified run period exceeds the historical data time frame. The database contains historical data from....
```

Cause and solution:

This problem occurs if different time zones are used when creating the report and when running it. To solve the problem, edit the report task, change the time zone making it equal to the time zone currently specified in the user preferences and run the report again.

Troubleshooting problems with browsers

- [Default tasks are not converted into the language set in the browser](#) on page 156
- ["Access Error" received when launching a task from the browser bookmark](#) on page 156
- [If you close the browser window, processing threads continue in the background](#) on page 156
- [Unresponsive script warning with Firefox browser](#) on page 157
- [Plan View panel seems to freeze with Internet Explorer version 7](#) on page 157
- [Workload Designer does not show on foreground with Firefox browser](#) on page 157
- [Some panels in Dynamic Workload Console might not be displayed correctly in Internet Explorer, version 8 and 9](#) on page 158
- [Web page error with Internet Explorer, version 9](#) on page 158
- [Dynamic Workload Console problems with Internet Explorer developer tools](#) on page 158
- [Some Simplified Chinese characters are missing or corrupted when using Google Chrome or Apple Safari browser](#) on page 158

Default tasks are not converted into the language set in the browser

An existing user logs in to the Dynamic Workload Console using a browser where the language set is different from the language that was set in the browser the first time he logged in. In the Manage Tasks window, the default tasks are not translated into the new language.

Cause and solution:

The default tasks are created, using the current language set in the browser, when the new user logs into the Dynamic Workload Console for the first time. To have the default tasks translated into a different language, the WebSphere Application Server Liberty Base administrator must create a new Dynamic Workload Console user, and use that to login to the Dynamic Workload Console for the first time using a browser configured with the requested language. By doing this the default tasks are created using the requested language.

"Access Error" received when launching a task from the browser bookmark

A Dynamic Workload Console task has been saved in the list of bookmarks of the browser. You try to launch the task using the bookmark but you receive the following error message:

"User does not have access to view this page, use the browser back button to return to previous page."

Cause and solution:

You do not have the necessary role required to run the task. To run a task you must have a role that allows you to access the Dynamic Workload Console panels that are relevant to the type of task you need.

For more information about setting roles to work with the Dynamic Workload Console, see the Administration Guide, under the section about Configuring new users to access Dynamic Workload Console

If you close the browser window, processing threads continue in the background

You perform an action or make a selection and immediately close the browser window. You expect that processing terminated but the messages stored in the `SystemOut.log` file show that processing continued in the background.

Cause and solution:

This is normal behavior for any WEB application, when the client browser is closed no notification is delivered to the server according to the HTTP protocol specifications. This is the reason why the last triggered thread continues to process even after the browser window was closed. You do not need to run any action, just allow the thread to end.

Unresponsive script warning with Firefox browser

When opening the Workload Designer with Firefox, the following warning message might appear:

```
Warning: Unresponsive script
A script on this page may be busy, or it may have stopped responding.
You can stop the script now, or you can continue to see if the script will
complete.
```

Cause and solution:

This is caused by a Firefox timeout. If prompted with this warning message, select the **Continue** option.

This behavior of Firefox is ruled by its `dom.max_script_run_time` preference, which determines the timeout that the browser must wait for before issuing the warning. The default value is 10 seconds, and might be changed to another value according to your needs.

To change this value, perform the following steps:

1. Type `about:config` in the address field of the browser.
2. Scroll down to the preference, select it, change the value, and click **OK**.

Plan View panel seems to freeze with Internet Explorer version 7

When using Internet Explorer version 7, some actions performed in sequence might cause the **Plan View** browser window to freeze and stay frozen for about 5 minutes. After this timeframe the browser window resumes.

Cause and solution:

Action sequences that might cause this problem typically include opening multiple **Plan View** panels at the same time and refreshing the **Plan View** panels that were already open.

To avoid or limit this behavior add the Dynamic Workload Console website to the **Local intranet** security zone of Internet Explorer 7, with its default security level.

Blank page displayed (in High availability disaster recovery configuration)

You are in a high availability disaster recovery (HADR) configuration and the Dynamic Workload Console displays blank panels when trying to retrieve information from DB2.

Cause and solution:

When DB2 primary node stops, every Dynamic Workload Console request waits for a manual switch to a standby node.

If you have a HADR DB2 configuration related to your IBM Workload Scheduler engine, and you get an empty or blocked panel in the Dynamic Workload Console, verify that your primary node is up and running.

Workload Designer does not show on foreground with Firefox browser

With Firefox, if you open the Workload Designer from a graphical view (with the `Open Job definition` or the `Open Job stream definition` commands), and the Workload Designer window is already open, this window might not be moved to the foreground.

Solution:

To fix this problem, change the Firefox settings as follows:

1. On the Firefox action bar select **Tools**, then **Options**, then **Content**, and finally **Advanced**
2. Enable the `Raise or lower windows` option

Some panels in Dynamic Workload Console might not be displayed correctly in Internet Explorer, version 8 and 9

When using Internet Explorer version 8 or 9, some panels in Dynamic Workload Console, might not display as expected, for example

- The Graphical View or some Dashboard graphics, might not be displayed correctly.
- When duplicating a Monitor task, the entire Dashboard Application Services Hub navigation toolbar appears duplicated.

Cause and solution:

This problem can be due to incorrect settings in Internet Explorer.

To avoid or limit this behavior, use the following workarounds:

- Add the Dynamic Workload Console web site to the **Local intranet** security zone of Internet Explorer, with its default security level.
- Add the hostname of the Dynamic Workload Console to the web sites used in Compatibility View by Internet Explorer. To do it, from Internet Explorer toolbar, click **Tools > Compatibility View Settings** and add the Dynamic Workload Console hostname to the list.
- Turn off Internet Explorer Enhanced Security mode as described in the following documentation: *IBM Tivoli Security Information and Event Manager*, section about Disabling Enhanced Security Configuration.. In fact, Dashboard Application Services Hub does not support Internet Explorer with Enhanced Security mode active.

Web page error with Internet Explorer, version 9

When using Internet Explorer version 9, some panels in Dynamic Workload Console, might not be displayed correctly and the page issues the following web page error: "object Error".

Cause and solution:

To solve this problem, clear the browser cache.

Dynamic Workload Console problems with Internet Explorer developer tools

When using Internet Explorer version 8 or 9, the Dashboard might not display correctly when working with Internet Explorer developer tools open. Some sections of the Dashboard might remain loading without completing the update.

Cause and solution:

This problem is due to a conflict between how events are managed respectively by Internet Explorer developer tools and the Dashboard.

To avoid or limit this behavior, close the developer tools and try again the operation.

Some Simplified Chinese characters are missing or corrupted when using Google Chrome or Apple Safari browser

When you access the Self-Service Catalog or Self-Service Dashboard from a mobile device that uses the Google Chrome or Apple iPad Safari browser, if you use the GB18030 Simplified Chinese character set, the characters that you type might be missing or corrupted.

Cause:

Google Chrome and Apple iPad Safari do not fully support GB18030 Simplified Chinese.

Solution:

Ensure that you are using a browser that supports the GB18030 Simplified Chinese character set.

Troubleshooting problems with graphical views

- [Language-specific characters are not correctly displayed in graphical views](#) on page 159
- [Plan View limit: maximum five users using the same engine](#) on page 159
- [AWSITA122E or AWKRAA209E error while working with jobs in the Workload Designer](#) on page 159

Language-specific characters are not correctly displayed in graphical views

When working with the graphical views some language specific characters might not be displayed correctly.

Cause and solution:

This might occur because the necessary language files have not been installed on the computer on which the Dynamic Workload Console is running. To solve the problem, install the operating system language files on the system hosting the Dynamic Workload Console.

Plan View limit: maximum five users using the same engine

If you try to open the **Plan View** when five users are already concurrently using it, with the same engine, your request is rejected with the following error message: `AWSJCO136E No more than 5 users are allowed to perform this operation at the same time. The maximum number of concurrent requests has been reached: please try again later.`

Cause and solution:

The maximum number of users that can use the **Plan View** connected to the same engine is five.

If needed, you can modify this limit by editing the `com.ibm.tws.conn.plan.view.maxusers` property in the `TWSConfig.properties` file.

AWSITA122E or AWKRAA209E error while working with jobs in the Workload Designer

While you are working with a job in the Workload Designer, you might receive one of the following errors:

AWSITA122E - A Java exception occurred while calling the command

Cause and solution:

An unexpected error occurred while running a Java method.

In case it happens, check the following log files:

1. Check the `JobManager_message.log` file.
2. Check the latest `/opt/ibm/TWA/TWS/JavaExt/eclipse/configuration/*.log` file

AWKRAA209E - The job with advanced options with ID "*application_type*" was not found.

Cause and solution:

The job with advanced options cannot be found.

In case it happens, perform the following steps:

1. Ensure that the job plug-in is present in the `/opt/IBM/TWA/TWS/JavaExt/eclipse/plugins` directory.
2. Ensure that the job plug-in is listed in the `/opt/IBM/TWA/TWS/JavaExt/eclipse/configuration/config.ini` file
3. Check the latest `/opt/IBM/TWA/TWS/JavaExt/eclipse/configuration/*.lma` log file.

Troubleshooting problems with database

- [Import preferences fails](#) on page 160

Import preferences fails

When trying to import your settings repository from the XML file by specifying the **Cancel and recreate** option, the import operation fails and you receive the following message: *AWSUI0924E Preferences import operation failed: Unable to create database.* Moreover, the following error is logged in the SystemErr.log file: DB2 SQL error: SQLCODE: -601, SQLSTATE: 42710, SQLERRMC: TDWC.TDWC_PREFERENCEABLE;TABLE.

Cause and solution:

This might occur because the database user with administrative authority specified to import the settings does not have the privileges required to drop the existing Dynamic Workload Console tables that were created with Dynamic Workload Console V8.6.0.0.

To solve this problem, provide the specified user with CONTROL privilege on all Dynamic Workload Console tables.

For example,

```
db2 "GRANT CONTROL ON TABLE TDWC.TDWC_CONFIGURATIONPROPERTY TO USER myuser"
db2 "GRANT CONTROL ON TABLE TDWC.TDWC_CREDENTIAL TO USER myuser"
db2 "GRANT CONTROL ON TABLE TDWC.TDWC_ENGINECONNECTION TO USER myuser"
db2 "GRANT CONTROL ON TABLE TDWC.TDWC_MEQUERYTASK TO USER myuser"
db2 "GRANT CONTROL ON TABLE TDWC.TDWC_PREFERENCEABLE TO USER myuser"
db2 "GRANT CONTROL ON TABLE TDWC.TDWC_QUERYTASK TO USER myuser"
db2 "GRANT CONTROL ON TABLE TDWC.TDWC_REPORTTASK TO USER myuser"
```

Troubleshooting other problems

- [The deletion of a workstation fails with the "AWSJOM179E error](#) on page 86
- [Data not updated after running actions against monitor tasks results](#) on page 161
- ["Session has become invalid" message received](#) on page 161
- [Actions running against scheduling objects return empty tables](#) on page 162
- [Default tasks are not converted into the language set in the browser](#) on page 156
- ["Access Error" received when launching a task from the browser bookmark](#) on page 156
- [The validate command running on a custom SQL query returns the error message AWSWUI0331E](#) on page 153
- [If you close the browser window, processing threads continue in the background](#) on page 156
- [The list of Available Groups is empty in the Enter Task Information window](#) on page 163
- [Blank page displayed \(in High availability disaster recovery configuration\)](#) on page 157
- [Extraneous exception logged in SystemOut](#) on page 164
- [Filtering task results might not work as expected](#) on page 164
- [Sorting task results might not work as expected](#) on page 165
- [Monitoring job streams on multiple engines does not respect the scheduled time range on z/OS](#) on page 166
- [Java exception when performing a query on job streams in plan](#) on page 166
- [Import a property file bigger than 100MB](#) on page 167
- [Query results not displayed](#) on page 167

Jobs in READY status do not start

When monitoring a job, it appears to be ready to run, but it does not start. All of the dependencies have been satisfied and the start time has passed, but something is holding it back.

Cause and solution:

There are a few reasons why a job cannot start. The most common reasons are the following:

- The workstation limit is set to zero.
- The workstation is stopped.
- The workstation on which the job should run is not linked.
- The number of jobs running on the workstation is greater than the limit set on the workstation.

The Dynamic Workload Console provides the capability to detect the problem and provide the solution for these most common reasons.

From the Dynamic Workload Console, when monitoring the job status, you can request problem determination for a job in READY status that does not start. To determine why a job does not start:

1. From Monitor Workload, run a query to monitor jobs.
2. Select one or more jobs in READY status and then click **More Actions > Why a job does not start**.
3. A window displays an explanation and a solution for each selected job in READY status.

The deletion of a workstation fails with the "AWSJOM179E error

You want to delete a workstation either using `Composer` or the Dynamic Workload Console and the following error occurs:

```
AWSJOM179E An error occurred deleting definition of the workstation {0}.
The workload broker server is currently unreachable.
```

Cause and solution:

This problem occurs if you removed a dynamic domain manager without following the procedure that describes how to uninstall a dynamic domain manager in the *IBM Workload Scheduler: Planning and Installation*.

To remove workstations connected to the dynamic domain manager, perform the following steps:

1. Verify that the dynamic domain manager was deleted, not just unavailable, otherwise when the dynamic domain manager restarts, you must wait until the workstations register again on the master domain manager before using them.
2. Delete the workstations using the following command:

```
composer del ws <workstation_name>;force
```

Data not updated after running actions against monitor tasks results

After you run an action on a list of objects returned from running a monitor task, the list is not updated.

Cause and solution:

The scheduling objects lists are not automatically updated after running actions. Click the **Refresh** button to update the list of objects.

"Session has become invalid" message received

You try to use the Dynamic Workload Console user interface, your working session closes, and you get the following warning:

```
Session has become invalid
Your session has become invalid. This is due to a session timeout, an
administrator
has logged you out, or another user has invalidated your session by logging
on with
the same User ID.
```

Cause and solution:

Check which reason among those listed in the warning has occurred, solve the issue, and then log in again to continue your working session.

If the session expired because either the HTTP session or the Lightweight Third Party Authentication (LTPA) session timeout was exceeded, you might decide to customize the timeout settings to values that are appropriate for your environment.

For instructions on how to do this, see the topic on session timeout settings in the *Performance* chapter of the *IBM® Workload Scheduler: Administration Guide*.

Actions running against scheduling objects return empty tables

After running a monitor task, you run an action against the scheduling objects listed in the result table, but you get, as a result of the action, an empty table or window, and no error message is displayed. This occurs regardless of which action you try to run against the listed scheduling objects.

Cause and solution:

Check if the connection with the IBM Workload Scheduler engine where you run the task failed by performing the following steps:

1. In the **Configuration** window select Scheduler Connections.
2. Select in the list the engine used to run the browse task and click **Test Connection**.



Note: The user ID you use to connect to the Dynamic Workload Console must belong to the **Administrator** groups to test the engine connection.

If the connection with the IBM Workload Scheduler engine is not active, ask the IBM Workload Scheduler administrator to restart the connection as described in the *IBM Workload Scheduler: User's Guide and Reference*, and then rerun the action.

If the connection with the IBM Workload Scheduler engine is active, then, on that engine, check that:

- The IBM Workload Scheduler user running the command to list scheduling objects is authorized to do so. For more information about how to set user authorization, see *IBM Workload Scheduler: User's Guide and Reference*.
- The global property *enListSecChk* is set to enable on the IBM Workload Scheduler master domain manager. For more information about how to set global properties, see *IBM Workload Scheduler: Planning and Installation*.

Then rerun the action.

Default tasks are not converted into the language set in the browser

An existing user logs in to the Dynamic Workload Console using a browser where the language set is different from the language that was set in the browser the first time he logged in. In the Manage Tasks window, the default tasks are not translated into the new language.

Cause and solution:

The default tasks are created, using the current language set in the browser, when the new user logs into the Dynamic Workload Console for the first time. To have the default tasks translated into a different language, the WebSphere Application Server Liberty Base administrator must create a new Dynamic Workload Console user, and use that to login to the Dynamic Workload Console for the first time using a browser configured with the requested language. By doing this the default tasks are created using the requested language.

"Access Error" received when launching a task from the browser bookmark

A Dynamic Workload Console task has been saved in the list of bookmarks of the browser. You try to launch the task using the bookmark but you receive the following error message:

"User does not have access to view this page, use the browser back button to return to previous page."

Cause and solution:

You do not have the necessary role required to run the task. To run a task you must have a role that allows you to access the Dynamic Workload Console panels that are relevant to the type of task you need.

For more information about setting roles to work with the Dynamic Workload Console, see the Administration Guide, under the section about Configuring new users to access Dynamic Workload Console

If you close the browser window, processing threads continue in the background

You perform an action or make a selection and immediately close the browser window. You expect that processing terminated but the messages stored in the `SystemOut.log` file show that processing continued in the background.

Cause and solution:

This is normal behavior for any WEB application, when the client browser is closed no notification is delivered to the server according to the HTTP protocol specifications. This is the reason why the last triggered thread continues to process even after the browser window was closed. You do not need to run any action, just allow the thread to end.

The list of Available Groups is empty in the Enter Task Information window

You are creating a task, and you notice that in the Enter Task Information the list of Available Groups is empty. You are using an LDAP user registry.

Cause and solution:

Log into the Integrated Solutions Console as administrator and check the advanced LDAP configuration settings are correct as follows:

1. In the Navigation tree click **Security**.
2. Click **Secure administration, applications, and infrastructure**.
3. Check that the **Available realm definitions** field is set to **Standalone LDAP registry**.
4. Click **Configure**.
5. Click **Advanced Lightweight Directory Access Protocol (LDAP) user registry settings** under **Additional Properties**.
6. Verify that the settings for groups and users are correct for your configuration.

For more information about how to set these values, refer to: http://publib.boulder.ibm.com/infocenter/wasinfo/v6r0/topic/com.ibm.websphere.express.doc/info/exp/ae/usec_advldap.html

Blank page displayed (in High availability disaster recovery configuration)

You are in a high availability disaster recovery (HADR) configuration and the Dynamic Workload Console displays blank panels when trying to retrieve information from DB2.

Cause and solution:

When DB2 primary node stops, every Dynamic Workload Console request waits for a manual switch to a standby node.

If you have a HADR DB2 configuration related to your IBM Workload Scheduler engine, and you get an empty or blocked panel in the Dynamic Workload Console, verify that your primary node is up and running.

Exceptions might not be displayed in Language-specific in the Dynamic Workload Console

When working with the Dynamic Workload Console, some exception might not be displayed correctly in the specific Language.

Cause and solution:

This might occur because if the master domain manager is installed in English language, all the exception that the master domain manager returns, are in English. To solve the problem, you need to change the language of the machine where the engine is installed and restart master domain manager.

Extraneous exception logged in SystemOut

While working with the Dynamic Workload Console, the following exception message might be reported in the `SystemOut.log` file:

```
ConnException E    AWSJCO005E WebSphere Application Server Liberty
Base
has given the following error:
CORBA NO_PERMISSION 0x0 No;
nested exception is:
  org.omg.CORBA.NO_PERMISSION:
>> SERVER (id=4773e3aa, host=axrsgpar0612.metlife.com) TRACE START:
>>   org.omg.CORBA.NO_PERMISSION: java.rmi.AccessException: ;
nested exception is:
  com.ibm.websphere.csi.CSIAccessException: SECJ0053E:
Authorization failed for
/UNAUTHENTICATED while invoking (Bean)ejb/com/ibm/tws/conn/engine
/ConnEngineHome getEngineInfo(com.ibm.tws.conn.util.Context):1
  securityName:
/UNAUTHENTICATED;accessID: UNAUTHENTICATED is not granted any
of the required roles:
TWSAdmin   vmcid: 0x0  minor code: 0  completed: No
```

Cause and solution:

This exception message might be logged if you are using an engine for which the credentials are not stored. You can ignore the exception message. It is not an indication that the product is not functioning correctly.

Filtering task results might not work as expected

When you use the quick filtering feature to filter the list of results shown in Dynamic Workload Console tables, with engines version 9.1 or later, you must consider the following limitations:

Filtering on dates and duration

- You cannot filter by timezone and offset.
- You cannot filter using text strings in date columns.
- Even though the table of results shows dates in the following format: `mm/dd/yyyy`, the leading "0" is not considered when filtering. For example, `6/8` when filtering is considered as if it was `06/08`.
- Even though the table of results shows duration time in the following format: `hh:mm`, the leading "0" is not considered when filtering. For example, `06:08` when filtering is considered as if it was `6:08`. In durations like `00:01` the `00` part cannot be matched with the search string `00`, because all non significant digits are discarded. The proper way to search for that is with the string `0`.

Filtering not supported

Quick filtering feature is not supported on the following columns:

- Information
- Node type

Filtering on job types

To filter for the following job types you must use the specified text:

Shadow Distributed

In the filter field, enter: `distributedShadowJob`

Shadow z/OS

In the filter field, enter: **zShadowJob**

Remote Command

In the filter field, enter: **remotecommand**

Database

In the filter field, enter: **database**

Executable

In the filter field, enter: **executable**

File Transfer

In the filter field, enter: **filetransfer**

IBM i

In the filter field, enter: **ibmi**

J2EE

In the filter field, enter: **j2ee**

Java

In the filter field, enter: **java**

z/OS

In the filter field, enter: **jcl**

MS SQL

In the filter field, enter: **mssqljob**

Provisioning

In the filter field, enter: **provisioning**

Web Services

In the filter field, enter: **ws**

Access Method

In the filter field, enter: **xajob**

OSLC Automation

In the filter field, enter: **oslcautomation**

Cause and solution:

This is due to a mismatch between how data is stored in the database and how it is shown from the Dynamic Workload Console.

You must set your user preferences so that dates are shown in short format (6/27/08 5:59) and you must use the specified strings to filter for job types.

Sorting task results might not work as expected

When you use the sorting feature to sort the list of results shown in Dynamic Workload Console tables, with engines version 9.1 or later, you must consider the following limitations:

- Sorting is not supported on Information column.
- When sorting on Node type column of Monitor workstations tasks, the sorting might result not correct.

Cause:

This is due to a mismatch between how data is stored in the database and how it is shown from the Dynamic Workload Console.

Monitoring job streams on multiple engines does not respect the scheduled time range on z/OS

If you created a task to monitor job streams on multiple engines with Dynamic Workload Console V9.1 or earlier, the scheduled time range is not respected on z/OS engines.

Solution:

This problem was solved on Dynamic Workload Console V9.2. Create the task again by using this version of the console.

Dynamic Workload Console 9.x login or graphical view pages do not display

If you access the Dynamic Workload Console from a supported browser, the following error message is displayed:

```
java.io.IOException: Too many open files
```

Another symptom related to the same problem is the graphical view opening a blank page.

Cause:

The number of open files for the WebSphere Application Server Liberty Base user has reached its limit. You can check the maximum number of open files with the command:

```
ulimit -n
```

You can list the open files and sockets with the command:

```
lsof -p <process id>
```

Solution:

Increase the limit for the number of open files for the WebSphere Application Server Liberty Base user, with the command:

```
ulimit -n <number_of_open_files>
```

It is recommended to set the limit to 8000.

For additional details, see the WebSphere Application Server Liberty Base technote: [Too Many Open Files error message](#).

Java exception when performing a query on job streams in plan

If the plan data replication feature (also known as mirroring) is disabled on the master domain manager, there is a time interval that makes a monitoring query fail and the following exception is displayed by the Dynamic Workload Console:

```
java.lang.UnsupportedOperationException
```

at

```
com.ibm.tws.dao.plan.SymphonyJobStreamDAO.queryJobStreams(SymphonyJobStreamDAO.java:109)
    at
    com.ibm.tws.conn.plan.PlanImpl.queryPlanObjectPage(PlanImpl.java:2602)
```

Cause and solution:

This problem occurs if the plan data replication feature (also known as mirroring) is disabled on the master domain manager.

The workaround is to log-out and log-in from the Dynamic Workload Console.

Import a property file bigger than 100MB

You would need to upload a property file bigger than 100MB which is the limit set by default.

Solution:

Edit the settings that are specified in the `TdwcGlobalSettings.xml.template`.

By default, the customizable file is copied into the following path after you install the Dynamic Workload Console:

On Windows operating systems:

```
DWC_home\usr\servers\dwcServer\registry
TdwcGlobalSettings.xml.template
```

On UNIX and Linux operating systems:

```
DWC_home/usr/servers/dwcServer/configDropins/templates/
TdwcGlobalSettings.xml.template
```

In the section User Registry, set the limit of the file size you want to import in the property as follow:

```
<property name="importSettingsMaxFileSize" value="102400"></property>
```



Note: the value is expressed in KB



Note: For security purposes, it is recommended to revert the file size back to the default value after the import has been performed.

See the topic about managing user settings in the *Dynamic Workload Console User's Guide*.

Query results not displayed

If you are running a query or displaying a table and switch to another page before the query or table has fully loaded, the results might not display correctly.

Cause and solution:

This happens because the page did not fully load the results before you switched to another page.

To resolve this problem, perform the following steps:

1. Right click on the page content.
2. Select the Reload frame option.
3. Wait until the results are fully loaded.

Chapter 11

Troubleshooting workload service assurance

Gives you troubleshooting information about workload service assurance by explaining how it works and how it exchanges information between the modules. In addition, it provides solutions to common problems.

This chapter provides information that is useful in identifying and resolving problems with the Workload Service Assurance feature. It includes the following sections:

- [Components involved in workload service assurance](#) on page 169
- [Exchange of information](#) on page 170
- [Common problems with workload service assurance](#) on page 170

Components involved in workload service assurance

Workload service assurance uses the following components to plan, monitor, and if necessary, intervene in the processing of jobs that are part of a critical network:

Planner

The planner component is triggered by the **JnextPlan** command. It includes a series of actions that result in the creation of the `Symphony` file on the master domain manager.

When workload service assurance is enabled, the planner calculates job streams and job networks, taking into consideration all "follows" dependencies in the new plan.

The planner then identifies all the jobs and job streams that are part of a critical network. These are jobs that are direct or indirect predecessors of a critical job. For each job, a critical start time is created and added to the `Symphony` file. It represents the latest time at which the job can start without putting the critical job deadline at risk. The plan information is then replicated in the database.

The `Symphony` file is subsequently distributed to all agents.

Plan monitor

The plan monitor component is introduced with the workload service assurance feature. It runs in the WebSphere Application Server Liberty Base on the master domain manager and is responsible for keeping track of the job streams and job network and for updating it when changes to the plan occur either because of the normal running of jobs or because of manual operations.

The plan monitor holds the information that is required to monitor the progress of the jobs involved in a critical network, for example critical start, planned start, estimated start, and risk level. It changes these values in response to changes in the plan, identified by the `batchman` process running on the master domain manager and communicated to the plan monitor using the `server.msg` file.

The information maintained by the plan monitor can be viewed on the Dynamic Workload Console in specialized views for critical jobs, allowing you easily to identify real and potential problems.

Agent processes (batchman and jobman)

Jobs in the critical network that are approaching the critical start time and have not started are promoted. The time at which the job is considered to be approaching its critical start time is determined by the global options setting `promotionOffset`.

The **batchman** process monitors the critical start time to determine if promotion is required and if so to schedule it at the highest job priority available in IBM Workload Scheduler. The **batchman** process also communicates with the **jobman** process, which is responsible for promoting the job at operating system level so that it receives more system resources when it starts. The operating system promotion is controlled by the local options settings `jm promoted nice` (UNIX™) and `jm promoted priority` (Windows™).

Exchange of information

Initially, the critical start time for jobs in the critical network is calculated by the planner and then recalculated, as required, by the plan monitor. Both of these components run on the master domain manager.

The critical start time is used by agents to determine when to promote a job. It is initially sent to the agent when the new `Symphony` file for the plan is distributed. Subsequent changes to critical start times are sent by the plan manager to agents using a IBM Workload Scheduler message. The agents update the local copy of the `Symphony` file.

The most common situations in which the plan monitor updates critical start times are:

- The Workload Designer functions on the Dynamic Workload Console or the `conman` command are used to modify jobs in the critical network. For example, predecessor jobs are added or cancelled.
- When **JnextPlan** is run to create the plan extension that includes the critical job, jobs in the original plan might be predecessors of the critical job and so be part of the critical network. In this case, critical start times are calculated by the plan monitor and sent in messages to the agents. This information is updated in both the local `Symphony` files and in the database where the plan data is replicated.

Common problems with workload service assurance

The following problems might occur when you are using IBM Workload Scheduler with workload service assurance enabled:

- [Critical start times not aligned](#) on page 170
- [Critical start times inconsistent](#) on page 170
- [Critical network timings change unexpectedly](#) on page 171
- [A high risk critical job has an empty hot list](#) on page 171

Critical start times not aligned

The values for critical start times in a critical network obtained from the appropriate `conman` commands on an agent are different from those displayed on the Tivoli® Dynamic Workload Console.

Cause and solution:

Changes that affect the critical start times have been made to the plan since the `Symphony` file was sent to the agent. The changes are calculated on the master domain manager and sent to agents in messages. It is probable that the message has not reached the affected agent.

Check that the agent is active and linked to the master domain manager, either directly or by other domain managers.

Critical start times inconsistent

The values for critical start time in the chain of jobs in the critical network appears to be inconsistent. There are predecessor jobs that have critical start dates that are later than their successors.

Cause and solution:

This inconsistency occurs when critical start times are recalculated after some of the jobs in the critical network have completed. To optimize the calculation, new critical start times are only recalculated and updated for jobs that have not yet completed. The completed jobs retain the original critical start time. If a completed job is subsequently selected to be rerun, its critical start date will be recalculated.

Critical network timings change unexpectedly

Timings for jobs in the critical network change even though there have been no user actions related to the timing of jobs.

Cause and solution:

Changes can be made to timings because of a plan extension or because of the submission of jobs or job streams.

A critical job is consistently late

A job that is defined as critical is consistently late despite promotion mechanisms being applied to it and its predecessors.

Cause and solution:

Using the successful predecessors task, compare the planned start, the actual start, and the critical start of all the predecessors of the late job. Check if any of them have time values that are too close together or have a planned start time that is later than the critical start time.

In such a case, you can:

- Consider changing the timings of these jobs. For example, postpone the deadline if possible, or if the deadline must be maintained anticipate the start of some of the jobs.
- Consider redesigning your job streams to optimize the paths that are causing delays.
- Increase the value of the `promotionOffset` global option, so that jobs are promoted earlier.
- On the workstations where jobs are tending to be late, increase the `jm promoted nice` (UNIX™) and `jm promoted priority` (Windows™) local options, so that promoted jobs receive more system resources.

A high risk critical job has an empty hot list

A job that is defined as critical is shown to be at high risk, but its hot list is empty.

Cause and solution:

This normally only occurs if you have designed a critical job or a critical predecessor with a conflict which means it will always be late, for example a start restriction after the critical job deadline. The hot list is empty if either the job or job stream that is causing the problem doesn't have its follows dependencies resolved, or the job stream that is causing the problem is empty.

The only solution is to examine the critical path in detail and determine where the problem lies. The steps to resolving this problem are the same as those documented in [A critical job is consistently late](#) on page 171.

Chapter 12

Troubleshooting the fault-tolerant switch manager

Provides troubleshooting information about the fault-tolerant switch manager in terms of the event counter, the Ftbody, and link problems. It also provides solutions to some common problems with the backup domain manager.

This section describes how to address the potential problems related to the use of the fault-tolerant switch manager.

It is divided into the following sections:

- [Event counter](#) on page 173
- [Ftbody](#) on page 174
- [Troubleshooting link problems](#) on page 174
- [Common problems with the backup domain manager](#) on page 180

Event counter

The messages displayed in the log file concerning the event counter table are of three types:

- Messages that confirm the successful event counter initialization. No action is needed.
- Messages that the event counter reports related to problems not related to it. For example, they could reveal that the workstation received a message out of sequence. If action is required it does not impact the event counter.
- Messages that indicate that the event counter has failed. User action is needed to restore the counter.

This section concerns itself with this third type of messages.

Two processes can display this kind of error message:

Writer

When an error message of this type is received from writer, the event counters stops. All messages received from the workstation which asked netman to activate writer, and from all its children, are ignored. This can lead to two situations:

- The workstation talking to writer is switched to a new manager. In this case the new manager asks for a counter table and receive a corrupt counter table. The replay protocol proceeds following the default behavior.
- Before the `switchmgr` operation can be performed, writer fails and is automatically restarted. In this case the counter mechanism partially repairs itself. New messages received by the process are stored in the counter, but the messages received by the writer from the moment the error message was displayed up to the point at which writer restarted are not tracked. The situation for a given workstation might be considered as reset only when the new instance of writer receives a message from it.

The situation is recovered after the next scheduled `JnextPlan`. If you need to recover more urgently, run `JnextPlan -for 0000` to refresh the Symphony file.

Mailman

When an error message of this type is received from mailman, the event counters stops. Mailman sets the IDs of all messages to 0. This means that there is a risk of duplication, because without the event counter, mailman is unable to properly sequence and process messages.

When the `switchmgr` is performed, and the new domain manager commences the replay protocol mechanism, for each message in the `ftbox` it looks at the position of the target workstation with respect to its own position in the tree:

- If the position of the target workstation in the workstation tree is higher than the new domain manager's (the workstation is either the domain manager or a full-status member of the parent domain of the domain where the `switchmgr` operation took place), the message is sent.
- If the position of the target workstation in the workstation tree is lower than the new domain manager's (the workstation either belongs to the domain where the `switchmgr` operation took place and it is not the new domain manager or is the domain manager or a full-status member of one of the child domains), the message is *not* sent.

The situation is recovered after `JnextPlan`.

Ftbox

If, on a full-status agent, you receive an error message concerning the `ftbox`, it means that the fault-tolerant backup domain manager feature is not working properly on that agent. Do not make this agent the new domain manager.

To restore the correct functionality of the feature on the instance, solve the problem as described in the error message, and restart the agent.

Troubleshooting link problems

When troubleshooting a link problem, the analysis is started from the master domain manager. The loss of the "F" flag at an agent indicates that some link had a problem. The absence of a secondary link can be located by matching the "W" flags found on the full-status fault-tolerant agent on the other side.

Consider the network shown in [Figure 1: ACCT_FS has not linked](#) on page 174, where the workstation `ACCT_FS`, which is a full-status fault-tolerant agent, is not linked:

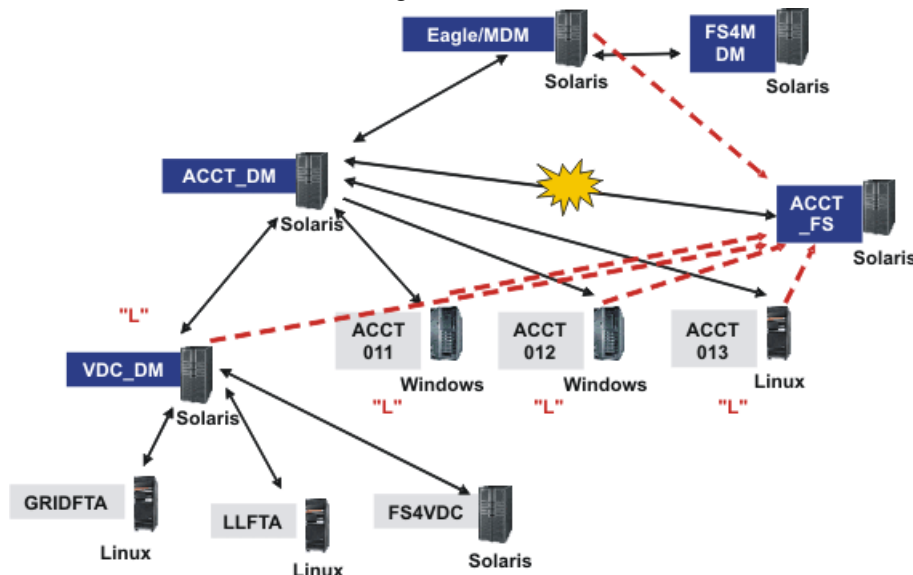


Figure 1: ACCT_FS has not linked

The key to [Figure 1: ACCT_FS has not linked](#) on page 174 is as follows (for those looking at this guide online or who have printed it on a color printer, the colors of the text and labels is indicated in parentheses, but if you are viewing it without the benefit of color, just ignore the color information):

White text on dark (blue) labels

CPUIDs of fault-tolerant agents in the master domain

Black text

Operating systems

Black text on grey labels

CPUIDs of standard agents in the master domain, or any agents in lower domains

Text (red) in "double quotation marks"

Status of workstations obtained by running `conman sc @!@` at the master domain manager.
Only statuses of workstations that return a status value are shown.

Black double-headed arrows

Primary links in master domain

Explosion

Broken primary link to ACCT_FS

Dotted lines (red)

Secondary links to ACCT_FS from the other workstations in the ACCT domain that could not be effected.

You might become aware of a network problem in a number of ways, but if you believe that a workstation is not linked, follow this procedure to troubleshoot the fault:

1. Use the command `conman sc @!@` on the master domain manager, and you can see that there is a problem with ACCT_FS, as shown in the example command output in [Figure 2: Example output for conman sc @!@ run on the master domain manager](#) on page 176:

```

$ conman sc @!@
Installed for user 'eagle'.
Locale LANG set to "C"
Schedule (Exp) 01/25/11 (#365) on EAGLE. Batchman LIVES. Limit: 20,
Fence: 0,
Audit Level: 1
sc @!@
CPUID      RUN   NODE      LIMIT FENCE    DATE    TIME    STATE  METHOD
DOMAIN
EAGLE      365  *UNIX MASTER  20    0    01/25/11 05:59  I I J
MASTERDM
FS4MDM     365  UNIX FTA    10    0    01/25/11 06:57 FTI JW
MASTERDM
ACCT_DM    365  UNIX MANAGER 10    0    01/25/11 05:42 LTI JW
DM4ACCT
ACCT011    365  WNT FTA      10    0    01/25/11 06:49 L I J
DM4ACCT
ACCT012    365  WNT FTA      10    0    01/25/11 06:50 L I J
DM4ACCT
ACCT013    365  UNIX FTA      10    0    01/25/11 05:32 L I J
DM4ACCT
ACCT_FS    363  UNIX FTA      10    0
DM4ACCT
VDC_DM     365  UNIX MANAGER 10    0    01/25/11 06:40 L I J
DM4VDC
FS4VDC     365  UNIX FTA      10    0    01/25/11 06:55 F I J
DM4VDC
GRIDFTA    365  OTHR FTA      10    0    01/25/11 06:49 F I J
DM4VDC
GRIDXA     365  OTHR X-AGENT 10    0    01/25/11 06:49 L I J  gridage+
DM4VDC
LLFTA      365  OTHR FTA      10    0    01/25/11 07:49 F I J
DM4VDC
LLXA       365  OTHR X-AGENT 10    0    01/25/11 07:49 L I J  llagent
DM4VDC
$

```

Figure 2: Example output for `conman sc @!@` run on the master domain manager

2. From the ACCT_DM workstation run `conman sc`. In this case you see that all the writer processes are running, except for ACCT_FS. These are the primary links, shown by the solid lines in [Figure 1: ACCT_FS has not linked](#)

on page 174. The output of the command in this example is as shown in [Figure 3: Example output for conman sc run on the domain manager](#) on page 177:

```

$ conman sc
TWS for UNIX (SOLARIS)/CONMAN 8.6 (1.36.2.21)
Licensed Materials Property of IBM
5698-WKB
(C) Copyright IBM Corp 1998,2011
US Government User Restricted Rights
Use, duplication or disclosure restricted by GSA ADP Schedule Contract
with IBM
Corp.
Installed for user 'dm010'.
Locale LANG set to "C"
Schedule (Exp) 01/25/11 (#365) on ACCT_DM. Batchman LIVES. Limit: 10,
Fence: 0
, Audit Level: 1
sc
CPUID      RUN   NODE      LIMIT FENCE    DATE    TIME    STATE  METHOD
DOMAIN
EAGLE      365   UNIX MASTER  20    0    01/25/11 05:59 LTI JW
MASTERDM
ACCT_DM    365   *UNIX MANAGER  10    0    01/25/11 05:42 I J
DM4ACCT
ACCT011    365   WNT FTA      10    0    01/25/11 06:49 LTI JW
DM4ACCT
ACCT012    365   WNT FTA      10    0    01/25/11 06:50 LTI JW
DM4ACCT
ACCT013    365   UNIX FTA      10    0    01/25/11 05:32 LTI JW
DM4ACCT
ACCT_FS    363   UNIX FTA      10    0
DM4ACCT
VDC_DM     365   UNIX MANAGER  10    0    01/25/11 06:40 LTI JW
DM4VDC
$

```

Figure 3: Example output for conman sc run on the domain manager

- From the ACCT_FS workstation run `conman sc`. In this case you see that there are no writer processes running. These are the secondary links, shown with the dashed lines in [Figure 1: ACCT_FS has not linked](#) on page 174.

The output of the command in this example is as shown in [Figure 4: Example output for conman sc run on the unlinked workstation](#) on page 178:

```

$ conman sc
Installed for user 'dm82'.
Locale LANG set to "C"
Schedule (Exp) 01/24/11 (#364) on ACCT_FS. Batchman LIVES. Limit: 10,
Fence: 0
, Audit Level: 1
sc @!@
CPUID      RUN   NODE      LIMIT FENCE    DATE    TIME    STATE  METHOD
DOMAIN
EAGLE      363   UNIX MASTER  20    0
MASTERDM
FS4MDM     363   UNIX FTA     10    0
MASTERDM
ACCT_DM    363   UNIX MANAGER 10    0
DM4ACCT
ACCT011    363   WNT FTA     10    0
DM4ACCT
ACCT012    363   WNT FTA     10    0
DM4ACCT
ACCT013    363   UNIX FTA     10    0
DM4ACCT
ACCT_FS    363   *UNIX FTA     10    0
DM4ACCT
VDC_DM     363   UNIX MANAGER 10    0
DM4VDC
FS4VDC     363   UNIX FTA     10    0
DM4VDC
GRIDFTA    363   OTHR FTA     10    0
DM4VDC
GRIDXA     363   OTHR X-AGENT 10    0
DM4VDC
gridage+
$

```

Figure 4: Example output for `conman sc` run on the unlinked workstation

4. If a network problem is preventing ACCT_FS from linking, resolve the problem.
5. Wait for ACCT_FS to link.
6. From the ACCT_FS workstation, run `conman sc @!@`. If the workstation has started to link, you can see that a writer process is running on many of the workstations indicated in [Figure 1: ACCT_FS has not linked](#) on page 174. Their secondary links have now been made to ACCT_FS. The workstations that have linked have an "F" instead of their previous setting. This view also shows that the master domain manager has started a writer process

running on ACCT_FS. The output of the command in this example is as shown in [Figure 5: Example output for conman sc @!@ run on the unlinked workstation](#) on page 179:

```

$ conman sc @!@
Installed for user 'dm82'.
Locale LANG set to "C"
Schedule (Exp) 01/24/11 (#364) on ACCT_FS. Batchman LIVES. Limit: 10,
Fence: 0
, Audit Level: 1
sc @!@
CPUID      RUN   NODE      LIMIT FENCE    DATE    TIME    STATE  METHOD
DOMAIN
EAGLE      371   UNIX MASTER  20    0    01/25/11 10:16 F I JW
MASTERDM
FS4MDM     370   UNIX FTA    10    0
MASTERDM
ACCT_DM    371   UNIX MANAGER 10    0    01/25/11 10:03 LTI JW
DM4ACCT
ACCT011    369   WNT FTA     10    0
DM4ACCT
ACCT012    371   WNT FTA     10    0    01/25/11 11:03 F I JW
DM4ACCT
ACCT013    371   UNIX FTA    10    0    01/25/11 09:54 F I JW
DM4ACCT
ACCT_FS    371   *UNIX FTA    10    0    01/25/11 11:08 F I J
DM4ACCT
VDC_DM     371   UNIX MANAGER 10    0    01/25/11 10:52 F I JW
DM4VDC
FS4VDC     371   UNIX FTA    10    0    01/25/11 11:07 F I J
DM4VDC
GRIDFTA    371   OTHR FTA    10    0    01/25/11 11:01 F I J
DM4VDC
GRIDXA     371   OTHR X-AGENT 10    0    01/25/11 11:01 L I J  gridage+
DM4VDC
LLFTA      371   OTHR FTA    10    0    01/25/11 12:02 F I J
DM4VDC
LLXA       371   OTHR X-AGENT 10    0    01/25/11 12:02 L I J  llagent
DM4VDC
$

```

Figure 5: Example output for conman sc @!@ run on the unlinked workstation

7. Another way of checking which writer processes are running on ACCT_FS is to run the command: `ps -ef | grep writer` (use Task Manager on Windows™). The output of the `ps` command in this example is as shown in [Figure 6: Example output for ps -ef | grep writer run on the unlinked workstation](#) on page 180:

```
$ ps -ef | grep writer
dm82_1363_616_0_06:43:11_?_0:01_ /usr/local/Tivoli/dm82/bin/write -- 2001
EAGLE MAILMAN UNIX 8.6 9
dm82_1317_616_0_06:42:21_?_0:01_ /usr/local/Tivoli/dm82/bin/write -- 2001
ACCT_DM MAILMAN UNIX 8.6 9
dm82_1337_616_0_06:42:25_?_0:01_ /usr/local/Tivoli/dm82/bin/write -- 2001
ACCT013 MAILMAN UNIX 8.6 9
dm82_1338_616_0_06:42:27_?_0:01_ /usr/local/Tivoli/dm82/bin/write -- 2001
VDC_DM MAILMAN UNIX 8.6 9
dm82_1364_616_0_06:51:48_?_0:01_ /usr/local/Tivoli/dm82/bin/write -- 2001
ACCT012 MAILMAN WNT 8.6 9
dm82_1336_616_0_06:42:24_?_0:00_ /usr/local/Tivoli/dm82/bin/write -- 2001
ACCT011 MAILMAN WNT 8.6 9
$
```

Figure 6: Example output for `ps -ef | grep writer` run on the unlinked workstation

8. To determine if a workstation is fully linked, use the **Monitor Workstations** list in the Dynamic Workload Console.

Common problems with the backup domain manager

The following problems could be encountered with the fault-tolerant backup domain manager (note that a backup domain manager is an agent with the *full status* attribute set):

- [The Symphony file on the backup domain manager is corrupted.](#) on page 180
- [Processes seem not to have been killed on previous UNIX domain manager after running switchmgr](#) on page 180
- [In a scenario involving more than one switchmgr command, agent cannot relink](#) on page 181

The Symphony file on the backup domain manager is corrupted.

When switching to the backup domain manager from the master domain manager, the Symphony file on the backup domain manager might become corrupted.

Cause and solution:

The "thiscpu" variable in the `localopts` file does not match the workstation name. Change the variable to match the workstation name and the problem no longer occurs.

Processes seem not to have been killed on previous UNIX™ domain manager after running switchmgr

You want to use the switch manager facility. You first stop all IBM Workload Scheduler processes on the domain manager and then you run `switchmgr`, which completes successfully. However, after running `%sc @!@`, the J flag state is given for the domain manager where you stopped the processes.

Cause and solution:

When a `shutdown` command is sent to a workstation, some unexpected output might be shown by the status of the processes shown by `conman`, as follows:

- The J flag relative to the shut workstation remains active (no message indicating that jobman is not running can be transmitted because mailman is also not running).
- `Conman` output on the shutdown workstation is not up-to-date (the Symphony file is not updated on the shutdown workstation).

- The shutdown workstation seems linked from its parent and child workstations (no unlink operation is run by the writers on the workstation that is shutting down).
- Both F or L flags might be displayed, depending on the messages processed by mailman before unlinking and stopping.

The correct link situation is restored as soon as a new link attempt is made to the workstation, either manually, or automatically (after 10 minutes).

The `shutdown` command must be sent only in critical situations (where a workstation is shutting down, for example).

To avoid these problems, precede the `shutdown` command with an `unlink @!@` or `stop` command.

In a scenario involving more than one `switchmgr` command, agent cannot relink

You have been using the `switchmgr` command to switch to backup master domain manager, and then back to the master domain manager, but an agent might not have relinked to the original master domain manager.

Cause and solution:

The complex interaction of variables, environments, network conditions, and linking and relinking events can sometimes prevent an agent from relinking correctly.

No events or messages are lost, you can repeat the use of `switchmgr`, if necessary, and the performance of the network is not normally impacted because one agent is out of communication.

If only one agent is involved the easiest solution is to manually relink it.

However, to avoid having to identify and specifically relink the non-linked agent or agents, you can, in any case, issue the following command, which automatically relinks all agents without needing to specifically identify the unlinked ones:

```
JnextPlan -for 0000
```

Chapter 13

Synchronizing the database with the Symphony file

If you suspect the plan data loaded in the database is not up-to-date, you can run `planman resync` to update the database with the latest information in the Symphony file.



Note: If the message box file, `mirrorbox.msg`, responsible for synchronizing the database with the Symphony file becomes full, for example, the database is unavailable for a long period of time, then a `planman resync` is automatically issued so that the plan is fully reloaded in the database.

The procedure requires you to run the following step on the master domain manager. If you run the command on the backup master domain manager when it is not acting as the master domain manager, the plan data is not replicated in the database.

On the master domain manager, issue the following command:

```
planman resync
```

All of the plan data currently stored in the Symphony file is replicated in database tables in the database.

For the complete command-line syntax for the `planman` command, refer to the *IBM Workload Scheduler: User's Guide and Reference*.

To see the database views containing information about the objects in the plan, see the views beginning with "PLAN_" in *IBM Workload Scheduler: Database Views*.

Chapter

14

Corrupt Symphony file recovery

Explains the symptoms of Symphony file corruption and links you to tasks that can recover the file on the master domain manager, fault-tolerant agent, or lower domain manager.

Symphony file corruption is a rare event, and a potential corruption must be verified before taking action. Following are common symptoms of the file corruption:

- A specific message informing you that the Symphony file is corrupt.
- A shutdown of various processes (especially batchman) with error messages referring to problems with the Symphony file in the stdlist.

The normal reason for the corruption of the Symphony file is a full file system. This can be avoided by regular monitoring of the file system where IBM Workload Scheduler is installed.

The procedure is different, depending on the location of the corrupt Symphony file.

Recovery procedure on a master domain manager

If a Symphony file is corrupt on a master domain manager, there are several ways in which you can regenerate it.

The Symphony file can be regenerated in the following ways:

1. Using the backup master domain manager
2. Using the logman and ResetPlan commands
3. Using the latest archived plan

Recovering using the backup master domain manager

If the Symphony file is corrupt on a master domain manager, it can be regenerated using the backup master domain manager.

The regeneration of the Symphony file causes some minor loss of data. The following procedure indicates what is lost.

The prerequisite for the procedure is to have a backup master domain manager already available. A backup master domain manager is a fault-tolerant agent in the master domain with its `fullstatus` attribute set to `yes`.



Note: If you have not already created a backup master domain manager, the Symphony file cannot be recovered and the processing it contains is lost.

The procedure requires you to take the following steps on either the master domain manager or the backup master domain manager:



Note: The steps must be followed in strict order; each step description below is prefaced by the identification of the workstation on which it must be performed.

1. On the backup master domain manager, do the following:
 - a. Issue the `switchmgr` command.
 - b. Verify that the backup master domain manager is acting as the master domain manager.

2. From the new master domain manager set the job "limit" on the old master domain manager to "0", using `conman` or the Dynamic Workload Console.

This prevents jobs from launching.

3. On the original master domain manager do the following:
 - a. Shut down all IBM Workload Scheduler processes
 - b. Rename the `Sinfonia` file and the corrupt `Symphony` file (any names will do).
4. On the current master domain manager (previous backup master domain manager) do the following:
 - a. Verify that it is linked to all agents *except* the old master domain manager.
 - b. Shut down all IBM Workload Scheduler processes (unlink from all agents).
 - c. Rename `Sinfonia` as `Sinfonia.orig`
 - d. Copy `Symphony` to `Sinfonia`

You now have identical `Symphony` and `Sinfonia` files.

5. On the original master domain manager do the following:
 - a. Issue a `StartUp` from the operating system's command line, to start the `netman` process.
 - b. Verify that the process remains active.
6. On the current master domain manager (previous backup master domain manager) do the following:
 - a. Issue a `StartUp` from the operating system's command line, to start the `netman` process.
 - b. Issue a `conman start`, or use the Dynamic Workload Console to start the current master domain manager.
 - c. Issue a link to the original master domain manager.

This action sends the `Symphony` file to the original master domain manager.

7. On the original master domain manager do the following:
 - a. Verify that the `Symphony` file is present and is the correct size (same as on the current master domain manager (previous backup master domain manager))
 - b. Verify that all IBM Workload Scheduler processes are active.
8. On the current master domain manager (previous backup master domain manager) verify that the original master domain manager is linked.
9. On the original master domain manager do the following:
 - a. Set the job "limit" on the old master domain manager to the previous level, using `conman` or the Dynamic Workload Console.

Jobs can commence launching.

- b. Verify that the original master domain manager has the current job status for all agents.
- c. Issue the `switchmgr` command to switch control back to the original master domain manager.

Following this procedure some information is lost, in particular, any events that were suspended on the master domain manager when you started the recovery procedure.

If this procedure cannot be performed, try using the procedure that uses the `logman` and `ResetPlan` commands: [Recover using the logman and ResetPlan commands](#) on page 186.

Recover using the logman and ResetPlan commands

The following procedures can also be used to recover a corrupt `Symphony` file on the master domain manager.

These procedures do not recover as much data as [Recovering using the backup master domain manager](#) on page 185, but they might be useful if that procedure cannot be performed.

The procedure that makes use of `ResetPlan` might result in a more complete recovery, but it is more demanding in time since it scratches both the production and the preproduction plans. The preproduction plan will be created again based on the modeling information stored in the database when you later generate a new production plan. This means that the new production plan will contain all job stream instances scheduled to run in the time frame covered by the plan regardless of whether or not they were already in `COMPLETE` state when the plan was scratched.

You should first run the recovery procedure that makes use of `logman`. If you do not obtain satisfactory results, run the other one.

Neither procedure requires the use of a backup master domain manager.

Recovering the Symphony file using the `logman` command

Describes how to recover from a corrupt Symphony file using the `logman` command.

Perform these steps on the master domain manager:

1. Set the job "limit" to "0" on all the workstations by using `conman`, the Dynamic Workload Console. If you are using `conman`, run the following command:

```
conman "limit cpu=@!@;0;noask"
```

This command prevents jobs from launching.

2. Shut down all IBM Workload Scheduler processes on the master domain manager.
3. Run `logman -prod` to update the preproduction plan with the information for the job streams that are in COMPLETE state.
4. Run `planman showinfo` and check for the first incomplete job stream instance.
5. Run `ResetPlan`.
6. Run `JnextPlan`, setting the `-from` parameter to the start time of the first incomplete job stream instance in the preproduction plan (acquired from the output of `planman showinfo`) and the `-to` parameter to the end date of your plan (or to the following day). Only incomplete job stream instances will be included in the new Symphony file. If the instance of the first incomplete job stream is very old the new plan creation can take a long time. The incomplete jobs and job streams that are created again with the `JnextPlan -from` parameter are those present in the database when the command is run.
7. Check the created plan and verify that all the jobs and job streams in the plan have the correct status.
8. Ensure that you want to run all the instances in the plan, deleting those that you do not want to run.
9. All the submitted job streams are not carried forward. Resubmit them.
10. Reset the job "limit" to its previous value. The Symphony file is distributed and production starts again.



Note:

- The status of the jobs and the job streams after you run the recovery procedure is reset to HOLD or READY.
- Some IBM® Workload Scheduler events that were triggered before applying the recovery procedure, might be triggered again after the recovery procedure has completed. This limitation concerns those events that are not managed through a message queue, for example, UNTIL, DEADLINE, and MAXDUR.
- Jobs in USERJOBS Job Stream are not subject to resource controlling. As a result, affected resources should be adjusted and attended manually.
- Prompts in the recovered plan might have a prompt number different from the prompt number in the original plan. To prevent mismatches, prompt reply events are not recovered.

Recovering with the use of the `ResetPlan` command

Perform these steps on the master domain manager:

1. Set the job "limit" to "0", using `conman` or the Dynamic Workload Console.

This prevents jobs from launching.


2. Shut down all IBM Workload Scheduler processes on the master domain manager.
3. Run `ResetPlan -scratch`.
4. Run `JnextPlan`, setting the `-from` and `-to` parameters to cover the period for which there are still outstanding jobs.
5. Check the created plan and ensure that you want to run all the instances it contains, deleting those that you do not want to run.


6. Reset the job "limit" to the previous value. The Symphony file is distributed and production recommences.

Recovering the plan from the latest archived plan

You can recover a corrupted plan on a master domain manager using the latest archived plan, however; this is possible only if you have performed some configuration steps prior to the occurrence of the file corruption.

The following procedure recovers a corrupted plan using `ResetPlan`. The plan is recovered using the latest archived plan and any events logged throughout the day are written to a new event message file. The last archived Symphony file is copied into the current `Symphony` file and then `JnextPlan` is run to apply the events from the `evtlog.msg` file.

-  **Restriction:** Before you can perform the recovery procedure, you must have completed some configuration steps prior to the file corruption occurrence.


 **Note:**

- Some IBM® Workload Scheduler events that were triggered before applying the recovery procedure, might be triggered again after the recovery procedure has completed. This limitation concerns those events that are not managed through a message queue, for example, UNTIL, DEADLINE, and MAXDUR.
- Jobs in USERJOBS Job Stream are not subject to resource controlling. As a result, affected resources should be adjusted and attended manually.
- Prompts in the recovered plan might have a prompt number different from the prompt number in the original plan. To prevent mismatches, prompt reply events are not recovered.

1. Complete the following configuration steps so that you can use the recovery procedure in the future if it becomes necessary:

- a) In the `localopts` file, add the following attribute and value: `bm log events = ON`.
- b) Optionally, customize the path where IBM Workload Scheduler creates the `evtlog.msg` event file by setting the `bm log events path` property in the `localopts` file. If you do not modify this setting, the `evtlog.msg` event file is created in the following default location: `<TWA_INST_DIR>/TWS`.
- c) Stop and start all IBM Workload Scheduler processes or run `JnextPlan` to create the `evtlog.msg` file.
- d) If necessary, you can configure the maximum size of both the `evtlog.msg` and `Intercom.msg` event files as follows:

```
evtsize -c evtlog.msg 500000000
evtsize -c Intercom.msg 550000000
```

-  **Note:** The default size of these event files is 10 MB. When the maximum size is reached, events are no longer logged to these files and the recovery procedure is unable to recover them and any that follow. Moreover, the following BATCHMAN warning is logged to `<TWA_INST_DIR>/TWS/stdlist/traces/YYYYMMDD_TWSMERGE.log`:

```
13:11:51 18.10.2012|BATCHMAN:+ WARNING:Error writing in evtlog:
  AWSDEC003I End of file on events file.
13:11:51 18.10.2012|BATCHMAN:*
13:11:51 18.10.2012|BATCHMAN:* AWSBHT160E The EvtLog message file
  is full,
  events will not be logged until a new Symphony is produced.
  Recovery with
  event reapply is no more possible until that time.
13:11:51 18.10.2012|BATCHMAN:*
```

If you encounter this problem increase the size of the `evtlog.msg` and `Intercom.msg` event files.

Consider that for 80,000 jobs and a Symphony file of size 40 MB, the `evtlog.msg` file is approximately 70 MB in size.

- !** **Important:** The `Intercom.msg` maximum size should always be set to a value greater than the maximum size of `evtlog.msg`

In the `<TWA_INST_DIR>/TWS/stdlist/traces/YYYYMMDD_TWSMERGE.log` trace file, the BATCHMAN process logs an informational line containing the expected size of the `evtlog.msg` queue. For example:

```
19:02:06 14.10.2012|BATCHMAN:INFO:0.25 MB of events to log during this
batchman run
```

If `Intercom.msg` reaches the maximum size during the recovery procedure, batchman stops.

- e) If the file system where `evtlog.msg` resides runs out of space, a BATCHMAN warning is logged to `<TWA_INST_DIR>/TWS/stdlist/traces/YYYYMMDD_TWSMERGE.log` as follows:

```
13:10:36 16.10.2012|BATCHMAN:+ WARNING:Error writing in evtlog:
AWSDEC002E An internal error has occurred.
The following UNIX system error occurred on an events file:
"No space left on device" at line = 3517.
```

2. Complete the recovery procedure:

- Ensure the IBM Workload Scheduler processes are stopped. Run `conman stop` to stop them.
- Copy the information retrieved by running the `planman showinfo` command.
- Run `ResetPlan`. The corrupted Symphony file is archived in the `schedlog` folder.
- Copy the second last Symphony file archived in the `schedlog` folder, and not the most recent one which is the corrupted file. For example, on UNIX, submit the following command:

```
cp -p /opt/ibm/TWA/TWS/schedlog/MYYYYMMDDhhmm /opt/ibm/TWA/TWS/Symphony
```

- e) Run `JnextPlan` as follows using the information retrieved when you ran `planman showinfo`:

```
JnextPlan -from MM/DD/YYYY hhmm TZ Timezone -for hhmm
```

where,

-from

Production plan start time of last extension.

-for

Production plan time extension.

When running this procedure, consider that the run number, that is, the total number of times the plan was generated, is automatically increased by one.

Job stream instances that have already completed successfully at the time this procedure is run are not included in the recovered plan.


After you have performed the recovery procedure, the workstation limit is set to 0 and the `evtlog.msg` queue is cleared with each successive run of `JnextPlan`.

Recovery procedure on a fault-tolerant agent or lower domain manager

If the Symphony file is corrupt on a lower level domain manager, or on a fault-tolerant agent, it can be replaced.

Complete removal and replacement of the Symphony file causes some loss of data. The following procedure minimizes that loss and indicates what is lost.

The procedure involves two agents, the agent where the Symphony file is corrupt and its domain manager.


 **Note:** Where the agent is a top level domain manager (below the master), or a fault-tolerant agent in the master domain, the manager is the master domain manager.

The procedure is as follows:

1. On the domain manager, unlink the agent which is having the `Symphony` file problem.
2. On the agent do the following:
 - a. Stop the agent if it has not yet failed. You do not need to shut it down.
 - b. Delete the `Symphony` and the `Sinfonia` files from the agent workstation. Alternatively you can move them to a different location on the agent workstation, or rename them.
3. On the domain manager do the following:
 - a. Back up the `Sinfonia` file if you want to be able to restore the original situation after completion. This is not an obligatory step, and no problems have been reported from not performing it.
 - b. Ensure that no agent is linking with the domain manager, optionally stopping the domain manager agent.
 - c. Copy the `Symphony` file on the domain manager to the `Sinfonia` file, replacing the existing version.
 - d. Restart the domain manager agent if necessary.
 - e. Link the agent and wait for the `Symphony` file to copy from the domain manager to the agent. The agent automatically starts.
 - f. Optionally restore the `Sinfonia` file from the backup you took in step 3.a on page 190. This restores the original situation, but with the agent now having an uncorrupted `Symphony` file. This is not an obligatory step, and no problems have been reported from not performing it.

Following this procedure some information is lost, in particular, the contents of the `Mailbox.msg` message and the `tomaster.msg` message queues. If state information about a job was contained in those queues, such that the `Symphony` file on the domain manager was not updated by the time the `Sinfonia` file is replaced (step 3.c on page 190), that job is rerun. To avoid that event, add these steps to the procedure immediately before step 3.a on page 190:

1. Make a list of jobs that ran recently on the agent.
2. At the domain manager, change their states to either `SUCC` or `ABEND`, or even cancel them on the domain manager.

 **Note:** if you set the states of jobs to `SUCC`, or cancel them, any successor jobs would be triggered to start. Ensure that this is the acceptable before performing this action.

This way these jobs are not rerun.

Recovery procedure on a fault-tolerant agent with the use of the `resetFTA` command

If the `Symphony` file is corrupt on a fault-tolerant agent, you can use the `resetFTA` command to automate the recovery procedure.

Complete removal and replacement of the `Symphony` file causes some loss of data, for example events on job status, or the contents of the `Mailbox.msg` message and the `tomaster.msg` message queues. If state information about a job was contained in those queues, that job is rerun. The following procedure minimizes that loss and indicates what is lost. It is recommended that you apply this procedure with caution.

The procedure renames the `Symphony`, `Sinfonia`, `*.msg` files on the fault-tolerant agent where the `Symphony` corruption occurred and generates an updated `Sinfonia` file, which is sent to the fault-tolerant agent. You can therefore resume operations quickly on the affected fault-tolerant agent, minimize loss of job and job stream information, and reduce recovery time.

The procedure involves two agents, the fault-tolerant agent where the `Symphony` file is corrupt and its domain manager.

You can start the command from any IBM Workload Scheduler workstation, with the exception of the fault-tolerant agent where the corruption occurred. Connection to the target fault-tolerant agent and to its domain manager is established using the **netman** port number. The default port number is 31111.

When you start the **resetFTA** command, the following operations are performed in the specified order:

on the fault-tolerant agent

- The following files are renamed:
 - Appserverbox.msg
 - clbox.msg
 - Courier.msg
 - Intercom.msg
 - Mailbox.msg
 - Monbox.msg
 - Moncmd.msg
 - Symphony
 - Sinfonia

The operations are performed asynchronously, to ensure that all target files have been renamed before starting the procedure on the domain manager.

on the domain manager

1. A backup of the *Sinfonia* file is created.
2. The *Symphony* file is copied to the *Sinfonia* file.
3. The target fault-tolerant agent is linked.
4. The updated *Sinfonia* file is sent to the target fault-tolerant agent.

The syntax of the command is as follows:

Syntax

```
resetFTA cpu
```

Arguments

cpu

Is the fault-tolerant agent to be reset.

This command is not available in the Dynamic Workload Console.

For more information, see the section about the `resetfta` command in *IBM Workload Scheduler: User's Guide and Reference*.

Appendix

A

Support information

If you have a problem with your IBM® software, you want to resolve it quickly. This section describes the following options for obtaining support for IBM® software products:

- [Searching knowledge bases](#) on page 193
- [Obtaining fixes](#) on page 194
- [Receiving support updates](#) on page 194

Searching knowledge bases

You can search the available knowledge bases to determine if your problem was already encountered and is already documented.

Search online product documentation in IBM Knowledge Center

IBM® provides extensive documentation that you can search and query for conceptual information, instructions for completing tasks, and reference information.

The online product documentation can be found in IBM Knowledge Center at: <http://www-01.ibm.com/support/knowledgecenter/SSGSPN/welcome>.

Search the Internet


If you cannot find an answer to your question in the information center, search the Internet for the latest, most complete information that might help you resolve your problem.

To search multiple Internet resources for your product, use the **Web search** topic in your information center. In the navigation frame, click **Troubleshooting and support** → **Searching knowledge bases** and select **Web search**. From this topic, you can search a variety of resources, including the following:

- IBM® technical notes (Technotes)
- IBM® downloads
- IBM® Redbooks®
- IBM® developerWorks®
- Forums and newsgroups
- Google


Search the IBM® support website

The IBM® software support website has many publications available online, one or more of which might provide the information you require:

1. Go to the IBM® Software Support website (<http://www.ibm.com/software/support>).
2. Select **Tivoli** under the **Select a brand and/or product** heading.
3. Select **IBM Workload Scheduler** under **Select a product**, and click the "Go" icon: . The IBM Workload Scheduler support page is displayed.
4. In the **IBM Workload Scheduler support** pane click **Documentation**, and the documentation page is displayed.

5. Either search for information you require, or choose from the list of different types of product support publications in the **Additional Documentation support links** pane:
 - Information center
 - Manuals
 - IBM® Redbooks®
 - White papers



If you click **Information center**, the IBM Workload Scheduler Information Center page opens, otherwise a search for the selected documentation type is performed, and the results displayed.

6. Use the on-screen navigation to look through the displayed list for the document you require, or use the options in the **Search within results for** section to narrow the search criteria. You can add **Additional search terms** or select a specific **Document type**. You can also change the sort order of the results (**Sort results by**). Then click the search icon to start the search: .

To access some of the publications you need to register (indicated by a key icon beside the publication title). To register, select the publication you want to look at, and when asked to sign in follow the links to register yourself. There is also a FAQ available on the advantages of registering.

Obtaining fixes

A product fix might be available to resolve your problem. To determine what fixes are available for your IBM® software product, follow these steps:

1. Go to the IBM® Software Support website (<http://www.ibm.com/software/support>).
2. Select **Tivoli** under the **Select a brand and/or product** heading.
3. Select **IBM Workload Scheduler** under **Select a product** and click the "Go" icon: . The IBM Workload Scheduler support page is displayed.
4. In the **IBM Workload Scheduler support** pane click **Download**, and the download page is displayed.
5. Either choose one of the displayed most-popular downloads, or click **View all download items**. A search for the downloads is performed, and the results displayed.
6. Use the on-screen navigation to look through the displayed list for the download you require, or use the options in the **Search within results for** section to narrow the search criteria. You can add **Additional search terms**, or select a specific **Download type**, **Platform/Operating system**, and **Versions**. Then click the search icon to start the search: .
7. Click the name of a fix to read the description of the fix and to optionally download the fix.

For more information about the types of fixes that are available, see the *IBM® Software Support Handbook* at <http://www14.software.ibm.com/webapp/set2/sas/f/handbook/home.html>.

Receiving support updates

To receive email notifications about fixes and other software support news, follow these steps:

1. Go to the IBM® Software Support website at <http://www.ibm.com/software/support>.
2. Click **My notifications** under the **Stay informed** heading in the upper-right corner of the page.
3. If you have already registered for **My support**, sign in and skip to the next step. If you have not registered, click **register now**. Complete the registration form using your email address as your IBM® ID and click **Submit**.
4. Follow the instructions on the page for subscribing to the information you require, at the frequency you require, for the products you require.

If you experience problems with the **My notifications** feature, you can obtain help in one of the following ways:

Online

Send an email message to erchelp@ca.ibm.com, describing your problem.

By phone

Call 1-800-IBM-4You (1-888 426 4409).

Appendix

B

Date and time format reference - strftime

IBM Workload Scheduler uses the *strftime* standard method for defining the presentation of the date and time in log files generated by CCLog. There is a parameter in the properties file of CCLog, where you define the format (see [IBM Workload Scheduler logging and tracing using CCLog](#) on page 33).

This parameter uses one or more of the following variables, each of which is introduced by a "%" sign, separated, if required, by spaces or other character separators.

For example, to define a date and time stamp that would produce the following (12-hour time, followed by the date) "7:30:49 a.m. - November 7, 2008", you would use the following definition:

```
%l:%M:%S %P - %B %e, %G
```

The full details of the parameters you can use are as follows:

Table 9: strftime date and time format parameters

Parameter	Description	Example
%a	The abbreviated weekday name according to the current locale.	Wed
%A	The full weekday name according to the current locale.	Wednesday
%b	The abbreviated month name according to the current locale.	Jan
%B	The full month name according to the current locale.	January
%c	The preferred date and time representation for the current locale.	
%C	The century number (year/100) as a 2-digit integer.	19
%d	The day of the month as a decimal number (range 01 to 31).	07
%D	Equivalent to %m/%d/%y. (This is the USA date format. In many countries %d/%m/%y is the standard date format. Thus, in an international context, both of these formats are ambiguous and must be avoided.)	12/25/04
%e	Like %d, the day of the month as a decimal number, but a leading zero is replaced by a space.	7
%G	The ISO 8601 year with century as a decimal number. The 4-digit year corresponding to the ISO week number (see %V). This has the same format and value as %y, except that if the ISO week number belongs to the previous or next year, that year is used instead.	2008
%g	Like %G, but without century, i.e., with a 2-digit year (00-99).	04
%h	Equivalent to %b.	Jan
%H	The hour as a decimal number using a 24-hour clock (range 00 to 23).	22
%I	The hour as a decimal number using a 12-hour clock (range 01 to 12).	07

Parameter	Description	Example
%j	The day of the year as a decimal number (range 001 to 366).	008
%k	The hour (24-hour clock) as a decimal number (range 0 to 23); single digits are preceded by a blank. (See also %H.)	7
%l	The hour (12-hour clock) as a decimal number (range 1 to 12); single digits are preceded by a blank. (See also %I.)	7
%m	The month as a decimal number (range 01 to 12).	04
%M	The minute as a decimal number (range 00 to 59).	58
%n	A newline character.	
%p	Either 'AM' or 'PM' according to the given time value, or the corresponding strings for the current locale. Noon is treated as 'pm' and midnight as 'am'.	AM
%P	Like %p but in lowercase: 'am' or 'pm' or a corresponding string for the current locale.	am
%r	The time in a.m. or p.m. notation. In the POSIX locale this is equivalent to '%I:%M:%S %p'.	07:58:40 am
%R	The time in 24-hour notation (%H:%M). For a version including the seconds, see %T below.	07:58
%s	The number of seconds since the Epoch, i.e., since 1970-01-01 00:00:00 UTC.	1099928130
%S	The second as a decimal number (range 00 to 61). the upper level of the range 61 rather than 59 to allow for the occasional leap second and even more occasional double leap second.	07
%t	A tab character.	
%T	The time in 24-hour notation (%H:%M:%S).	17:58:40
%u	The day of the week as a decimal, range 1 to 7, Monday being 1. See also %w.	3
%U	The week number of the current year as a decimal number, range 00 to 53, starting with the first Sunday as the first day of week 01. See also %V and %W.	26
%V	The ISO 8601:1988 week number of the current year as a decimal number, range 01 to 53, where week 1 is the first week that has at least 4 days in the current year, and with Monday as the first day of the week. See also %U and %W.	26
%w	The day of the week as a decimal, range 0 to 6, Sunday being 0. See also %u.	5
%W	The week number of the current year as a decimal number, range 00 to 53, starting with the first Monday as the first day of week 01.	34
%x	The preferred date representation for the current locale without the time.	
%X	The preferred time representation for the current locale without the date.	
%y	The year as a decimal number without a century (range 00 to 99).	04
%Y	The year as a decimal number including the century.	2008
%z	The time-zone as hour offset from GMT. Required to emit RFC822-conformant dates (using "%a, %d %b %Y %H:%M:%S %z").	-2
%Z	The time zone or name or abbreviation.	GMT
%%	A literal '%' character.	%

Notice

Notices

This document provides information about copyright, trademarks, terms and conditions for product documentation.

© Copyright IBM Corporation 1993, 2016 / © Copyright HCL Technologies Limited 2016, 2020

This information was developed for products and services offered in the US. This material might be available from IBM in other languages. However, you may be required to own a copy of the product or product version in that language in order to access it.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not grant you any license to these patents. You can send license inquiries, in writing, to:

*IBM Director of Licensing
IBM Corporation
North Castle Drive, MD-NC119
Armonk, NY 10504-1785
US*

For license inquiries regarding double-byte character set (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

*Intellectual Property Licensing
Legal and Intellectual Property Law
IBM Japan Ltd.
19-21, Nihonbashi-Hakozakicho, Chuo-ku
Tokyo 103-8510, Japan*

INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM websites are provided for convenience only and do not in any manner serve as an endorsement of those websites. The materials at those websites are not part of the materials for this IBM product and use of those websites is at your own risk.

IBM may use or distribute any of the information you provide in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

*IBM Director of Licensing
IBM Corporation
North Castle Drive, MD-NC119
Armonk, NY 10504-1785
US*

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this document and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement or any equivalent agreement between us.

The performance data discussed herein is presented as derived under specific operating conditions. Actual results may vary.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

This information is for planning purposes only. The information herein is subject to change before the products described become available.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to actual people or business enterprises is entirely coincidental.

COPYRIGHT LICENSE:

This information contains sample application programs in source language, which illustrate programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to IBM, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. IBM, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs. The sample programs are provided "AS IS", without warranty of any kind. IBM shall not be liable for any damages arising out of your use of the sample programs.

© (your company name) (year).

Portions of this code are derived from IBM Corp. Sample Programs.

© Copyright IBM Corp. 2020

Trademarks

IBM, the IBM logo, and ibm.com are trademarks or registered trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. Other product and service names might be trademarks of IBM® or other companies. A current list of IBM® trademarks is available on the web at "Copyright and trademark information" at www.ibm.com/legal/copytrade.shtml.

Adobe™, the Adobe™ logo, PostScript™, and the PostScript™ logo are either registered trademarks or trademarks of Adobe™ Systems Incorporated in the United States, and/or other countries.

IT Infrastructure Library™ is a Registered Trade Mark of AXELOS Limited.

Linear Tape-Open™, LTO™, the LTO™ Logo, Ultrium™, and the Ultrium™ logo are trademarks of HP, IBM® Corp. and Quantum in the U.S. and other countries.

Intel™, Intel™ logo, Intel Inside™, Intel Inside™ logo, Intel Centrino™, Intel Centrino™ logo, Celeron™, Intel Xeon™, Intel SpeedStep™, Itanium™, and Pentium™ are trademarks or registered trademarks of Intel™ Corporation or its subsidiaries in the United States and other countries.

Linux™ is a registered trademark of Linus Torvalds in the United States, other countries, or both.

Microsoft™, Windows™, Windows NT™, and the Windows™ logo are trademarks of Microsoft™ Corporation in the United States, other countries, or both.



Java™ and all Java-based trademarks and logos are trademarks or registered trademarks of Oracle and/or its affiliates.

Cell Broadband Engine™ is a trademark of Sony Computer Entertainment, Inc. in the United States, other countries, or both and is used under license therefrom.

ITIL™ is a Registered Trade Mark of AXELOS Limited.

UNIX™ is a registered trademark of The Open Group in the United States and other countries.

Terms and conditions for product documentation

Permissions for the use of these publications are granted subject to the following terms and conditions.

Applicability

These terms and conditions are in addition to any terms of use for the IBM website.

Personal use

You may reproduce these publications for your personal, noncommercial use provided that all proprietary notices are preserved. You may not distribute, display or make derivative work of these publications, or any portion thereof, without the express consent of IBM.

Commercial use

You may reproduce, distribute and display these publications solely within your enterprise provided that all proprietary notices are preserved. You may not make derivative works of these publications, or reproduce, distribute or display these publications or any portion thereof outside your enterprise, without the express consent of IBM.

Rights

Except as expressly granted in this permission, no other permissions, licenses or rights are granted, either express or implied, to the publications or any information, data, software or other intellectual property contained therein.

IBM reserves the right to withdraw the permissions granted herein whenever, in its discretion, the use of the publications is detrimental to its interest or, as determined by IBM, the above instructions are not being properly followed.

You may not download, export or re-export this information except in full compliance with all applicable laws and regulations, including all United States export laws and regulations.

IBM MAKES NO GUARANTEE ABOUT THE CONTENT OF THESE PUBLICATIONS. THE PUBLICATIONS ARE PROVIDED "AS-IS" AND WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT, AND FITNESS FOR A PARTICULAR PURPOSE.

Index

Special Characters

@ (atsign) key setup incorrectly on UNIX [86](#)
 <TWS_user>
 unable to login to conman [93](#)

A

about this guide [xix](#)
 access permission problem for Oracle administration user [107](#)
 access problems for user on DWC [152](#)
 access to Symphony locked by stageman [124](#)
 accesses, multiple, from TDWC, wrong user logged in [152](#)
 accessibility [xix](#)
 action on TDWC, list not updated after running [161](#)
 actions return empty tables in TDWC [162](#)
 add, command, validating time zone incorrectly [87](#)
 administration user, Oracle, access permission problem [107](#)
 advanced user rights (incorrect), causing login failure to conman [93](#)
 agent
 log and trace files [40](#)
 traces [39](#)
 agent log and trace files
 twstrace syntax [42](#)
 agent traces
 modifying [42](#)
 viewing settings [42](#)
 agents
 down [82](#)
 not linking after first JnextPlan on HP-UX [80](#)
 not linking after repeated switchmgr [181](#)
 not linking to master domain manager [80](#)
 AIX
 rmstdlist fails with an exit code of 126 [129](#)
 An internal error has occurred - AWSJPL006E [126](#), [126](#), [126](#)
 APARs
 IY50132 [87](#)
 IY50136 [33](#)
 IY60841 [89](#)
 application server
 creating core dump [55](#)
 does not start after keystore password change [108](#)
 hanging, creating core dump [55](#)
 log and trace files [45](#)
 times out [109](#)
 trace settings [45](#)
 troubleshooting [108](#)
 at keyword, validating time zone incorrectly [87](#)
 authentication
 wrong attempt [150](#)
 authentication problem with UpdateStats [103](#)
 Autotrace
 stopping while running JnextPlan [89](#)
 available groups list is empty in enter task information window,
 using LDAP with TDWC [163](#)
 AWKRAA209E [159](#)

AWKRCE012E
 connection failure [79](#)
 AWSBCV012E received [97](#)
 AWSBCW037E received [90](#)
 AWSBCW039E received [90](#)
 AWSBIA015I received [87](#)
 AWSBIA019E received [87](#)
 AWSBIA106W received [87](#)
 AWSBIA148W received [87](#)
 AWSDEB003I
 Writing socket Resource temporarily unavailable [78](#)
 AWSDEC002E received [97](#)
 AWSDEQ008E received [102](#)
 AWSDEQ024E received [93](#)
 AWSECM003E message received [122](#)
 AWSEDW001I received [79](#)
 AWSEDW020E received [79](#)
 AWSITA104E
 agents down [82](#)
 AWSITA122E [159](#)
 AWSITA245E
 agents down [82](#)
 AWSJCO005E
 CORBA NO_PERMISSION [164](#)
 AWSJCO084E message issued [103](#)
 AWSJCS011E message using planman deploy
 not enough space [103](#)
 zip file error [103](#)
 AWSJPL017E received [89](#)
 AWSMSP104E message, failed mail send [119](#)
 AWSUI0924E
 problems with import operation [160](#)
 AWSWUI0331E error returned from custom SQL query with
 validate command on TDWC [153](#)

B

background threads continue if browser window closed [156](#), [163](#)
 backup domain manager
 agents not linking after repeated switchmgr [181](#)
 common problems [180](#)
 Symphony file becomes corrupted [180](#)
 troubleshooting [173](#)
 batchman
 fails on a fault-tolerant agent [97](#)
 in workload service assurance [170](#)
 batchup service fails to start [100](#)
 behind firewall, attribute in fault-tolerant agents [79](#)
 blank page in DWC
 High availability disaster recovery [157](#), [163](#)
 bound z/OS shadow job is carried forward indefinitely [105](#)
 browser window closing leaves background threads running [156](#),
[163](#)
 built-in troubleshooting features [27](#)

C

- can be event processor, used to check workstation event enablement [112](#)
- canceling TWS jobs
 - kill command [138](#)
- carry forward z/OS bound shadow job never completes [105](#)
- cag_basiclogger, CCLog parameter value [36](#)
- cag_filehandler, CCLog parameter value [36](#)
- cag_multiproc_filehandler, CCLog parameter value [36](#)
- cag_pdlogger, CCLog parameter value [36](#)
- CCLog
 - causing jobs to fail on fault-tolerant agent [97](#)
 - date and time format [197](#)
 - description [33](#)
 - parameters [33](#), [37](#)
 - performance [37](#)
 - switching [34](#)
- character corruption [133](#)
- cli
 - command line
 - Windows, problems with [102](#)
- CLI
 - for composer
 - gives server access error [86](#)
 - programs (like composer) do not run [129](#)
- Cloud & Smarter Infrastructure technical training [xix](#)
- cluster.exe [133](#)
- clusterupg [133](#)
- collected data
 - data capture utility [52](#)
- command
 - startappserver [124](#)
- command line (Windows), problems executing cli commands [102](#)
- commands
 - xcli [62](#)
- commands and scripts
 - add, validating time zone incorrectly [87](#)
 - cpuname [79](#)
 - deldep [76](#)
 - evtsize, to enlarge Mailbox.msg file [97](#)
 - release [76](#)
 - replace, validating time zone incorrectly [87](#)
 - rmstdlist, fails on AIX with an exit code of 126 [129](#)
 - rmstdlist, gives different results [129](#)
 - shutdown [180](#)
 - start, not working with firewall [79](#)
 - stop, not working with firewall [79](#)
 - submit job [76](#)
 - submit schedule [76](#)
- completed jobs or job streams not found [131](#)
- composer
 - CLI gives server access error [86](#)
 - display cpu=@ fails on UNIX [86](#)
 - gives a dependency error with interdependent object definitions [85](#)
 - gives the AWSJOM179E error when deleting a workstation [86](#), [161](#)
 - troubleshooting [85](#)
- Composer deletion of a workstation fails with the AWSJOM179E error [86](#), [161](#)
- configuration data capture utility [49](#)

- configuration file, event monitoring, empty or missing [122](#)
- conman
 - login fails on Windows [93](#)
 - troubleshooting [92](#)
- conman command
 - monitoring TWS jobs [138](#)
 - viewing job output [138](#)
- conman sj
 - job log not displaying [96](#)
- connection from DWC
 - not working [145](#)
- connection from TDWC
 - fails if Oracle database in use [147](#)
 - fails when performing any operation [148](#)
 - settings not checked [150](#)
 - test, takes several minutes before failing [147](#)
 - troubleshooting [145](#)
- connectivity, troubleshooting [174](#)
- core dump
 - Job manager [100](#)
- core dump of application server, creating [55](#)
- corrupt CSV report generated from TDWC as seen in MS Excel [154](#)
- corrupt Symphony file recovery [185](#)
- corrupt Symphony recovery
 - automated procedure [190](#)
 - command-line command [190](#)
 - corrupt Symphony recovery
 - on FTA [190](#)
 - on fault-tolerant agent [190](#)
 - resetFTA command [190](#)
- corrupted
 - Symphony file [188](#)
- corrupted characters in the command shell [102](#)
- corrupted characters(Windows) [102](#)
- cpuname, command [79](#)
- Create Post Reports
 - Create Post Reports
 - Create Post Reports [127](#)
- credentials error with
 - IBM Z Workload Scheduler connector z/OS WebSphere® Application Server [153](#)
- critical job
 - high risk, has an empty hot list [171](#)
 - is consistently late [171](#)
- critical network timings changing unexpectedly [171](#)
- critical start times
 - inconsistent [170](#)
 - not aligned [170](#)
- cscript error [89](#)
- CSV report generated from TDWC is corrupted in MS Excel [154](#)
- custom SQL query returns the error message AWSWUI0331E with validate command on TDWC [153](#)
- customization
 - CCLog [34](#)

D

- data capture in event of problems [49](#)
- data capture tool
 - used for ffdc [54](#)

- data capture utility
 - command syntax [51](#)
 - data collection [52](#)
 - parameters [51](#)
 - prerequisites [50](#)
 - syntax [51](#)
 - tasks [51](#)
 - when to run [49](#)
- database
 - table locked [128](#)
- database jobs
 - supported JDBC drivers [99](#)
 - troubleshooting [99](#)
- database query returns the error message AWSWUI0331E with validate command on TDWC [153](#)
- database transaction log full on Oracle - JnextPlan fails [107](#)
- date and time format, CCLog
 - parameter [33](#)
 - reference [197](#)
- date errors in jobs
 - time zone incorrect setting [132](#)
- date inconsistency
 - AIX master domain manager [132](#)
- date inconsistency in job streams
 - time zone incorrect setting [132](#)
- db2 [160](#)
- DB2
 - deadlock [106](#)
 - error causing JnextPlan to fail [88](#)
 - full transaction log causing JnextPlan to fail [106](#)
 - table locked [128](#)
 - timeout [106](#)
 - times out [105](#)
 - transaction log full [88](#)
 - troubleshooting [105](#)
- DB2 error message [160](#)
- DB2 to Oracle
 - problems [107](#)
- deadline keyword, validating time zone incorrectly [87](#)
- default tasks not converted into language set in browser, in TDWC [156](#), [162](#)
- default values in report fields in TDWC after upgrade [154](#)
- deldep, command [76](#)
- delete
 - workstation fails with the AWSJOM179E error [86](#), [161](#)
- deleted
 - stdlist erroneously [130](#)
- deleting MSSQL records
 - with cascade option [108](#)
- dependencies
 - giving error with interdependent object definitions [85](#)
 - lost when submitting job streams with wildcards [95](#)
 - of Job Scheduler instance not updated [131](#)
- deploy (D) flag not set after ResetPlan command used [121](#)
- deploying event rule [99](#)
- developer tools
 - freeze panels [158](#)
- diagnostic tools [29](#)
- directories
 - pobox, storing messages [76](#)
- disk filling up
 - EDWA [123](#)
- disk usage problems
 - EDWA [123](#)
- display cpu=@ fails, on UNIX [86](#)
- distributed engine
 - responsiveness of TDWC decreasing with [151](#)
 - when running production details reports, might overload TDWC [151](#)
- domain manager
 - agents not linking after repeated switchmgr [181](#)
 - cannot link to fault-tolerant agent [79](#)
 - mailman unlinking from fault-tolerant agents [98](#)
 - not connecting to fault-tolerant agent dynamic domain manager [78](#)
 - not connecting to fault-tolerant agent using SSL [77](#)
 - not shut down on UNIX after switchmgr [180](#)
 - recovering corrupt Symphony file [185](#)
 - running as standalone [75](#)
 - standalone running [75](#)
 - start and stop, commands not working [79](#)
 - Symphony file on backup becomes corrupted [180](#)
 - UNIX, system processes not killed after switchmgr [180](#)
 - workstation not linking after JnextPlan [90](#)
- domain name
 - not included for mail sender [119](#)
- duplicate user ID invalidating session on TDWC [161](#)
- duration might be calculated incorrectly [105](#)
- DWC connection status blank [147](#)
- DWC engine version empty [147](#)
- dynamic agent
 - event condition does not generate any action [99](#)
 - job status continually in running state [82](#)
 - not found from console [81](#)
 - not running submitted job [81](#)
 - server connection [98](#)
 - troubleshooting [98](#), [98](#)
- dynamic workload broker
 - cached jobs
 - increasing [135](#)
 - concurrent threads on server
 - configuring [135](#)
 - job archiving
 - configuring [135](#)
 - job throughput
 - increasing [135](#)
- Dynamic Workload Console
 - 9.x login or graphical view pages do not display [166](#)
 - access error launching task from bookmark [156](#), [162](#)
 - accessibility [xix](#)
 - actions return empty tables [162](#)
 - available groups list is empty in enter task information window, using LDAP [163](#)
 - CSV report corrupted in MS Excel [154](#)
 - db2 [160](#)
 - default tasks not converted into language set in browser [156](#), [162](#)
 - engine connection
 - fails if Oracle database in use [147](#)
 - fails when performing any operation [148](#)
 - not working [145](#)
 - settings not checked [150](#)
 - test, taking several minutes before failing [147](#)
 - troubleshooting [145](#)

- insufficient space when running production details reports [154](#)
- internet explorer problem [158](#), [158](#)
- list not updated after running action [161](#)
- other problems [160](#)
- performance problems [151](#)
- plan view [159](#)
- problems with browsers [156](#)
- problems with reports [153](#)
- processing threads continue in background if browser window closed [156](#), [163](#)
- production details reports, running, might overload distributed engine [151](#)
- report fields show default values after upgrade [154](#)
- reports not displayed when third party toolbar in use [153](#)
- responsiveness decreasing with distributed engine [151](#)
- run period exceeds the historical data time frame [155](#)
- scheduled time range not respected on z/OS engines [166](#)
- session has become invalid message received [161](#)
- Simplified Chinese characters missing or corrupted when using Google Chrome or Apple Safari [158](#)
- SQL query returns the error message AWSWUI0331E with validate command [153](#)
- troubleshooting [21](#), [145](#)
- unexpected login request when using single sign-on [152](#)
- unresponsive script warning with Firefox browser when opening Workload Designer [157](#)
- user access problems [152](#)
- Workload Designer [159](#)
- wrong user logged in when making multiple accesses [152](#)
- WSWUI0331E error when running reports on an Oracle database [154](#)
- dynamic workload scheduling
 - log files [40](#)
 - trace files [40](#)

E

- education [xix](#)
- EIF event, checking it has been sent [117](#)
- email send action fails
 - for event rule [119](#)
- empty or missing event monitoring configuration file [122](#)
- empty panel in DWC
 - HADR [157](#), [163](#)
- empty tables returned in TDWC from actions [162](#)
- enEventDrivenWorkloadAutomation, used to check event management enablement [111](#)
- engine connection from DWC
 - not working [145](#)
- engine connection from TDWC
 - fails if Oracle database in use [147](#)
 - fails when performing any operation [148](#)
 - settings not checked [150](#)
 - test, takes several minutes before failing [147](#)
 - troubleshooting [145](#)
- enLegacyStartOfDayEvaluation, time zones not resolving correctly [124](#)
- enter task information window, has available groups list empty, using LDAP with TDWC [163](#)
- erroneously deleted
 - stdlist [130](#)

- error AWSJOM179E Composer deletion of a workstation fails [86](#), [161](#)
- error given with interdependent object definitions [85](#)
- error java.lang.UnsupportedOperationException [166](#)
- error launching tasks from browser [156](#), [162](#)
- error messages MakePlan [125](#), [125](#), [125](#), [126](#), [126](#)
- error messages SwitchPlan [126](#), [127](#), [127](#)
- error opening IPC, error message [79](#)
- error opening zip file
 - in planman deploy [103](#)
- error using add task to bookmark, in TDWC [156](#), [162](#)
- event
 - lost [120](#), [120](#)
 - no match to event condition [119](#)
- event condition on dynamic agent does not generate any action [99](#), [99](#)
- event counter
 - troubleshooting [173](#)
- event management
 - check if enabled [111](#)
 - checking
 - EIF event has been sent [117](#)
 - FileMonitorPlugIn event has been received [116](#)
 - monconf directory [114](#)
 - that SSM Agent is running [116](#)
 - TWSObjectMonitorPlugIn event has been received [117](#)
 - deploy (D) flag not set after ResetPlan command used [121](#)
 - LogMessageWritten not triggered [121](#)
 - monman deploy messages [115](#)
 - not processed in correct order [122](#)
 - showcpus state values [112](#)
 - troubleshooting [110](#)
 - using getmon [113](#)
- event monitoring configuration file, empty or missing [122](#)
- event processor
 - commands not working [122](#)
 - not deploying rules after switching [121](#)
- event rule deployment [99](#)
- event rules
 - action not triggered [119](#), [123](#)
 - do not trigger [110](#)
 - email send action fails [119](#)
 - file monitoring
 - Solaris AMD Opteron [124](#)
 - many, causing planman deploy to fail [123](#)
 - not deployed after switching event processor [121](#)
 - Solaris AMD Opteron
 - file monitoring [124](#)
- evtsize, command to enlarge Mailbox.msg file [97](#)
- Excel showing corrupt CSV report generated from TDWC [154](#)
- exclusive access to Symphony, not possible with stageman [124](#)
- extended agent for MVS does not work [102](#)
- extended agent, troubleshooting [102](#)
- extraneous exception [164](#)

F

- F flag state given for domain manager on UNIX after switchmgr [180](#)
- Failover Cluster Command Interface [133](#)
- fault-tolerant
 - agent, cannot be linked [95](#)

fault-tolerant agent

- cannot link to domain manager [79](#)
- job status not updated master domain manager [98](#)
- jobs failing in heavy workload conditions [97](#)
- not connecting to domain manager using SSL [77](#)
- not linking to master domain manager [80](#)
- not obeying start and stop commands [79](#)
- recovering corrupt Symphony file [185](#)
- running as standalone [75](#)
- troubleshooting [97](#)
- unlinking from mailman on domain manager [98](#)

 fault-tolerant agents

- cannot be linked [95](#)

 ffdc, *See* first failure data capture

file create

- action not triggered [123](#)

 file delete

- action not triggered [123](#)

 FileMonitorPlugIn event, checking it has been received [116](#)

files

- localopts, thiscpu option not set correctly [180](#)
- Mailbox.msg corrupt [97](#)
- pobox, full [88](#)
- Sinfonia
 - in recovery of corrupt Symphony file [185](#)
 - to delete after SSL mode change [79](#)
- Symphony
 - becomes corrupted on backup domain manager [180](#)
 - to delete after SSL mode change [79](#)
- TWSCCLog.properties [33](#)

 filling percentage of the mailboxes

- EDWA [123](#)

 final status, jobs or job streams in, not found [131](#)

Firefox browser giving unresponsive script warning when using the TDWC Workload Designer [157](#)

firewall, between domain managers [79](#)

first failure data capture [54](#)

fix packs

- keeping up-to-date [27](#)
- obtaining [194](#)

 fixes [194](#)

fomatters.basicFmt.dateTimeFormat, CCLog parameter [36](#)

fomatters.basicFmt.separator, CCLog parameter [36](#)

forced logout invalidating session on TDWC [161](#)

freeze

- panels [158](#)

 fibox, troubleshooting [174](#)

full mailboxes

- EDWA [123](#)

G

getmon, used to check workstation monitoring configuration [113](#)

getting a new socket, error message [79](#)

graphical view problems [159](#)

groups available list is empty in enter task information window, using LDAP with TDWC [163](#)

H

hang

- Windows [92](#)

hang of application server, creating core dump [55](#)

high risk critical job has an empty hot list [171](#)

host name

- not recognized [90](#)

 hot list, empty, for high risk critical job [171](#)

HP-UX

- agents not linking after first JnextPlan [80](#)

I

IBM Workload Automation

- overview [21](#)

 IBM Workload Scheduler agent

- trace files [39](#)
- traces [39](#)

 IBM Workload Scheduler agent traces

- from Dynamic Workload Console [39](#)

 IBM Workload Scheduler for z/OS

- troubleshooting [21](#)

 IBM Workload Scheduler service for <TWS_user>

- fails to start [100](#), [100](#)

 IBM Workload Scheduler: Troubleshooting [102](#)

impersonation level errors (Windows) [102](#)

Import a property file bigger than 100MB [167](#)

import settings [160](#)

ImportSettingsMaxFileSize [167](#)

In-Flight Trace facility [57](#)

inconsistent times in planman showinfo [104](#)

increase job processing [135](#)

increase processed jobs [135](#)

information centers

- at IBM support website, searching for problem resolution [193](#)

 Informix

- troubleshooting [108](#)

 Informix deadlocks

- solving [108](#)
- with composer [108](#)

 initialization problems [75](#)

installation

- log files [38](#)

 interactive job [140](#)

interactive job is not visible [140](#)

interactive jobs not interactive using Terminal Services [100](#)

internet explorer

- developer tools [158](#)
- graphic panels not displayed [158](#)
- object error [158](#)

 Internet, searching for problem resolution [193](#)

invalid session message received on TDWC [161](#)

IP address

- not recognized [90](#)

 IY50132, APAR [87](#)

IY50136, APAR [33](#)

IY60841, APAR [89](#)

J

J flag state given for domain manager on UNIX after switchmgr [180](#)

Java compiler error

- using planman deploy [103](#)

- Java exception
 - not enough space
 - using planman deploy 103
- Java exception when performing a query on job streams in plan 166
- Java out of memory when running JnextPlan 88
- Jnextplan
 - fault-tolerant agents
 - cannot be linked 95
- JnextPlan
 - CreatePostReports.cmd 92
 - fails
 - AWSJPL017E 89
 - because database log is full 88
 - cscript 89
 - Java out of memory 88
 - to start 88
 - with DB2 error: nullDSRA0010E: SQL State = 57011, Error Code = -912 88
 - fails because database transaction log full 107
 - fails because DB2 transaction log full 106
 - job remains in "exec" status after 90
 - Makeplan.cmd
 - rep8.cmd 92
 - Updatestats.cmd 92
 - not changing available resource quantity in plan 92
 - not initializing remote workstation 90
 - slow 89
 - troubleshooting 87
 - workstation not linking 90
- job
 - bound z/OS shadow, is carried forward indefinitely 105
 - remains in "exec" status 90
- job canceling
 - TWS kill command 138
- job failure
 - remote command 137
- job log
 - not displayed 96
- Job manager
 - core dump 100
- job number increase 135
- job output character corruption 133
- job rate increase 135
- Job Scheduler instance
 - dependency not updated 131
 - predecessor not updated 131
- Job Scheduler instance mismatch between Symphony and preproduction plan 103
- job shows as not running 81
- job shows as running 82
- job status
 - problems with, on fault-tolerant agent 98
- job status mapping
 - TWS job status 138
- Job stream duration might be calculated incorrectly 105
- job streams
 - completed, not found 131
- job types with advanced options
 - database jobs error 99
 - MSSQL jobs error 99

- jobman and JOBMAN
 - fails on a fault-tolerant agent 97
 - in workload service assurance 170
- jobmon and JOBMON
 - fails on a fault-tolerant agent 97
- jobs
 - completed, not found 131
 - failing on fault-tolerant agent in heavy workload conditions 97
 - interactive, not interactive using Terminal Services 100
 - limit problem 160
 - not starting 160
 - statistics are not updated daily 131
 - with a "rerun" recovery job remains in the "running" state 130
- jobs ready
 - do not start 160

K

- keystore password changed, WebSphere Application Server does not start 108
- kill command
 - job canceling 138
- knowledge bases, searching for problem resolution 193

L

- L flag state given for domain manager on UNIX after switchmgr 180
- language
 - of log messages 31
- language not being set for default tasks in TDWC 156, 162
- late, consistently, critical job 171
- late, job status, incorrectly reported when time zones not enabled 131
- LDAP
 - account lock 150
- LDAP, using when available groups list is empty in enter task information window (TDWC) 163
- limit
 - jobs 160
- Limited fault-tolerant agents on IBM i
 - troubleshooting 21
- link problems, troubleshooting 174
- linking
 - agent not found 81
 - no resources available 79, 81
 - problems 76
 - problems with, in dynamic environment 82
 - problems with, on fault-tolerant agent 80
- links
 - cannot be made
 - after SSL mode change 78
 - between fault-tolerant agent and domain manager 79
- links, agents not making after repeated switchmgr 181
- list not updated after running action on TDWC 161
- local parameters not resolving correctly 132
- localopts
 - merge stdlists 33
 - nm port 79
 - SSL port setting 78

- thiscpu option not set correctly [180](#)
- locked, database table [128](#)
- locklist problem causing JnextPlan [88](#)
- log and trace files
 - agent [40](#)
- log file
 - content [38](#)
 - location [38](#)
- log files
 - database, full [88](#)
 - for application server [45](#)
 - location [33](#)
 - question marks found in [130](#)
 - Self-Service Catalog [39](#)
 - Self-Service Monitoring [39](#)
 - separate from trace files [31](#)
- logging
 - dynamic workload scheduling [40](#)
 - engine log file switching [34](#)
 - file locations [33](#)
 - modify logging level (quick reference) [29](#)
 - overview [29](#)
- login request, unexpected, when using single sign-on [152](#)
- login to conman fails on Windows [93](#)
- LogMessageWritten event not triggered [121](#)
- logout (forced) invalidating session on TDWC [161](#)
- low disk space
 - EDWA [123](#)

M

- Mailbox.msg
 - file, corrupt [97](#)
- mailman
 - fails on a fault-tolerant agent [97](#)
 - initialization phase
 - backup domain manager [78](#)
 - message from, stops event counter [174](#)
 - messages
 - when SSL connection not made [77](#)
 - no incoming message from [98](#)
- mailSenderName option
 - not defined [119](#)
- makeplan [125](#), [125](#)
- MakePlan problems [125](#), [125](#), [125](#), [126](#), [126](#)
- master domain manager
 - recovering corrupt Symphony file [185](#)
- Master Domain Manager may stop when trying to retrieve a big job log [110](#), [110](#)
- MASTERAGENTS workstation
 - moving to folder [141](#)
- memory
 - problem, Java, when running JnextPlan [88](#)
- messages
 - concerning fibox on full-status agent [174](#)
 - from mailman, stopping event counter [174](#)
 - from writer, stopping event counter [173](#)
 - log, described [31](#)
 - not being tracked [173](#)
 - trace, described [31](#)
 - xcli [69](#)

- migrate database
 - DB2 to Oracle, errors [107](#)
- mirroring disabled
 - query error [166](#)
- mismatch of Job Scheduler instances between Symphony and preproduction plan [103](#)
- missing or empty event monitoring configuration file [122](#)
- modifying
 - agent traces [42](#)
- monconf directory, checking for monitoring configuration availability [114](#)
- monitoring TWS jobs
 - conman command [138](#)
- monman deploy messages [115](#)
- MS Excel showing corrupt CSV report generated from TDWC [154](#)
- MSSQL
 - troubleshooting [107](#)
- MSSQL jobs
 - supported JDBC drivers [99](#)
 - troubleshooting [99](#)
- multiple accesses from TDWC, wrong user logged in [152](#)
- mustgather tool [49](#)

N

- netman
 - two instances listening on the same port [79](#)
- network
 - common problems [77](#)
 - link problems [76](#)
 - problems, common [77](#)
 - recovery [75](#)
 - troubleshooting [75](#)
- network timings, critical, changing unexpectedly [171](#)
- nm port, localopts parameter [79](#)
- no results from query [167](#)
- nullDSRA0010E error causing JnextPlan to fail [88](#)

O

- objects in folders, cannot retrieve [96](#)
- online product documentation
 - searching for problem resolution [193](#)
- Onnnn.hmmm files
 - deleting [132](#)
- opening Workload Designer from graphical view with Firefox [157](#)
- Oracle
 - transaction log full [88](#)
 - troubleshooting [106](#)
- Oracle database giving WSWUI0331E error when running reports in TDWC [154](#)
- order of events not respected [122](#)
- organization parameter, in CCLog [33](#)

P

- panels not displayed with internet explorer [158](#)
- parameters, local, not resolving correctly [132](#)
- parms, not resolving local parameters correctly [132](#)
- performance
 - CCLog [37](#)

- logging [37](#)
- troubleshooting for TDWC [151](#)
- performance - troubleshooting [73](#)
- permissions problem for Oracle administration user [107](#)
- plan monitor
 - in workload service assurance [169](#)
- planman
 - deploy, failing with many rules [123](#)
- planman deploy
 - fails with Java compiler error [103](#)
 - insufficient space error [103](#)
- planman showinfo displays inconsistent times [104](#)
- planner
 - in workload service assurance [169](#)
 - troubleshooting [103](#)
- plug-in deploy
 - fails with Java compiler error [103](#)
- pobox
 - directory, storing messages [76](#)
 - file, full [88](#)
- post-uninstallation clean up [132](#)
- predecessor to Job Scheduler instance
 - not updated [131](#)
- preproduction plan has different Job Scheduler instances than Symphony file [103](#)
- problems MakePlan [125](#), [125](#), [125](#), [126](#), [126](#)
- problems SwitchPlan [126](#), [127](#), [127](#)
- problems, other, on TDWC [160](#)
- processing threads continue in background if browser window closed [156](#), [163](#)
- product
 - parameter, in CCLog [33](#)
- production details reports run in TDWC, insufficient space to complete [154](#)
- production details reports, running from TDWC, might overload distributed engine [151](#)
- prompts, duplicate numbers [94](#)

Q

- query does not complete [167](#)
- question marks found in the stdlist [130](#)

R

- record deletion in MSSQL fails [108](#)
- recover
 - corrupt Symphony [188](#)
- recovering
 - corrupt Symphony file [185](#)
 - network failures [75](#)
- recovering a corrupt Symphony file [187](#)
- release, command [76](#)
- remote command [137](#)
- remote command job
 - connection failure [79](#)
- remote workstation not initializing after JnextPlan [90](#)
- replace, command, validating time zone incorrectly [87](#)
- replay protocol, after switchmgr [173](#)
- report fields show default values in TDWC after upgrade [154](#)
- report problems, on DWC [156](#)
- report problems, on TDWC [153](#)

- reports getting WSWUI0331E error when running on an Oracle database in TDWC [154](#)
- reports not displayed in TDWC when third party toolbar in use [153](#)
- reports, not including completed jobs or job streams [131](#)
- rerun recovery job, original job remains in the "running" state [130](#)
- ResetPlan command
 - not setting deploy (D) flag [121](#)
- resource quantity changes in database not also implemented in plan after JnextPlan [92](#)
- responsiveness of TDWC decreasing with distributed engine [151](#)
- resubmitJobName optman property
 - update failure [141](#)
- rights problem for Oracle administration user [107](#)
- rmstdlist command
 - fails on AIX with an exit code of 126 [129](#)
 - gives different results [129](#)
- rules (event)
 - do not trigger [110](#)
- rules deploy
 - insufficient space error [103](#)
- run time
 - log files [38](#)
- runmsgno, reset [94](#)
- running but not visible on dynamic agent [140](#)
- running state, original job remains in, with a "rerun" recovery job [130](#)

S

- scratch option
 - in planman deploy
 - insufficient space [103](#)
- Self-Service Catalog
 - log files [39](#)
- Self-Service Catalog or Self-Service Dashboard from mobile device, characters missing or corrupted [158](#)
- Self-Service Monitoring
 - log files [39](#)
- separator parameter, in CCLog [33](#)
- service pack (Windows), problems after upgrading with [102](#)
- services (Windows)
 - fail to start [100](#), [100](#)
 - Tivoli Token Service, causing login failure to conman [93](#)
 - session has become invalid message received on TDWC [161](#)
 - setting trace levels for application server [45](#)
- settings
 - agent traces [42](#)
- shadow bound z/OS job is carried forward indefinitely [185](#)
- showinfo (planman) displays [104](#)
- ShutDown_clu.cmd [133](#)
- shutdown, command [180](#)
- Simplified Chinese character set, not fully supported by Google Chrome and Apple Safari [158](#)
- Sinfonia, file
 - in recovery of corrupt Symphony file [185](#)
 - to delete after SSL mode change [79](#)
- single sign-on, unexpected login request received [152](#)
- Software Support
 - receiving weekly updates [194](#)
- space insufficient when running production details reports in TDWC [154](#)

Special characters
 corruption [133](#)

SQL query returns the error message AWSWUI0331E with validate command on TDWC [153](#)

SSL
 no connection between fault-tolerant agent and its domain manager [77](#)
 port setting in localopts [78](#)
 workstation cannot link after changing mode [78](#)

SSM Agent, checking for event processing [116](#)

stageman, unable to get exclusive access to Symphony [124](#)

standalone mode for fault-tolerant agents and domain managers [75](#)

standard list file [33](#)

start times, critical
 inconsistent [170](#)
 not aligned [170](#)

start-of-plan-period
 problems [75](#)

start, command not working with firewall [79](#)

startappserver
 command [124](#)

Startup_clu.cmd [133](#)

statistics are not updated daily [131](#)

status of TWS processes
 EDWA [123](#)

stdlist
 erroneously deleted [130](#)
 restricting access to [31](#)

stdlist, question marks found in [130](#)

stop, command
 not working with firewall [79](#)

stopeventprocessor, not working [122](#)

strftime (date and time format) [197](#)

submit job streams with wildcards loses dependencies [95](#)

submit job, command [76](#)

submit schedule, command [76](#)

support website, searching to find software problem resolution [193](#)

swap space problem
 using planman deploy [103](#)

switcheventprocessor, not working [122](#)

switching logs in CCLog [34](#)

switchmgr
 used repeatedly [181](#)

switchmgr command, UNIX system processes not being killed after [180](#)

SwitchPlan problems [126](#), [127](#), [127](#)

Symphony
 Symphony download timeout [78](#)

Symphony corruption [187](#)

symphony file
 master domain manager [98](#)

Symphony file
 becomes corrupted on backup domain manager [180](#)
 corrupt [185](#)
 corrupted [188](#)
 different Job Scheduler instances than preproduction plan [103](#)
 managing concurrent access to [124](#)
 recovery [185](#)
 to delete after SSL mode change [79](#)
 troubleshooting [185](#)

Symphony recovery [187](#)

system resources scan
 notify scan [99](#)
 troubleshooting [99](#)

systemout exception [164](#)

T

table does not render correctly [167](#)

table, database, locked [128](#)

task information entry window, has available groups list empty, using LDAP with TDWC [163](#)

TDWC test connection failure [148](#), [149](#)

TDWC Workload Designer does not show on foreground with Firefox browser [157](#)

technical training [xix](#)

Terminal Services, interactive jobs not interactive when using [100](#)

test connection to engine from TDWC takes several minutes before failing [147](#)

The database is already locked - AWSJPL018E [126](#), [126](#), [126](#)

the specified run period exceeds the historical data time frame [155](#)

thiscpu option not set correctly in localopts file [180](#)

threads continue in background if browser window closed [156](#), [163](#)

time and date format, CCLog
 parameter [33](#)
 reference [197](#)

time errors in jobs
 time zone incorrect setting [132](#)

time inconsistency
 AIX master domain manager [132](#)

time inconsistency in job streams
 time zone incorrect setting [132](#)

time zone
 not enabled, causing time-related status problems [131](#)
 not recognized by WebSphere Application Server [104](#)
 not validated correctly by composer [87](#)

time zones, not resolving when enLegacyStartOfDayEvaluation is set [124](#)

time-related calculations [105](#)

time-related status
 incorrect when time zone not enabled [131](#)

timeout of session on TDWC [161](#)

timeout on application server [109](#)

timeout on DB2 [105](#)

times inconsistent in planman showinfo [104](#)

timings, network, critical, changing unexpectedly [171](#)

Tivoli Token Service
 causing login failure to conman [93](#)
 fails to start [100](#)

Tivoli Workload Dynamic Broker
 troubleshooting [21](#)

too many concurrent jobs [100](#)

toolbar, third party, stopping display of reports in TDWC [153](#)

tools
 CCLog [33](#)

tools, for troubleshooting [29](#)

TOS errors, on fault-tolerant agent [97](#)

trace and log files
 agent [40](#)

trace and log files agent
 agent twstrace syntax [42](#)

- trace file
 - activation [38](#)
- trace files
 - for application server [45](#)
 - IBM Workload Scheduler agent [39, 39](#)
 - question marks found in [130](#)
 - separate from log files [31](#)
- trace information
 - gathering [49](#)
- trace levels
 - application server
 - setting [45](#)
- tracing
 - dynamic workload scheduling [40](#)
 - modify logging level (quick reference) [29](#)
 - overview [29](#)
- tracing facility [57](#)
- training
 - technical [xix](#)
- transaction log for database is full [88](#)
- transaction log for the database is full message received from DB2, causing JnextPlan to fail [106](#)
- troubleshooting
 - application server [108](#)
 - built-in features [27](#)
 - common problems [85](#)
 - composer [85](#)
 - concurrent accesses to the Symphony file [124](#)
 - conman [92](#)
 - database jobs [99](#)
 - DB2 [105](#)
 - DWC
 - database [160](#)
 - graphical view [159](#)
 - problems with browsers [156](#)
 - user access problems [152](#)
 - dynamic agent [98, 98](#)
 - event management [110](#)
 - extended agents [102](#)
 - fault-tolerant agents [97](#)
 - fault-tolerant switch manager [173](#)
 - finding information in other manuals [21](#)
 - IBM Workload Dynamic Broker [21](#)
 - Informix [108](#)
 - JnextPlan [87](#)
 - Limited fault-tolerant agents on IBM i [21](#)
 - miscellaneous problems [128](#)
 - MSSQL [107](#)
 - MSSQL jobs [99](#)
 - networks [75](#)
 - Oracle [106](#)
 - performance [73](#)
 - planner [103](#)
 - Symphony file corruptions [185](#)
 - system resources scan [99](#)
 - TDWC
 - engine connections [145](#)
 - other problems [160](#)
 - performance problems [151](#)
 - problems with reports [153](#)
 - tools [29](#)
 - TWS for z/OS [21](#)

- Windows [100](#)
- workload service assurance [169](#)
- TWS job status
 - job status mapping [138](#)
- TWS kill command
 - job canceling [138](#)
- tws.loggers.className, CCLog parameter [36](#)
- tws.loggers.msgLogger.level, CCLog parameter [35](#)
- tws.loggers.organization, CCLog parameter [37](#)
- tws.loggers.product, CCLog parameter [37](#)
- tws.loggers.trc<component>.level, CCLog parameter [35](#)
- TWSCCLog.properties
 - customization [34](#)
- TWSCCLog.properties, file [33](#)
- twsHnd.logFile.className, CCLog parameter [36](#)
- TWSObjectMonitorPlugIn event, checking it has been received [117](#)
- twstrace syntax
 - agent log and trace files [42](#)

U

- UNIX
 - display cpu=@ fails [86](#)
 - rmstdlist, fails on AIX with an exit code of 126 [129](#)
 - rmstdlist, gives different results [129](#)
 - system processes not killed on ex domain manager after switchmgr [180](#)
- unlinking
 - fault-tolerant agents from mailman on domain manager [98](#)
- unresponsive script warning with Firefox browser when using the TDWC Workload Designer [157](#)
- unsatisfied link error when using extended agent for MVS [102](#)
- unsupported file monitoring events
 - Solaris AMD Opteron [124](#)
- until keyword, validating time zone incorrectly [87](#)
- Update Stats
 - Update Stats
 - Update Stats [128](#)
- UpdateStats, fails if longer than two hours [103](#)
- upgrade
 - Windows, problems after [102](#)
 - your whole environment [27](#)
- upgrade, making report fields show default values in TDWC [154](#)
- user access problems, on DWC [152](#)
- user, wrong, logged in when making multiple accesses from TDWC [152](#)
- users
 - <TWS_user>
 - unable to login to conman [93](#)
 - not authorized to access server, error given by CLI programs [129](#)
 - rights
 - causing login failure to conman [93](#)
 - Windows, problems with [102](#)

V

- validate command returns the error message AWSWUI0331E from TDWC database query [153](#)
- validation error given with interdependent object definitions [85](#)

- variable tables
 - default not accessible [132](#)
- variables
 - not resolved after upgrade [131](#), [133](#)
- viewing
 - agent traces [42](#)
- viewing job output
 - conman command [138](#)
- virtual memory problem
 - using planman deploy [103](#)

W

- wa_pull_info
 - new version of old tws_inst_pull_info tool [50](#)
- web page error with internet explorer [158](#)
- Windows
 - conman login fails [93](#)
 - Terminal Services, interactive jobs not interactive when using [100](#)
 - troubleshooting [100](#)
 - upgrading, problems after [102](#)
 - user rights, problems with [102](#)
- workload
 - fault-tolerant agent causing jobs to fail [97](#)
- workload designer does not open [153](#)
- workload service assurance
 - critical job
 - is consistently late [171](#)
 - critical network timings changing unexpectedly [171](#)
 - critical start times
 - inconsistent [170](#)
 - not aligned [170](#)
 - high risk critical job has an empty hot list [171](#)
 - troubleshooting [169](#)
 - use of batchman [170](#)
 - use of jobman [170](#)
 - use of plan monitor [169](#)
 - use of planner [169](#)
- workstation ID
 - retrieving [96](#)
- workstation not linking after JnextPlan [90](#)
- workstation set to ignore, cannot find objects [96](#)
- workstations
 - not linking after JnextPlan [90](#)
 - not shut down on UNIX after switchmgr [180](#)
 - remote, not initializing after JnextPlan [90](#)
- writer
 - message from, stops event counter [173](#)
 - messages
 - when SSL connection not made [77](#)
- Writing socket
 - messages
 - Resource temporarily unavailable [78](#)
- wrong duration [105](#)
- wrong schedtime in jobs
 - time zone incorrect setting [132](#)
- wrong start time in jobs
 - time zone incorrect setting [132](#)
- WSWUI0331E error when running reports on an Oracle database in TDWC [154](#)

X

- xcli
 - messages [69](#)
- xcli command [62](#)
- xtrace.ini
 - description [59](#)
 - modify [60](#)
 - syntax [60](#)

Z

- z/OS bound shadow job is carried forward indefinitely [105](#)

