

# Dell Networking W-IAP108/109 Instant Access Point

## Installation Guide

The Dell Networking W-IAP108 and W-IAP109 are dual-radio, dual-band remote access points that support the IEEE 802.11n standard for high-performance WLAN. These access points use MIMO (Multiple-in, Multiple-out) technology and other high-throughput mode techniques to deliver high-performance, 802.11n 2.4 GHz and 5 GHz functionality while simultaneously supporting existing 802.11a/b/g wireless services.

The W-IAP108/W-IAP109 ship with Dell Instant software. Therefore, out of the box, the W-IAP108/W-IAP109 will operate as a Virtual Controller (VC) or an Instant AP. However, the W-IAP108/W-IAP109 can be converted to operate as a Remote AP (RAP). For information about the IAP to RAP conversion, see [RAP Conversion](#).

**Note:** The W-IAP108/W-IAP109 requires the use of Instant 3.2. To convert the IAPs to a RAP, a controller running ArubaOS 6.2 is required.

The Dell W-IAP108/W-IAP109 remote access point provides the following capabilities:

- Wireless transceiver
- Protocol-independent networking functionality
- IEEE 802.11a/b/g/n operation as a wireless access point
- IEEE 802.11a/b/g/n operation as a wireless air monitor
- Compatibility with IEEE 802.3af and 802.3at


### Package Contents

- W-IAP108 or W-IAP109 Remote Access Point
- W-IAP108/W-IAP109 Mounting Stand
- Installation Guide

**Note:** Inform your supplier if there are any incorrect, missing, or damaged parts. If possible, retain the carton, including the original packing materials. Use these materials to repack and return the unit to the supplier if needed.

### W-IAP108/W-IAP109 Hardware Overview

**Figure 1** Ports and Connectors

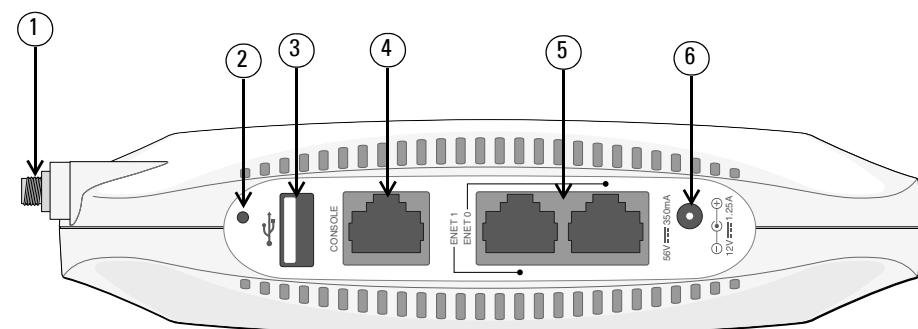

**Table 1** Ports and Connectors

| Callout | Component                  |
|---------|----------------------------|
| 1       | External Antenna Connector |
| 2       | Reset Button               |
| 3       | USB Interface              |
| 4       | Console Port               |
| 5       | ENET 0 and ENET 1          |
| 6       | DC Power Socket            |

#### External Antenna Connectors (W-IAP108 Only)

The W-IAP108 is equipped with two RP-SMA external antenna connectors and requires the use of two dual-band antennas. These ports are marked ANT0 and ANT1, matching radio chains 0 and 1.

In order to ensure accurate RF power level setting and reporting in software, as well as compliance with any regulatory restrictions, the correct gain for antennas used (adjusted for any additional cabling loss, if applicable) needs to be entered in software when provisioning the W-IAP108. Two antenna gain numbers are needed for this; one for each supported band (2.4GHz and 5GHz). These numbers can be obtained from the antenna datasheet or specifications. Antenna gain for W-IAP109 is hardcoded to the correct values already, so there is no need for any additional action on that platform.

#### Reset Button

The reset button can be used to return the AP to factory default settings. To reset the AP:

1. Power off the AP.
2. Press and hold the reset button using a small, narrow object, such as a paperclip.
3. Power-on the AP without releasing the reset button. The power LED will flash within 5 seconds.
4. Release the reset button.

The power LED will flash again within 15 seconds indicating that the reset is completed. The AP will now continue to boot with the factory default settings.

#### USB Interface

The W-IAP108/W-IAP109 is equipped with a USB interface for connectivity with cellular modems.

**Note:** The USB interface is disabled when the W-IAP108/W-IAP109 is powered from 802.3af PoE.

#### Console Port

Use the console port to connect to a terminal for direct local management.

#### ENET 0 (Yellow)

For primary network connectivity, W-IAP108/W-IAP109 is equipped with a yellow 10/100/1000BASE-T (RJ-45) auto-sensing, MDI/MDX Gigabit Ethernet port. This port supports IEEE 802.3af Power over Ethernet (PoE) compliance, accepting 48VDC as a standard defined Powered Device (PD) from a Power Sourcing Equipment (PSE) such as a PoE midspan injector, or network infrastructure that supports PoE.


#### ENET 1 (Blue)

For secondary network connectivity, W-IAP108/W-IAP109 is equipped with a blue 10/100BASE-T (RJ-45) auto-sensing, MDI/MDX Fast Ethernet port.

#### DC Power Socket

If PoE is not available, an optional AC-DC adapter kit (sold separately) can be used to power the W-IAP108/W-IAP109.

**Figure 2** LEDs

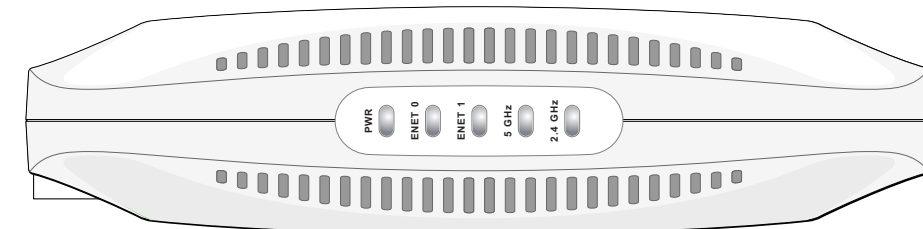

#### LEDs

- PWR: Indicates whether or not the W-IAP108/W-IAP109 is powered-on
- ENET0 and ENET1: Indicates the status of the W-IAP108/W-IAP109's Ethernet ports
- 5 GHz: Indicates the status of the 802.11a/n radio
- 2.4 GHz: Indicates the status of the 802.11b/g/n radio

| LED   | Color/State    | Meaning                   |
|-------|----------------|---------------------------|
| PWR   | Off            | No power to AP            |
|       | Red steady     | System initializing       |
|       | Green flashing | Device booting, not ready |
|       | Green steady   | Device ready              |
| ENET0 | Off            | No link                   |
|       | Amber          | 10/100 Mbps link          |
|       | Green          | 1000 Mbps link            |
|       | Flashing       | Ethernet link activity    |

| LED     | Color/State    | Meaning                            |
|---------|----------------|------------------------------------|
| ENET1   | Off            | No link                            |
|         | Green          | 10/100 Mbps link                   |
|         | Flashing       | Ethernet link activity             |
| 5 GHz   | Off            | 5 GHz radio is disabled            |
|         | Amber steady   | 5 GHz radio enabled in WLAN mode   |
|         | Green steady   | 5 GHz radio enabled in 11n mode    |
|         | Green flashing | 5 GHz Air Monitor mode             |
| 2.4 GHz | Off            | 2.4 GHz radio disabled             |
|         | Amber steady   | 2.4 GHz radio enabled in WLAN mode |
|         | Green steady   | 2.4 GHz radio enabled in 11n mode  |
|         | Green flashing | 2.4 GHz Air Monitor mode           |

### Installing the AP


#### Tabletop Mounting

The W-IAP108/W-IAP109 is shipped with a stand to use on flat (i.e. tabletop) surfaces. Place the W-IAP108/W-IAP109 in the stand (see [Figure 3](#)) and place the stand on a flat, level surface.

To attach the IAP to the stand:

1. Align the center peg of the stand with recessed hole on the unit.
2. Align the mounting posts on the back of the AP with corresponding openings on the stand.
3. Rotate the AP clockwise until it clicks into place.

**Figure 3** Stand Installation

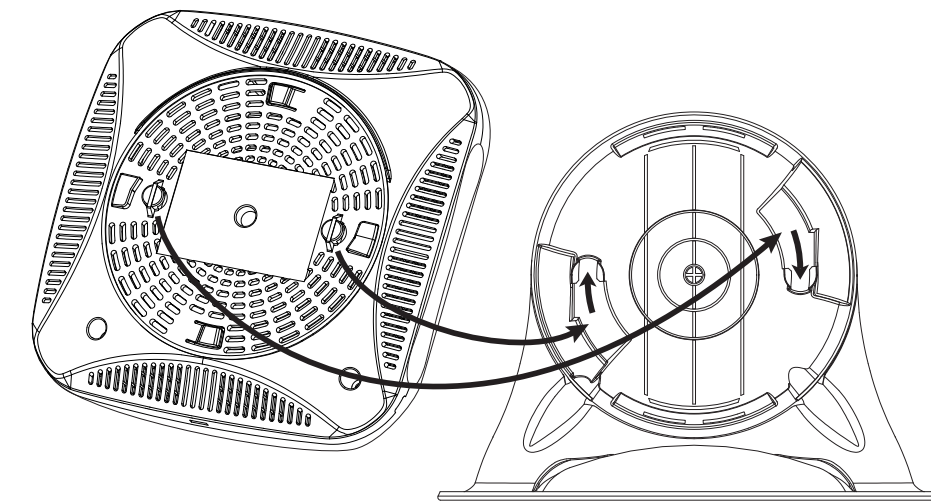

#### Connecting the Required Cables

The W-IAP108/W-IAP109 must be connected to a network device that has access to the Internet, such as a router or modem. To complete the installation of the W-IAP108/W-IAP109:

1. Connect one end of the provided RJ-45 cable to yellow ENET 0 port on the W-IAP108/W-IAP109.
2. Connect the other end of the RJ-45 cable to a free RJ-45 port on your modem or router.
3. Attach the provided power adapter to the DC IN port on the W-IAP108/W-IAP109.
4. Connect the other end of the power adapter to a power outlet.

The W-IAP108/W-IAP109 is now powered on. To verify this, ensure that the PWR LED is solid green.

#### Verifying Successful Installation


Once the W-IAP108/W-IAP109's PWR LED has come up, the device will take 2 to 3 minutes to complete the boot cycle. Once the boot cycle is complete, you can connect to your company or corporate network.

### RAP Conversion

If your network administrator has instructed you to convert the W-IAP108/W-IAP109 to work in RAP mode, follow the process below to complete the RAP conversion.

1. Power up the W-IAP108/W-IAP109.
2. Connect to **Instant** SSID.
3. Login to the W-IAP108/W-IAP109 by navigating to and login to the Instant WebUI. The default username is **admin** and the default password is **admin**. See the included *Dell Instant Quick Start Guide* for more information.
4. Navigate to the **Maintenance** tab in the top right.
5. Click on the **Convert** tab.
6. Select **Remote APs managed by a Mobility Controller** from the drop down menu.
7. Enter the IP address of the controller. This is provided by your network administrator.
8. Click **Convert Now** to complete the conversion (see [Figure 4](#)).
9. The W-IAP108/W-IAP109 will reboot and begin operating in RAP mode.


**Figure 4** IAP-RAP Conversion over the Internet

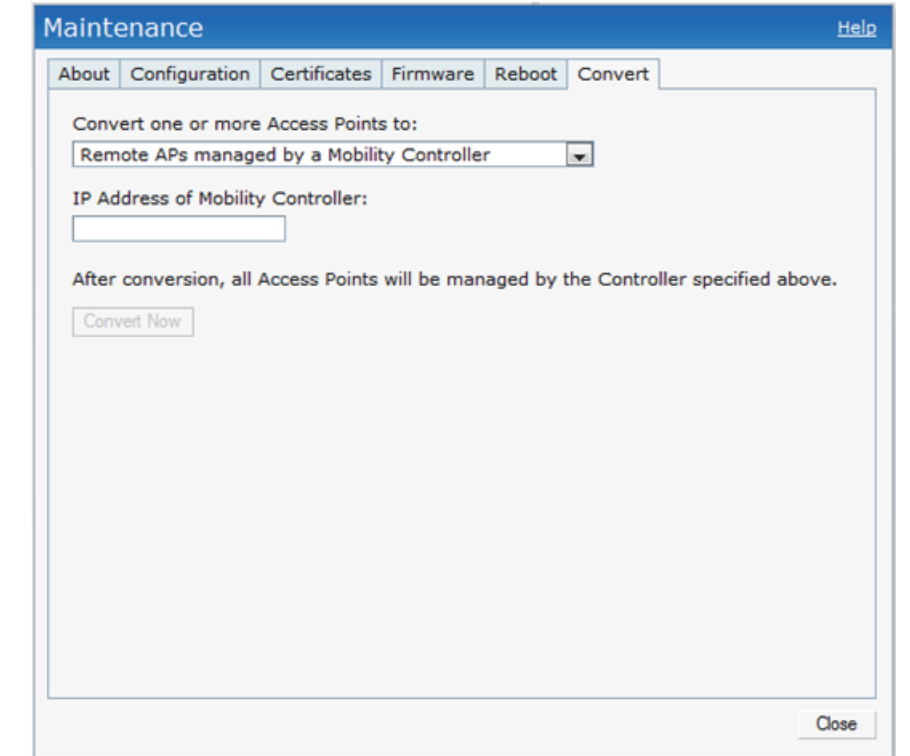

## Product Specifications

### Electrical

- Ethernet:
  - 1 x 10/100/1000Base-T auto-sensing Ethernet RJ-45 Interface
  - 1x 10/100Base-T auto-sensing Ethernet RJ-45 Interface
  - MDI/MDX
  - IEEE 802.3 (10Base-T), IEEE 802.3u (100Base-T). IEEE 802.3ab (1000Base-T)
  - Power over Ethernet (IEEE 802.3af and 802.3at compliant), 56V DC/350mA
- Power: 12 VDC power interface, supports powering through an AC-to-DC power adapter


|  |  |
|--|--|
|  | <b>Note:</b> If a power adapter other than the one provided by Dell is used in the US or Canada, it should be cULus (NRTL) Listed, with an output rated 12 VDC, minimum 1.25A, marked “LPS” or “Class 2,” and suitable for plugging into a standard power receptacle in the US and Canada. |
|--|--|

For additional specifications on this product, please refer to the data sheet. The data sheet can be found at [dell.com/wireless](http://dell.com/wireless)

## Proper Disposal of Dell Equipment

For the most current information about Global Environmental Compliance and Dell products, see our website at [dell.com](http://dell.com).

### Waste of Electrical and Electronic Equipment



Dell products at end of life are subject to separate collection and treatment in the EU Member States, Norway, and Switzerland and therefore are marked with the symbol shown at the left (crossed-out wheelee bin). The treatment applied at end of life of these products in these countries shall comply with the applicable national laws of countries implementing Directive 2002/96EC on

Waste of Electrical and Electronic Equipment (WEEE).

### European Union RoHS

**RoHS** Dell products also comply with the EU Restriction of Hazardous Substances Directive 2011/65/EC (RoHS). EU RoHS restricts the use of specific hazardous materials in the manufacture of electrical and electronic equipment. Specifically, restricted materials under the RoHS Directive are Lead (including Solder used in printed circuit assemblies), Cadmium, Mercury, Hexavalent Chromium, and Bromine. Some Dell products are subject to the exemptions listed in RoHS Directive Annex 7 (Lead in solder used in printed circuit assemblies). Products and packaging will be marked with the “RoHS” label shown at the left indicating conformance to this Directive.

### China RoHS

**10** Dell products also comply with China environmental declaration requirements and are labeled with the “EFUP 10” label shown at the left.

| 产品内含危害物质揭露表 | 危害物质项目 |      |      |                     |        |          |
|-------------|--------|------|------|---------------------|--------|----------|
|             | 铅      | 镉    | 汞    | 六价铬                 | PBB    | PBDE     |
| 零部件名称       | (Pb)   | (Cd) | (Hg) | (Cr <sup>6+</sup> ) | (多溴联苯) | (多溴二苯乙醚) |
| 含铜及铜材金属件    | x      | o    | o    | o                   | o      | o        |
| 含玻璃电阻       | x      | o    | o    | o                   | o      | o        |
| 高温锡材        | x      | o    | o    | o                   | o      | o        |

o: 表示此部件使用的所有同类材料中此种有毒或有害物质的含量均低于 SJ/T11363-2006 规定的限制要求。  
x: 表示此部件使用的至少一种同类材料中, 此种有毒或有害物质的含量高于 SJ/T11363-2006 规定的限制要求。


## Safety and Regulatory Compliance

Dell provides a multi-language document that contains country-specific restrictions and additional safety and regulatory information for all Dell hardware products. The *Dell Networking W-Series Safety, Environmental, and Regulatory Information* document is included with this product.


### Regulatory Model Names


The following regulatory model names apply to the W-IAP108/W-IAP109:

- W-IAP108: APINR108
- W-IAP109: APINR109

|  |   |
|--|---|
|  | <b>Caution:</b> Dell access points must be installed by a professional installer. The professional installer is responsible for ensuring that grounding is available and it meets applicable local and national electrical codes. |
|--|---|

### FCC

|   |  |
|---|--|
|  | <b>Caution: RF Radiation Exposure Statement:</b> This equipment complies with FCC RF radiation exposure limits. The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. |
|---|--|


|   |   |
|---|---|
|  | <b>Caution:</b> When operated in the 5.15 to 5.25 GHz frequency range, this device is restricted to indoor use to reduce the potential for harmful interference with co-channel Mobile Satellite Systems. |
|---|---|

This device is electronically labeled and the FCC ID is displayed in the WebUI under the **About** menu.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference, and
- This device must accept any interference received, including interference that may cause undesired operation.

Modifications not expressly approved by Dell could void the user's authority to operate the equipment.

|   |  |
|---|--|
|  | <b>Note:</b> This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. |
|---|--|

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### EMC Compliance and Warning Statement

- IEC 60601-1-2: 2007
- EN 60601-1-2: 2007

This equipment has been tested and found to comply with the limits of the standard for medical devices, IEC 60601-1-2:2007. The unit also complies with the requirements of EN 60601-1-2:2007, providing the presumption of compliance to the European Union’s Medical Device Directive 2007/47/EC. The limits are designed to provide reasonable protection against harmful interference in a typical medical installation. This equipment generates, uses and can radiate radio frequency energy, and, if not installed and used in accordance with the manufacturer’s instructions may cause harmful interference to other devices in the vicinity. However, there is no guarantee that interference will not occur in a particular installation. If this equipment causes interference with other devices, which may be determined by turning the equipment off and on, the user is encouraged to try and correct the interference by one or more of the following measures:

- Reorient or relocate the device receiving the interference.
- Increase the separation between the equipment.
- Connect the equipment into an outlet on a circuit different from that to which the other device(s) are connected.
- Consult the manufacturer or field service technician for help.

The Models APINR108 and APINR109 do not have an Applied Part as defined in IEC 60601-1. The protection against electric shock is Class II.

Device is not protected against ingress of liquids and has a protection class of IPX0 as defined by IEC 60601-1 and IEC 60529. Equipment not suitable for use in the presence of flammable mixtures.

The unit is considered “Continuous Operation” equipment as defined by IEC 60601-1.

Power Consumption – 56 VDC 802.3at power over Ethernet or 12VDC, 1.25A for external AC supplied power (adapter sold separately); Maximum power consumption - 12.5W (without USB device connected); 15W (with USB device connected).

Mechanical Dimensions: 160mm x 160mm x 41mm; 300g.

Environmental: Operating Temp: 0° C to +40° C (+32° F to +104° F); Humidity: 5 to 95% non-condensing. Storage Temp: -40° C to +70° C (-40°F to +158°F).

### Medical

- Equipment not suitable for use in the presence of flammable mixtures.
- End product system, including power supply, must be evaluated to IEC 60601-1-1 and IEC 60601-1 by the end user.
- Wipe with a dry cloth, no additional maintenance required.
- No serviceable parts, the unit must be sent back to the manufacturer for repair.

### Brazil

Este equipamento opera em caráter secundário, isto é, não tem direito a proteção contra interferência prejudicial, mesmo de estações do mesmo tipo, e não pode causar interferência a sistemas operando em caráter primário.

### Hong Kong

|   |   |
|---|---|
|  <p>Certified for use in Hong Kong<br/>經驗證可在香港使用<br/>Certificate No. 證書號碼<br/>HK0042300009</p> |  <p>Certified for use in Hong Kong<br/>經驗證可在香港使用<br/>Certificate No. 證書號碼<br/>HK0041300010</p> |
|    |    |

### Singapore

|   |
|---|
|  <p>Complies with<br/>IDA Standards<br/>200202320G</p> |
|---|

### UAE

|   |
|---|
|  <p>TRA<br/>REGISTERED No:<br/>EPI010500193<br/>DEALER No:<br/>0A003942510</p> |
|---|


# Dell Networking W-IAP108/109 Instant Access Point Installation Guide



### Contacting Support

| Web Site Support   |  |
|--------------------|--|
| Main Site          | <a href="http://dell.com">dell.com</a>                                 |
| Support Site       | <a href="http://dell.com/support">dell.com/support</a>                 |
| Dell Documentation | <a href="http://dell.com/support/manuals">dell.com/support/manuals</a> |

### Copyright

© 2013 Aruba Networks, Inc. Aruba Networks trademarks include  Airwave, Aruba Networks®, Aruba Wireless Networks®, the registered Aruba the Mobile Edge Company logo, and Aruba Mobility Management System®. Dell™, the DELL™ logo, and PowerConnect™ are trademarks of Dell Inc. All rights reserved. Specifications in this manual are subject to change without notice. Originated in the USA. All other trademarks are the property of their respective owners.

**Open Source Code**  
Certain Aruba products include Open Source software code developed by third parties, including software code subject to the GNU General Public License (GPL), GNU Lesser General Public License (LGPL), or other Open Source Licenses. The Open Source code used can be found at this site:

[http://www.arubanetworks.com/open\\_source](http://www.arubanetworks.com/open_source)

Includes software from Litech Systems Design. The IF-MAP client library copyright 2011 Infoblox, Inc. All rights reserved. This product includes software developed by Lars Fenneberg, et al.

### Legal Notice

The use of Aruba Networks, Inc. switching platforms and software, by all individuals or corporations, to terminate other vendors' VPN client devices constitutes complete acceptance of liability by that individual or corporation for this action and indemnifies, in full, Aruba Networks, Inc. from any and all legal actions that might be taken against it with respect to infringement of copyright on behalf of those vendors.



[www.dell.com](http://www.dell.com)

